
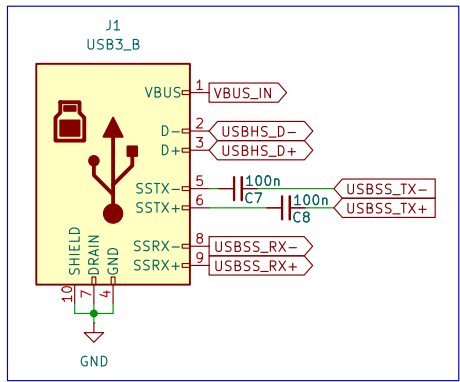


This bank is high-speed IO. All pins are described as GPIO SDR/DDR.

TODD: Reset

U1B
CYUSB3082-FCAXI

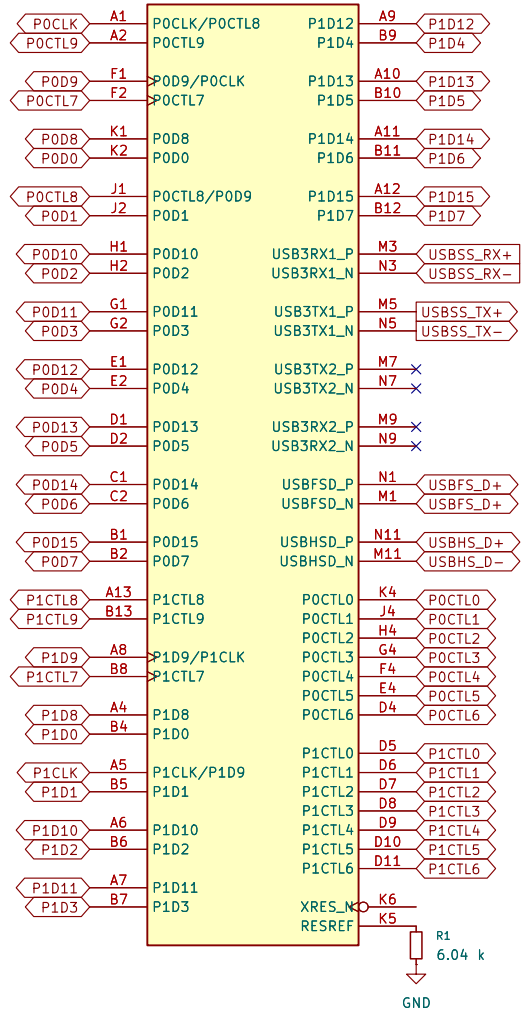


With exception of SCB3, all pins in this bank used as GPIO.
DONE and INITN require pullup.

TODD: Crystal


TODD: Find boot mode select

TODD: Check all pins for other essential functions
TODD: Ensure GPIO pins are usable as GPIO with pullup where needed


U1C
CYUSB3082-FCAXI

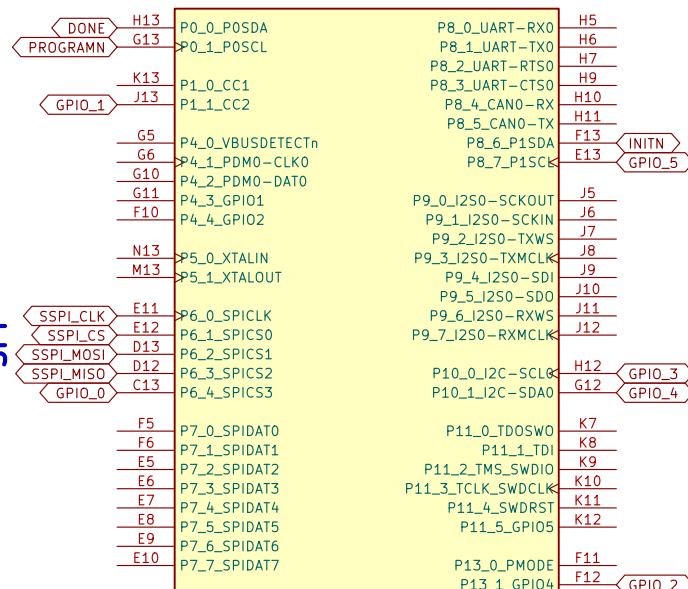


SCB3
SPI

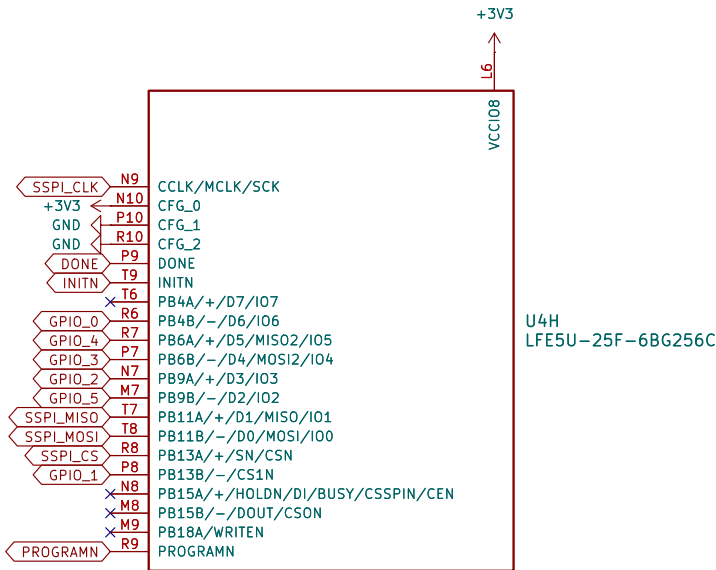


ECPS Power
TODD: 1v1 and 2v5 regulators
TODD: Decoupling

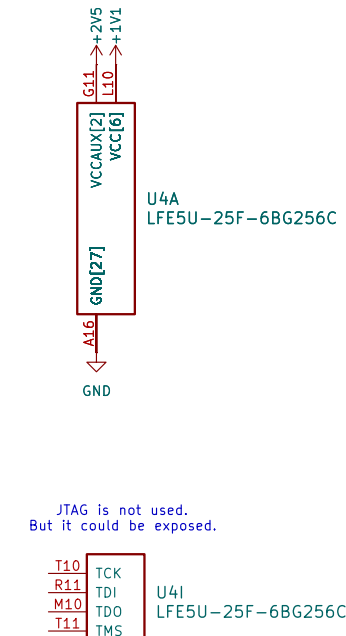

This bank is not used.

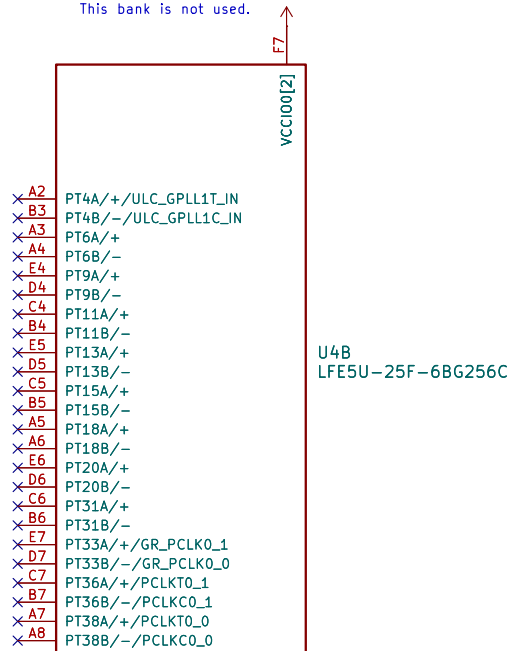

This bank is not used.

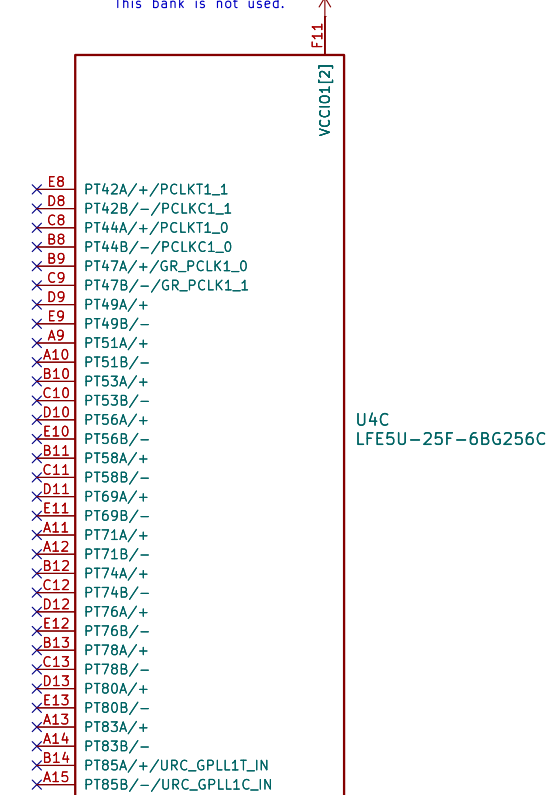


This bank reserved for exposed IO.

TODD: Exposed IO connector.



This bank reserved for exposed IO.

TODD: Exposed IO connector.

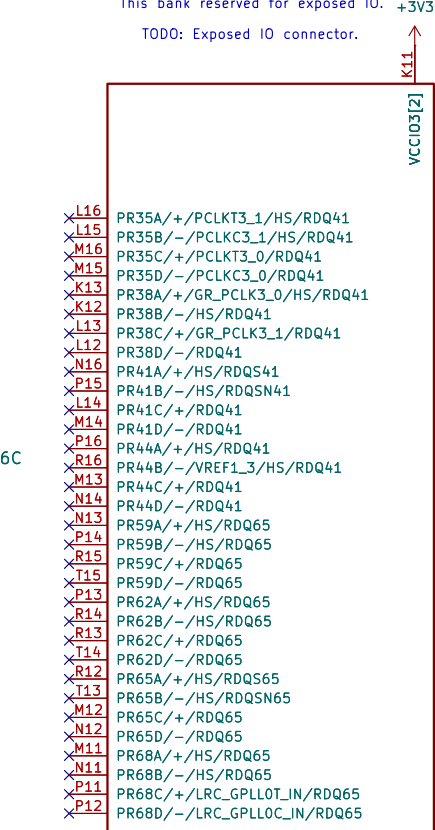

High speed interface to FX5
All pins interchangeable except P0CLK which must be assigned to a true clock pin.

TODD: Exposed IO connector.



High speed interface to FX5
All pins interchangeable except P0CLK which must be assigned to a true clock pin.

TODD: Exposed IO connector.

