

SSTO fusion powered spaceplane using CHARM architecture with p-¹¹B fuel

Lars Warren Ericson¹

¹Catskills Research Company
¹lars.ericson@catskillsresearch.com

July 25, 2026

ORCID: 0000-0001-8299-9361

Source repository: <https://github.com/catskillsresearch/p11b>

Abstract

We specify a single-stage-to-orbit (SSTO) spaceplane that flies Space Shuttle-style operations—including a Shuttle-class cargo bay—from a municipal airport to International Space Station (ISS) altitude in low Earth orbit (LEO), powered by a continuous Chambered Aneutronic Rotating Mirror (CHARM) p-¹¹B plant [1] with direct energy conversion (DEC). Flight regimes use three electric stages: ducted fan on free air, microwave air plasma on climb, then carried-water plasma with intakes sealed. Each design step is written as a closed set of equations. We guesstimate the reactor mass hole, constrain water as a function of dry mass and vacuum Δv , impose a 1 GW plant with space restart and DEC, and solve a reference all-up mass. Combined-cycle engine maps and CHARM size/performance constraints follow.

Contents

1	Vehicle vision	6
1.1	AI concept render	6
1.2	Interior floorplan and exterior profile	10
1.3	Forward drop-ins (top-down, covers off)	13
1.4	Fusion electric plant (assembly SSOT)	18
1.5	Profile stations	20
2	Design goals (the plane)	22
3	Constants and symbols	22
4	MWh budget: Shuttle-class mass to ISS LEO	23
4.1	Ideal orbital specific energy	23
4.2	Orbital energy of the inserted vehicle	24
4.3	Source energy (plant must supply)	24
5	Flight regimes: three electric stages	24
6	Water mass as a function of whole dry mass	25
7	Vehicle sizing equations	26
7.1	Structure, crew, gear, controls, and bay	26
7.2	CHARM mass hole	27
7.3	Engine and battery holes	27
7.4	Closed dry / wet mass	28
8	Solved reference vehicle (all-up mass)	28
9	Constraints on the CHARM power plant	29
9.1	Power and mass	29
9.2	Fuel and ash	29
9.3	DEC	30
9.4	Restartable in space	30
9.5	Continuous operation / no beam farm	30
9.6	CHARM island bottom-up mass roll-up: magnets and cryo, sized; RF/shield- /structure, not yet	30
9.7	Municipal and flight safety	32
9.8	How CHARM is lit (and how much energy)	33
9.9	Radiation and RF shielding: permanent bulkhead (baseline), water relocation (bonus), RF leakage (separate)	34
10	Combined-cycle engine (detail)	35
10.1	Stage map and literature anchors	35
10.2	Performance constants (frozen for sizing)	36
10.2.1	OpenVSP / VSPAERO digital wind tunnel (subsonic–transonic)	37
10.3	Stage 1 — takeoff lift, power, and mass	39
10.4	Stage 2 — power and mass (electrothermal, not Ye’s N/kW)	41
10.5	Stage 3 — water, power, and I_{sp} cases	43
10.6	Closed solve: powers, component masses, fuels	45
10.7	Physical envelope	46
10.8	Audio signature in atmosphere	46

10.9 Orbital ascent profile	49
11 Layout details	49
12 Systems checklist (equations → constraints)	53
13 Imputed CHARM plant specs, gap to present design, and unobtainiums	53
13.1 Specs this vehicle imputes to CHARM	53
13.2 Where published CHARM stands today	54
13.3 Unobtainiums in the gap	55
13.4 How to read the rest of this paper	56
14 Conclusion	56
14.1 CHARM reactor performance goals (what this airframe invoices)	56
14.2 Unmet materials-science and packaging challenges	57
14.3 Propulsion maturity: stages 1, 2, and 3	57
Acknowledgments	57
14.4 AI-assisted development	58
References	58
A Design software	61
A.1 Imported packages actually used	61
A.2 Assembly outliner	62
A.3 Blender drop-in cutaways	63
A.4 Generated numeric constants	63
A.5 Aerodynamics figure toolchain	63

List of Figures

1	CATSKILLS SSTO, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image) of the vehicle taking off from a municipal airport, prompted from the CAD floorplan and profile wireframes below.	7
2	CATSKILLS SSTO crew cabin at liftoff, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image): view from the rear seats of the flight deck as the vehicle rotates off the runway, prompted from the interior floorplan schematic and the prior exterior-render window shape.	9
3	Vehicle floor plan.	11
4	Vehicle profile view.	12
5	Crew capsule, Blender top-down cutaway from assembly.json.	14
6	Airlock, Blender top-down cutaway from assembly.json.	15
7	Cargo skid, Blender top-down cutaway from assembly.json with bay doors open.	16
8	Fusion plant skid, Blender top-down cutaway from assembly.json: flight battery, relocated water tanks (radiation-shield buffer, §9.9), p-11B fuel, permanent shield bulkhead, chamber string, 6 mirror magnets, 6-unit cryo compressor bay, magnet PSU, RF, and DEC.	17
9	Fusion electric plant (assembly.json).	19
10	Profile stations from assembly envelopes.	21
11	Stage 1 VSPAERO polar (Mach $\times\alpha$ digital tunnel on <code>catskills_ssto.vsp3</code>).	38
12	Stage 1 snappyHexMesh wall on the OpenVSP exterior (full airframe in frame; unbroken tube OML — bay doors live on the cargo-skid drop-in, not as roof wings). Colour = wall eddy viscosity ν_t from the Stage 1 RANS dump.	39
13	Stage 1 turbulent flow: OpenFOAM Spalart–Allmaras RANS ($\sim M = 0.3$, $\alpha = 4^\circ$), full airframe. Wall coloured by eddy viscosity ν_t ; streamlines over the forward fuselage and wing root.	40
14	Stage 1 takeoff closure: ground-roll speed vs distance (left); clean-wing vs high-lift runway demand (right).	40
15	Stage 2 climb smoke: constant- Q path with T_2 vs $D = QC_D S$ (left) and $h(v)$ to seal (right).	42
16	Ascent soundscape: waveform (top) and spectrogram (bottom) of the stylized audio signature — Stage 1 EDF, the modeled $M = 1$ crack, Stage 2 air-plasma roar, and the Stage-3 vacuum hum, in relative-loudness proportion from the table above.	49
17	Schematic ascent profile from Statesville Regional Airport (KSVH), NC to ISS-altitude LEO (≈ 400 km, 51.6° [15]): spiral view (left, altitude exaggerated, colored by stage) and altitude vs. mission elapsed time on a log time axis (right, true relative stage durations). Generated by <code>emit_orbital_ascent_diagram.py</code>	50
18	Top-down floorplan from assembly.json.	52
19	A.5 Aerodynamics figure toolchain.	64

List of Tables

1	Design goals for the plane.	22
2	Physical constants and reference symbols.	22
3	Mass symbol definitions.	23
4	Orbital energy for representative inserted masses.	24
5	Combined-cycle stages (reaction mass and thruster family).	25
6	Water mass fraction versus vacuum Δv and I_{sp}	26
7	CHARM island mass versus specific power at 1 GW.	27

8	Reference vehicle mass bill.	28
9	Sensitivity of dry and wet mass to specific power.	29
10	CHARM light-off sequence.	33
11	Stages, reaction mass, and primary literature (one family each — not a survey).	35
12	Frozen stage constants (literature-anchored; packaging α are design holes like α_C).	36
13	VSPAERO polar on <code>catskills_ssto.vsp3</code> (gear retracted; $Re_c/10^6 = 10$; thin-surface VLM). Source: <code>research/figures/cad/vspaero/polar.csv</code>	37
16	Water store versus stage-3 I_{sp} at fixed $m_{dry} = 196\text{ t}$, $\Delta v_{vac} = 4\text{ km/s}$	43
18	Stage energy comparison at the closed reference vehicle ($m_0 = 240\text{ t}$).	44
19	Engine component mass allocation and implied packaging specific power.	46
20	Atmospheric acoustic order-of-magnitude estimate vs. a real, comparably sized reference jet.	48
21	Longitudinal station and bay layout.	50
22	Systems checklist: equations to constraints.	53
23	Imputed CHARM plant requirements for this SSTO.	53
24	Gap between present CHARM and vehicle need.	54
26	External packages and tools used by the living design / paper build.	62

1 Vehicle vision

Municipal runway to ISS-class LEO: a Shuttle-style SSTO spaceplane with a real cargo bay, a single-deck crew module, and a continuous CHARM $p\text{-}^{11}\text{B}$ plant driving a three-stage combined-cycle engine (electric ducted fan $\rightarrow$ microwave air plasma $\rightarrow$ water plasma). The figures below are the vehicle picture; the equations that close the mass and energy budgets follow.

1.1 AI concept render

Fig.~1 is an AI-rendered concept illustration, not an engineering drawing: **Google Nano Banana Pro** (Gemini 3 Pro Image) was given the two CAD wireframes below as reference images and prompted to render the vehicle's true fuselage/wing contour — the grey wireframe lines, not the blocky bounding box — taking off from a municipal airport [47]. Proportions, panel lines, livery, and the runway scene are AI interpretation; the dimensioned CAD wireframes immediately below remain the source of truth for station layout and outer mold line.



Figure 1 CATSKILLS SSTO, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image) of the vehicle taking off from a municipal airport, prompted from the CAD floorplan and profile wireframes below.

Fig.~2 is a companion AI concept render of the flight deck at the same moment, from the rear seats looking forward: six crew in Crew-Dragon-style seats and suits (captain and copilot forward, four aft), helmets marked “Catskills Research,” small oval windows sized to match Fig.~1, and Crew-Dragon-style forward flight-deck controls. Illustrative only — seat count, suit design, and cockpit layout are AI interpretation prompted from the interior floorplan schematic (Fig.~3), not an engineering cabin design.



Figure 2 CATSKILLS SSTO crew cabin at liftoff, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image): view from the rear seats of the flight deck as the vehicle rotates off the runway, prompted from the interior floorplan schematic and the prior exterior-render window shape.

1.2 Interior floorplan and exterior profile

Crew volume flattens the **Space Shuttle crew module** from two decks to **one** [14,21], then **stretches** the pressurized nose so life support and a suited airlock are not cartoon-thin. Reference overall length $L \approx 52$ m. ECLSS = **Environmental Control and Life Support System**. Depth ≈ 6.5 –7 m, span ≈ 28 m.

Figs.~3 and 4 are orthographic CAD views of the same station map as `assembly.json` (nose left, length 52 m): crew capsule 0–11 m (flight deck + seats, internal O_2/N_2 , port **ground-only** side hatch); airlock 11–15 m (hatches cabin $\leftrightarrow$ airlock and airlock $\leftrightarrow$ bay only); cargo bay 15–33.3 m (18.3×4.6 m, clamshell doors on the cargo-skid drop-in; exterior OML is an unbroken tube); **fusion electric plant** 33.3–49 m on one skid (flight battery 33.3–35.5 m, water tanks 35.5–39.5 m — relocated ahead of CHARM as a supplemental radiation shield, §9.9 — fuel services 39.5–41.5 m, CHARM island incl. permanent shield bulkhead 41.5–49 m); **combined-cycle engine** 49–52 m (stages 1–3 + nozzle). The plant schematic (Fig.~9) is 1–1 with that JSON tree. Fig.~3 is a top-down cutaway (no landing gear). Fig.~4 shows white upper OML, dark TPS belly, extended gear, the port crew hatch, and closed top bay doors.

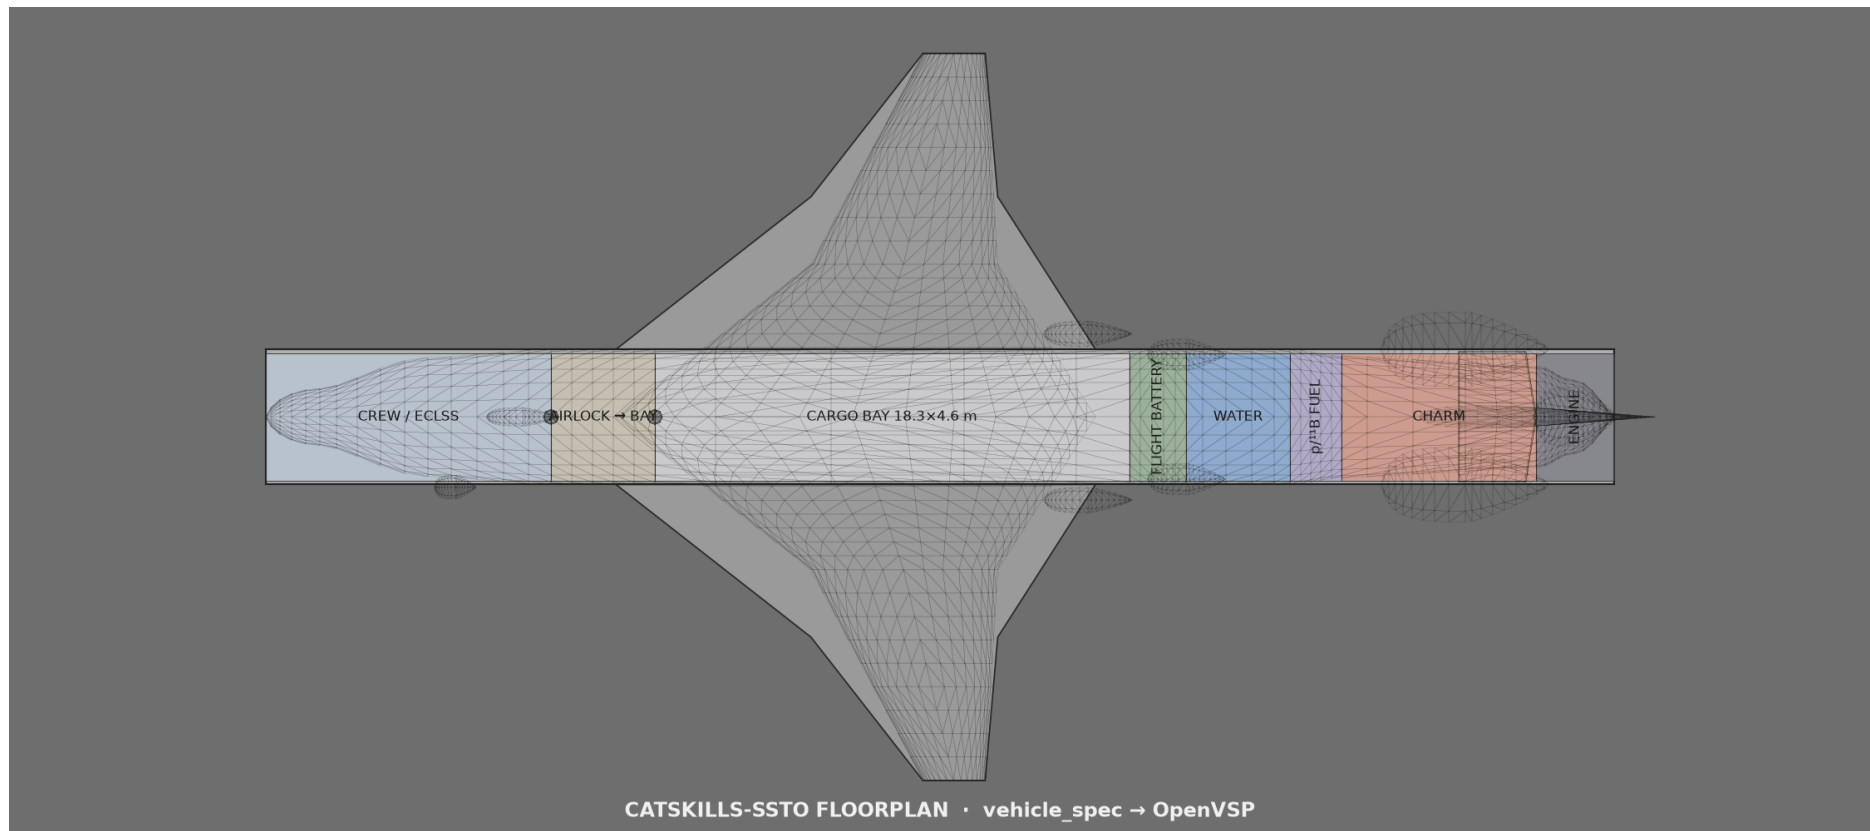


Figure 3 Vehicle floor plan.

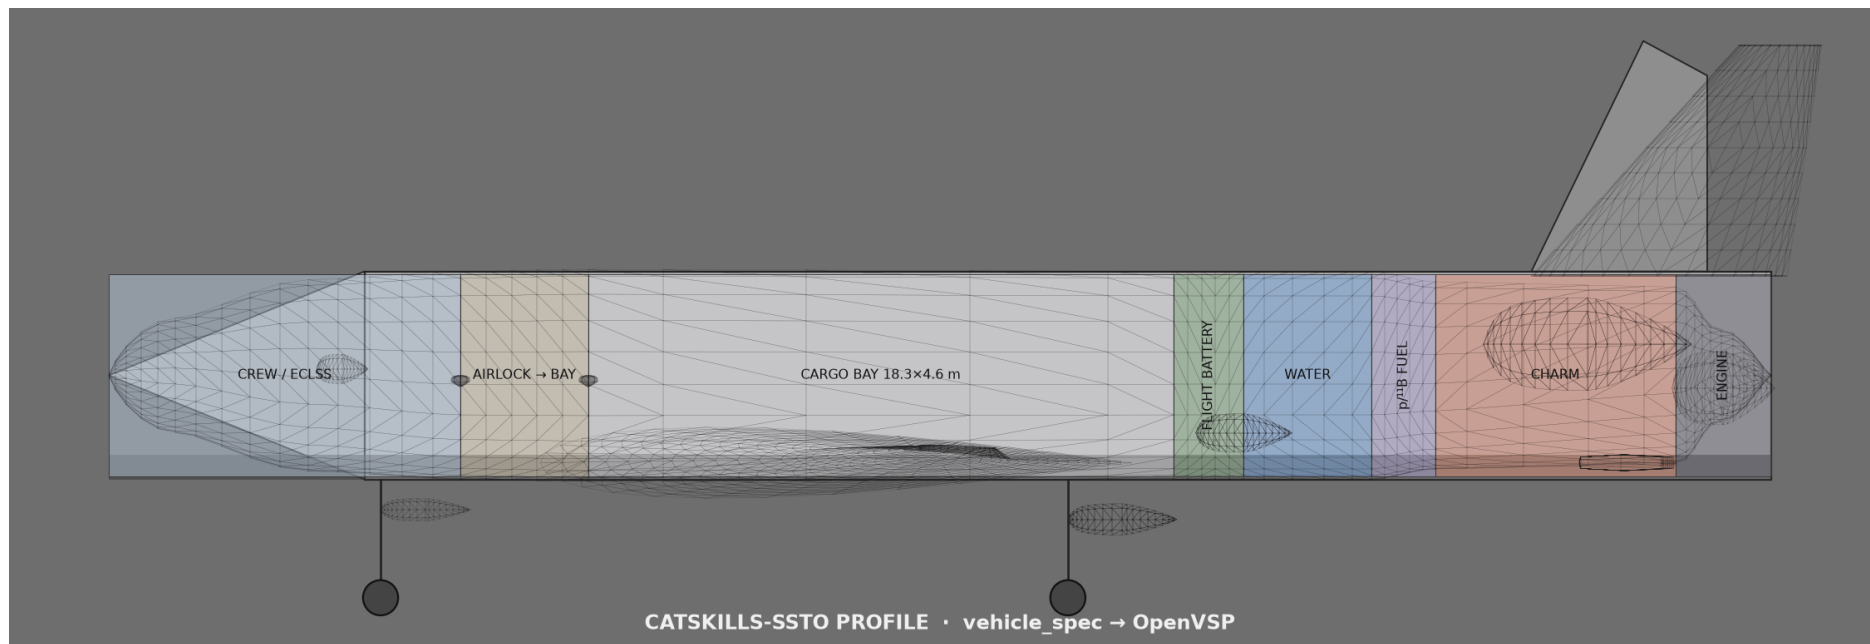


Figure 4 Vehicle profile view.

1.3 Forward drop-ins (top-down, covers off)

Figs.~5–8 are **Blender** orthographic top views built procedurally from `assembly.json` (make `cad-drop-ins`; see `research/figures/cad/build_crew_capsule_blender.py`, `build_airlock_blender.py`, `build_cargo_skid_blender.py`, `build_fusion_plant_skid_blender.py`, and the shared helpers in `research/figures/cad/lib/`). No AI-generated imagery remains in this section.

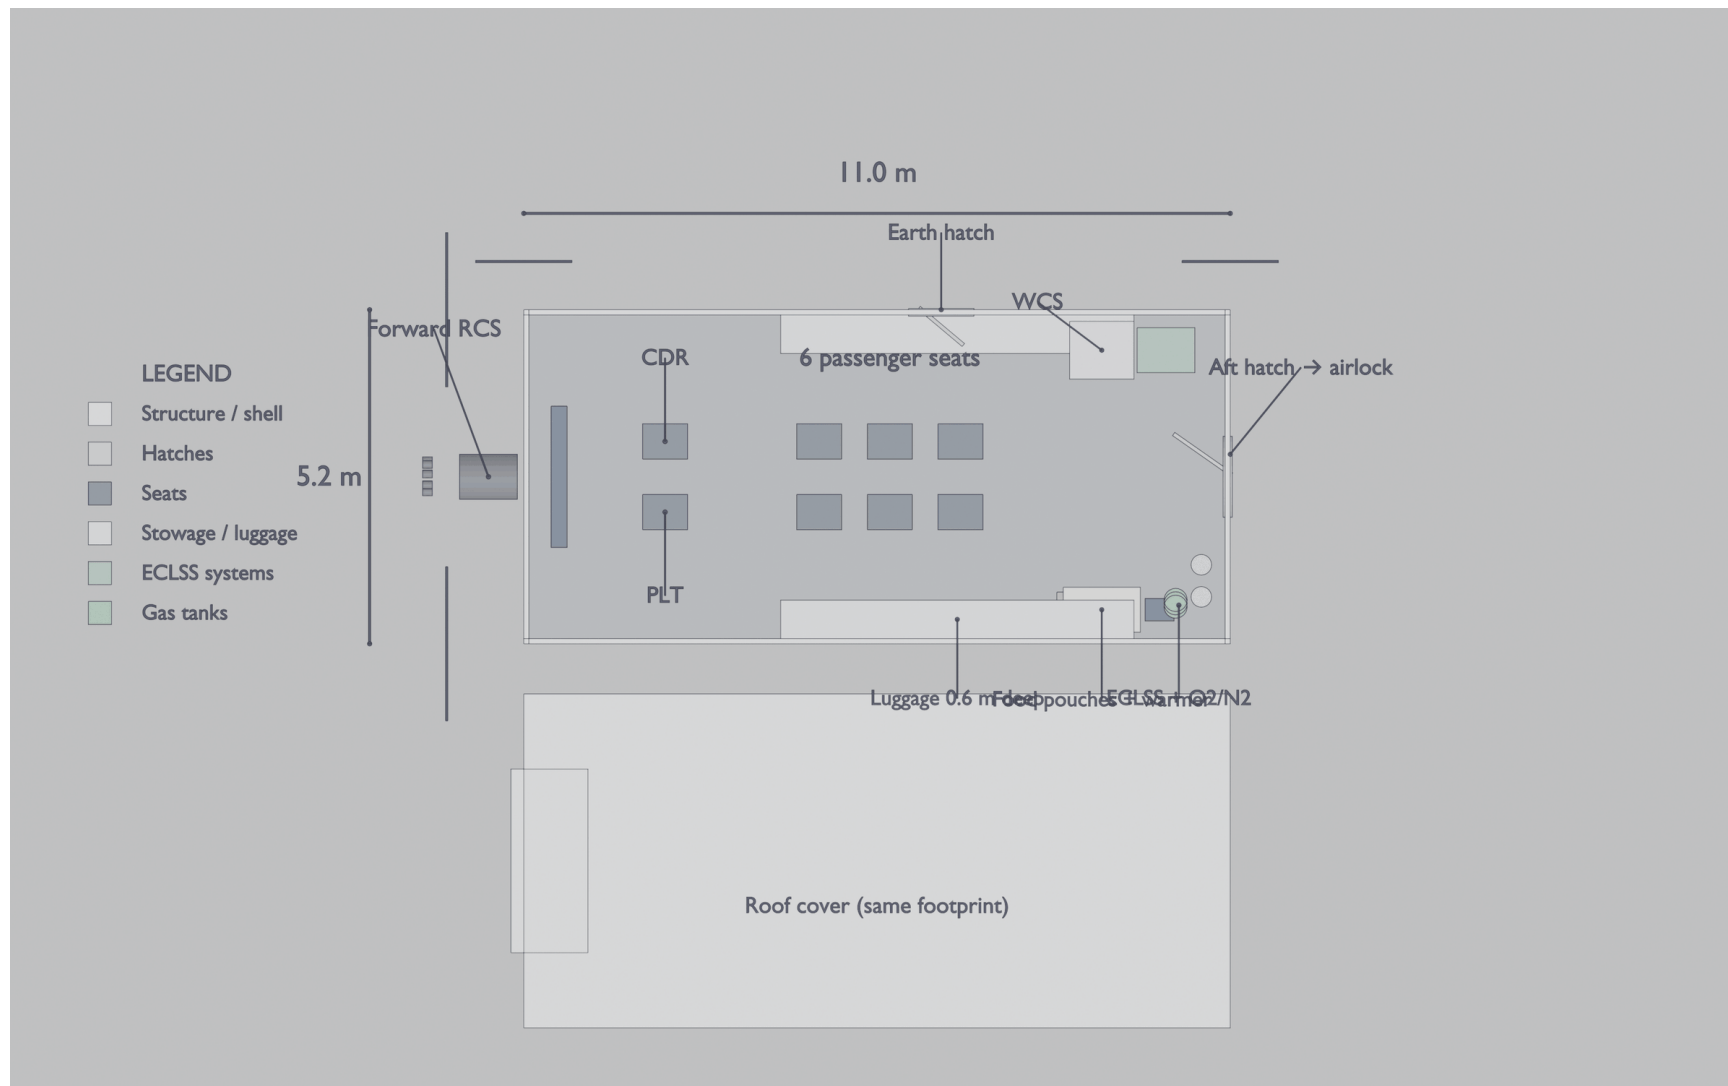


Figure 5 Crew capsule, Blender top-down cutaway from assembly.json.

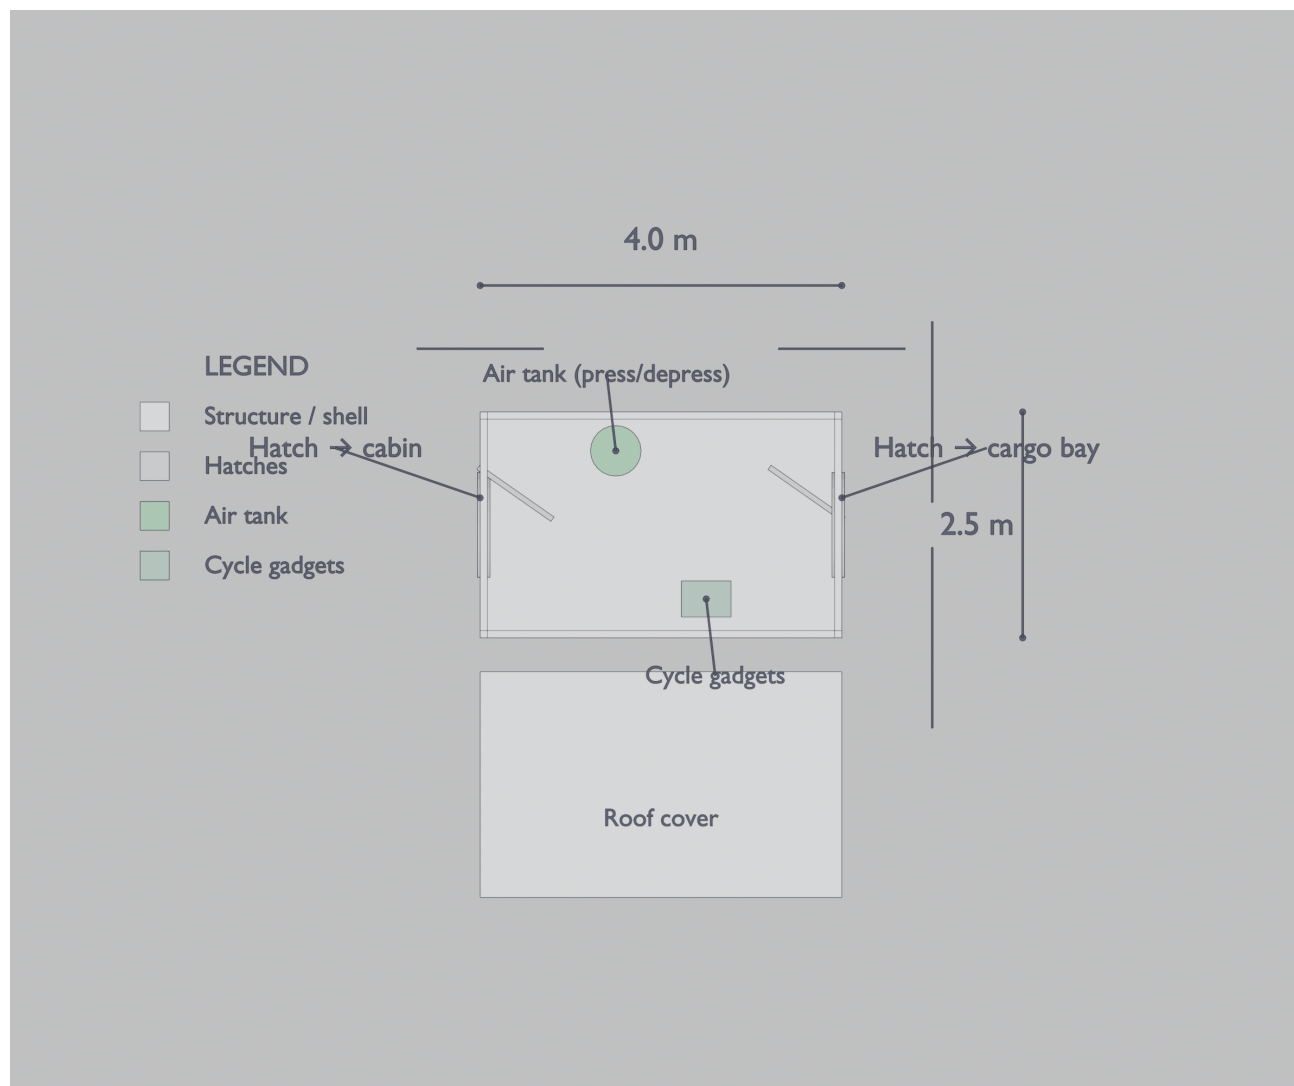


Figure 6 Airlock, Blender top-down cutaway from assembly.json.

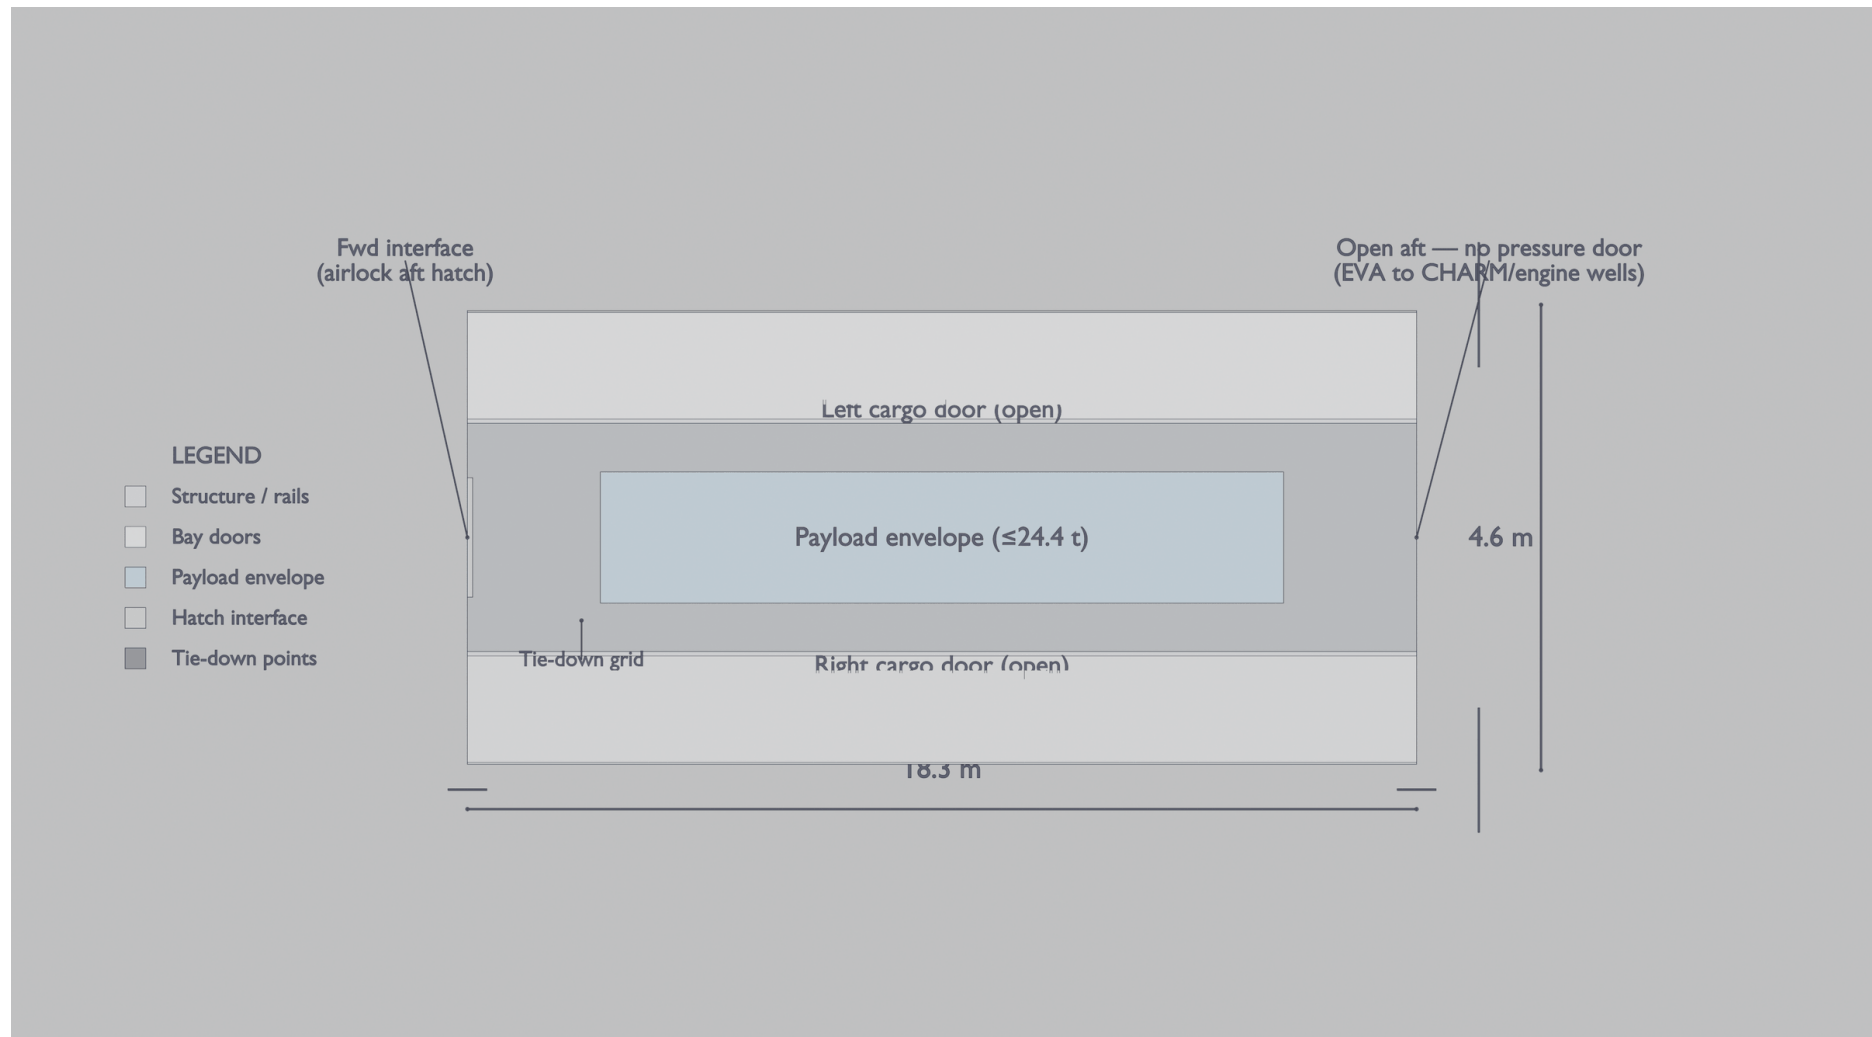


Figure 7 Cargo skid, Blender top-down cutaway from assembly.json with bay doors open.

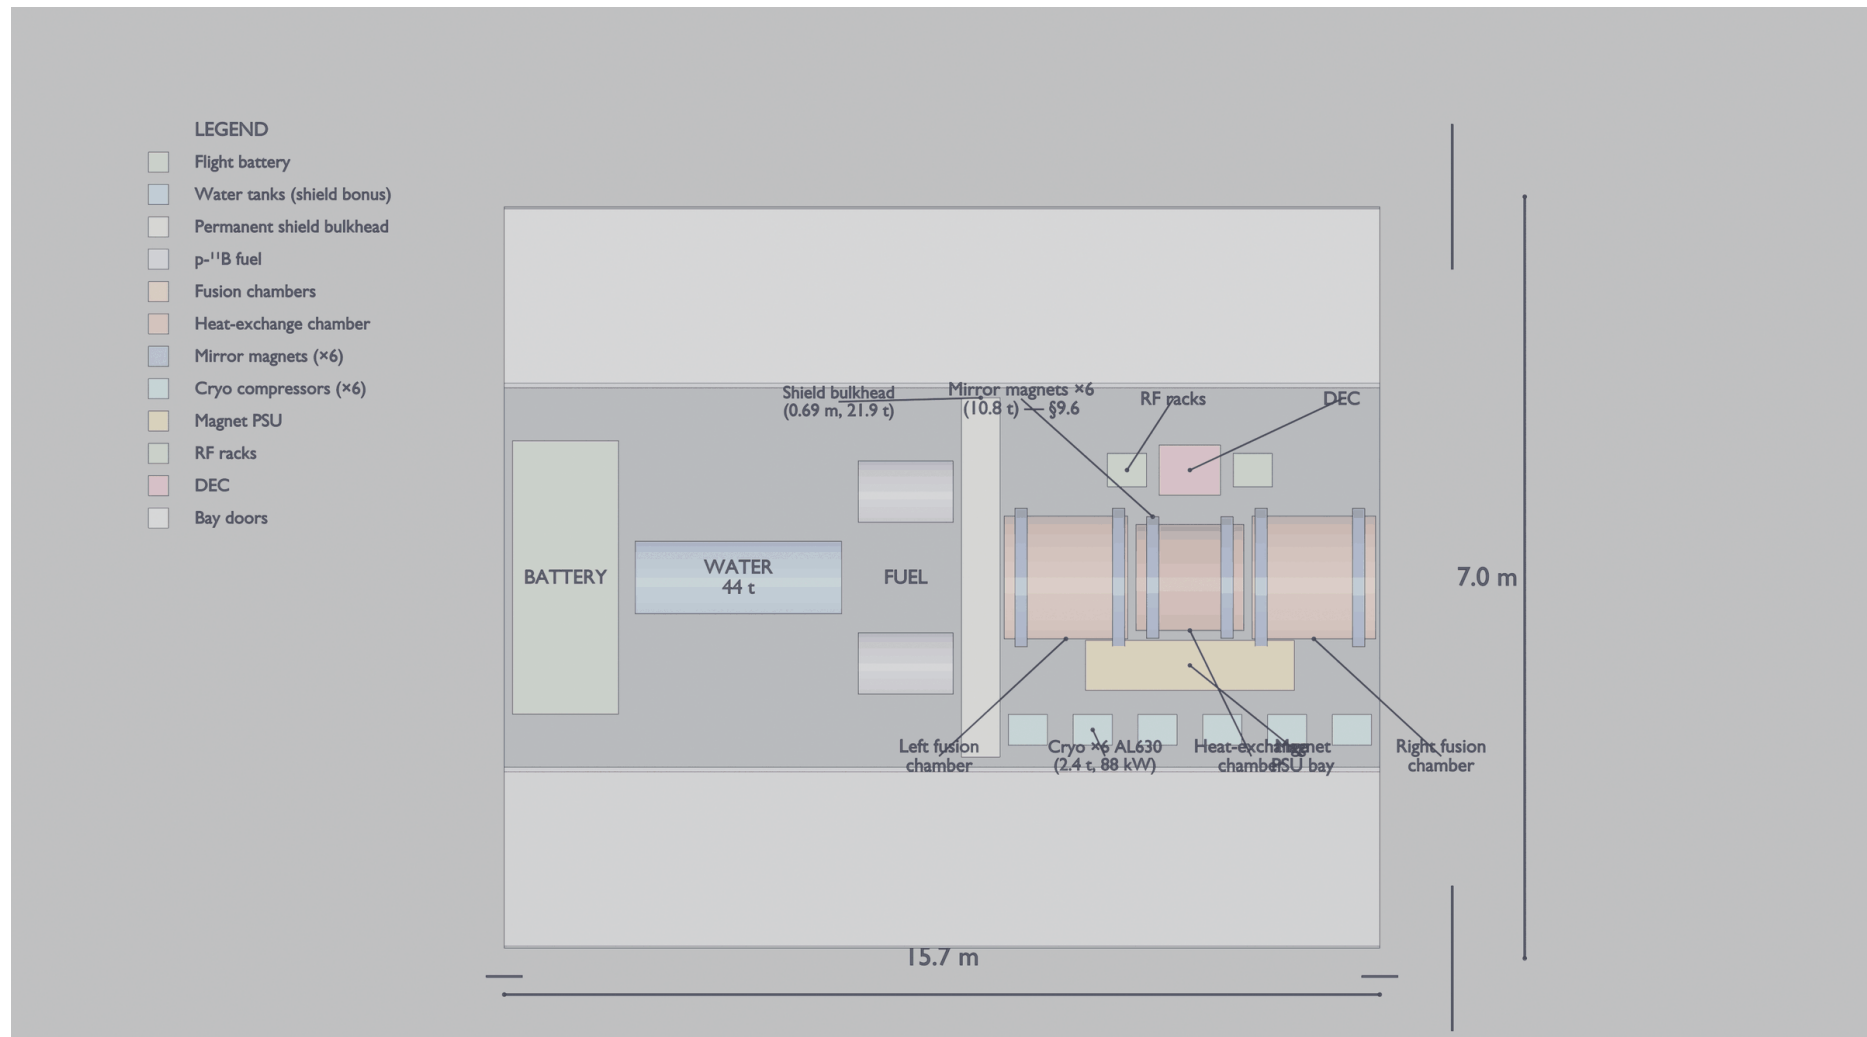


Figure 8 Fusion plant skid, Blender top-down cutaway from assembly.json: flight battery, relocated water tanks (radiation-shield buffer, \$9.9), p-11B fuel, permanent shield bulkhead, chamber string, 6 mirror magnets, 6-unit cryo compressor bay, magnet PSU, RF, and DEC.

1.4 Fusion electric plant (assembly SSOT)

Fig.~9 is auto-generated from `research/figures/cad/assembly.json` on every build (`scripts/update_arxiv_mermaid.py`, same visible-set algorithm as the interactive outliner — see `research/figures/cad/lib/m_builder.py`). Boxes are plant parts/collections, not a separate physics cartoon; this figure is hard-scoped to the fusion plant assembly, so the one connection leaving it (to the combined-cycle engine) is drawn as a dashed boundary stub rather than pulling in the engine's own parts.

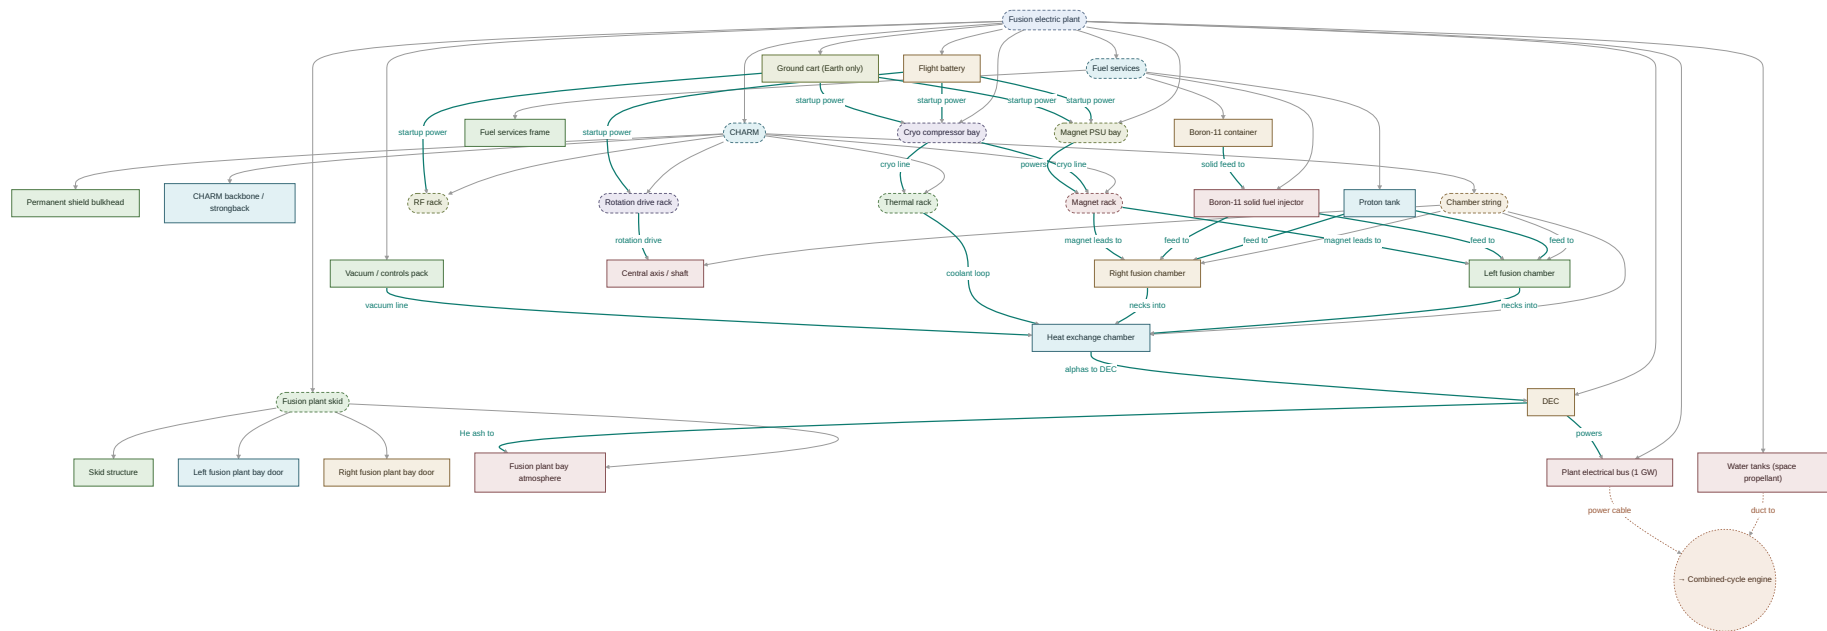


Figure 9 Fusion electric plant (assembly.json).

1.5 Profile stations

Stations match assembly envelopes: crew 0–11 m, airlock 11–15 m, cargo 15–33.3 m, fusion plant 33.3–49 m (battery + water + fuel + CHARM on one skid — water relocated ahead of CHARM as a supplemental shield, §9.9), engine 49–52 m. Fig.~10 is auto-generated (whole-vehicle scope, one level into the fusion plant and engine) by the same `scripts/update_arxiv_mermaid.py` pipeline as Fig.~9.

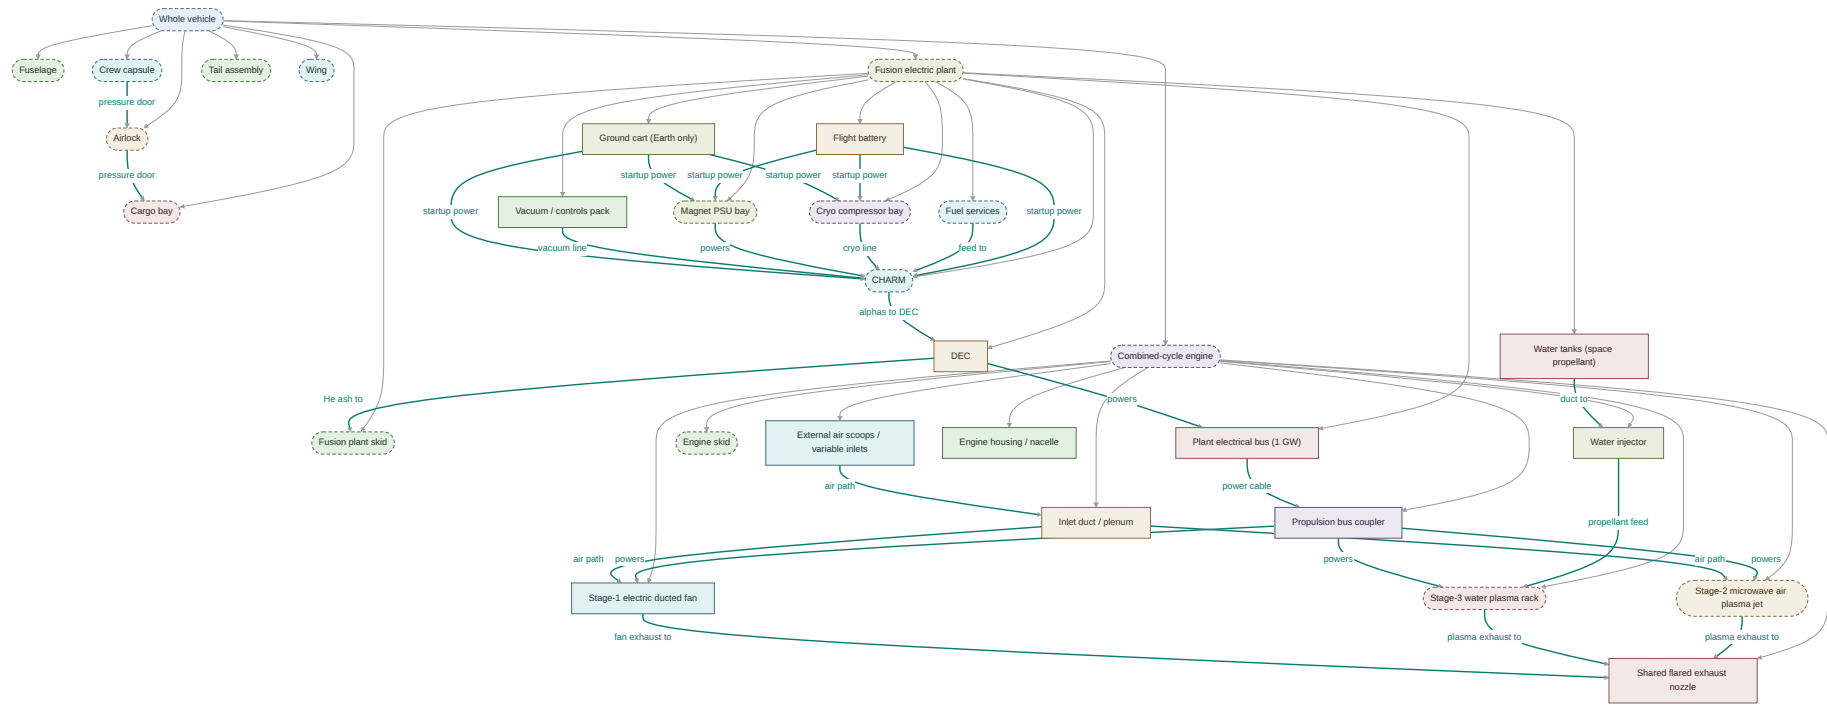


Figure 10 Profile stations from assembly envelopes.

2 Design goals (the plane)

Table 1 Design goals for the plane.

ID	Goal	Statement
G1	SSTO	Single stage from runway to ISS-class LEO; no discarded boosters or external tank
G2	Shuttle style	Orbiter-like airframe: wing-body, thermal protection system (TPS), runway landing, gear, control surfaces; crew systems (toilet, ECLSS, food)
G2b	Single-deck crew	Flatten Shuttle cabin to one deck: flight deck; six reclining seats; O_2/N_2 + ECLSS; luggage; forward/side ground door; large aft airlock into bay
G2c	Length	Stretch OML as needed for airlock, ECLSS tanks, battery, and fusion-fuel tanks—reference $L \approx 52$ m
G3	Shuttle cargo bay	Usable bay ≈ 18.3 m $\times$ 4.6 m class for payload—not filled with reactors
G4	Payload	Shuttle-class cargo: $m_{pl} = 24\,400$ kg reference
G5	Destination	Circular LEO compatible with ISS altitude (≈ 400 km); plane-change to 51.6° treated as margin
G6	Municipal airport	Takeoff/landing on long civil runways; first gear cool enough for noise/oversight; no vertical pad
G7	One engine	Single combined-cycle propulsion string; deadstick glide if plant fails
G8	Clean fuel	$p + {}^{11}\text{B} \rightarrow 3\alpha + 8.7\text{ MeV}$; CHARM bottle; DEC-first electricity
G9	Power	Plant electrical bus peak $P_\star = 1$ GW (design target)

Not goals: expendable stages; D–T breeding plant; filling the bay with the fusion island.

3 Constants and symbols

Table 2 Physical constants and reference symbols.

Symbol	Meaning	Reference value
R_E	Earth radius	6.371×10^6 m
μ_E	GM_E	3.986×10^{14} m ³ /s ²
h_{ISS}	ISS-class altitude	4.00×10^5 m

Symbol	Meaning	Reference value
r	Orbit radius	$R_E + h_{\text{ISS}}$
g_0	Standard gravity	9.80665 m/s^2
m_{pl}	Cargo-bay payload	$2.44 \times 10^4 \text{ kg}$
$P_\star$	CHARM bus peak power	$1.00 \times 10^9 \text{ W}$

Masses (all kg):

Table 3 Mass symbol definitions.

Symbol	Meaning
m_{af}	Airframe primary: fuselage, wings, TPS (excl. gear/controls)
m_{gear}	Landing gear (nose + mains), doors, actuators
m_{ctrl}	Control surfaces + actuators (elevons, rudder, speed brake / body flap equiv.)
m_{crew}	Crew cabin systems: ECLSS, O ₂ /N ₂ tanks, pressure control, toilet, galley, food, luggage, airlock fittings
m_{str}	$m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$
m_{eng}	Combined-cycle engine + inlets + nozzles + ducts
m_{C}	CHARM island (chambers, magnets, radio-frequency (RF), DEC, local shield, cryo, bath)
m_{bat}	Flight battery / auxiliary power unit (APU) (restart + hotel)
m_{f}	$p\text{-}^{11}\text{B}$ fuel
m_{w}	Water carried at takeoff (vacuum reaction mass)
m_{dry}	All mass except water
m_0	Gross liftoff mass (GLOW)
m_{ins}	Mass at LEO insertion (after water burn)

4 MWh budget: Shuttle-class mass to ISS LEO

4.1 Ideal orbital specific energy

$$r = R_E + h_{\text{ISS}}, \quad v_{\text{orb}} = \sqrt{\frac{\mu_E}{r}}, \quad \varepsilon_{\text{orb}} = -\frac{\mu_E}{2r}, \quad \varepsilon_{\text{surf}} \approx -\frac{\mu_E}{R_E}.$$

$$\Delta\varepsilon = \varepsilon_{\text{orb}} - \varepsilon_{\text{surf}} = \frac{\mu_E}{R_E} - \frac{\mu_E}{2r} \approx 3.31 \times 10^7 \text{ J/kg} = 33.1 \text{ MJ/kg}.$$

Numerical anchors:

$$v_{\text{orb}} \approx 7.67 \text{ km/s}, \quad \Delta\varepsilon \approx 9.19 \text{ kWh/kg}.$$

4.2 Orbital energy of the inserted vehicle

Everything that arrives at ISS altitude is still aboard (SSTO):

$$E_{\text{orb}} = m_{\text{ins}} \Delta\varepsilon.$$

In MWh:

$$E_{\text{orb}}^{(\text{MWh})} = m_{\text{ins}} \cdot \frac{\Delta\varepsilon}{3.6 \times 10^9}.$$

Table 4 Orbital energy for representative inserted masses.

m_{ins}	E_{orb}	E_{orb}
100 t (orbiter+cargo class)	3.31 TJ	920 MWh
150 t	4.97 TJ	1380 MWh
200 t	6.62 TJ	1840 MWh

4.3 Source energy (plant must supply)

Air-breathing and rocket/plasma paths leave energy in the wake and fight drag/gravity. Define a mission multiplier $\kappa_E \geq 1$:

$$E_{\text{src}} = \kappa_E E_{\text{orb}} = \kappa_E m_{\text{ins}} \Delta\varepsilon.$$

Working band for planning:

$$\kappa_E \in [2, 4] \Rightarrow E_{\text{src}}^{(\text{MWh})} \approx (18\text{--}37) m_{\text{ins},100\text{t}}$$

i.e. about 1.8–3.7 GWh of source energy per 100 t inserted, scaling linearly with m_{ins} .

Time at constant bus power $P_\star$:

$$t_{\text{src}} = \frac{E_{\text{src}}}{P_\star} = \frac{\kappa_E m_{\text{ins}} \Delta\varepsilon}{P_\star}.$$

For $m_{\text{ins}} = 1.9 \times 10^5$ kg, $\kappa_E = 3$, $P_\star = 1$ GW:

$$E_{\text{src}} \approx 18.9 \text{ TJ} \approx 5240 \text{ MWh}, \quad t_{\text{src}} \approx 5.2 \text{ h}.$$

So a 1 GW CHARM bus is an **energy-throughput** match for Shuttle-class SSTO only if the climb/insert lasts hours at high average power—or peak $P_\star$ is used with κ_E toward the low end and a lighter m_{ins} .

ISS note. Matching ISS inclination adds plane-change Δv . Fold into vacuum Δv margin (§5) rather than into $\Delta\varepsilon$.

5 Flight regimes: three electric stages

One propulsion string, three stages. No scramjet claim. Plant couples only by **power cable** (DEC $\rightarrow$ bus).

Table 5 Combined-cycle stages (reaction mass and thruster family).

Stage	Ambient	Reaction mass	Thruster family (anchor lit.)
1 Munici- pal / dense air	Free air	Ingested air	Electric ducted fan (EDF)
2 Climb / scarce air	Free air	Ingested + compressed air	Microwave air plasma jet [23]
3 Vacuum / LEO insert	Intakes sealed	Carried water	Microwave water plasma thruster lineage [24]

Cutoff: intakes seal at density/Mach command $\rho \leq \rho_{\text{seal}}$ (or crew/auto seal for reentry); stage 3 begins.

Energy split (schematic):

$$E_{\text{src}} = E_1 + E_2 + E_3 + E_{\text{hotel}} + E_{\text{loss}}.$$

With free reaction mass in stages 1–2, plant energy primarily raises vehicle mechanical energy and pays drag:

$$P_{\text{prop}}(t) \approx \frac{D(t) v(t)}{\eta_p(t)}, \quad \int P_{\text{prop}} dt \subset E_1 + E_2.$$

In stage 3, jet power for exhaust speed v_e and water mass flow $\dot{m}_w$ is

$$P_{\text{jet}} = \frac{1}{2} \dot{m}_w v_e^2, \quad T = \dot{m}_w v_e \quad \Rightarrow \quad P_{\text{jet}} = \frac{1}{2} T v_e.$$

6 Water mass as a function of whole dry mass

Water is used only in stage 3. Let

$$m_{\text{dry}} = m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + m_{\text{C}} + m_{\text{bat}} + m_{\text{f}},$$

$$m_0 = m_{\text{dry}} + m_w, \quad m_{\text{ins}} = m_{\text{dry}}$$

(all water expended by insertion). Rocket equation for vacuum Δv_{vac} :

$$\Delta v_{\text{vac}} = v_e \ln \left(\frac{m_{\text{dry}} + m_w}{m_{\text{dry}}} \right) = v_e \ln \mu, \quad \mu = e^{\Delta v_{\text{vac}}/v_e}.$$

Water constraint (closed form):

$$m_w = m_{\text{dry}} \left(e^{\Delta v_{\text{vac}}/v_e} - 1 \right) = m_{\text{dry}} (\mu - 1)$$

$$m_0 = m_{\text{dry}} \mu = m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}$$

Vacuum Δv budget:

$$\Delta v_{\text{vac}} = v_{\text{orb}} - v_{\text{ab}} + \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} + \Delta v_{\text{ISS plane}}.$$

Reference planning values:

$$v_{\text{ab}} = 3.5 \text{ km/s}, \quad \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} = 0.8 \text{ km/s}, \quad \Delta v_{\text{ISS plane}} = 0.2 \text{ km/s} \Rightarrow \Delta v_{\text{vac}} \approx 5.2 \text{ km/s}.$$

Optimistic air-breathing ($v_{\text{ab}} = 5 \text{ km/s}$, small margins) $\rightarrow \Delta v_{\text{vac}} \approx 3.5\text{--}4 \text{ km/s}$.

Exhaust speed from specific impulse:

$$v_e = I_{\text{sp}} g_0.$$

Table 6 Water mass fraction versus vacuum Δv and I_{sp} .

Δv_{vac}	I_{sp}	v_e	μ	m_w/m_{dry}
4 km/s	2000 s	19.6 km/s	1.226	0.226
4 km/s	3000 s	29.4 km/s	1.146	0.146
5.2 km/s	2000 s	19.6 km/s	1.302	0.302
5.2 km/s	5000 s	49.0 km/s	1.112	0.112

7 Vehicle sizing equations

7.1 Structure, crew, gear, controls, and bay

Cargo bay geometry (goal G3):

$$L_{\text{bay}} = 18.3 \text{ m}, \quad D_{\text{bay}} = 4.6 \text{ m}, \quad V_{\text{bay}} \approx \frac{\pi}{4} D_{\text{bay}}^2 L_{\text{bay}} \approx 304 \text{ m}^3.$$

Payload density check:

$$\bar{\rho}_{\text{pl}} = \frac{m_{\text{pl}}}{V_{\text{bay}}} \approx 80 \text{ kg/m}^3$$

(compatible with mixed cargo; bay remains payload volume).

Crew (Shuttle functions, single deck). Forward **flight deck**: commander and pilot **facing forward** into windows and a full control-panel wall [14,21]. Living volume: **six forward-facing passenger seats** (Crew Dragon-like rows, stretched cabin) plus the flight-deck pair; **waste collection system (WCS)**; **galley/food station without a kitchen sink** (0g); **crew luggage** with doors into the aisle; **ECLSS with O₂/N₂ tankage inside the pressure vessel**. **Solid port side hatch** (Earth/runway only) and **solid aft pressure hatch** to the airlock. **Airlock** oversized vs a suit-closet: dual-hatch volume on the aft cabin bulkhead facing the **cargo bay**, sized for suited egress (Shuttle middeck airlock pattern, not undersized) [21].

Landing gear and control surfaces are explicit mass lines (not buried only in a lump “structure” number):

$$\begin{aligned} m_{\text{af}} &= 7.20 \times 10^4 \text{ kg} && \text{(longer fuselage, wings, TPS, doors),} \\ m_{\text{gear}} &= 4.00 \times 10^3 \text{ kg} && \text{(nose + dual main trucks; mass bill only—see profile),} \\ m_{\text{ctrl}} &= 3.00 \times 10^3 \text{ kg} && \text{(elevons, rudder, speed-brake equiv. + actuators),} \\ m_{\text{crew}} &= 8.50 \times 10^3 \text{ kg} && \text{(ECLSS, O}_2\text{/N}_2\text{, WCS, galley, food, luggage, airlock),} \\ m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}} = 8.75 \times 10^4 \text{ kg.} \end{aligned}$$

CHARM and propulsion water **do not** consume V_{bay} . Plant volume sits in a **fuselage island** (spine / aft of bay / wing carry-through), subject to

$$V_C \leq V_{\text{island}}^{\text{max}} \approx 80\text{--}150 \text{ m}^3 \quad (\text{guesstimate for pancaked Shuttle envelope}).$$

7.2 CHARM mass hole

Define island specific power on the **electrical bus**:

$$\alpha_C = \frac{P_\star}{m_C} \quad \Rightarrow \quad \boxed{m_C = \frac{P_\star}{\alpha_C}}.$$

Table 7 CHARM island mass versus specific power at 1 GW.

α_C	m_C at $P_\star = 1 \text{ GW}$	Com- ment
5 kW/kg	200 t	Heavy; fights SSTO
10 kW/kg	100 t	Stretch
15 kW/kg	67 t	Refer- ence hole — bottom- up roll-up in §9.6
25 kW/kg	40 t	Aggres- sive

Volume consistency:

$$\bar{p}_C = \frac{P_\star}{V_C} \quad \Rightarrow \quad V_C = \frac{P_\star}{\bar{p}_C}.$$

For $V_C \leq 120 \text{ m}^3$: $\bar{p}_C \geq 8.3 \text{ MW/m}^3$ bus-averaged over the island—severe packaging.

7.3 Engine and battery holes

$m_{\text{eng}} = m_{\text{EDF}} + m_{\mu\text{air}} + m_{\text{wth}} + m_{\text{shared}} = 1.5 \times 10^4 \text{ kg}$ (reference packaging hole; closed in §10.6),

$$m_{\text{bat}} = 2.0 \times 10^3 \text{ kg} \quad (\text{restart} + \text{hotel}; \text{ground cart does first light}),$$

$$m_{\text{f}} = 5.0 \times 10^2 \text{ kg} \quad (p\text{-}^{11}\text{B} + \text{H inventory}; \text{water dominates expendables}; \text{§10.6}).$$

7.4 Closed dry / wet mass

$$\begin{aligned}
m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}, \\
m_{\text{dry}} &= m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + \frac{P_{\star}}{\alpha_{\text{C}}} + m_{\text{bat}} + m_{\text{f}}, \\
m_{\text{w}} &= m_{\text{dry}} \left(e^{\Delta v_{\text{vac}}/v_e} - 1 \right), \\
m_0 &= m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}, \\
m_{\text{ins}} &= m_{\text{dry}}.
\end{aligned}$$

8 Solved reference vehicle (all-up mass)

Freeze:

$$\begin{aligned}
P_{\star} &= 1 \text{ GW}, \quad \alpha_{\text{C}} = 15 \text{ kW/kg}, \quad \Delta v_{\text{vac}} = 4.0 \text{ km/s}, \\
I_{\text{sp}} &= 2000 \text{ s}, \quad v_e = I_{\text{sp}} g_0 = 19.61 \text{ km/s}.
\end{aligned}$$

Solve:

$$m_{\text{C}} = \frac{10^9}{1.5 \times 10^4} = 6.67 \times 10^4 \text{ kg} \quad (\text{bottom-up roll-up: §9.6}).$$

$$m_{\text{str}} = 72\,000 + 4\,000 + 3\,000 + 8\,500 = 8.75 \times 10^4 \text{ kg},$$

$$m_{\text{dry}} = 87\,500 + 24\,400 + 15\,000 + 66\,667 + 2\,000 + 500 = 1.961 \times 10^5 \text{ kg} \quad (196.1 \text{ t}),$$

$$\mu = e^{4000/19613} = 1.226, \quad m_{\text{w}} = 0.226 m_{\text{dry}} = 4.44 \times 10^4 \text{ kg} \quad (44.4 \text{ t}),$$

$$m_0 = 2.404 \times 10^5 \text{ kg} \quad (\mathbf{240 \text{ t GLOW}}),$$

$$m_{\text{ins}} = 196.1 \text{ t}.$$

Mass bill (reference):

Table 8 Reference vehicle mass bill.

Item	Mass
Airframe + TPS (longer OML)	72.0 t
Landing gear	4.0 t
Control surfaces + actuators	3.0 t
Crew systems (ECLSS, O ₂ /N ₂ , WCS, galley, food, luggage, airlock)	8.5 t
Payload (cargo bay)	24.4 t
Combined-cycle engine (EDF 5.0 + air-plasma 4.4 + water thruster 3.1 + shared 2.5)	15.0 t
CHARM island (bottom-up roll-up: magnets + cryo + unsized remainder, §9.6)	66.7 t
Flight battery	2.0 t

Item	Mass
$p\text{-}^{11}\text{B}$ / proton fuel (+ tankage)	0.5 t
Water (vacuum propellant)	44.4 t
GLOW	240 t

Energy at this mass:

$$E_{\text{orb}} = 6.49 \text{ TJ} = 1800 \text{ MWh}, \quad E_{\text{src}}(\kappa_E = 3) = 5410 \text{ MWh}, \quad t_{\text{src}}(1 \text{ GW}) = 5.4 \text{ h}.$$

Sensitivity (same $\Delta v_{\text{vac}}, I_{\text{sp}}; m_{\text{str}}$ fixed):

Table 9 Sensitivity of dry and wet mass to specific power.

α_C	m_C	m_{dry}	m_{w}	m_0
10 kW/kg	100 t	229 t	52 t	281 t
15 kW/kg	67 t	196 t	44 t	240 t
25 kW/kg	40 t	169 t	38 t	208 t

Municipal takeoff weight $\sim 210\text{--}280 \text{ t}$ is heavy vs airliners but in the large-military / 747-class band—not a Citation.

9 Constraints on the CHARM power plant

Summarize as a requirement vector $\mathcal{R}_C$:

9.1 Power and mass

$$P_{\text{bus}}(t) \geq P_{\text{prop}}(t) + P_{\text{hotel}}(t), \quad \max P_{\text{bus}} = P_{\star} = 1 \text{ GW},$$

$$m_C = \frac{P_{\star}}{\alpha_C}, \quad \alpha_C \geq 15 \text{ kW/kg (reference; } \geq 10 \text{ kW/kg hard floor for SSTO)}.$$

$$V_C \leq 120 \text{ m}^3, \quad \bar{p}_C = P_{\star}/V_C \geq 8 \text{ MW/m}^3.$$

9.2 Fuel and ash

$$\dot{N}_{p^{11}\text{B}} = \frac{P_{\text{fusion}}}{8.7 \text{ MeV}}, \quad m_{\text{f}}(t_{\text{mission}}) \ll m_{\text{w}}.$$

Ash (He) strained per CHARM multi-chamber design; DEC captures charged-product free energy.

9.3 DEC

$$P_{\text{bus}} = \eta_{\text{DEC}} P_{\alpha, \text{ordered}} + \eta_{\text{th}} P_{\text{thermal reject}}, \quad \eta_{\text{DEC}} \gtrsim 0.4\text{--}0.7 \text{ (design target band)}.$$

Thermal reject (X-ray, wall, inefficiencies) must be dumped to:

- air path (stage-1/2 heat exchanger / microwave reject), and/or
- island bath $\rightarrow$ compact turbine, and/or
- radiators only after exo-atmospheric (limited area).

9.4 Restartable in space

$$E_{\text{restart}} \leq \eta_{\text{bat}} m_{\text{bat}} e_{\text{bat}},$$

with $m_{\text{bat}} = 2 \text{ t}$ reference and $e_{\text{bat}} \sim 0.15\text{--}0.25 \text{ kWh/kg} \Rightarrow 300\text{--}500 \text{ kWh}$ class store—enough for **pilot-chamber relight + cascade**, not for ascent.

$$\text{Ground cart: } P_{\text{cart}} \geq P_{\text{light-off}}, \quad \text{not carried.}$$

Doctrine: continuous burn nominally; pilot-string kindling from m_{bat} if segmented; glide if relight fails.

9.5 Continuous operation / no beam farm

Recirculating power is RF walls, rotation, magnets, vacuum, cryo:

$$P_{\text{recirc}} = f_r P_{\text{fusion}}, \quad P_{\text{bus}} = (1 - f_r) P_{\text{fusion, net to bus}}.$$

Design intent: f_r small enough that 1 GW **bus** does not require multi-MW neutral-beam injection (NBI).

9.6 CHARM island bottom-up mass roll-up: magnets and cryo, sized; RF/shield-/structure, not yet

[1] gives no magnet field, magnet technology, or cryostat design — CHARM’s own public materials are pure confinement/ash/DEC physics with zero cryogenics content. §7.2/§9.1’s $m_C = P_*/\alpha_C$ is a **top-down** target, not a sum of parts. This subsection replaces two of that budget’s line items — magnets and the cryo compressor bay — with explicit, literature-anchored bottom-up numbers computed by `constants_model.py` (plain numpy, no fitting), and is honest about what still isn’t independently sized. All boxed numbers below are program-generated (`‘spans’`); `re-running python research/figures/cad/constants_model.py regenerates them from theParams` at the top of that file.

Magnets — anchor: WHAM, not SPARC. SPARC’s TF coil is a tokamak magnet; CHARM is a chambered rotating **mirror**. The much closer real-hardware analog is the Wisconsin HTS Axisymmetric Mirror (WHAM), an ARPA-E-funded, currently-operating HTS mirror machine whose two magnets — built by Commonwealth Fusion Systems (CFS) — are real, delivered, tested hardware: $< 2 \text{ t}$ each, 17 T in the warm bore / 20 T on tape, REBCO, “self-contained systems” bundling cryogenic refrigeration, vacuum, and controls on the magnet itself [34,35,36]. Take

$$N_{\text{coil}} = 6 \quad (\text{two WHAM-style end-mirror coils per fusion chamber, } \times 2 \text{ chambers, } + 2 \text{ shaping coils at the head})$$

$$m_{\text{magnets}} = N_{\text{coil}} \times 1.8 \text{ t} = 10.8 \text{ t}$$

(WHAM’s “self-contained” description means the on-coil cold head is already inside that 1.8 t figure — only the skid-mounted compressor package is a separate line item, below).

Cryo compressor bay — 6 flight-remanufactured AL630-class compressors. One dedicated Cryomech AL630-class compressor **package** per magnet (echoing WHAM/CFS’s “self-contained per-magnet” cryo philosophy); the cold head stays on the magnet (counted above), only the CPA1114 compressor package sits on the skid. Bare datasheet: 191 kg, 12.7 kW electrical (60 Hz), 100 W at 20 K per cold head [33].

$$N_{\text{AL630}} = 6 \quad \Rightarrow \quad Q_{20\text{K}} = N_{\text{AL630}} \times 100 \text{ W} = 600 \text{ W} \quad (\approx 100 \text{ W/coil}).$$

This $\approx 100 \text{ W/coil}$ is **six times lighter** than the 600 W/coil SPARC actually measured on its TFMC test coil (next subsection) — flagged plainly as an aggressive assumption resting on WHAM-style production coils (optimized current leads, no test-article instrumentation) rather than anything measured for CHARM.

We do not have vendor or test data for re-engineering an AL630 to fly (vibration qualification; swapping the water-cooled compressor for a radiator/pumped-loop interface). **This multiplier is a guess, flagged as such:**

$$\text{flight mass multiplier} = 1.5\times, \quad \text{flight power penalty} = 1.15\times$$

(“remanufacturing a proven, efficient ground design for flight qualification is assumed cheaper in mass than developing new lightweight cryocooler tech from scratch — no vendor or test data backs either number”). With the same $\times 1.4$ integration margin as before (cryostat structure, transfer lines, manifolds — also a guess):

$$m_{\text{cryo}} = N_{\text{AL630}} \times 191 \text{ kg} \times 1.5 \times 1.4 = 2.41 \text{ t}, \quad P_{\text{cryo}} = 87.6 \text{ kW}$$

CHARM island roll-up. Compare the parts we can now ground (magnets + cryo) against the existing top-down target:

$$m_{\text{bottom-up,known}} = m_{\text{magnets}} + m_{\text{cryo}} = 13.2 \text{ t}, \quad m_{\text{C,target}} = \frac{P_{\star}}{\alpha_{\text{C}}} = 66.7 \text{ t}.$$

RF launchers/amplifiers, Bremsstrahlung/neutron shielding, and the CHARM backbone/chamber structure are **not independently sized in this pass** — no citable specific-mass number for gyrotron/RF-launcher hardware or $p\text{-}^{11}\text{B}$ photon-shield areal density was found that we trust enough to present as engineering (one search result claimed an RF specific mass near 0.5 kg/kW, which is implausibly light for gyrotron + waveguide + power-supply hardware and is deliberately **not used**). Rather than fabricate precision, the model carries the gap as one honestly-labeled remainder:

$$m_{\text{remainder}} = m_{\text{C,target}} - m_{\text{bottom-up,known}} = 53.5 \text{ t} \quad (\text{"RF + shielding + backbone/chamber structure + margin})$$

§9.9 below sources the first real piece of this bucket — a permanent radiation-shield bulk-head, 21.9 t — leaving 31.5 t still unsized (RF hardware + backbone/chamber structure).

$$m_{\text{C}} = \max(m_{\text{C,target}}, m_{\text{bottom-up,known}}) = 66.7 \text{ t} \quad \Rightarrow \quad \alpha_{\text{C,implied}} = 15.00 \text{ kW/kg}$$

i.e. magnets are 16.2% of m_{C} , cryo is 3.6%, and the unsized remainder is 80.2%. Because the known bottom-up pieces fit comfortably inside the existing 67 t target, m_{C} , m_{dry} , and **GLOW**

in §7.4/§8 do not move — but the mechanism is live: `m_C = max(...)` in `constants_model.py` means a future RF/shield/structure sizing pass (or a heavier magnet/cryo number) would cascade into m_0 automatically rather than needing another hand edit.

Conservative risk case — SPARC TFMC per-coil heat load. If CHARM’s production coils do **not** beat the 600 W/coil SPARC actually measured on its Toroidal Field Model Coil (TFMC) — a real 10,058 kg REBCO coil tested at 20.1 T, cooled by eight Cryomech AL630s in a liquid-free loop [29,30] — the bracket is much heavier. For $N_{\text{coil}} = 4\text{--}8$:

$$Q_{20\text{K}}^{\text{TFMC}} = N_{\text{coil}} \times 600 \text{ W} = 2.4\text{--}4.8 \text{ kW} \Rightarrow N_{\text{AL630}} = 24\text{--}48 \text{ units},$$

$$m_{\text{cryo}}^{\text{risk}} \approx 7.9\text{--}15.8 \text{ t}, \quad P_{\text{cryo}}^{\text{risk}} \approx 305\text{--}610 \text{ kW}.$$

This is still $\ll$ the 53.5 t remainder, so it would not by itself force m_C up — but it is the number to reach for if the 100 W/coil baseline assumption above turns out to be too optimistic.

Sanity check against a real full-scale plant (“why not a warehouse”). The Politico/CFS reporting on SPARC’s actual cryoplant hall is the right gut-check, and the real numbers back the instinct that it’s a *categorically* bigger machine, for reasons that don’t apply here: SPARC’s production TF magnet is 18,025 kg per coil, eighteen of them ($\gtrsim 324$ t of TF magnet alone, before poloidal-field/central-solenoid coils, cryostat, or vacuum vessel) [29], and its full cryoplant needs 17 kW steady-state (4.5 K-equivalent) plus a separate 2.9 MW blowdown system to absorb the heat pulse from each $\gtrsim 1$ GJ-class shot — infrastructure that fills a dedicated cryoplant building and helium storage yard next to the tokamak hall [31]. Even the conservative TFMC-anchored risk case above is 14–28% of SPARC’s *steady-state* number alone, for a coil inventory two orders of magnitude lighter — defensible **only** because (i) $p\text{--}^{11}\text{B}$ is aneutronic, so there is no nuclear heating of the magnets/shield that dominates a D–T tokamak’s cryoplant sizing, and (ii) CHARM runs continuously rather than in pulses, so there is no SPARC-style blowdown/buffer system to size at all. Neither of those is a CHARM-specific result; both are architecture-level consequences of the fuel choice already assumed elsewhere in this note (G8, §9.2).

Ceiling check — flight-cryocooler technology instead of a remanufactured ground unit. If remanufacturing an AL630 for flight turns out not to work and a clean-sheet space-qualified cryocooler is needed instead, NASA’s own 20 W/20 K reverse turbo-Brayton flight-cryocooler program is the closest public benchmark: state-of-the-art specific mass is 18.7 kg/W (vs. that program’s own 4.4–5.5 kg/W *goal*, not yet demonstrated) [32] — $12\text{--}45\times$ heavier than our $2.4 \text{ t}/600 \text{ W} \approx 4.0 \text{ kg/W}$ flight-remanufactured-AL630 assumption. Applied to the conservative TFMC-level risk-case load instead of the optimistic baseline:

$$m_{\text{cryo}}^{\text{ceiling}} = Q_{20\text{K}}^{\text{TFMC}} \times 18.7 \text{ kg/W} \approx 45\text{--}90 \text{ t}$$

— up to, or beyond, the *entire* 67 t CHARM island budget by itself. This stays tracked as its own named unobtainium (§13.3 item 6) rather than silently absorbed into α_C ; it is also the reason “remanufacture, don’t clean-sheet” is load-bearing for this vehicle closing at all.

Reference point carried forward. $N_{\text{coil}} = 6$, $N_{\text{AL630}} = 6$, $m_{\text{magnets}} \approx 10.8 \text{ t}$, $m_{\text{cryo}} \approx 2.4 \text{ t}$, $P_{\text{cryo}} \approx 88 \text{ kW}$ (0.009% of the 1 GW bus — negligible next to RF/magnet recirculating power, consistent with §9.5) are the working numbers carried into `assembly.json`’s `charm_magnet_rack` (6 magnet nodes) and `cryo_compressor_bay` (6 compressor nodes). The 53.5 t remainder stays an explicit, tracked placeholder — not a rounding error, and not yet real engineering.

9.7 Municipal and flight safety

- No tritium breeding inventory.

- Shield so that ramp and cabin doses meet civil constraints with plant running in fan mode.
- Single-string plant: accept engine-out $\equiv$ plant-out $\rightarrow$ glide.

9.8 How CHARM is lit (and how much energy)

CHARM is **not** lit with a neutral-beam farm. Published architecture lights a **rotating open-field mirror** with **species-separated chambers** and **RF / ponderomotive walls** [1,8,9]. A practical light-off sequence for this vehicle is:

Table 10 CHARM light-off sequence.

Step	Action	Power plant elements
0	Evacuate, interlocks, ground-cart connect	Vacuum, controls
1	Energize mirror / chamber magnets	Magnet PSU $\leftarrow$ cart or battery
2	Spin up plasma rotation (centrifugal boron trap)	Rotation drive; energy later recoverable in principle [1]
3	Raise RF one-way / ponderomotive barriers	RF units
4	Inject protons and boron into separated regions	Fuel injectors + p / ^{11}B tanks
5	Establish fusion cell; route alphas to heat-exchange / DEC	DEC electrodes / wave couplers
6	Disconnect cart; bus takes hotel + propulsion	Continuous burn doctrine

Energy scale (engineering estimate — CHARM papers do not publish a flight kWh bill of materials (BOM)):

Magnet + RF + rotation spin-up for a segmented 1 GW island is treated as 50–200 kWh class to first useful plasma (seconds–minutes of MW-class RF/magnet draw), not **MWh-class beams**. That is why

$$E_{\text{restart}} \leq 300\text{--}500 \text{ kWh} \quad (m_{\text{bat}} = 2 \text{ t})$$

is booked for **on-orbit relight**, while **first light on Earth** uses the ground cart. One-way RF walls can be energetically expensive if overused [1]; the vehicle concept of operations (CONOPS) keeps barriers as needed for separation, not as a continuous full-power sink that eats the 1 GW bus.

Pilot-string kindling: battery (or cart) lights a fraction of chambers $\rightarrow$ DEC/RF bus cascades the rest.

9.9 Radiation and RF shielding: permanent bulkhead (baseline), water relocation (bonus), RF leakage (separate)

Crew/cargo safety must not depend on the water tank’s fill state — water is a consumable that can legitimately be empty (post-insertion, pre-fueling, or after an early dump). This is therefore **three separate, independently-motivated additions**, computed by `constants_model.py` (plain numpy, no fitting) and reported as “spans. All three are explicitly-flagged, 1D slab, order-of-magnitude estimates — no real photon/neutron spectrum, scatter, or 3D solid-angle coverage is modeled, and no CHARM-specific source term exists in [1] or the CHARM literature search behind §9.6.

Shared methodology. A representative bremsstrahlung/X-ray photon energy of ~ 300 keV is assumed (flagged guess, informed by the 100s-of-keV electron temperatures discussed for radiation-trapping p - ^{11}B regimes [7]), with NIST XCOM mass-attenuation coefficients [39] for water and polyethylene at that energy. A residual-neutron source term is also carried even though p - ^{11}B is billed as aneutronic: secondary/contamination reactions give a small non-zero yield, flagged at $\lesssim 1\%$ of a D-T-equivalent yield per general p - ^{11}B literature, attenuated using standard polyethylene/water fast-neutron removal cross sections [40] (a different physical mechanism than the photon μ/ρ above, reported separately). A **target attenuation** of 30 dB (10.0 half-value layers, $1000\times$ flux reduction) is the flagged baseline design requirement — a planning choice, absent a real CHARM source-term/dose calculation, applied identically to both B1 and B2 below.

B1 — Permanent dedicated shield bulkhead (baseline, sized for zero water present). A polyethylene (or borated-polyethylene) bulkhead between CHARM and the forward vehicle — the standard aerospace choice for combined photon+neutron shielding (hydrogen-rich; the NASA/ISS/Orion reference material) — spans the fuselage cross-section (34 m^2 , reused from §10.2’s aero frontal-area estimate) and is thick enough to hit the target attenuation against **both** hazards independently:

$$t_\gamma = N_{\text{HVL}} \times \text{HVL}_{\gamma,\text{poly}} \approx 61\text{ cm}, \quad t_n = N_{\text{HVL}} \times \text{HVL}_{n,\text{poly}} \approx 69\text{ cm},$$

$$t_{\text{B1}} = \max(t_\gamma, t_n) \approx 0.69\text{ m} \quad \Rightarrow \quad m_{\text{B1}} = t_{\text{B1}} \times A \times \rho_{\text{poly}} \approx 21.9\text{ t}$$

This mass becomes the **first real, sourced line item** inside the 53.5 t “RF + shielding + backbone/chamber structure” remainder carried since §9.6 — 41% of it, leaving 31.5 t still unsized (RF hardware and backbone/chamber structure). It is a partial de-risking, not a closure — m_C does not move, since the bottom-up known total (magnets + cryo + B1) still fits inside the top-down target.

B2 — Relocate water tanks (bonus/supplemental shield, unchanged station lengths). Moving the water tanks from aft-of-CHARM (§1/§11, previously shielding nothing) to between CHARM and the forward vehicle adds *supplemental* shielding on top of B1 whenever the tank is full — new layout: crew $\rightarrow$ airlock $\rightarrow$ cargo $\rightarrow$ battery $\rightarrow$ water $\rightarrow$ fuel $\rightarrow$ charm $\rightarrow$ engine (§1/§11). At the full-tank slab depth (44 t reference load, 4.0 m envelope), water alone provides:

$$206\text{ dB (photon)}, \quad 179\text{ dB (neutron)}$$

— both far beyond the 30 dB B1 baseline target, i.e. a full water tank is vastly better shielding than the permanent bulkhead alone, but B1 is what remains when it is empty.

B3 — RF/microwave leakage (separate physics, own brief treatment). “Damaging RF energy” — stray microwave/RF leakage from the RF confinement racks, a non-ionizing occupational-exposure hazard — is a **different shielding problem** from B1/B2: solved by continuous conductive (Faraday-cage) enclosure, not mass shielding. At a flagged representative

frequency of 2.45 GHz (CHARM’s actual RF launcher frequency is unspecified in [1]), the skin depth in aluminum is $1.7\ \mu\text{m}$, so a 1 mm structural skin (≈ 582 skin depths) gives

$$\text{SE} \approx 5054\ \text{dB}$$

— i.e. the airframe/backbone structure and B1’s likely metal facesheets already provide near-total RF attenuation at **zero incremental mass**. This is explicitly **not a mass driver**; the real engineering risk is penetrations and seams (hatches, feedthroughs) needing EMI gaskets, called out qualitatively rather than mass-costed.

10 Combined-cycle engine (detail)

One propulsion string with stage index $\sigma \in \{1, 2, 3\}$. Plant couples **only** by power cable. Stages 1–2 burn **free air** (reaction mass not carried). Stage 3 burns **carried water**. Fusion fuel m_f is not propellant for the nozzle.

10.1 Stage map and literature anchors

Table 11 Stages, reaction mass, and primary literature (one family each — not a survey).

σ	Name	Reaction mass	Primary lit.	What we take from it
1	Elec- tric ducted fan	Free air	NASA HEMM megawatt motor [25]	$\alpha_{\text{mot}} \sim 16\ \text{kW/kg}$ (EM mass), $\eta_m \gtrsim 0.98$ stretch / 0.90 system
2	Mi- crowave air plasma jet	Free compressed air	Ye et al. microwave air plasma [23]; efficiency comment [26]	Architecture (magnetron → compressed-air plasma duct). Do not use Ye’s 28 N/kW thrust claim — control-volume comment shows stagnation-pressure artifact [26]
3	Water plasma thruster	Carried H_2O	Nakagawa water microwave ion thruster [24]; water MPD high- I_{sp} path [27]; water MET [28]	Water + microwave/EM plasma is real [24], [28]. Demo $I_{\text{sp}} \sim 400\text{--}665\ \text{s}$ (gridded) [24]; water-MPD $I_{\text{sp}} \sim 3000\ \text{s}$ class at low η [27]. Vehicle reference uses $I_{\text{sp}} = 2000\ \text{s}$ as a mid stretch (§10.6)

Switching:

$$\sigma = \begin{cases} 1 & \rho > \rho_{12},\ M < M_{12}, \\ 2 & \rho > \rho_{\text{seal}},\ M \geq M_{12}, \\ 3 & \rho \leq \rho_{\text{seal}} \text{ or intakes sealed.} \end{cases}$$

10.2 Performance constants (frozen for sizing)

Table 12 Frozen stage constants (literature-anchored; packaging α are design holes like α_C).

Symbol	Stage	Meaning	Freeze
η_m	1	Motor + drive electrical efficiency	0.90 [25]
η_{prop}	1	Fan propulsive efficiency (Tv/P_{shaft})	0.80
$\eta_l = \eta_m \eta_{\text{prop}}$	1	Bus $\rightarrow Tv$	0.72
$(T/W)_{\text{min}}$	1	Takeoff thrust / weight	0.25
$C_{L,\text{max}}^{\text{TO}}$	1	Takeoff max lift (high-lift / flaps)	Flagged 1.65 — clean VSPAERO $C_L(M=0.3, \alpha=8^\circ) \approx 0.48$ is not enough alone
k_{lof}	1	V_{lof}/V_s	1.12
$v_{\text{to}} \equiv V_{\text{lof}}$	1	Liftoff speed (EDF power reference)	113 m/s from $V_s = \sqrt{2W/(\rho S C_{L,\text{max}})}$
k_{fan}	1	Fan+duct+inverter mass / EM motor mass	1.35
α_{mot}	1	Motor specific power (EM)	16 kW/kg [25]
η_μ	2	Bus $\rightarrow$ microwave power in plasma	0.55
$\eta_{j,2}$	2	Plasma enthalpy $\rightarrow$ directed jet	0.45
$v_{j,2}$	2	Reference jet speed (electrothermal)	600 m/s
η_{jet}	3	Bus $\rightarrow$ jet kinetic power	0.55 (stretch vs water-MPD demo $\sim 0.07\text{--}0.11$ [27])
I_{sp}	3	Vacuum specific impulse (reference)	2000 s
$v_e = I_{\text{sp}} g_0$	3	Exhaust speed	19.61 km/s
P_{hotel}	all	Hotel / plant recirculating floor	5 MW
C_{cap}	1–2	Inlet capture coefficient	≤ 1 (free air; not a carried mass)
$\rho(h)$	2	US Standard Atmosphere 1976 [37]	Closed-form piecewise layers (textbook, not a guess)
S	2	Wing reference area	229 m ² — computed from <code>vehicle_spec.json</code> 's double-delta geometry (§1); cross-checks OpenVSP's own ≈ 229 m ²

Symbol	Stage	Meaning	Freeze
$C_D(M)$	2	Generic hypersonic lifting-body drag table [38]	Flagged for hypersonic; subsonic/transonic now cross-checked by OpenVSP/VS-PAERO (§10.2.1). Table freeze still 0.045 subsonic, 0.09 transonic peak, 0.05 hypersonic
Q_{ascent}	2	Design ascent dynamic pressure	Flagged guess, X-15/Shuttle-class order: 25 kPa
v_1	1→2	Stage 1→2 transition speed	Flagged guess (transonic handoff): 300 m/s

10.2.1 OpenVSP / VSPAERO digital wind tunnel (subsonic–transonic)

The living exterior (`.vsp3` from `vehicle_spec.json` / `make cad-figures`) is run through the bundled **VSPAERO** vortex-lattice solver (`make cad-vspaero`; gear pods deleted for the working copy). Reference area is the OpenVSP MAIN_WING component ($S \approx 229 \text{ m}^2$, same as the paper freeze). This is a **potential-flow digital tunnel**, not hypersonic CFD and not a stage-2/3 propulsion aero model — it qualifies the *outline* in the regime VSPAERO is built for.

Table 13 VSPAERO polar on `catskills_ssto.vsp3` (gear retracted; $Re_c/10^6 = 10$; thin-surface VLM). Source: `research/figures/cad/vspaero/polar.csv`.

M	$\alpha = 0^\circ$: C_D	$\alpha = 4^\circ$: $C_L, C_D, L/D$	$\alpha = 8^\circ$: $C_L, C_D, L/D$
0.30	0.027	0.232, 0.021, 10.9	0.478, 0.038, 12.6
0.60	0.033	0.250, 0.028, 8.9	0.515, 0.047, 10.9
0.80	0.108	0.237, 0.096, 2.5	0.534, 0.111, 4.8
0.95	0.077	0.350, 0.075, 4.7	0.680, 0.106, 6.4

Read against the §10.2 $C_D(M)$ freeze. At $\alpha = 0$ the VLM zero-lift drag is ~ 0.027 subsonic (lighter than the frozen 0.045 floor — VSPAERO under-counts some parasite/excrescence) and peaks near 0.11 at $M = 0.8$ (same *order* as the frozen 0.09 transonic peak). Best L/D in this grid is ≈ 12.6 at $M = 0.3$, $\alpha = 8^\circ$. The climb energy integral in §10.4 still uses the conservative generic table [38]; replacing that table with a VSPAERO-fitted $C_D(M)$ (and extending past Mach 1 with real hypersonic CFD) is future work — Mach $\gtrsim 1.2$ cases on this full airframe did not converge in practical wall time under VLM.

Stage 1 pass analysis. Stage 1 (electric ducted fan, municipal runway through the transonic handoff at v_1) is the propulsion segment whose airframe loads sit inside VSPAERO’s credible band. Treating the digital tunnel as a **Stage 1 outline go / no-go**:

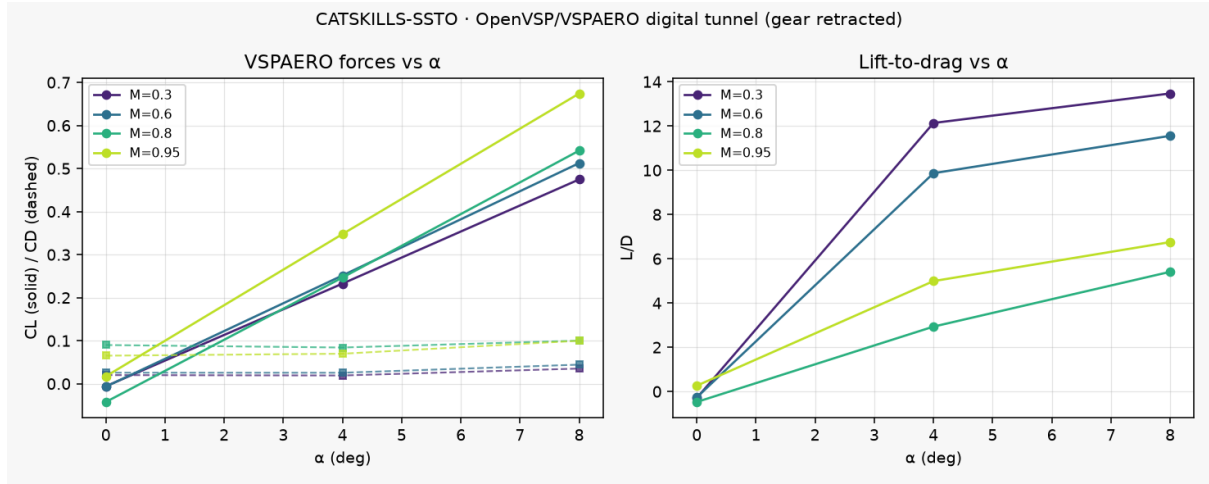


Figure 11 Stage 1 VSPAERO polar (Mach $\times\alpha$ digital tunnel on `catskills_ssto.vsp3`).

Check	Verdict	Note
Solver ran; polar written	Pass	12 cases ($M \in \{0.3, 0.6, 0.8, 0.95\}$, $\alpha \in \{0^\circ, 4^\circ, 8^\circ\}$) $\approx 229 \text{ m}^2$ matches the paper freeze $C_D \sim 0.11$ at $M = 0.8$, $\alpha = 0$ vs frozen ~ 0.09 VSPAERO ~ 0.027 vs frozen 0.045 — solver optimistic on parasite; paper keeps the heavier floor
Reference area S	Pass	
Transonic drag peak	Pass	
Subsonic C_D floor	Soft pass	
Exterior hex mesh + layers (snappyHexMesh)	Pass (mesh)	Flight OML (gear retracted); checkMesh OK (make cad-snappy). Layer coverage partial on thin features
Wing-flow smoke (potentialFoam)	Soft pass	Inviscid streamlines over the port wing at $\sim M = 0.3$, $\alpha = 4^\circ$ (make cad-flow) — poster check, not a polar
Turbulent wing smoke (SA RANS)	Soft pass	simpleFoam + Spalart–Allmaras on the snappy mesh (make cad-rans) — optics / eddy-viscosity field, not a polar

Check	Verdict	Note
Takeoff lift / ground roll (§10.3)	Pass (with flaps)	$V_{\text{lof}} \approx 113 \text{ m/s}$, $s_g \approx 3.34 \text{ km}$ on a 3500 m runway; clean wing alone fails

CHARM SSTO · snappyHexMesh WALL · full airframe

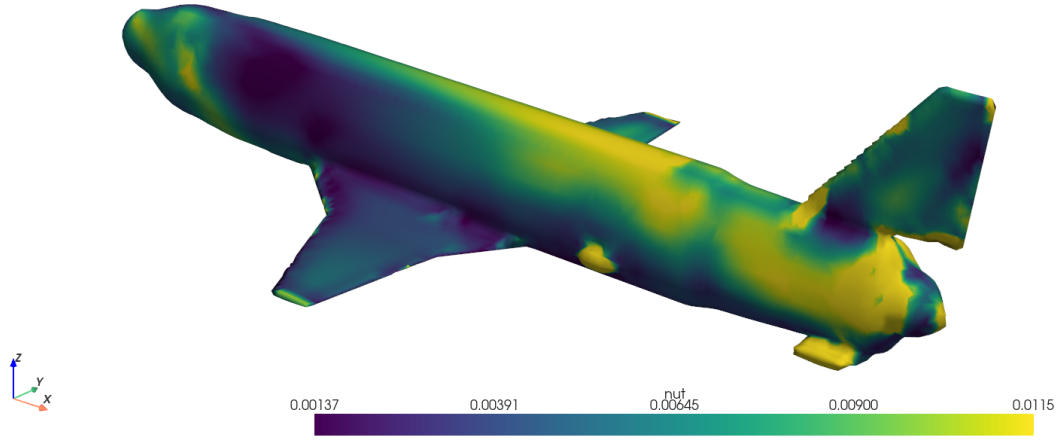


Figure 12 Stage 1 snappyHexMesh wall on the OpenVSP exterior (full airframe in frame; unbroken tube OML — bay doors live on the cargo-skid drop-in, not as roof wings). Colour = wall eddy viscosity ν_t from the Stage 1 RANS dump.

Verdict: Stage 1 **passes** this outline check — the planform is sane in the subsonic–transonic band and nothing in VSPAERO breaks the Stage 1 power/drag story (§10.3). Takeoff **requires the flagged high-lift** $C_{L,\text{max}}$ (clean VSPAERO C_L alone needs $\gtrsim 16 \text{ km}$ of runway). Stage 2 and Stage 3 have their own pass analyses (§10.4, §10.5); they are not VSPAERO freestream polars.

Reaction-mass utilization: - Stages 1–2: utilization of **carried** propellant is zero (air is free). Inlet capture C_{cap} only limits available $\dot{m}_{\text{air}}$. - Stage 3: mass accounting assumes all loaded water is expelled ($u_w = 1$); power conversion is η_{jet} (not all bus power becomes $\frac{1}{2}\dot{m}v_e^2$).

10.3 Stage 1 — takeoff lift, power, and mass

Can it get off the runway before Stage 2? Thrust alone is not enough — the wing must lift $m_0 g_0$ at a municipal V_{lof} . With the VSPAERO clean-wing $C_L \approx 0.48$ ($M=0.3$, $\alpha=8^\circ$) the stall speed is $\sim 187 \text{ m/s}$ and the ground roll is $\sim 15197 \text{ m}$ — **fail**. Closing municipal takeoff therefore freezes a **flagged high-lift** $C_{L,\text{max}}^{\text{TO}} = 1.65$ (flaps / elevon droop; not yet in the OpenVSP exterior):

$$V_s = \sqrt{\frac{2 m_0 g_0}{\rho_{\text{SL}} S C_{L,\text{max}}^{\text{TO}}}}, \quad V_{\text{lof}} = k_{\text{lof}} V_s, \quad s_g = \int_0^{V_{\text{lof}}} \frac{V \, dV}{a(V)}$$

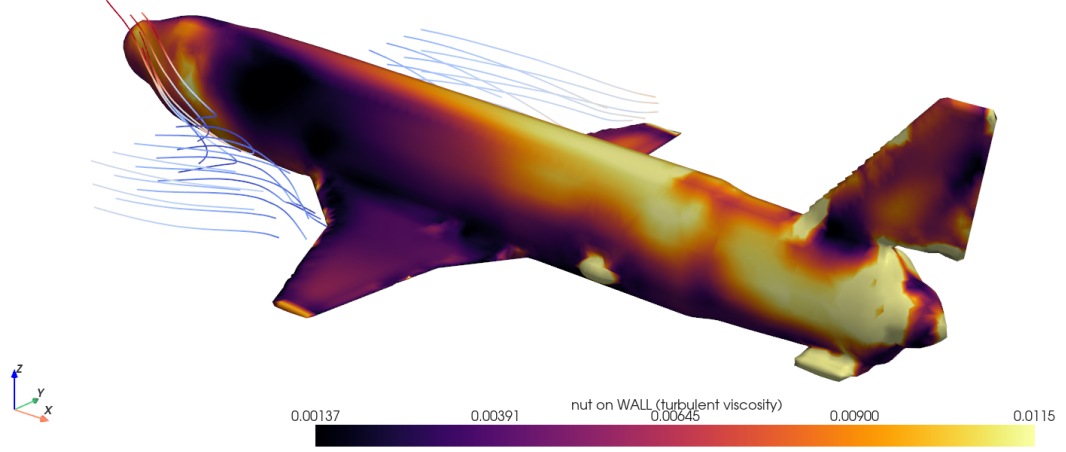


Figure 13 Stage 1 turbulent flow: OpenFOAM Spalart–Allmaras RANS ($\sim M = 0.3$, $\alpha = 4^\circ$), full airframe. Wall coloured by eddy viscosity ν_t ; streamlines over the forward fuselage and wing root.

with $a = (T_1 - D - \mu(W - L))/m_0$ during the roll (C_L, C_D frozen at gear+flaps values). At $m_0 = 240$ t:

$$V_{\text{lof}} \approx 113 \text{ m/s}, \quad s_g \approx 3.34 \text{ km on a 3500 m runway (margin 156 m)}.$$

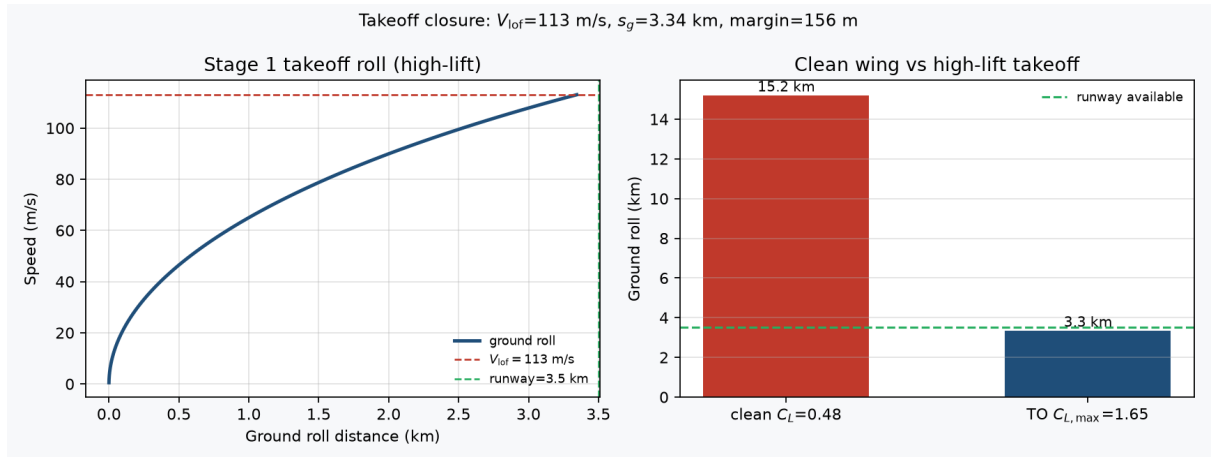


Figure 14 Stage 1 takeoff closure: ground-roll speed vs distance (left); clean-wing vs high-lift runway demand (right).

EDF bus power is referenced at liftoff (not an arbitrary 80 m/s):

$$T_1 \geq (T/W)_{\min} m_0 g_0, \quad P_1 = \frac{T_1 V_{\text{lof}}}{\eta_1}, \quad m_{\text{EDF}} = k_{\text{fan}} \frac{P_1}{\alpha_{\text{mot}}}.$$

$$T_1 \approx 589 \text{ kN}, \quad P_1 \approx 93 \text{ MW}, \quad m_{\text{EDF}} \approx 7.8 \text{ t (HEMM-class } \alpha_{\text{mot}}; \text{ within the 15 t engine budget)}.$$

Municipal segment is **not** the $P_\star$ driver: ground roll + accel to v_1 gives $t_1 \approx 133 \text{ s}$, $E_1 \approx 3.4 \text{ MWh}$ — still small next to stages 2–3. **Optics caveat:** takeoff **passes only with the high-lift freeze**; a clean double-delta does not municipal-takeoff this GLOW.

10.4 Stage 2 — power and mass (electrothermal, not Ye’s N/kW)

Energy-consistent thrust-to-power (comment [26] kills super-unity claims):

$$\boxed{\frac{T_2}{P_2} = \frac{2\eta_\mu \eta_{j,2}}{v_{j,2}} \approx 0.825 \text{ N/kW} \quad (v_{j,2} = 600 \text{ m/s}).}$$

(Ye’s reported $\sim 28 \text{ N/kW}$ [23] would imply $\gg 100\%$ efficiency and is discarded [26].)

$$\dot{m}_{\text{air}} = \rho A_i v C_{\text{cap}}, \quad \Delta h = \frac{\eta_\mu P_2}{\dot{m}_{\text{air}}}, \quad P_2 \leq P_\star - P_{\text{hotel}}.$$

Climb still sets the bus:

$$D_{\text{ram}} = \frac{1}{2} \rho v^2 C_D S = Q C_D(M) S, \quad P_{\text{need}} \approx \frac{(D_{\text{ram}} - T_{\text{excess}})v}{\eta_p}.$$

Freeze for sizing: $P_2^\star = P_\star - P_{\text{hotel}} = 995 \text{ MW} \rightarrow T_2 = (2\eta_\mu \eta_{j,2}/v_{j,2}) P_2^\star \approx 821 \text{ kN}$, constant along the climb since P_2 sits at the ceiling and $v_{j,2}$ is frozen.

Why $P_2^\star = P_3^\star$ does not mean stage 2 and stage 3 look alike. Both freezes above are taken *at the same ceiling* $P_\star - P_{\text{hotel}}$ — that is a packaging/bus-sizing choice, not a claim that the two mission phases consume comparable energy. Under a **constant ascent dynamic pressure** Q_{ascent} climb schedule (Bryson-style energy-height method [38]: $E_s = h + v^2/2g_0$, $dE_s/dt = (T - D)v/(mg_0)$), the path $h(v)$ is fixed by $\rho(h) = 2Q_{\text{ascent}}/v^2$ (US Standard Atmosphere 1976 [37]), collapsing the 2D trajectory to a 1D quadrature

$$\boxed{\frac{dt}{dv} = \frac{m_0 \left(g_0 \frac{dh}{dv} + v \right)}{(T_2 - Q_{\text{ascent}} C_D(M) S) v}}$$

integrated numerically (`integrate_stage2_climb` in `constants_model.py`, plain numpy quadrature) from v_1 to the existing air-breathing handoff speed $v_{\text{ab}} = 3.5 \text{ km/s}$ (§6 — reused, not re-guessed). Mass is held at m_0 (stages 1–2 burn free air; no carried propellant depletes). The sealing altitude is **not** assumed — it falls out as $h(v_{\text{ab}})$:

$$\boxed{t_2 \approx 28.7 \text{ min}, \quad h_{\text{seal}} \approx 39.6 \text{ km}, \quad M_{\text{seal}} \approx 11.0}$$

$$E_2 = P_2^\star t_2 \approx 476 \text{ MWh}.$$

Stage 2 pass analysis. Stage 2 is microwave air plasma on a hypersonic constant- Q climb — **not** a VSPAERO freestream polar. The smoke tests that exist today are energy / climb bookkeeping and literature anchors, not a duct CFD:

Check	Verdict	Note
Climb quadrature closes ($T_2 > D$ along path)	Pass	<code>integrate_stage2_climb</code> returns finite t_2 , h_{seal} , M_{seal} at P_2^* $T_2/P_2 = 2\eta_\mu\eta_{j,2}/v_{j,2}$ — energy-consistent; super-unity claims rejected [26]
Electrothermal T/P (not Ye N/kW)	Pass (physics)	Bottom-up stage energies land inside the §4 $\kappa_E \in [2, 4]$ band (§10.5 reconciliation)
$E_2 = P_2^* t_2$ vs top-down κ_E	Soft pass	Generic table [38]; VSPAERO did not finish Mach $\gtrsim 1.2$
Hypersonic airframe $C_D(M)$	Not tested	§10.2.1 SU2 Euler is a Stage1-band exterior check only — it does not clear hypersonic C_D
Subsonic volume-CFD airframe smoke	Inherited	Lab ducts exist [23]; vehicle-scale power and specific mass do not (§13.3)
GW-class air-plasma thruster + packaging ~ 230 kW/kg	Fail / unobtainium	

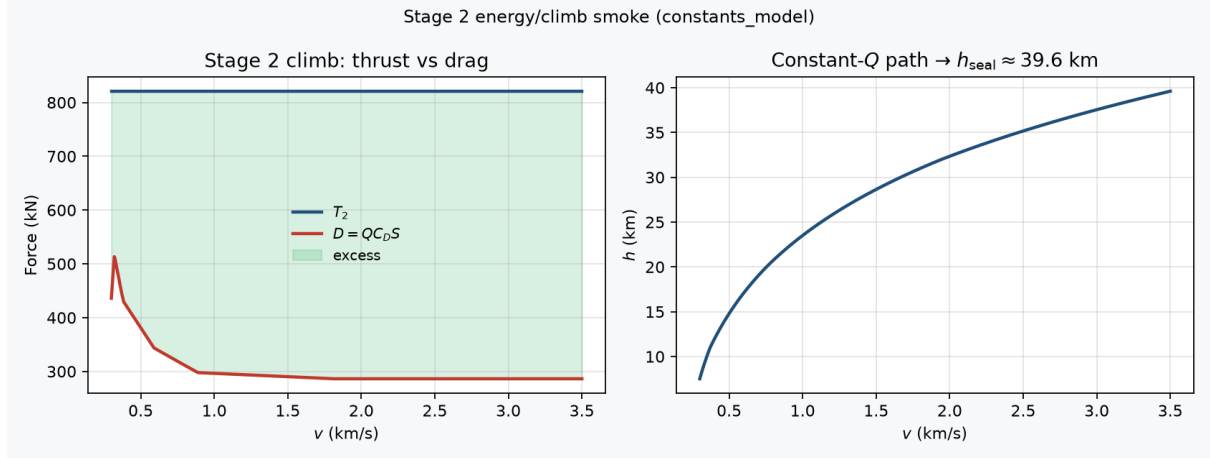


Figure 15 Stage 2 climb smoke: constant- Q path with T_2 vs $D = QC_D S$ (left) and $h(v)$ to seal (right).

Verdict: Stage 2 **passes the energy/climb smoke** (the trajectory integral and T/P physics close on paper) and **fails the thruster/packaging smoke** until a real MW $\rightarrow$ GW air-plasma string exists. The exterior CFD figure in §10.2.1 is deliberately **not** re-used as a Stage2 hypersonic clearance. Next smoke tests worth building: (i) a 1D inlet + applicator mass-flow / Δh model at Q_{ascent} that must recover $\dot{m}_{\text{air}}$ and T_2 without magic C_{cap} ; (ii) OpenVSP **actuator-disk** or jet boundary on the same `.vsp3` (still not plasma CFD); (iii) OpenFOAM **snappyHexMesh** (+ layers) $\rightarrow$ RANS/Euler on the true STL, then a high-Mach solver before touching the frozen $C_D(M)$ table; (iv) subscale literature replay — reproduce published microwave-air thrust/power within a factor of a few before trusting the vehicle freeze.

10.5 Stage 3 — water, power, and I_{sp} cases

$$\boxed{T_3 = \frac{2\eta_{\text{jet}}P_3}{v_e}, \quad \dot{m}_{\text{w}} = \frac{T_3}{v_e}, \quad P_3 \leq P_{\star} - P_{\text{hotel}},}$$

$$m_{\text{w}} = m_{\text{dry}}(e^{\Delta v_{\text{vac}}/v_e} - 1) \quad (u_{\text{w}} = 1).$$

With $P_3 = 995$ MW, $\eta_{\text{jet}} = 0.55$, $I_{\text{sp}} = 2000$ s:

$$T_3 \approx 56 \text{ kN}, \quad \dot{m}_{\text{w}} \approx 2.85 \text{ kg/s}.$$

E_3 is a **physical invariant, independent of the P_3 ceiling**. Unlike stage 2 (§10.4), stage 3's total energy does not depend on which power ceiling gets assumed — the closed form

$$\boxed{E_3 = \frac{1}{2} m_{\text{w}} v_e^2 / \eta_{\text{jet}} \approx 4309 \text{ MWh}}$$

follows purely from $(m_{\text{w}}, v_e, \eta_{\text{jet}})$ — pick a *smaller* P_3 and t_3 simply grows in proportion ($t_3 = E_3/P_3$), the total energy delivered to the water is the same. At the $P_3^{\star}$ ceiling this gives the burn time already used above (§10.6): $t_3 \approx m_{\text{w}}/\dot{m}_{\text{w}} \approx 4.33$ h, and $P_3^{\star}t_3 \equiv E_3$ exactly by construction (same physics, not a coincidence).

Table 16 Water store versus stage-3 I_{sp} at fixed $m_{\text{dry}} = 196$ t, $\Delta v_{\text{vac}} = 4$ km/s.

I_{sp}	Anchor	m_{w}	m_0	Note
665 s	Nakagawa water ion demo [24]	166 t	362 t	Archi- tecture real; SSTO water brutal
2000 s	Refer- ence stretch	44 t	240 t	Be- tween gridded water and water- MPD I_{sp}
3150 s	Water MPD class [27]	27 t	223 t	Demo η much lower than our η_{jet} freeze

Path: tanks $\rightarrow$ pump/injector $\rightarrow$ vaporizer $\rightarrow$ microwave/EM plasma $\rightarrow$ shared nozzle [24], [27], [28].

Stage 3 pass analysis. Stage 3 is carried-water plasma in vacuum — **no atmosphere**, so no wind tunnel. The smoke tests that exist today are propellant / power bookkeeping and demo-literature anchors:

Check	Verdict	Note
Rocket-equation water mass $m_w(I_{sp})$	Pass	Closed form at fixed m_{dry} , Δv_{vac} (table above)
$E_3 = \frac{1}{2}m_w v_e^2 / \eta_{jet}$ invariant	Pass	Independent of P_3 ceiling; $P_3^* t_3 \equiv E_3$ by construction
T_3 , $\dot{m}_w$, t_3 consistency	Pass	$T_3 = 2\eta_{jet} P_3 / v_e$, $t_3 = m_w / \dot{m}_w$
Reference $I_{sp} = 2000$ s at $\eta_{jet} = 0.55$	Soft fail / stretch	Between gridded water-ion demos [24] and high- I_{sp} /low- η water-MPD [27] — not jointly demonstrated
Packaging ~ 320 kW/kg in 3.1 t	Fail / unobtainium	Same class hole as stage 2 (§10.6, §13.3)

Verdict: Stage 3 **passes the propellant/energy smoke** (water, Δv , and bus energy close on paper) and **does not pass the thruster-performance or packaging smoke** at the reference freeze. Next smoke tests worth building: (i) a 0D thruster I/O block (P, η_{jet}, I_{sp}) $\rightarrow$ ($T, \dot{m}_w$) with hard bounds from [24], [27], [28] that flags when the vehicle freeze leaves the demo envelope; (ii) burn the 44 t water store in that block and check Δv vs 4 km/s; (iii) tank $\rightarrow$ injector feed pressure / vaporizer power draw as a hotel-load line item; (iv) later, FlightGear/JSBSim vacuum coast+burn using that same I/O map — orbit is where stage 3 actually lives.

Stage energy comparison — same peak power, very different mission phases. $P_2^* = P_3^*$ is a **bus-ceiling coincidence**, not a claim that the two phases are alike: stage 2 is a short, low-mass-flow hypersonic climb; stage 3 is a long, power-limited vacuum burn that expends the entire water store.

Table 18 Stage energy comparison at the closed reference vehicle ($m_0 = 240$ t).

Stage	Peak P^*	Duration	Energy	Why
1 — EDF	93 MW	133 s	3.4 MWh	Ground roll / initial climb only
2 — air plasma	995 MW	28.7 min	476 MWh	Short, steep constant- Q climb to h_{seal}
3 — water plasma	995 MW	4.33 h	4309 MWh	Long, power-limited vacuum insertion burn

Stage	Peak $P^\star$	Duration	Energy	Why
Hotel	5 MW	$t_1 + t_2 + t_3$	24.2 MWh	Continuous recirculating floor (§9.5)
Bottom-up total	—	—	4812 MWh	$E_1 + E_2 + E_3 + E_{\text{hotel}}$

Same peak power ($P_2^\star = P_3^\star$ by ceiling), but $t_2 \ll t_3$ and $E_2 \ll E_3$ by **actual physics** — this is the answer to why stage 2 and stage 3 previously looked identical on paper: the ceiling was the only number ever shown; duration and energy were never independently derived until this pass.

Reconciliation against the §4/§8 top-down energy budget. §4/§8 assume $E_{\text{src}} = \kappa_E E_{\text{orb}}$ with $\kappa_E \in [2, 4]$ as a chain-efficiency guess, without a bottom-up check. Summing the stage energies above against $E_{\text{orb}} = 6.49 \text{ TJ}$ (§4.1):

$$\kappa_{E,\text{implied}} = \frac{E_1 + E_2 + E_3 + E_{\text{hotel}}}{E_{\text{orb}}} \approx 2.67$$

— inside the assumed $[2, 4]$ band (not forced to agree by construction; the two derivations are independent), and 89% of the top-down $\kappa_E = 3$ figure of 5408 MWh used to freeze the reference vehicle in §8. This is an honesty check, not a new closure — §7/§8’s mass chain is not re-solved against this bottom-up number.

10.6 Closed solve: powers, component masses, fuels

Power ratings (required outputs):

$P_1^\star \approx 93 \text{ MW}$	(stage 1 at $m_0 = 240 \text{ t}$),
$P_2^\star = 995 \text{ MW}$	(stage 2 sizes $P_\star$; $t_2 \approx 28.7 \text{ min}$),
$P_3^\star = 995 \text{ MW}$	(stage 3 vacuum; $T_3 \sim 56 \text{ kN}$; $t_3 \approx 4.33 \text{ h}$).

$P_2^\star = P_3^\star$ by the shared bus ceiling — §10.4/§10.5 now derive t_2 , h_{seal} , and E_2 independently of that ceiling coincidence, and show $E_2 \ll E_3$ despite it (comparison table, §10.5).

How to read the equal peak loads. The plant is sized so that a feasible flight envelope exists in *both* stage 2 and stage 3 when the bus is run at its ceiling $P_\star - P_{\text{hotel}}$. The CHARM plant is assumed throttleable (§5; stage 1 only needs $\sim P_1^\star$), but the reference mission holds stages 2 and 3 at that same maximum: stage 2 because the constant- Q climb *requires* that power to close t_2 and h_{seal} on a municipal-runway GLOW; stage 3 because E_3 is fixed by (m_w, I_{sp}) and $t_3 = E_3/P_3$, so running below the ceiling only lengthens an already multi-hour insertion. The equal ratings therefore imply an asymmetry of *need*, not of physics: **stage 2 is the power-sizing driver** (it sets how large $P_\star$ must be for the envelope to close), while **stage 3 is somewhat underpowered** relative to a short vacuum burn — even flat-out at the stage-2-sized plant it still takes $t_3 \sim 4.33 \text{ h}$. A bigger plant would shorten stage 3 without changing E_3 ; a smaller plant would break stage 2 first.

Engine mass budget (reference hole $m_{\text{eng}} = 15 \text{ t}$):

Table 19 Engine component mass allocation and implied packaging specific power.

Component	Mass	Sized to	Implied $\alpha = P/m$
Stage-1 EDF (motor+fan+duct)	5.0 t	P_1^*	$\sim 13 \text{ kW/kg}$ (near HEMM [25] after k_{fan})
Stage-2 MW farm + applicator + precompress	4.4 t	P_2^*	$\sim 230 \text{ kW/kg}$ (packaging unobtainium)
Stage-3 thruster head + vaporizer/feed	3.1 t	P_3^*	$\sim 320 \text{ kW/kg}$ (packaging unobtainium)
Shared nacelle / nozzle / inlets / bus coupler	2.5 t	structure	—
Engine total	15 t	§8 freeze	—

If stage-2/3 hardware were packaged at a more literal $\alpha_\mu \sim 8 \text{ kW/kg}$, m_{eng} would jump to $\mathcal{O}(100 \text{ t})$ and GLOW to $\sim 400 \text{ t}$. The 15 t engine line is therefore a **same-class hole as** $\alpha_C = 15 \text{ kW/kg}$ — called out in §13 — while **power** and **water** closes are on firmer ground.

Fusion fuel (not nozzle propellant): mission bus energy $E_{\text{src}} = \kappa_E m_{\text{ins}} \Delta \varepsilon$. Stoichiometric $p\text{-}^{11}\text{B}$ rest-mass for that energy is $\ll 1 \text{ kg}$ at ideal conversion; with chain efficiency ~ 0.25 still $\sim 1 \text{ kg}$. Freeze $m_f = 0.5 \text{ t}$ covers tankage, residuals, and margin — **water dominates expendables**.

Vacuum burn time at constant T_3 : $t_3 \approx m_w / \dot{m}_w \approx 4.33 \text{ h}$ — long insertion, consistent with power-limited electric thrust, and $\gg t_2 \approx 28.7 \text{ min}$ (§10.5 comparison table).

10.7 Physical envelope

- One nacelle with **external air scoops** (OML lips + close-off shutters) feeding an **inlet duct/plenum**.
- Stage-1 EDF sits **in-duct** behind the scoops (not a bare fan on the skid face); duct also feeds stage-2 precompressor.
- **Shared flared** aft nozzle — common exit for **all three** stages (stage-1 EDF bypass + stages 2–3 plasma).
- Water tanks moved to the **fusion plant skid**, ahead of CHARM ($m_w \approx 44 \text{ t} \approx 44 \text{ m}^3$ at the reference I_{sp} ; envelope 35.5–39.5 m, not small service bottles) — a supplemental radiation shield when full, §9.9; fed to the engine skid by a long cross-skid duct (`j_water_to_injector`). MW farm shared in packaging intent between stages 2 and 3.
- $m_{\text{eng}} = 15 \text{ t}$ reference as in §10.6.

10.8 Audio signature in atmosphere

There is no muffler for this. A jet, a fan, and a plasma torch are all doing the same physical thing — dumping kinetic energy into a compressible fluid — and every way of doing that quietly

amounts to spreading the same thrust over more mass flow at a lower exit velocity (exactly how a modern high-bypass turbofan buries the shriek of a 1960s low-bypass one, at equal thrust). CHARM SSTO’s three propulsion regimes sit at three very different points on that trade, so the atmospheric soundprint is expected to **change character across the ascent**, not hold one hum like a cruising airliner:

- **Stage 1 (EDF, municipal takeoff/climb).** An electric ducted fan has no combustor and no turbine — the two loudest tonal sources on a jet engine are simply absent. What is left is blade-passage tone(s) plus broadband turbulent-mixing “whoosh,” the same two mechanisms that make a modern turbofan’s fan stage its dominant noise source.
- **Stage 2 (microwave air plasma, hypersonic climb).** A hotter, faster heated-air jet ($v_{j,2} = 600 \text{ m/s}$, §10.4) — mechanically a jet, physically indifferent to how the enthalpy got there (combustion or microwaves) — so the same turbulent-mixing jet-noise physics applies, and at a materially higher jet velocity than Stage 1 or a legacy low-bypass turbojet.
- **Stage 3 (water plasma, vacuum).** Intakes are sealed (§10.4’s h_{seal}) — there is no external medium left to carry airborne noise. Atmospheric acoustic signature is, by construction, a Stage-1/Stage-2-only question.

A real calibration, not textbook v^8 taken on faith. Lighthill’s classic result [41] is that subsonic jet-mixing acoustic power scales as $\dot{m} v_{\text{jet}}^n$ with $n \approx 8$ in the far field. Rather than adopt that exponent by citation alone, this section calibrates n from real hardware: NASA’s JT8D→JT8D-109 “Refan” program [41] cut the JT8D’s mixed takeoff jet velocity from 1470 to 1140 ft/s ($448.1 \rightarrow 347.5 \text{ m/s}$) and measured a 7–8 EPNdB reduction on a B727-200 at the FAR Part 36 measuring stations — a real ($\Delta v, \Delta \text{dB}$) pair, not a simulation:

$$P_{\text{acoustic}} \propto \dot{m} v_{\text{jet}}^n, \quad n = \frac{\Delta \text{EPNdB}}{10 \log_{10}(v_{727}/v_{727,\text{refan}})} \approx 6.79$$

— close to Lighthill’s $n = 8$, not identical, which is exactly what a real measured EPNL (loudness/duration/tone-corrected) should look like next to an idealized far-field acoustic-power law.

Own-vehicle jet velocities and mass flows, backed out of numbers already frozen in §10.3/§10.4 (not new design choices): Stage 1’s $v_{j,1}$ comes from inverting the already-assumed $\eta_{\text{prop}} = T v / P_{\text{shaft}} = 0.80$ through ideal actuator-disk (Froude) theory, $\eta_{\text{prop}} = 2V / (V + v_{j,1})$ — a flagged modeling assumption, since η_{prop} was frozen as a flat efficiency, not derived from a jet velocity in §10.3:

$$v_{j,1} = V_{\text{lof}} \left(\frac{2}{\eta_{\text{prop}}} - 1 \right) \approx 170 \text{ m/s}, \quad \dot{m}_1 = \frac{T_1}{v_{j,1} - V_{\text{lof}}} \approx 10430 \text{ kg/s}.$$

That implied mass flow is enormous — roughly 7–10× a modern widebody turbofan’s — which is itself a **flagged packaging caveat** (no fan diameter this large is sized anywhere in §10.3/§10.7); it is also *why* Stage 1 comes out quiet despite $T_1 \approx 589 \text{ kN}$ being nearly 3× a whole 727’s static thrust. Stage 2’s mass flow follows directly from the already-frozen T_2 , $v_{j,2}$ (§10.4): $\dot{m}_2 = T_2 / v_{j,2} \approx 1368 \text{ kg/s}$.

Table 20 Atmospheric acoustic order-of-magnitude estimate vs. a real, comparably sized reference jet.

	v_{jet}	$\dot{m}$	rel. to 727 (dB)	$\approx$ EPNdB
727 (3 $\times$ JT8D-9, ref.) [41], [42], [43]	448 m/s	434 kg/s	0	100 (ref.)
Stage 1 — EDF	170 m/s	10430 kg/s	−15	$\sim$ 85
Stage 2 — air plasma	600 m/s	1368 kg/s	+14	$\sim$ 114

Reading these as everyday loudness (a rough translation, not a rigorous EPNdB $\rightarrow$ dBA conversion): $\sim$ 85 dB is heavy truck traffic at the curb — noticeable, not hazardous; $\sim$ 114 dB is jackhammer/front-row-concert territory — genuinely hazardous without hearing protection at close range, and louder than an unmodified 727 was. **Stage 1, despite carrying 3 $\times$ a 727’s static thrust, is estimated $\sim$ 15 dB *quieter* than a 727 at the reference distance** — the same “spread the thrust over more mass flow at lower velocity” trade that quieted every high-bypass turbofan since the 1970s, taken further by an electric fan with no combustor. **Stage 2 is estimated $\sim$ 14 dB *louder*** — a real, flagged community-noise problem for the portion of the climb still low enough to matter, not resolved by “it’s not chemical.”

Sonic boom. The constant- Q climb path already integrated in §10.4 crosses $M = 1$ at $h \approx 8.0$ km (own atmosphere model, not an assumption) — far lower than Concorde’s $\sim$ 16–18 km supersonic-cruise altitude, where its well-documented $\sim$ 1–2 psf boom overpressure was already enough to end civil overland supersonic flight. No boom-overpressure model is applied here (that requires a dedicated ascent-corridor acoustic study, flagged as future work, §13), but boom overpressure falls off with slant range from the shock, so a crossing at half Concorde’s altitude points toward a **louder** ground boom, not a quieter one — an unresolved noise-abatement problem, not a solved one.

A stylized listen. `charm_ssto_ascent_soundscape.wav` (repo, $\sim$ 52 s stereo, generated by `emit_audio_signature.py`) is a **time-compressed sound-design pass**, not a validated psychoacoustic or CFD acoustic simulation: real stage durations are $t_1 \approx 133$ s, $t_2 \approx 29$ min, $t_3 \approx 4.3$ h (§10.5/§10.6), obviously not literal audio length. What *is* grounded in the numbers above: the two “roars” really are mixed at the $\dot{m} v_{\text{jet}}^n$ ratio from the table (dynamic range compressed 2 $\times$ for audibility, not hidden), and a stylized N-wave “crack” transient sits exactly at the timeline fraction corresponding to the $M = 1$ crossing computed above. Frequencies and timbre are illustrative — no fan blade count, duct geometry, or Strouhal-scaled spectrum exists for this airframe to compute a real one — but each stage is still built from a distinct, motivated mechanism rather than one flat noise wash: Stage 1 spools up from standstill and builds with ground-roll speed toward V_{lof} (§10.3), with a faint high-frequency inverter/PWM whine (visible as the wavering band near 7 kHz in the figure below) marking it as *electric*, not turbine; Stage 2 adds a sizzling plasma-discharge crackle and a slow turbulent “surge” on top of the broadband roar, since a real microwave/arc air-plasma jet buzzes and spits rather than just hissing like a clean thermal jet. The final segment renders the Stage-3 vacuum silence from the cabin’s perspective: no jet roar reaches the hull once there is no air outside it to carry one — but that does **not** mean nothing is audible. It is deliberately a **“bump and grind,”** not a hum alone: magnet/pump tonal whine, a low broadband bearing-friction “grind” texture, and a periodic percussive cold-head knock (synthesized as a short decaying broadband impulse at the cryocooler’s own cycle rate, not a smooth sine swell — a real Gifford-McMahon cold head’s displacer stroke is a knock, per §9.5/§9.6), all mixed well below the atmospheric-flight levels above but with real presence, not near-silence.

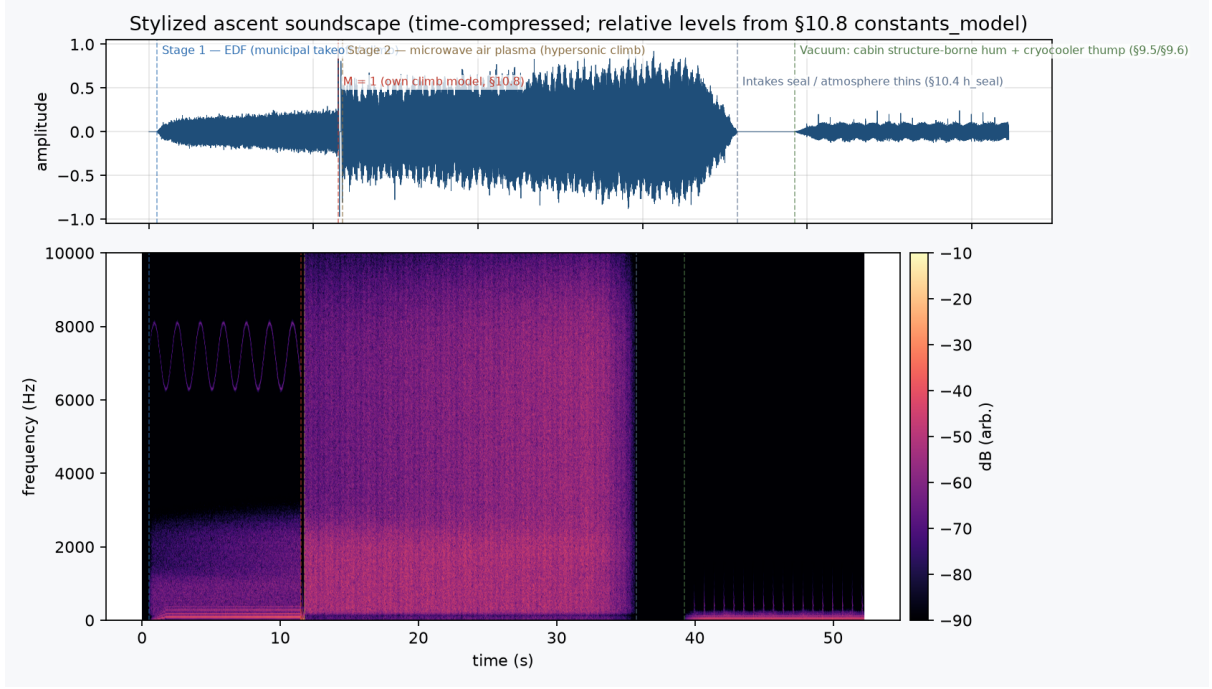


Figure 16 Ascent soundscape: waveform (top) and spectrogram (bottom) of the stylized audio signature — Stage 1 EDF, the modeled $M = 1$ crack, Stage 2 air-plasma roar, and the Stage-3 vacuum hum, in relative-loudness proportion from the table above.

10.9 Orbital ascent profile

To make the three-stage flight envelope of §10.3–10.6 concrete end to end, Fig.~17 traces the reference mission from a specific, real municipal field — **Statesville Regional Airport (KSVH)**, Iredell County, NC (formerly *Statesville Municipal Airport*) — up to ISS-altitude LEO. This is a **schematic**, not a navigation product: the spiral panel’s radial axis exaggerates altitude relative to Earth’s radius for legibility (true LEO-altitude/ $R_{\oplus} \approx 0.06$, an invisible sliver at true scale), and Stage 1/Stage 3 altitude-vs-time *pacing* is a smooth interpolation between grounded endpoints rather than a separately time-integrated trajectory (only Stage 2 has a real $h(t)$, reusing the exact constant- Q quadrature from `integrate_stage2_climb` in §10.4). What *is* physically real: the three stage durations ($t_1 \approx 133$ s, $t_2 \approx 28.7$ min, $t_3 \approx 4.33$ h) are the same numbers from §10.5/§10.6, Stage 1 ends exactly at $h(v_1)$ on the same constant- Q schedule Stage 2 continues (not a new assumption), and the spiral’s rotation rate at each instant is the true local circular-orbit rate $2\pi/T(h)$ from the vis-viva relation — so the ≈ 3.3 visible loops during Stage 3 are a genuine consequence of a ~ 4.3 h burn against an ~ 88 – 93 min LEO period in this altitude band, not a decorative flourish. Note KSVH’s real runway (2,135 m) is shorter than the 3,500 m municipal-runway closure assumed for the reference GLOW elsewhere in this paper (§10.3, G6) — it is used here as a concrete, real-world stand-in for “a municipal airport,” not a claim that this exact field supports the takeoff roll as sized.

11 Layout details

Station map for the vision figures in §1. The **top-down bay connectivity** diagram is a reading aid for the floorplan; gear remains on the exterior profile only.

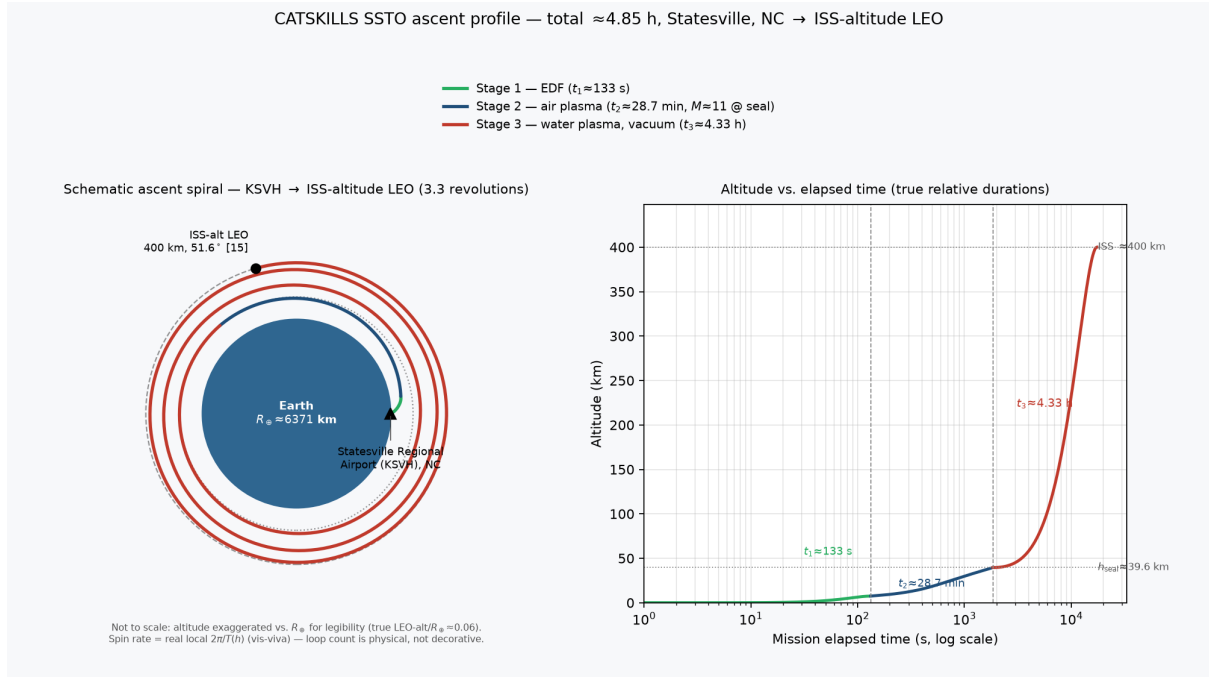


Figure 17 Schematic ascent profile from Statesville Regional Airport (KSVH), NC to ISS-altitude LEO (≈ 400 km, 51.6° [15]): spiral view (left, altitude exaggerated, colored by stage) and altitude vs. mission elapsed time on a log time axis (right, true relative stage durations). Generated by `emit_orbital_ascent_diagram.py`.

Table 21 Longitudinal station and bay layout.

Station (m)	Bay	Contents
0–11	Crew module	Forward-facing CDR/PLT flight deck; six forward-facing passenger seats; WCS; galley (no sink); luggage stowage ; ECLSS + O₂/N₂ inside pressure vessel; solid side + aft hatches
—	Ground door	Forward/port crew door (side hatch) — terrestrial ingress only
11–15	Airlock	Suited-crew airlock (~ 2.5 m class clear), aft bulkhead facing into cargo bay
15–33.3	Cargo	18.3 m $\times$ 4.6 m payload bay (no reactors)
33.3–35.5	Battery	Flight battery ≈ 2 t (restart / hotel)
35.5–39.5	Water	≈ 44 t H ₂ O — relocated ahead of CHARM: supplemental radiation shield when full (§9.9)
39.5–41.5	Fusion fuel	Proton / ¹¹ B feed tanks + plumbing (low mass, real volume)

Station (m)	Bay	Contents
41.5–49	CHARM	Reactor island incl. permanent shield bulkhead ($\lesssim 120\text{ m}^3$, 66.7 t)
49–52	Engine	Combined-cycle nacelle + nozzle
Wings	Controls	Elevons, rudder (gear not drawn on this figure)

Doors (Shuttle pattern). (1) **Side/forward crew door** — runway/ground only; (2) **airlock** — on-orbit cabin $\leftrightarrow$ cargo bay / vacuum for suited operations [21]. Fig.~18 is auto-generated (whole-vehicle scope; crew capsule expanded to system level, airlock/cargo bay as single boxes, plant/engine one level) by the same pipeline as Figs.~9–10.

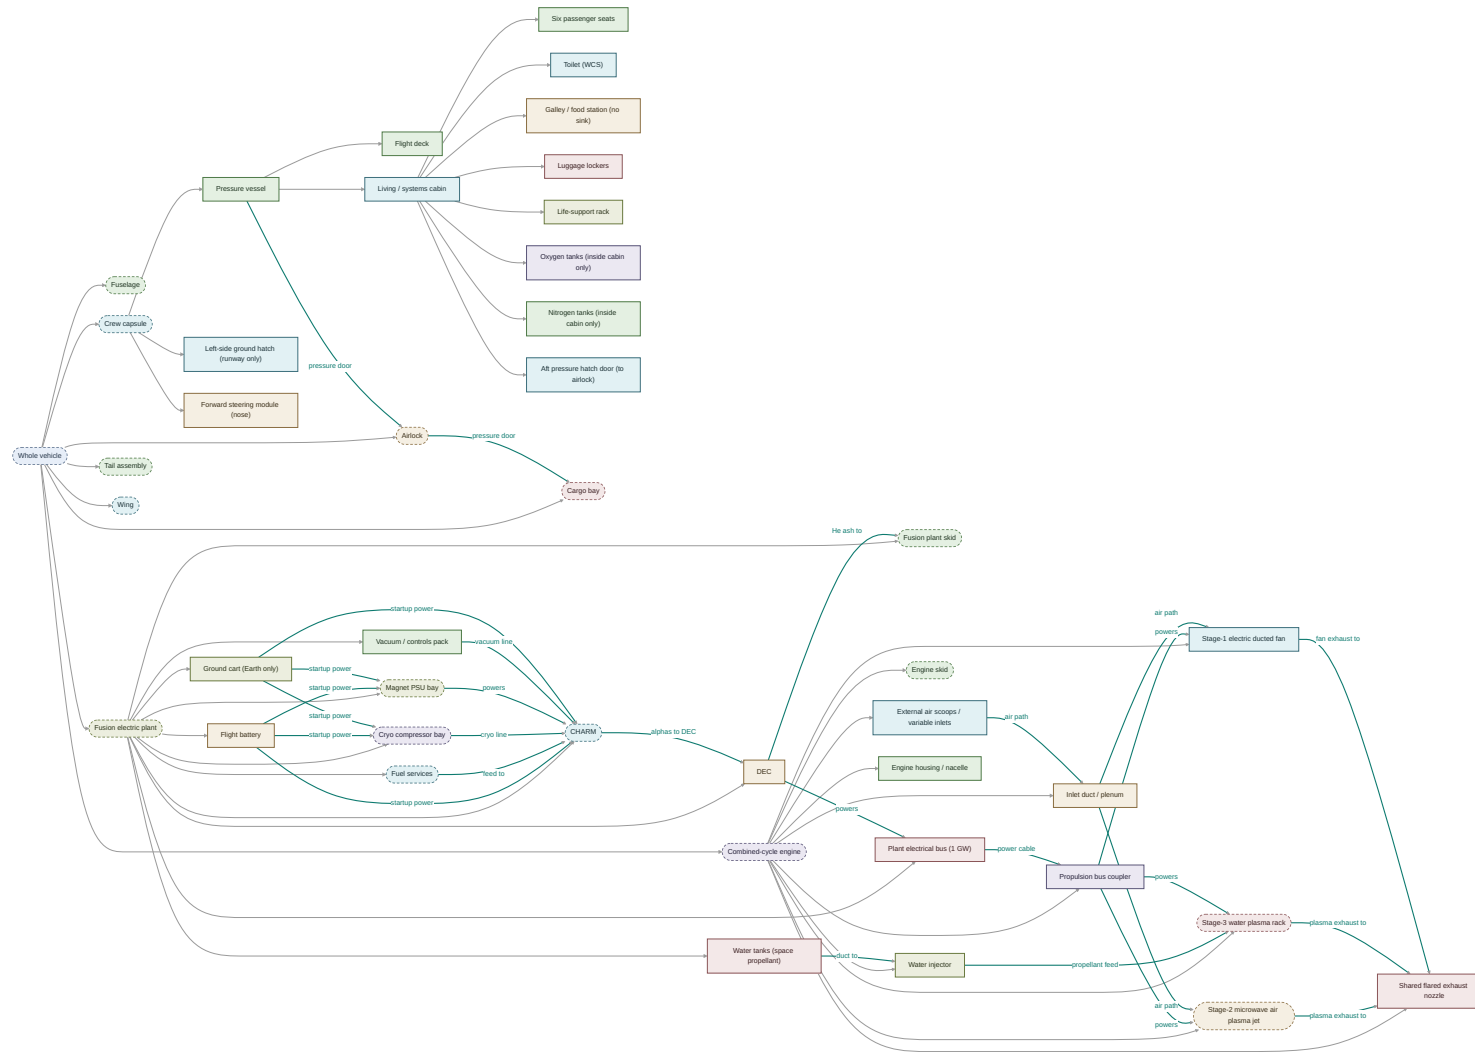


Figure 18 Top-down floorplan from assembly.json.

12 Systems checklist (equations $\rightarrow$ constraints)

Table 22 Systems checklist: equations to constraints.

Step	Governing relations	Binding output
Goals	G1–G9 + single-deck crew	Shuttle bay + municipal SSTO to ISS
LEO energy	$E_{\text{orb}} = m_{\text{ins}}\Delta\varepsilon$, $E_{\text{src}} = \kappa_E E_{\text{orb}}$	~ 1.8 GWh orbital @ 196 t; ~ 5.4 GWh source @ $\kappa_E = 3$
Regimes	Stages 1–3 mass-flow logic	EDF $\rightarrow$ microwave air plasma $\rightarrow$ water plasma
Water	$m_w = m_{\text{dry}}(e^{\Delta v_{\text{vac}}/v_e} - 1)$	$\sim 23\%$ of dry mass @ ref
Structure	$m_{\text{str}} = m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$	87.5 t incl. gear/controls/ECLSS+O ₂ /lug-gage/airlock
CHARM	$m_C = P_\star/\alpha_C$, DEC, restart	67 t @ 15 kW/kg
Light-off	Magnets + RF + rotation; no NBI	50–200 kWh est.; cart / 2 t battery
Solve	$m_0 = m_{\text{dry}}e^{\Delta v_{\text{vac}}/v_e}$	$m_0 \approx 240$ t; $L \approx 52$ m
Engine	$P_1^\star \approx 65$ MW; $P_2^\star = P_3^\star \approx 995$ MW; $m_w(I_{\text{sp}})$	§10.6; lit [23]–[28]

13 Imputed CHARM plant specs, gap to present design, and unobtainiums

13.1 Specs this vehicle imputes to CHARM

The SSTO solve does not invent new plasma physics; it **back-solves** a power island that must fit the airframe. Reference imputed plant:

Table 23 Imputed CHARM plant requirements for this SSTO.

Quantity	Imputed requirement	Source in this note
Fuel	Continuous p - ¹¹ B	G8; §2
Architecture	Multi-chamber rotating mirror; species separation; ash strain; DEC	§3, §9, §1; [1,8–11]
Electrical bus peak	$P_\star = 1$ GW	G9; Phase B/C power
Mission source energy	~ 5 GWh class per ascent ($\kappa_E \sim 3$)	§4, §8
Island mass	$m_C \approx 67$ t	$\alpha_C = 15$ kW/kg
Specific power (bus)	$\alpha_C \geq 15$ kW/kg (floor ~ 10 kW/kg)	§7.2, §9.1
Island volume	$V_C \lesssim 120$ m ³	Fuselage bay aft of cargo
Volumetric power	$\bar{p}_C \gtrsim 8$ MW/m ³	$P_\star/V_C$

Quantity	Imputed requirement	Source in this note
DEC	$\eta_{\text{DEC}} \sim 0.4\text{--}0.7$ on ordered α / wave channel	§9.3
Aux heating	RF + rotation + magnets; no multi-MW NBI farm	§9.5, §9.8
Magnets (6, WHAM-anchored)	$\approx 10.8\text{ t}$ (16.2% of m_C)	§9.6
Cryo compressor bay (6 AL630, flight-remanufactured)	$\approx 2.4\text{ t}$, $\approx 88\text{ kW}$ (3.6% of m_C)	§9.6
Permanent radiation shield bulkhead (poly, sized empty-tank)	$\approx 21.9\text{ t}$ (0.69 m), first sourced piece of the remainder	§9.9
RF + back-bone/chamber structure	$\approx 31.5\text{ t}$ remaining, not independently sized	§9.6, §9.9
Light-off energy	$\sim 50\text{--}200\text{ kWh}$ to useful plasma (est.)	§9.8
Space restart	Pilot-string from $\sim 2\text{ t}$ battery ($\sim 300\text{--}500\text{ kWh}$)	§6, §9.4
Duty	Continuous burn through climb/insert; throttleable bus	§5
Environment	Flight loads, TPS-adjacent thermal, municipal dose with fan-mode plant	G6, §9.7

13.2 Where published CHARM stands today

Relative to that invoice, the Fisch / Advanced Research Projects Agency–Energy (ARPA-E) / Pale Blue line today is a **physics and intellectual-property (IP) program**, not a flight power plant [1,2]:

Table 24 Gap between present CHARM and vehicle need.

Gate	Present CHARM (public)	Vehicle need
Fuel / kinetics	Strong papers on hybrid fast–thermal $p\text{-}^{11}\text{B}$, alpha channeling, ash poisoning [3–7]	Same fuel family — aligned in intent
Chambering	Architecture + patent filings for separated reactants, ponderomotive walls, open-trap HV, differential confinement [1,8–11]	Must work together in one island
Lawson / Q	Component studies and 0D balances; integrated self-consistent power-positive reactor not demonstrated [1]	Net bus power after recirculating RF/rotation
Hardware	No public GW-class (or even pilot) CHARM machine; software-first / early company path	Flyable 67 t island
DEC	Themes in theory and open-trap high-voltage (HV) patents [1,10]	Flight-qualified η_{DEC} at GW

Gate	Present CHARM (public)	Vehicle need
Mass / volume	Not published as kW/kg or MW/m ³ plant envelopes	15 kW/kg, $\gtrsim$ 8 MW/m ³
Operations	Lab/site thinking	Continuous ascent, g-load, restart, airport licensing

Gap in one line: CHARM has a credible **aneutronic architecture story**; this vehicle needs a **closed, flight-packaged, gigawatt, high specific-power product** that does not yet exist on paper as an engineered BOM.

13.3 Unobtainiums in the gap

Call a requirement **unobtainium** if it is not implied by present CHARM results and would break the SSTO close if false. Ranked for this airframe:

1. **Integrated p -¹¹B power balance with chambered species + ash removal + tolerable synchrotron/bremsstrahlung simultaneously** — components suggest feasibility; full self-consistency is explicitly still open [1].
2. **Centrifugal / rotating-mirror differential confinement at useful density and confinement time**, including rotation sustainment **without intolerable wall voltage drops** [1].
3. **Selective RF / ponderomotive “one-way” walls** that regulate ion traffic at acceptable recirculating power (slides note one-way walls can be energetically costly if overused) [1,9].
4. **Wave-mediated ash extraction / alpha channeling into protons (or DEC)** fast enough that helium does not poison the cell [3,6].
5. **Ultra-high DC / open-field electrode structures** that survive α and X-ray loads while feeding a GW bus [10].
6. **Flight specific power $\alpha_C \sim 15$ kW/kg and $\bar{p}_C \gtrsim 8$ MW/m³** including magnets, RF, shield, cryo, and structure — beyond any published CHARM packaging study. §9.6 now sizes magnets (≈ 10.8 t, WHAM-anchored) and cryo (≈ 2.4 t, 6 flight-remanufactured AL630s) bottom-up, and §9.9 now sizes a permanent radiation-shield bulkhead (≈ 21.9 t, sized for the empty-water-tank case) bottom-up; on demonstrated flight-cryocooler specific mass instead of the remanufactured-AL630 guess, cryo alone could reach 45–90 t — i.e., **flight-weight cryocooler specific mass is its own unobtainium**, not just a rounding term inside α_C . The remaining ≈ 31.5 t (RF hardware + backbone/chamber structure) is **still an unsized placeholder**, not fabricated engineering — the largest unresolved piece of α_C .
7. **Continuous GW-class operation** through a multi-hour ascent with vibration, thrust-vector loads, and thermal transients — not part of the present ARPA-E scope.

8. **Pilot-string light-off / space restart** at 50–200 kWh class — engineering estimate only; not a CHARM experimental result.
9. **Stage-2/3 thruster packaging** at $\sim 200\text{--}300\text{ kW/kg}$ inside a 15 t engine (§10.6) — HEMM-class stage 1 is nearer [25]; microwave air / water plasma at GW in a few tonnes is not [23], [24], [26], [27].
10. **Stage-3** $I_{\text{sp}} \sim 2000\text{ s}$ at $\eta_{\text{jet}} \sim 0.55$ on water — between demonstrated water-ion I_{sp} [24] and water-MPD I_{sp} at much lower η [27].

Items 1–5 are **physics/architecture unobtainiums** shared with any CHARM plant. Items 6–10 are **aerospace packing / propulsion unobtainiums** imposed by SSTO. If 1–5 fail, no amount of airframe cleverness saves the mission; if 1–5 hold but 6–10 fail, CHARM may still be a ground plant while this spaceplane does not close.

13.4 How to read the rest of this paper

Sections 1–12 are a **requirements mirror** held up to CHARM: they say what a successful bottle must look like to fly Shuttle-class cargo from a municipal runway to ISS altitude. They are **not** a claim that Pale Blue / Princeton has those numbers. Closing the gap is future plasma physics, materials, and packaging work—tracked against the unobtainium list above.

14 Conclusion

Design goals fix a **Shuttle-style SSTO** with a **real cargo bay**, municipal runway ops, and ISS-altitude LEO. Closing $P_\star = 1\text{ GW}$ at $\alpha_C = 15\text{ kW/kg}$ yields a reference vehicle of about 196 t **dry**, 44 t **water**, 240 t **GLOW**. Vision figures (Figs.~3–10) show the interior floorplan, exterior profile, drop-in cutaways, and assembly trees that those numbers must fit.

14.1 CHARM reactor performance goals (what this airframe invoices)

The plant that closes the mass/energy budget must deliver, as a single flight-packaged island:

- **Continuous $p\text{-}^{11}\text{B}$ fusion** with multi-chamber rotating-mirror confinement, species separation, ash strain, and **DEC** onto a 1 GW **electrical bus**.
- **Mission source energy** $\sim 5\text{ GWh}$ class per ascent ($\kappa_E \sim 3$), not a pulsed shot.
- **Island mass / volume** $m_C \approx 67\text{ t}$, $V_C \lesssim 120\text{ m}^3 \Rightarrow \alpha_C \geq 15\text{ kW/kg}$ and $\bar{p}_C \gtrsim 8\text{ MW/m}^3$.
- **Light-off / space restart** at 50–200 kWh class from a $\sim 2\text{ t}$ battery (no multi-MW NBI farm).
- **Continuous throttleable duty** through climb and multi-hour insertion, under flight loads and airport-compatible dose with the plant in fan mode.

These are the numbers the in-silico CHARM plant must satisfy; they are a requirements mirror, not a claim that present CHARM hardware has them (§13).

14.2 Unmet materials-science and packaging challenges

The still-open gaps that would break this close if false are materials/package as much as plasma physics (§13.3):

- **Flight-weight cryogenics** for six HTS mirror magnets — remanufactured industrial AL630-class coolers are assumed; demonstrated flight cryocooler specific mass alone could consume most of m_C .
- **REBCO / cryostat structure** that survives ascent vibration and α /X-ray loads at WHAM-class field without a tokamak-scale cryoplant hall.
- **DEC electrodes / open-field HV structures** that take continuous α and bremsstrahlung while feeding a GW bus.
- **Permanent radiation/RF shield** (polyethylene bulkhead + Faraday skin) already carved out of the mass remainder; **RF hardware and backbone/chamber structure** (≈ 31.5 t) remain an **unsized placeholder**, not fabricated engineering.
- **Integrated p - ^{11}B power balance** with chambered species, ash removal, and tolerable synchrotron/bremsstrahlung simultaneously — still open in the CHARM literature.

14.3 Propulsion maturity: stages 1, 2, and 3

Stage	Maturity judgment for this vehicle
1 — Electric ducted fan	Relatively vanilla engineering at the architecture level. NASA HEMM-class MW motors [25] and ducted-fan propulsion are demonstrated families; the stretch is packaging a ~ 65 MW string at the assumed motor/fan mass, not inventing a new thruster physics.
2 — Microwave air plasma	Experimental / unproven at vehicle scale. Lab microwave-air-plasma ducts exist [23], but published thrust claims are contested [26], and there is no demonstrated GW-class, flight-packaged, air-breathing microwave plasma jet. Architecture is real; the power, $C_D(M)$, and specific-mass closes are not.
3 — Water plasma	Experimental / unproven at the reference point. Water microwave / MET thrusters and water-MPD paths are real [24], [27], [28], but demo I_{sp} and η do not jointly support the vehicle freeze ($I_{sp} = 2000$ s at $\eta_{jet} \sim 0.55$ in a few tonnes). Stage 3 is a mid-stretch between gridded water-ion demos and high- I_{sp} /low- η MPD — not flight-qualified engineering.

In short: **stage 1 is near-term electric-propulsion packaging; stages 2 and 3 are the propulsion unobtainiums.** If CHARM physics closes but stages 2–3 packaging fails, CHARM may still be a ground plant while this spaceplane does not.

Acknowledgments

CHARM denotes the chambered aneutronic rotating-mirror architecture developed at Princeton Plasma Physics Laboratory (PPPL) under the ARPA-E economical p - ^{11}B program [1]–[11] and discussed toward Pale Blue Fusion. This vehicle sketch is an independent systems exercise and does not speak for that program.

14.4 AI-assisted development

The human author retains sole responsibility for the vehicle-sizing methodology, every modeling choice, and every technical claim in this work; no large language model or image model is listed as a co-author. We gratefully acknowledge assistance from the following tools (auto-generated from `scripts/ai_model_cards.py` when building `arxiv.tex`):

- **Cursor** [44] — agent-assisted development environment for this repository: the CAD/CFD figure pipeline (OpenVSP, OpenFOAM `snappyHexMesh`/RANS, SU2 Euler, VSPAERO, Blender drop-in cutaways), the `constants_model.py` sizing derivations, the interactive assembly outliner, and drafting/maintaining this narrative (`arxiv.md`).
- **xAI Grok 4.5** [45] — primary agent model for large stretches of the vehicle-packaging and CFD-pipeline work: OpenVSP geometry iteration (body flap, OMS pods), `snappyHexMesh`/SU2/VSPAERO debugging, the CHARM bottom-up mass roll-up in `constants_model.py`, and the `assembly.json`-driven Blender drop-in figures. Used via the Cursor agent environment.
- **Anthropic Claude Sonnet 5** [46] — session work including full-airframe CFD camera framing and streamline-artifact fixes on the OpenFOAM/SU2 renders, the \$10.8 audio-signature derivation and stylized ascent-soundscape synthesis (`emit_audio_signature.py`), and narrative maintenance (table of contents, appendix reordering, this AI-assistance disclosure). Used via the Cursor agent environment.
- **Google Nano Banana Pro (Gemini 3 Pro Image)** [47] — generated Fig.~1, an illustrative exterior concept render of the vehicle taking off from a municipal airport, and Fig.~2, a companion flight-deck interior render at the same moment, both prompted from the CAD floorplan/profile wireframes as reference images (Figs.~3, 4). Concept art only — proportions, panel lines, cabin layout, and the runway scene are AI interpretation, not CAD; the wireframe figures remain the dimensioned source of truth.

All derived numbers, pipeline code, and final prose were reviewed by the human author, who takes full responsibility for them.

References

- [1] N. J. Fisch et al. (Princeton Plasma Physics Laboratory), “Why pB11?” ARPA-E Fusion Annual Meeting slides (Day2_08_Fisch.pdf), Aug. 2025. Primary public overview of the Chambered Aneutronic Rotating Mirror (CHARM) / chambered rotating-mirror p - ^{11}B architecture. [Online]. Available: https://arpa-e.energy.gov/sites/default/files/2025-08/Day2_08_Fisch.pdf
- [2] Advanced Research Projects Agency–Energy (ARPA-E), “Economical Proton-Boron11 Fusion,” Award No. DE-AR0001554, OPEN 2021.
- [3] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Wave-supported hybrid fast-thermal p - ^{11}B fusion,” *Phys. Plasmas*, vol. 29, no. 11, Art. no. 110701, 2022, doi: 10.1063/5.0118337.
- [4] I. E. Ochs, E. J. Kolmes, M. E. Mlodik, T. Rubin, and N. J. Fisch, “Improving the feasibility of economical proton–boron-11 fusion via alpha channeling with a hybrid fast and thermal proton scheme,” arXiv:2210.08076 [physics.plasm-ph], 2022.
- [5] I. E. Ochs and N. J. Fisch, “Lowering the reactor breakeven requirements for proton–boron 11 fusion,” *Phys. Plasmas*, 2024, doi: 10.1063/5.0184945. (ARPA-E DE-AR0001554.)
- [6] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “Preventing ash from poisoning proton–boron 11 fusion,” *Phys. Plasmas*, 2025. [Online]. Available: <https://w3.pppl.gov/~fisch/fischpapers/2025/Ochs.poisoning.POP2025.pdf>

- [7] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “On the feasibility of radiation-trapping regimes in compressed proton-boron-11 plasmas,” *Phys. Plasmas*, vol. 32, no. 2, Art. no. 022504, 2025, doi: 10.1063/5.024504.
- [8] N. J. Fisch, I. E. Ochs, E. J. Kolmes, M. E. Mlodik, and T. Rubin, “Nonthermal Proton-Boron11 Fusion with Separated Reactant Regions,” U.S. Patent Application 19/083,790, filed Mar. 19, 2025.
- [9] T. Rubin, J.-M. Rax, N. J. Fisch, I. E. Ochs, and E. J. Kolmes, “Enhanced Particle Confinement with Positive and Negative Ponderomotive Potentials,” U.S. Patent Application 19/084,168, filed Mar. 19, 2025.
- [10] N. J. Fisch et al., “Systems and Methods for Producing Ultra-high DC Voltages in Open Field Line Traps...,” U.S. Patent Application 19/175,473, filed Apr. 10, 2025.
- [11] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Method and Apparatus for Differential Confinement, Mixing, and Demixing...,” U.S. Provisional Patent 63/794,470, filed Apr. 25, 2025.
- [12] N. J. Fisch, “Theory of current drive in plasmas,” *Rev. Mod. Phys.*, vol. 59, no. 1, pp. 175–208, 1987, doi: 10.1103/RevModPhys.59.175. (Alpha-channeling / wave-particle foundations.)
- [13] N. J. Fisch and J.-M. Rax, “Interaction of energetic alpha particles with intense lower hybrid waves,” *Phys. Rev. Lett.*, vol. 69, no. 4, pp. 612–615, 1992, doi: 10.1103/PhysRevLett.69.612.
- [14] National Aeronautics and Space Administration, *Space Shuttle Orbiter / OV-105 Atlantis* dimensional and mass data (cargo bay 18.3×4.6 m; payload to LEO $\approx 24\,400$ kg; empty mass $\approx 78\,000$ kg class). NASA fact sheets and Orbiter inventory documentation.
- [15] International Space Station Program, nominal orbital altitude ≈ 400 km and inclination 51.6° . NASA ISS reference.
- [16] D. A. Vallado, *Fundamentals of Astrodynamics and Applications*, 4th ed. Hawthorne, CA: Microcosm Press / Springer, 2013. (Two-body orbital energy; LEO $\Delta\epsilon$.)
- [17] G. P. Sutton and O. Biblarz, *Rocket Propulsion Elements*, 9th ed. Hoboken, NJ: Wiley, 2017. (Rocket equation; $I_{sp}-v_e$ relation.)
- [18] J. D. Anderson Jr., *Modern Compressible Flow*, 3rd ed. New York, NY: McGraw-Hill, 2003. (Ram drag / inlet thermo context for stage-2 air path.)
- [19] W. J. D. Escher, E. H. Hyde, and D. M. Anderson, “A preliminary systems assessment of the ‘Star-Raker’... airbreathing SSTD concept,” AIAA Paper, 1980s SABRE/airbreathing SSTD literature context for multi-regime airbreathing logic (this paper replaces scramjet claims with microwave air plasma [23]).
- [20] T. H. Rider, “Fundamental limitations on plasma fusion systems not in thermodynamic equilibrium,” Ph.D. dissertation, Massachusetts Institute of Technology, Cambridge, MA, 1995. (Non-equilibrium / radiation-limit context motivating chambered $p\text{-}^{11}\text{B}$ approaches.)
- [21] NASA, *Space Shuttle Vehicle Familiarization* (SSV FAM), crew module description: flight deck; middeck galley, personal hygiene, airlock, and **side hatch** for ground ingress/egress; equipment bay ECLSS. Training document SSV-FAM-1107 and NASA *Space Shuttle News Reference* crew-cabin arrangement figures (flight deck p. 3-9; middeck p. 3-10).
- [22] NASA, “A Walk Around the Space Shuttle,” crew compartment summary: flight deck controls; middeck living; side hatch; airlock hatch into the cargo bay. [Online]. Available: https://www.nasa.gov/wp-content/uploads/2016/08/113009main_walkaround.pdf
- [23] D. Ye, J. Li, and J. Tang, “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, no. 5, Art. no. 055002, 2020, doi: 10.1063/5.0005814. (Stage-2 anchor: magnetron $\rightarrow$ compressed-air microwave plasma jet.)
- [24] Y. Nakagawa, H. Koizumi, H. Kawahara, and K. Komurasaki, “Performance characterization of a miniature microwave discharge ion thruster operated with water,” *Acta Astronautica*, vol. 157, pp. 294–299, 2019, doi: 10.1016/j.actaastro.2018.12.031. (Stage-3 architecture: water

+ microwave plasma; demo $I_{sp} \sim 665$ s, μ N thrust.)

[25] R. H. Jansen et al., “High Efficiency Megawatt Motor conceptual design,” AIAA Propulsion and Energy Forum, 2018 (NASA/TM / NTRS). (Stage-1: $\gtrsim 16$ kW/kg EM mass, $\eta \gtrsim 0.98$ stretch for MW-class motors.)

[26] Comment on Ye et al., “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, 2020, doi: 10.1063/5.0013575. (Stage-2: Ye’s ~ 28 N/kW is stagnation pressure, not jet thrust — use electrothermal $T/P = 2\eta/v_j$.)

[27] D. Komatsu, K. Nishii, and A. Kakami, “Study on electrodes design for MPD thruster using water propellant,” *Trans. JSASS*, vol. 68, 2025, doi: 10.2322/tjsass.68.108. (Stage-3 high- I_{sp} water-MPD path: ~ 3150 s class at $\eta \sim 0.07$ – 0.11 , ~ 5 mN/kW.)

[28] J. E. Brandenburg, J. Kline, and D. Sullivan, “The microwave electro-thermal (MET) thruster using water vapor propellant,” *IEEE Trans. Plasma Sci.*, vol. 33, no. 2, pp. 776–782, 2005, doi: 10.1109/TPS.2005.845252. (Stage-3 water MET / electrothermal lineage; $I_{sp} \gtrsim 800$ s reported class.)

[29] Z. S. Hartwig et al., “The SPARC Toroidal Field Model Coil Program,” *IEEE Trans. Appl. Supercond.*, vol. 34, no. 2, Art. no. 0600316, Mar. 2024, doi: 10.1109/TASC.2023.3332613; arXiv:2308.12301. (§9.6 anchor: 10,058 kg TFMC test coil at 20.1 T; 18,025 kg per production SPARC TF coil, 18 coils per tokamak.)

[30] P. C. Michael et al., “A 20-K, 600-W, Cryocooler-Based, Supercritical Helium Circulation System for the SPARC Toroidal Field Model Coil Program,” *IEEE Trans. Appl. Supercond.*, vol. 34, no. 2, Art. no. 0600313, Mar. 2024, doi: 10.1109/TASC.2023.3332266. (§9.6 anchor: measured 600 W at 20 K via eight Cryomech AL630 cryocoolers, cooling one HTS test coil.)

[31] A. Dalesandro et al., “The SPARC cryogenic system,” *IOP Conf. Ser.: Mater. Sci. Eng.*, vol. 1301, Art. no. 012107, 2024, doi: 10.1088/1757-899X/1301/1/012107. (§9.6 full-scale contrast: 17 kW steady-state 4.5 K-equivalent cryoplant plus a separate 2.9 MW blowdown system for pulse heat removal.)

[32] B. T. Nugent, R. J. Grotenrath, and W. L. Johnson (NASA Glenn Research Center), “20 Watt 20 Kelvin Reverse Turbo-Brayton Cycle Cryocooler Testing and Applications,” 22nd Int. Cryocooler Conf. (ICC), Bethlehem, PA, Jun. 27–30, 2022, NASA/TM (NTRS 20220009350). (§9.6 flight-cryocooler ceiling check: 4.4–5.5 kg/W goal vs. 18.7 kg/W state-of-the-art specific mass at 20 K.)

[33] Cryomech, Inc., “AL630 Gifford-McMahon Cryocooler” datasheet: 100 W at 20 K, 44 kg cold head + 191 kg CPA1114 compressor package, 11.7–12.7 kW electrical input. [Online]. Available: <https://bluefors.com/products/gifford-mcmahon-cryocoolers/al630-gifford-mcmahon-cryocooler/>

[34] Commonwealth Fusion Systems, “Commonwealth Fusion Systems Delivers Superconducting Magnets to University of Wisconsin’s WHAM Project,” press release, Jul. 12, 2024. (§9.6 magnet anchor: two < 2 t REBCO magnets, 17 T warm bore / 20 T on tape, self-contained with integrated cryo/vacuum/controls.) [Online]. Available: <https://www.cfs.energy/news-and-media/commonwealth-fusion-systems-delivers-hts-magnets-to-uw-wham-project/>

[35] A. Radovsky et al., “Design of High Field HTS Coils for Magnetic Mirror,” *IEEE Trans. Appl. Supercond.*, vol. 33, no. 5, 2023, doi: 10.1109/TASC.2023.3240377. (§9.6 magnet anchor: preliminary design of the < 2 t, ~ 20 T-on-tape, conduction-cooled WHAM mirror coil.)

[36] “Manufacturing and Testing HTS Coils for Magnetic Mirror,” *IEEE Trans. Appl. Supercond.*, vol. 35, 2025, doi: 10.1109/TASC.2025.3542351. (§9.6 magnet anchor: as-built/tested confirmation of the < 2 t WHAM magnet pair, conduction-cooled to 20 K.)

[37] National Oceanic and Atmospheric Administration (NOAA), National Aeronautics and Space Administration (NASA), and U.S. Air Force, *U.S. Standard Atmosphere, 1976*, NOAA-S/T 76-1562. (§10.2/§10.4 atmosphere model: closed-form piecewise density/temperature/pressure layers used by the stage-2 climb integrator in `constants_model.py`.)

[38] J. D. Anderson Jr., *Hypersonic and High-Temperature Gas Dynamics*, 3rd ed. Re-

ston, VA: American Institute of Aeronautics and Astronautics (AIAA), 2019. (§10.4 generic hypersonic lifting-body $C_D(M)$ drag-coefficient shape and constant-dynamic-pressure ascent-trajectory design point — a flagged non-CHARM-specific stand-in for the stage-2 climb, in lieu of any CFD/wind-tunnel data for this airframe.)

[39] National Institute of Standards and Technology (NIST), “X-Ray Mass Attenuation Coefficients (XCOM),” NIST Standard Reference Database 8. (§9.9 photon-shielding order-of-magnitude estimate: μ/ρ for water and polyethylene.) [Online]. Available: <https://www.nist.gov/pml/xcom-photon-cross-sections-database>

[40] J. K. Shultis and R. E. Faw, *Fundamentals of Nuclear Science and Engineering*, 3rd ed. Boca Raton, FL: CRC Press, 2016. (§9.9 neutron-shielding order-of-magnitude estimate: standard fast-neutron removal cross sections for water and polyethylene.)

[41] J. B. Large, T. G. Wilkinson, and D. W. Hoefs (Boeing Commercial Airplane Company), “Reduction of JT8D Powered Aircraft Noise by Engine Refanning,” NASA CR-134855, 1974, NTRS 19740015229. (§10.8 acoustic anchor: JT8D-9→JT8D-109 refan cut mixed takeoff jet velocity from 1470 to 1140 ft/s for a measured 7–8 EPNdB reduction on a B727-200 at FAR Part 36 stations — calibrates the §10.8 $\dot{m} v_{\text{jet}}^n$ exponent from real hardware instead of assuming Lighthill’s textbook $n = 8$; also the source of Lighthill’s own jet-noise theory reference frame.) M. J. Lighthill, “On sound generated aerodynamically I. General theory,” *Proc. R. Soc. Lond. A*, vol. 211, no. 1107, pp. 564–587, 1952, doi: 10.1098/rspa.1952.0060.

[42] Pratt & Whitney, JT8D turbofan family technical data: JT8D-9 rated air mass flow 144.7 kg/s (19,140 lb/min), max thrust class 54–77 kN depending on variant. (§10.8: reference engine for the 727 three-engine mass-flow baseline.)

[43] Federal Aviation Administration, *Advisory Circular AC 36-1H: Noise Levels for U.S. Certificated and Foreign Aircraft*, type-certification noise data under 14 CFR Part 36 Appendix C. (§10.8: B727-200/JT8D-15QN, 190,500 lb configuration, 100.0 EPNdB takeoff — reference EPNdB level; unmodified pre-hush-kit JT8D-9/-17 727-200s measured 7–8 EPNdB higher per [41], consistent with why the type needed hush kits at all.)

AI development-tool references (§ Acknowledgments, auto-generated from `scripts/ai_model_cards.py`):

[44] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).

[45] xAI. *Grok 4.5*. Model documentation, <https://docs.x.ai/developers/models/grok-4.5>; Cursor announcement, <https://cursor.com/blog/grok-4-5> (accessed 2026).

[46] Anthropic. *Claude Sonnet 5*. System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).

[47] Google DeepMind. *Nano Banana Pro (Gemini 3 Pro Image)*. Product announcement, <https://blog.google/innovation-and-ai/products/nano-banana-pro/>; model documentation, <https://ai.google.dev/gemini-api/docs/image-generation> (accessed 2026).

A Design software

This appendix inventories **software still in active use** for the vehicle packaging model and this paper’s figure/PDF pipeline. Tools tried and discarded are omitted. Further subsections will be added as the toolchain grows.

A.1 Imported packages actually used

Table 26 External packages and tools used by the living design / paper build.

Package / tool	Role in this project
Python ≥ 3.12 + Poetry	Project environment; CAD scripts; assembly JSON tooling; paper build driver
NumPy	OpenVSP figure export; <code>constants_model.py</code> sizing / Stage2 climb smoke
Matplotlib	OpenVSP floorplan/profile rasters; VSPAERO polar; Stage2 climb check
OpenVSP (optional Poetry group; upstream .deb + Python API; NOSA 1.3)	Parametric vehicle CAD (.vsp3); source of the orthographic floorplan and profile figures
VSPAERO (bundled with OpenVSP; NOSA 1.3)	Digital wind tunnel on <code>catskills_ssto.vsp3</code> — Mach $\times\alpha$ VLM polar (<code>make cad-vspaero</code> → <code>research/figures/cad/vspaero/</code>); Stage1 outline check (§10.2.1)
SU2 v8.x (OpenMP binary under <code>third_party/su2/</code>)	Scripted compressible CFD — NACA0012 proof (<code>make su2-naca</code>) and coarse 3D Euler on the SSTO exterior (<code>make su2-ssto</code> → §10.2.1 figure)
OpenFOAM (host apt; not Poetry)	<code>snappyHexMesh</code> exterior mesh + prism layers on the true OpenVSP STL (<code>make cad-snappy</code> → <code>research/figures/cad/openfoam/</code>); next step above the voxel/TetGen plushy mesh
Gmsh / TetGen / trimesh / pyvista / scikit-image (Poetry)	STL cleanup, coarse tet far-field (interim), and off-screen CFD renders for the paper figures
Blender 5.x (snap /snap/bin/blender)	Drop-in cutaways from <code>assembly.json</code> (crew capsule, airlock, cargo skid, fusion plant skid top-down; <code>make cad-drop-ins</code>)
NumPy (<code>research/figures/cad/constants_model.py</code>)	Single source for every sizing-constraint number in §6–§9 and the CHARM bottom-up mass roll-up (§9.6); regenerates ‘spans in this file and patchesassembly.json/vehicle_spec.json– plain arithmetic, never an LLM call **Pillow** Image handling when the paper build ingests raster figure assets **Pandoc** arxiv.md→ LaTeX body conversion <code>insidescripts/build_arxiv_tex.py</code> **Mermaid CLI** (mmdc/@mermaid-js/mermaid-cli) Paper mermaid fences →figures/figure-NNN.pdf **latexmk** + **LuaLaTeX** <code>Localarxiv.pdf/zenodo.pdfcompile (.latexmkrc)</code>
Mermaid.js v11 (CDN, browser)	Live diagram engine inside the assembly outliner (§A.2)

Python’s standard library (`json`, `http.server`, etc.) serves assembly I/O and the outliner static server; it is not listed as an imported third-party package.

A.2 Assembly outliner

The **assembly outliner** is a small local web app under `research/figures/cad/hierarchy_app/`. It is the interactive view of the vehicle packaging tree.

Source of truth. `research/figures/cad/assembly.json` holds the hierarchy (collections vs parts), ports, and joints. Paper mermaid plant/station figures are reconciled to this file (§1). A companion emitter writes `assembly_hierarchy.mmd` for offline diffs.

UI. Left pane: Blender-style tree (expand/collapse, collections marked). Right pane: Mermaid flowchart of the **visible** subtree — grey containment edges, teal functional joints; collapsed mates **proxy** to the nearest expanded ancestor; neighboring expanded siblings get distinct tints so stage-1/2/3 (and plant sub-racks) read at a glance.

How to run. From the repo root: `make cad-outliner` (or `./research/figures/cad/serve_hierarchy_app.sh`) → open `http://127.0.0.1:8765/hierarchy_app/`. The server sends `Cache-Control: no-store`; use **Reload data** after editing `assembly.json`.

Stack. Static HTML/CSS/JS; Mermaid.js in the browser; no build step. The serve script is a tiny Python `ThreadingHTTPServer`.

A.3 Blender drop-in cutaways

Layout-critical packaging figures (hatches, seat rows, aisle clearances, bay doors, magnet/cryo layout) are built as **editable Blender geometry** from `assembly.json`, not AI image prompts. Four modules are done this way — crew capsule, airlock, cargo skid, and fusion plant skid:

```
make cad-drop-ins
# research/figures/{crew_capsule_top,airlock_top,cargo_skid_top,fusion_plant_skid_top}.png
# research/figures/cad/{crew_capsule_cutaway,airlock_cutaway,cargo_skid_cutaway,
#   fusion_plant_skid_cutaway}.blend
./bl.sh # GUI edit (crew capsule; edit the path for the others)
```

A.4 Generated numeric constants

Every numeric value wrapped in a machine-readable HTML comment pair in this document (the CHARM mass/power/cryo chain of §6–§9, most visibly §9.6) is **program-controlled**, not hand-typed: it is written by `scripts/update_arxiv_constants.py`, which re-runs `research/figures/cad/compile_model.py` (pure NumPy + Python stdlib, no LLM in the loop) and regex-replaces only the text between each marker pair, leaving surrounding prose untouched. The same run also writes `research/figures/cad/constants.generated.json`, which `scripts/apply_constants_to_assembly.py` reads to patch `assembly.json`’s magnet/cryocooler node counts and `size` blocks, and which `build_fusion_plant_skid_blender.py` reads for its magnet/cryocooler counts — so the paper, the JSON single source of truth, and the Blender renders can never numerically disagree. `make paper-render` runs the whole chain; it is a dependency of `make arxiv` and `make zenodo-tex`.

Each figure has its own placement script — `build_crew_capsule_blender.py`, `build_airlock_blender.py`, `build_cargo_skid_blender.py` — sharing common primitives, hatch/shell/door “kits”, and camera setup from `research/figures/cad/lib/` (`assembly_parser.py`, `procedural_geometry.py`, `render_utils.py`). The fusion-plant skid (CHARM chambers) and combined-cycle engine skid (scoops/duct/nozzle/water tanks) are not yet migrated — those need real procedural modeling of hardware that has no library equivalent, and remain AI concept sketches for now.

A.5 Aerodynamics figure toolchain

How the Stage1 / Stage2 aerodynamics check diagrams in §10.2.1 and §10.4 are produced. Host tools (OpenVSP, OpenFOAM, SU2 binary) sit outside Poetry; Python deps for meshing/plotting are in the Poetry environment.

Make targets:

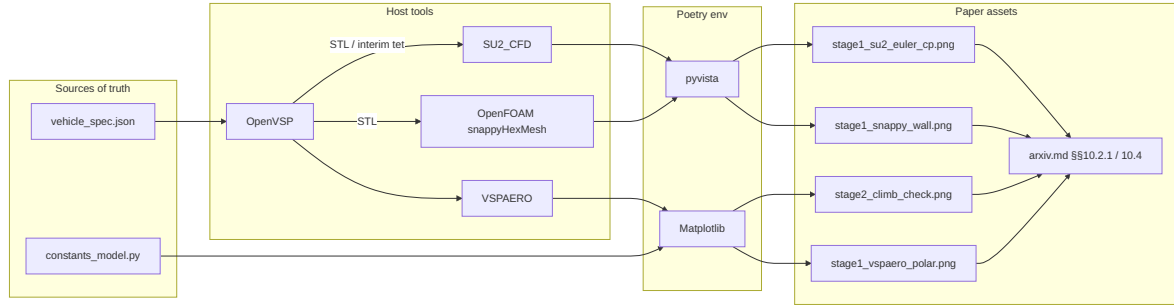


Figure 19 A.5 Aerodynamics figure toolchain.

```

make cad-vspaero
make cad-snappy
make su2-ssto
poetry run python research/figures/cad/emit_stage2_climb_plot.py
poetry run python research/figures/cad/emit_audio_signature.py
make arxiv

```

Working draft for HAL.science deposit. Not a license to operate a reactor.