

# SSTO fusion powered spaceplane using CHARM architecture with $p\text{-}^{11}\text{B}$ fuel

Lars Warren Ericson<sup>1</sup>

<sup>1</sup>Catskills Research Company  
<sup>1</sup>[lars.ericson@catskillsresearch.com](mailto:lars.ericson@catskillsresearch.com)

July 25, 2026

**ORCID:** 0000-0001-8299-9361

**Source repository:** <https://github.com/catskillsresearch/p11b>

## Abstract

We specify a single-stage-to-orbit (SSTO) spaceplane that flies Space Shuttle-style operations—including a Shuttle-class cargo bay—from a municipal airport to International Space Station (ISS) altitude in low Earth orbit (LEO), powered by a continuous Chambered Aneutronic Rotating Mirror (CHARM)  $p\text{-}^{11}\text{B}$  plant [1] with direct energy conversion (DEC). Flight regimes use three electric stages: ducted fan on free air, microwave air plasma on climb, then carried-water plasma with intakes sealed. Each design step is written as a closed set of equations. We guesstimate the reactor mass hole, constrain water as a function of dry mass and vacuum  $\Delta v$ , impose a 1 GW plant with space restart and DEC, and solve a reference all-up mass. Combined-cycle engine maps and CHARM size/performance constraints follow.

# Contents

|           |                                                                                                                         |           |
|-----------|-------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b>Vehicle vision</b>                                                                                                   | <b>6</b>  |
| 1.1       | AI concept render . . . . .                                                                                             | 6         |
| 1.2       | Interior floorplan and exterior profile . . . . .                                                                       | 10        |
| 1.3       | Forward drop-ins (top-down, covers off) . . . . .                                                                       | 13        |
| 1.4       | Fusion electric plant (assembly SSOT) . . . . .                                                                         | 18        |
| 1.5       | Profile stations . . . . .                                                                                              | 20        |
| <b>2</b>  | <b>Design goals (the plane)</b>                                                                                         | <b>22</b> |
| <b>3</b>  | <b>Constants and symbols</b>                                                                                            | <b>22</b> |
| <b>4</b>  | <b>MWh budget: Shuttle-class mass to ISS LEO</b>                                                                        | <b>23</b> |
| 4.1       | Ideal orbital specific energy . . . . .                                                                                 | 23        |
| 4.2       | Orbital energy of the inserted vehicle . . . . .                                                                        | 24        |
| 4.3       | Source energy (plant must supply) . . . . .                                                                             | 24        |
| <b>5</b>  | <b>Flight regimes: three electric stages</b>                                                                            | <b>24</b> |
| <b>6</b>  | <b>Water mass as a function of whole dry mass</b>                                                                       | <b>25</b> |
| <b>7</b>  | <b>Vehicle sizing equations</b>                                                                                         | <b>26</b> |
| 7.1       | Structure, crew, gear, controls, and bay . . . . .                                                                      | 26        |
| 7.2       | CHARM mass hole . . . . .                                                                                               | 27        |
| 7.3       | Engine and battery holes . . . . .                                                                                      | 27        |
| 7.4       | Closed dry / wet mass . . . . .                                                                                         | 28        |
| <b>8</b>  | <b>Solved reference vehicle (all-up mass)</b>                                                                           | <b>28</b> |
| <b>9</b>  | <b>Constraints on the CHARM power plant</b>                                                                             | <b>29</b> |
| 9.1       | Power and mass . . . . .                                                                                                | 29        |
| 9.2       | Fuel and ash . . . . .                                                                                                  | 29        |
| 9.3       | DEC . . . . .                                                                                                           | 30        |
| 9.4       | Restartable in space . . . . .                                                                                          | 30        |
| 9.5       | Continuous operation / no beam farm . . . . .                                                                           | 30        |
| 9.6       | CHARM island bottom-up mass roll-up: magnets and cryo, sized; RF/shield-<br>/structure, not yet . . . . .               | 30        |
| 9.7       | Municipal and flight safety . . . . .                                                                                   | 32        |
| 9.8       | How CHARM is lit (and how much energy) . . . . .                                                                        | 33        |
| 9.9       | Radiation and RF shielding: permanent bulkhead (baseline), water relocation<br>(bonus), RF leakage (separate) . . . . . | 34        |
| <b>10</b> | <b>Combined-cycle engine (detail)</b>                                                                                   | <b>35</b> |
| 10.1      | Stage map and literature anchors . . . . .                                                                              | 35        |
| 10.2      | Performance constants (frozen for sizing) . . . . .                                                                     | 36        |
| 10.2.1    | OpenVSP / VSPAERO digital wind tunnel (subsonic–transonic) . . . . .                                                    | 37        |
| 10.3      | Stage 1 — takeoff lift, power, and mass . . . . .                                                                       | 39        |
| 10.4      | Stage 2 — power and mass (electrothermal, not Ye’s N/kW) . . . . .                                                      | 41        |
| 10.5      | Stage 3 — water, power, and $I_{sp}$ cases . . . . .                                                                    | 43        |
| 10.6      | Closed solve: powers, component masses, fuels . . . . .                                                                 | 45        |
| 10.7      | Physical envelope . . . . .                                                                                             | 46        |
| 10.8      | Audio signature in atmosphere . . . . .                                                                                 | 46        |

|                                                                              |           |
|------------------------------------------------------------------------------|-----------|
| <b>11 Layout details</b>                                                     | <b>49</b> |
| <b>12 Systems checklist (equations <math>\rightarrow</math> constraints)</b> | <b>52</b> |
| <b>13 Imputed CHARM plant specs, gap to present design, and unobtainiums</b> | <b>52</b> |
| 13.1 Specs this vehicle imputes to CHARM . . . . .                           | 52        |
| 13.2 Where published CHARM stands today . . . . .                            | 53        |
| 13.3 Unobtainiums in the gap . . . . .                                       | 54        |
| 13.4 How to read the rest of this paper . . . . .                            | 55        |
| <b>14 Conclusion</b>                                                         | <b>55</b> |
| 14.1 CHARM reactor performance goals (what this airframe invoices) . . . . . | 55        |
| 14.2 Unmet materials-science and packaging challenges . . . . .              | 56        |
| 14.3 Propulsion maturity: stages 1, 2, and 3 . . . . .                       | 56        |
| <b>Acknowledgments</b>                                                       | <b>56</b> |
| 14.4 AI-assisted development . . . . .                                       | 57        |
| <b>References</b>                                                            | <b>57</b> |
| <b>A Design software</b>                                                     | <b>60</b> |
| A.1 Imported packages actually used . . . . .                                | 60        |
| A.2 Assembly outliner . . . . .                                              | 61        |
| A.3 Blender drop-in cutaways . . . . .                                       | 62        |
| A.4 Generated numeric constants . . . . .                                    | 62        |
| A.5 Aerodynamics figure toolchain . . . . .                                  | 62        |

## List of Figures

|    |                                                                                                                                                                                                                                                                                              |    |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1  | CATSKILLS SSTO, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image) of the vehicle taking off from a municipal airport, prompted from the CAD floorplan and profile wireframes below. . . . .                                                                                    | 7  |
| 2  | CATSKILLS SSTO crew cabin at liftoff, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image): view from the rear seats of the flight deck as the vehicle rotates off the runway, prompted from the interior floorplan schematic and the prior exterior-render window shape. . . . . | 9  |
| 3  | Vehicle floor plan. . . . .                                                                                                                                                                                                                                                                  | 11 |
| 4  | Vehicle profile view. . . . .                                                                                                                                                                                                                                                                | 12 |
| 5  | Crew capsule, Blender top-down cutaway from assembly.json. . . . .                                                                                                                                                                                                                           | 14 |
| 6  | Airlock, Blender top-down cutaway from assembly.json. . . . .                                                                                                                                                                                                                                | 15 |
| 7  | Cargo skid, Blender top-down cutaway from assembly.json with bay doors open. . . . .                                                                                                                                                                                                         | 16 |
| 8  | Fusion plant skid, Blender top-down cutaway from assembly.json: flight battery, relocated water tanks (radiation-shield buffer, §9.9), p-11B fuel, permanent shield bulkhead, chamber string, 6 mirror magnets, 6-unit cryo compressor bay, magnet PSU, RF, and DEC. . . . .                 | 17 |
| 9  | Fusion electric plant (assembly.json). . . . .                                                                                                                                                                                                                                               | 19 |
| 10 | Profile stations from assembly envelopes. . . . .                                                                                                                                                                                                                                            | 21 |
| 11 | Stage 1 VSPAERO polar ( $Mach \times \alpha$ digital tunnel on <code>catskills_ssto.vsp3</code> ). . . . .                                                                                                                                                                                   | 38 |
| 12 | Stage 1 snappyHexMesh wall on the OpenVSP exterior (full airframe in frame; unbroken tube OML — bay doors live on the cargo-skid drop-in, not as roof wings). Colour = wall eddy viscosity $\nu_t$ from the Stage 1 RANS dump. . . . .                                                       | 39 |
| 13 | Stage 1 turbulent flow: OpenFOAM Spalart–Allmaras RANS ( $\sim M = 0.3$ , $\alpha = 4^\circ$ ), full airframe. Wall coloured by eddy viscosity $\nu_t$ ; streamlines over the forward fuselage and wing root. . . . .                                                                        | 40 |
| 14 | Stage 1 takeoff closure: ground-roll speed vs distance (left); clean-wing vs high-lift runway demand (right). . . . .                                                                                                                                                                        | 40 |
| 15 | Stage 2 climb smoke: constant- $Q$ path with $T_2$ vs $D = QC_D S$ (left) and $h(v)$ to seal (right). . . . .                                                                                                                                                                                | 42 |
| 16 | Ascent soundscape: waveform (top) and spectrogram (bottom) of the stylized audio signature — Stage 1 EDF, the modeled $M = 1$ crack, Stage 2 air-plasma roar, and the Stage-3 vacuum hum, in relative-loudness proportion from the table above. . . . .                                      | 49 |
| 17 | Top-down floorplan from assembly.json. . . . .                                                                                                                                                                                                                                               | 51 |
| 18 | A.5 Aerodynamics figure toolchain. . . . .                                                                                                                                                                                                                                                   | 63 |

## List of Tables

|    |                                                                                         |    |
|----|-----------------------------------------------------------------------------------------|----|
| 1  | Design goals for the plane. . . . .                                                     | 22 |
| 2  | Physical constants and reference symbols. . . . .                                       | 22 |
| 3  | Mass symbol definitions. . . . .                                                        | 23 |
| 4  | Orbital energy for representative inserted masses. . . . .                              | 24 |
| 5  | Combined-cycle stages (reaction mass and thruster family). . . . .                      | 25 |
| 6  | Water mass fraction versus vacuum $\Delta v$ and $I_{sp}$ . . . . .                     | 26 |
| 7  | CHARM island mass versus specific power at 1 GW. . . . .                                | 27 |
| 8  | Reference vehicle mass bill. . . . .                                                    | 28 |
| 9  | Sensitivity of dry and wet mass to specific power. . . . .                              | 29 |
| 10 | CHARM light-off sequence. . . . .                                                       | 33 |
| 11 | Stages, reaction mass, and primary literature (one family each — not a survey). . . . . | 35 |



|    |                                                                                                                                                                        |    |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 12 | Frozen stage constants (literature-anchored; packaging $\alpha$ are design holes like $\alpha_C$ ).                                                                    | 36 |
| 13 | VSPAERO polar on <code>catskills_ssto.vsp3</code> (gear retracted; $Re_c/10^6 = 10$ ; thin-surface VLM). Source: <code>research/figures/cad/vspaero/polar.csv</code> . | 37 |
| 16 | Water store versus stage-3 $I_{sp}$ at fixed $m_{dry} = 196$ t, $\Delta v_{vac} = 4$ km/s.                                                                             | 43 |
| 18 | Stage energy comparison at the closed reference vehicle ( $m_0 = 240$ t).                                                                                              | 44 |
| 19 | Engine component mass allocation and implied packaging specific power.                                                                                                 | 46 |
| 20 | Atmospheric acoustic order-of-magnitude estimate vs. a real, comparably sized reference jet.                                                                           | 48 |
| 21 | Longitudinal station and bay layout.                                                                                                                                   | 49 |
| 22 | Systems checklist: equations to constraints.                                                                                                                           | 52 |
| 23 | Imputed CHARM plant requirements for this SSTO.                                                                                                                        | 52 |
| 24 | Gap between present CHARM and vehicle need.                                                                                                                            | 53 |
| 26 | External packages and tools used by the living design / paper build.                                                                                                   | 61 |

# 1 Vehicle vision

Municipal runway to ISS-class LEO: a Shuttle-style SSTO spaceplane with a real cargo bay, a single-deck crew module, and a continuous CHARM  $p\text{-}^{11}\text{B}$  plant driving a three-stage combined-cycle engine (electric ducted fan  $\rightarrow$  microwave air plasma  $\rightarrow$  water plasma). The figures below are the vehicle picture; the equations that close the mass and energy budgets follow.

## 1.1 AI concept render

Fig.~1 is an AI-rendered concept illustration, not an engineering drawing: **Google Nano Banana Pro** (Gemini 3 Pro Image) was given the two CAD wireframes below as reference images and prompted to render the vehicle's true fuselage/wing contour — the grey wireframe lines, not the blocky bounding box — taking off from a municipal airport [47]. Proportions, panel lines, livery, and the runway scene are AI interpretation; the dimensioned CAD wireframes immediately below remain the source of truth for station layout and outer mold line.



**Figure 1** CATSKILLS SSTO, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image) of the vehicle taking off from a municipal airport, prompted from the CAD floorplan and profile wireframes below.

Fig.~2 is a companion AI concept render of the flight deck at the same moment, from the rear seats looking forward: six crew in Crew-Dragon-style seats and suits (captain and copilot forward, four aft), helmets marked “Catskills Research,” small oval windows sized to match Fig.~1, and Crew-Dragon-style forward flight-deck controls. Illustrative only — seat count, suit design, and cockpit layout are AI interpretation prompted from the interior floorplan schematic (Fig.~3), not an engineering cabin design.






**Figure 2** CATSKILLS SSTO crew cabin at liftoff, AI concept render (Google Nano Banana Pro / Gemini 3 Pro Image): view from the rear seats of the flight deck as the vehicle rotates off the runway, prompted from the interior floorplan schematic and the prior exterior-render window shape.


## 1.2 Interior floorplan and exterior profile

Crew volume flattens the **Space Shuttle crew module** from two decks to **one** [14,21], then **stretches** the pressurized nose so life support and a suited airlock are not cartoon-thin. Reference overall length  $L \approx 52$  m. ECLSS = **Environmental Control and Life Support System**. Depth  $\approx 6.5$ –7 m, span  $\approx 28$  m.

Figs.~3 and 4 are orthographic CAD views of the same station map as `assembly.json` (nose left, length 52 m): crew capsule 0–11 m (flight deck + seats, internal  $\text{O}_2/\text{N}_2$ , port **ground-only** side hatch); airlock 11–15 m (hatches cabin $\leftrightarrow$ airlock and airlock $\leftrightarrow$ bay only); cargo bay 15–33.3 m ( $18.3 \times 4.6$  m, clamshell doors on the cargo-skid drop-in; exterior OML is an unbroken tube); **fusion electric plant** 33.3–49 m on one skid (flight battery 33.3–35.5 m, water tanks 35.5–39.5 m — relocated ahead of CHARM as a supplemental radiation shield, §9.9 — fuel services 39.5–41.5 m, CHARM island incl. permanent shield bulkhead 41.5–49 m); **combined-cycle engine** 49–52 m (stages 1–3 + nozzle). The plant schematic (Fig.~9) is 1–1 with that JSON tree. Fig.~3 is a top-down cutaway (no landing gear). Fig.~4 shows white upper OML, dark TPS belly, extended gear, the port crew hatch, and closed top bay doors.

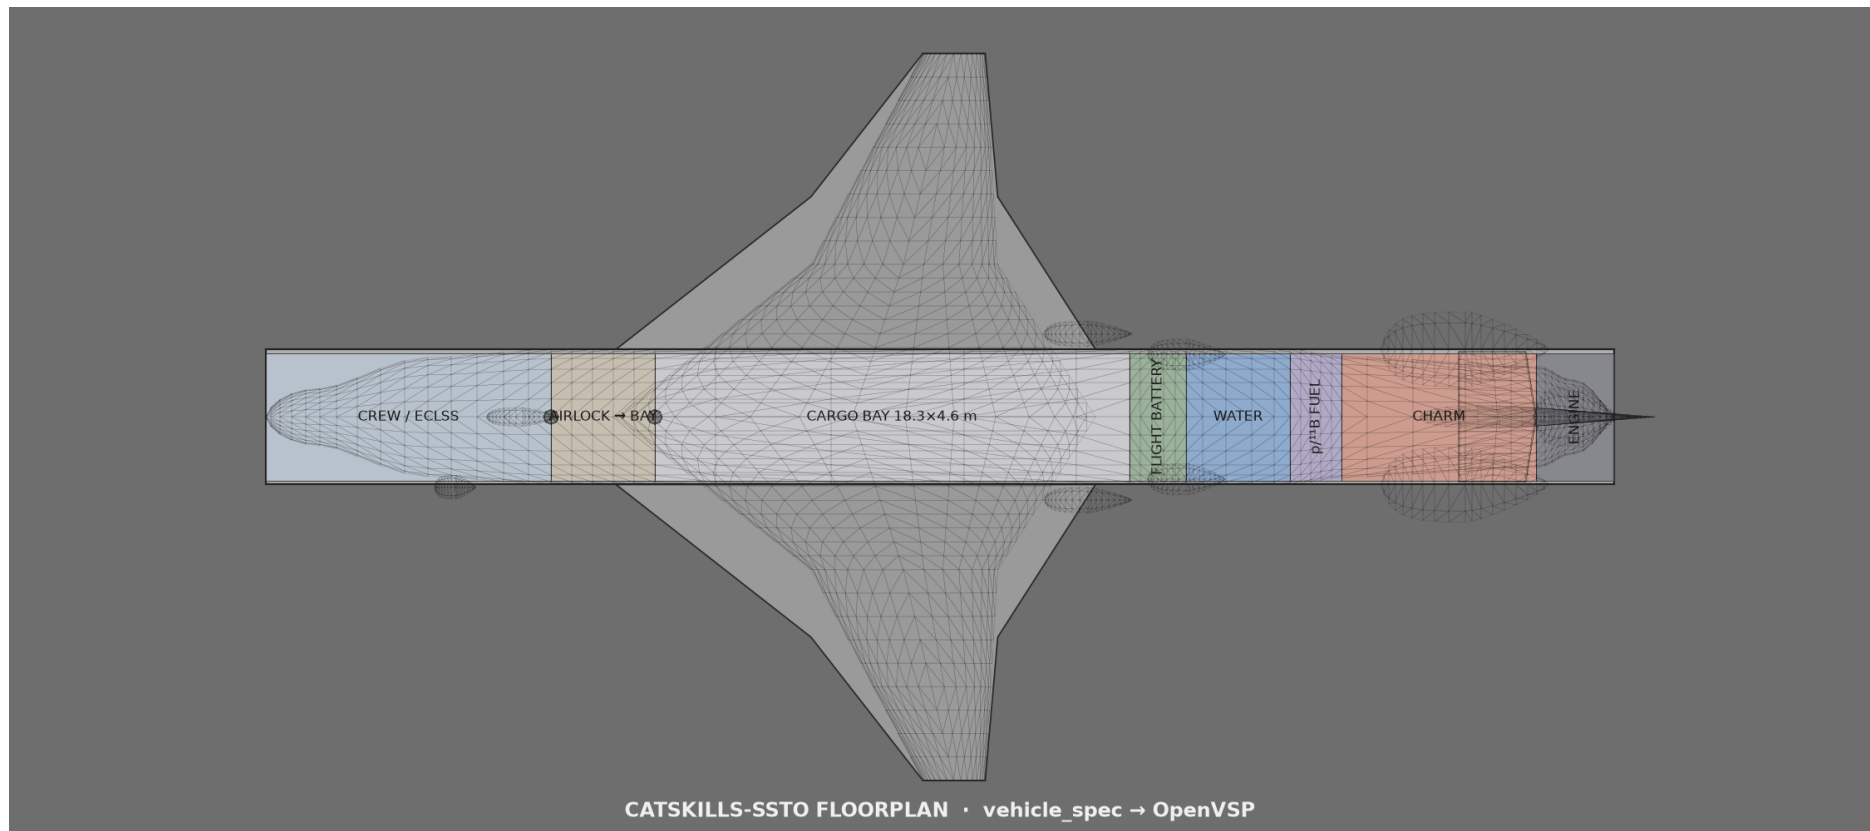

**Figure 3** Vehicle floor plan.

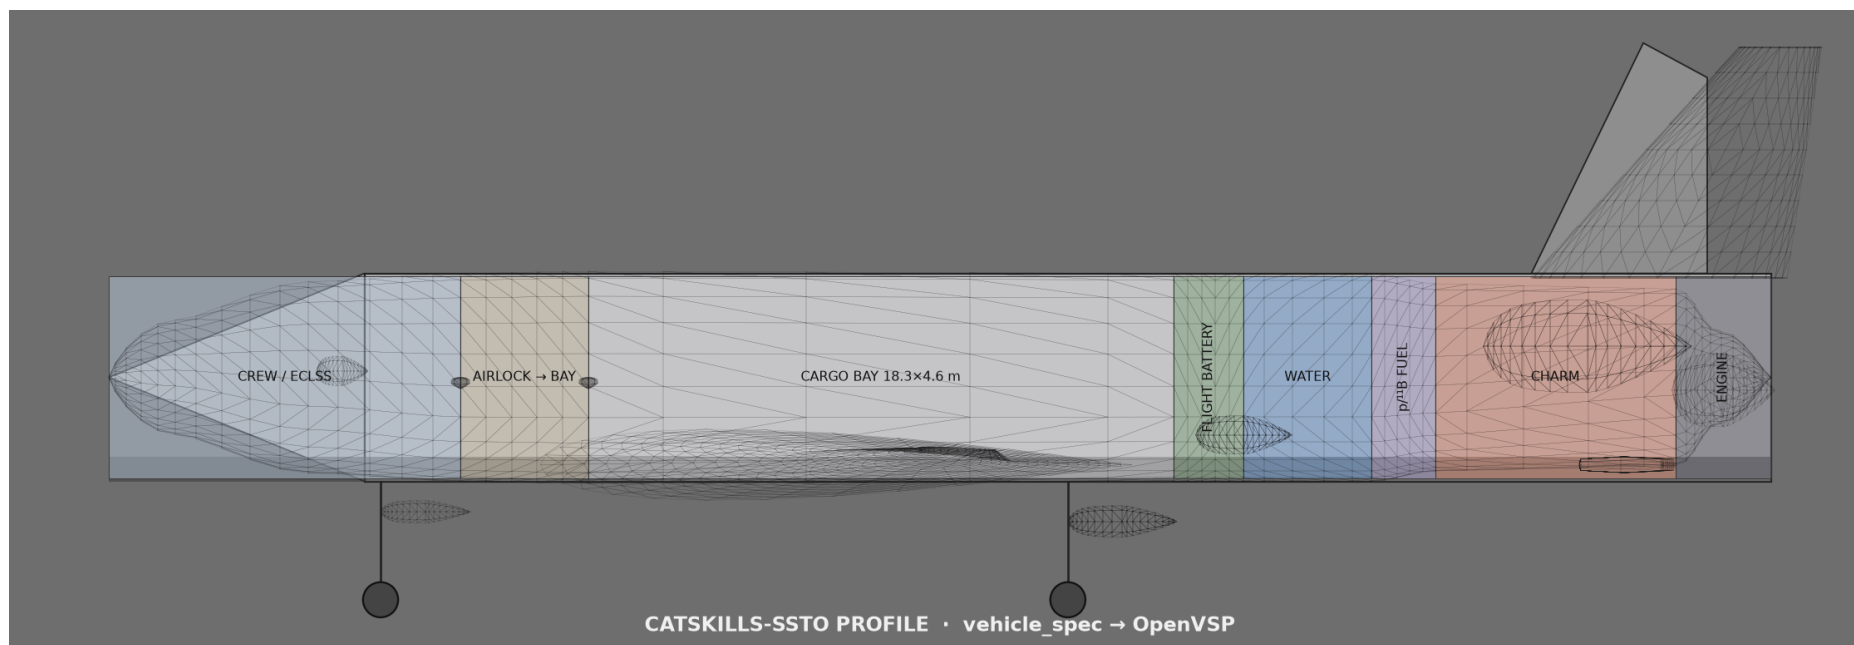


**Figure 4** Vehicle profile view.




### 1.3 Forward drop-ins (top-down, covers off)


Figs.~5–8 are **Blender** orthographic top views built procedurally from `assembly.json` (make `cad-drop-ins`; see `research/figures/cad/build_crew_capsule_blender.py`, `build_airlock_blender.py`, `build_cargo_skid_blender.py`, `build_fusion_plant_skid_blender.py`, and the shared helpers in `research/figures/cad/lib/`). No AI-generated imagery remains in this section.

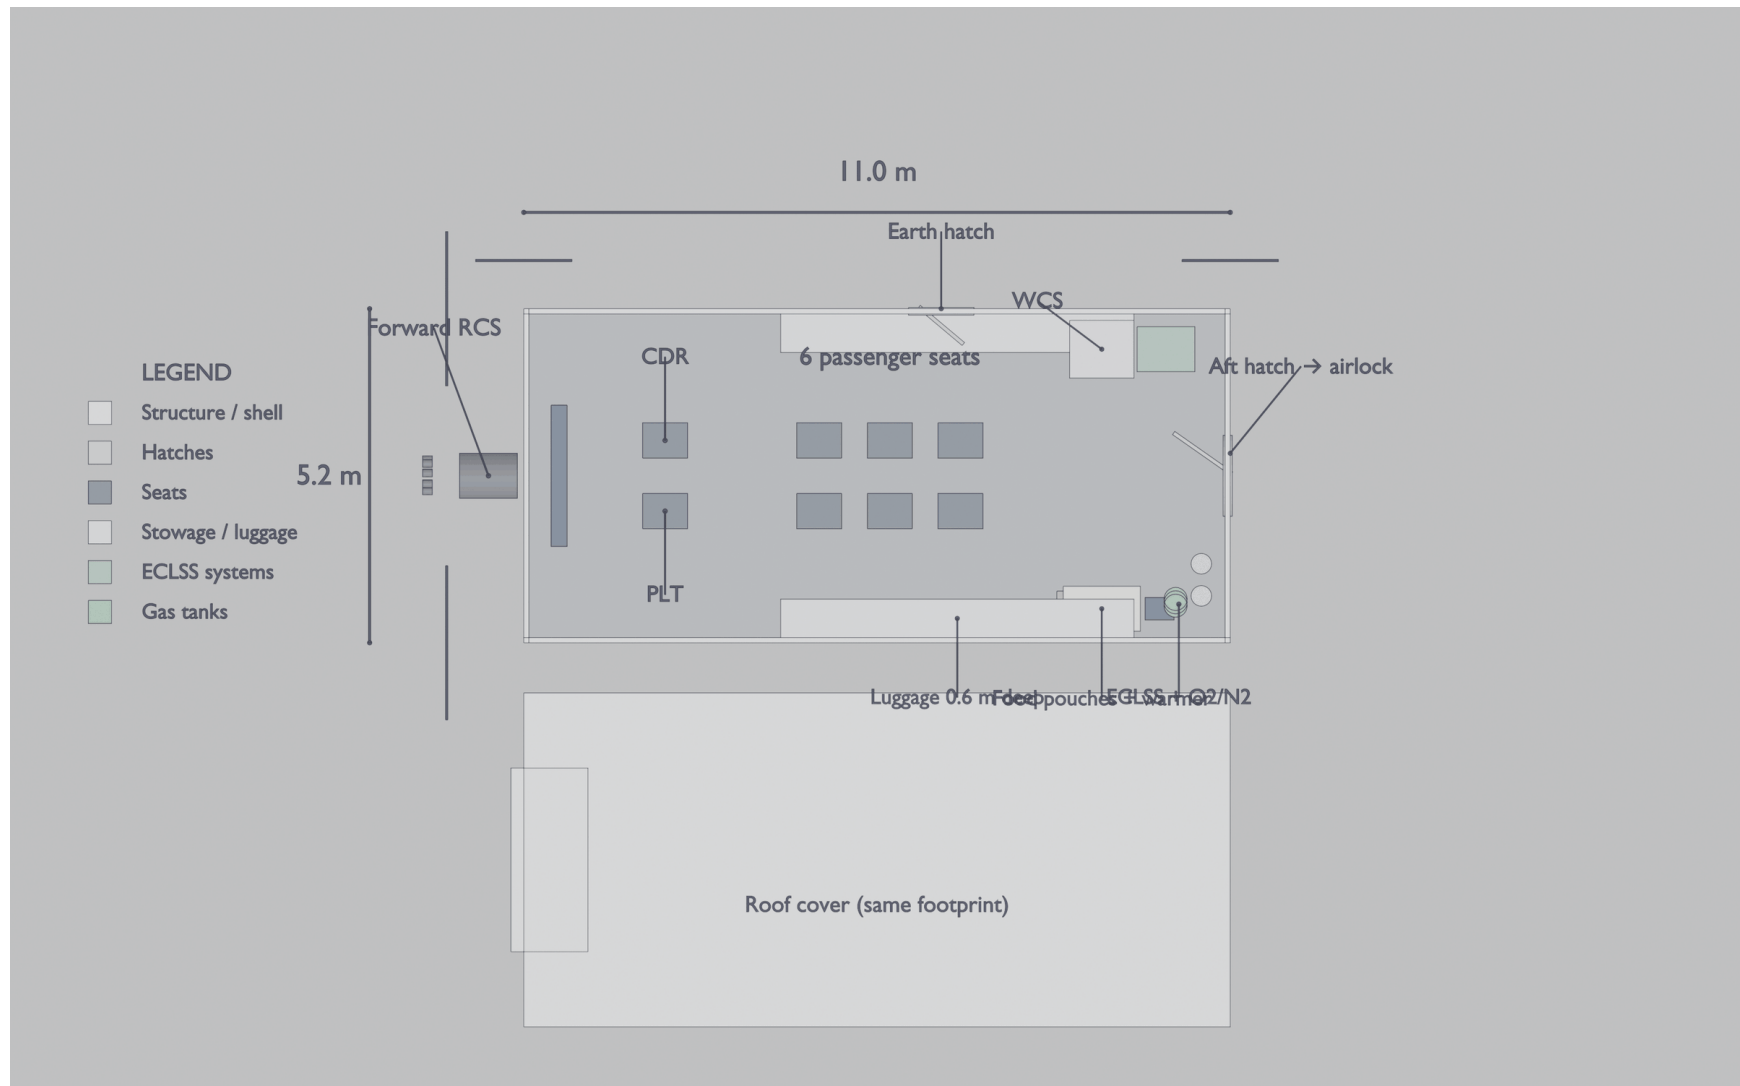


**Figure 5** Crew capsule, Blender top-down cutaway from assembly.json.

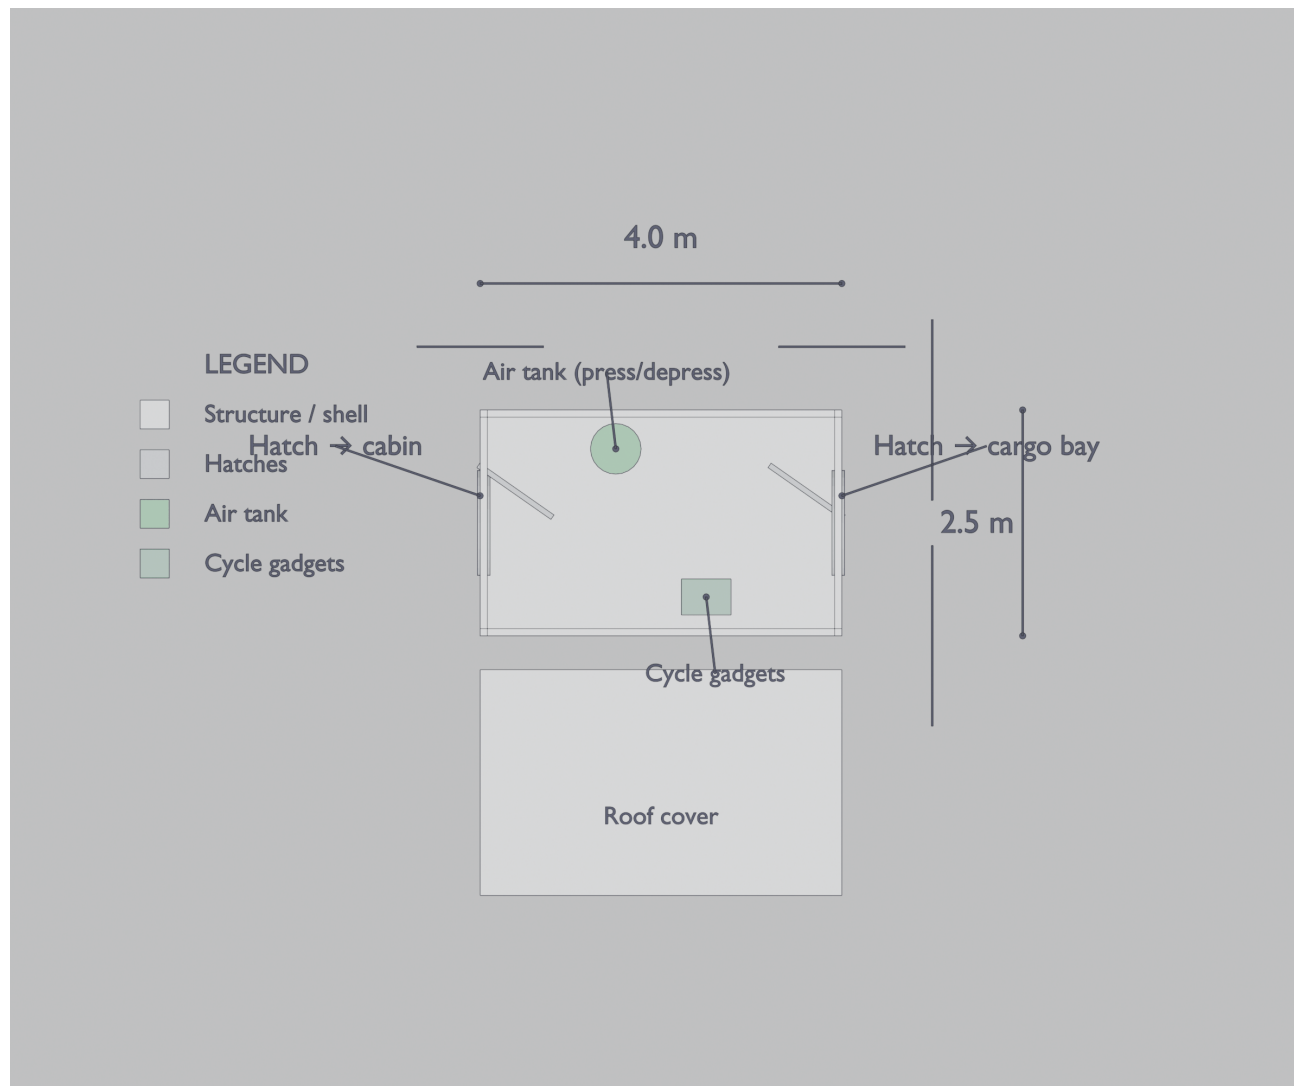

**Figure 6** Airlock, Blender top-down cutaway from assembly.json.

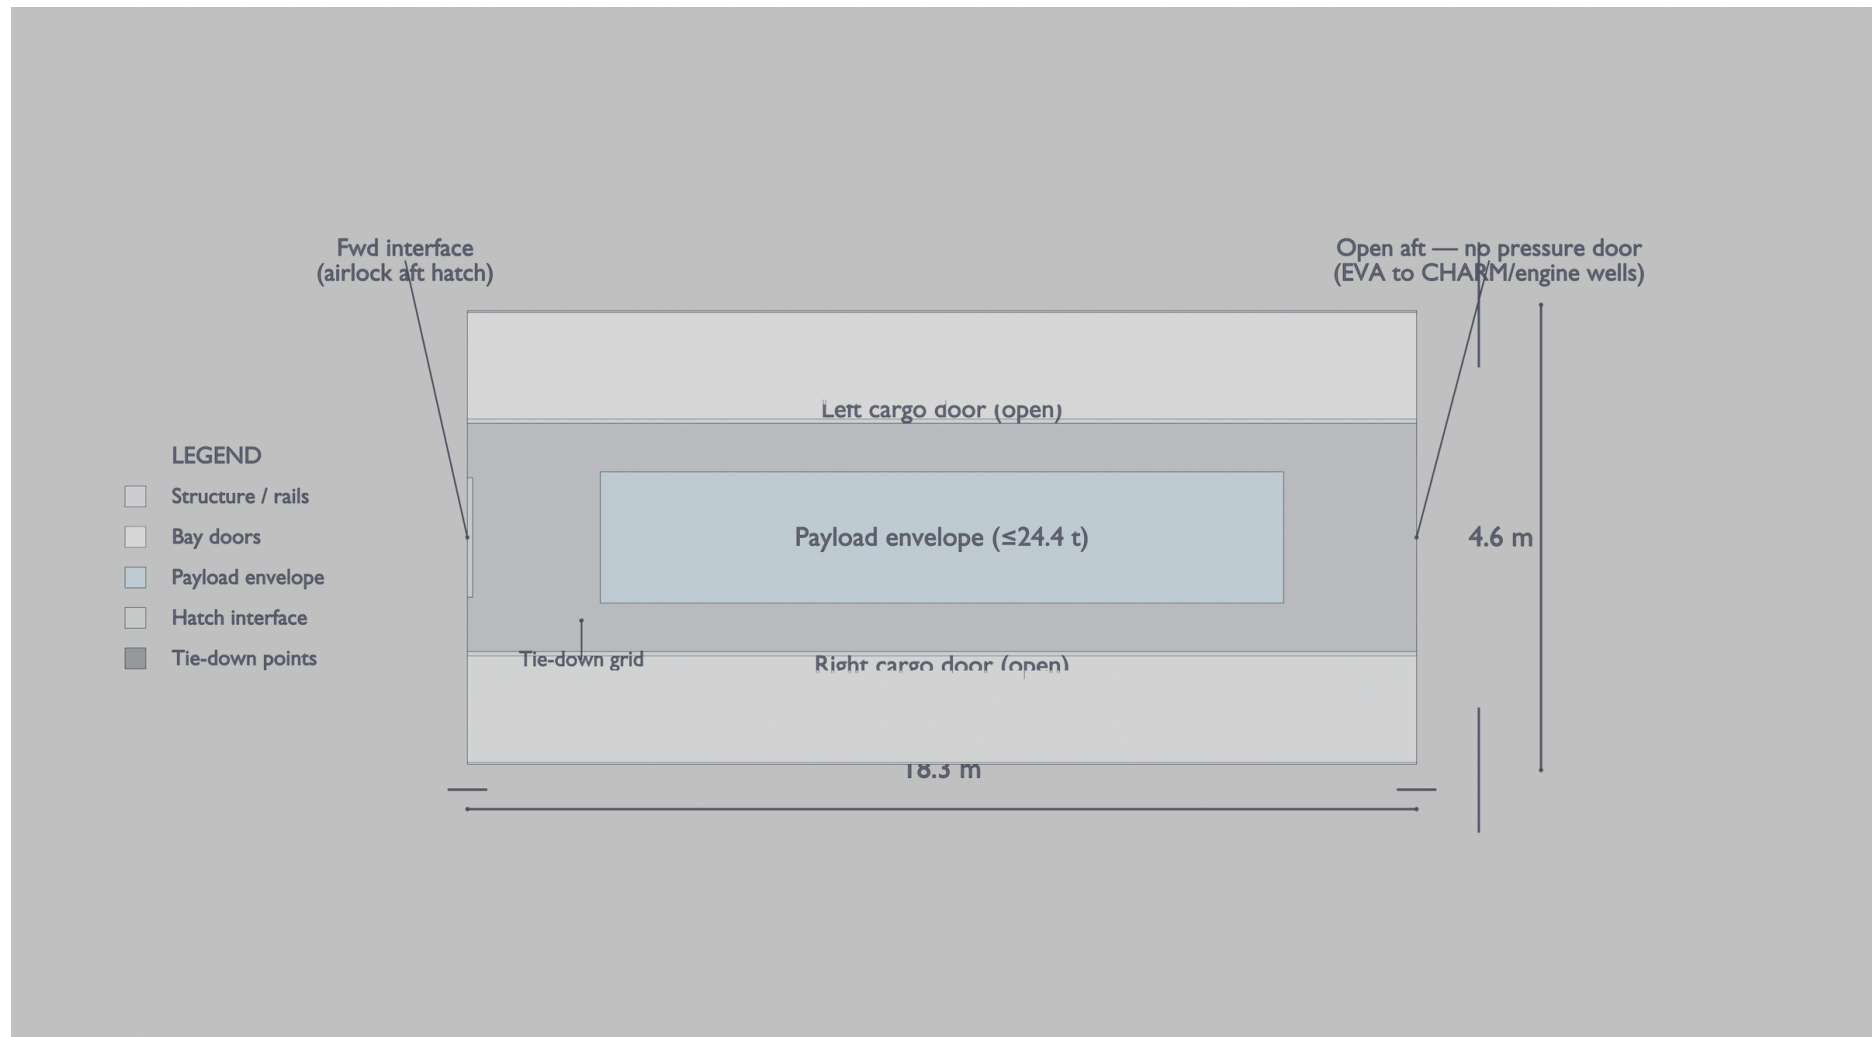

**Figure 7** Cargo skid, Blender top-down cutaway from assembly.json with bay doors open.

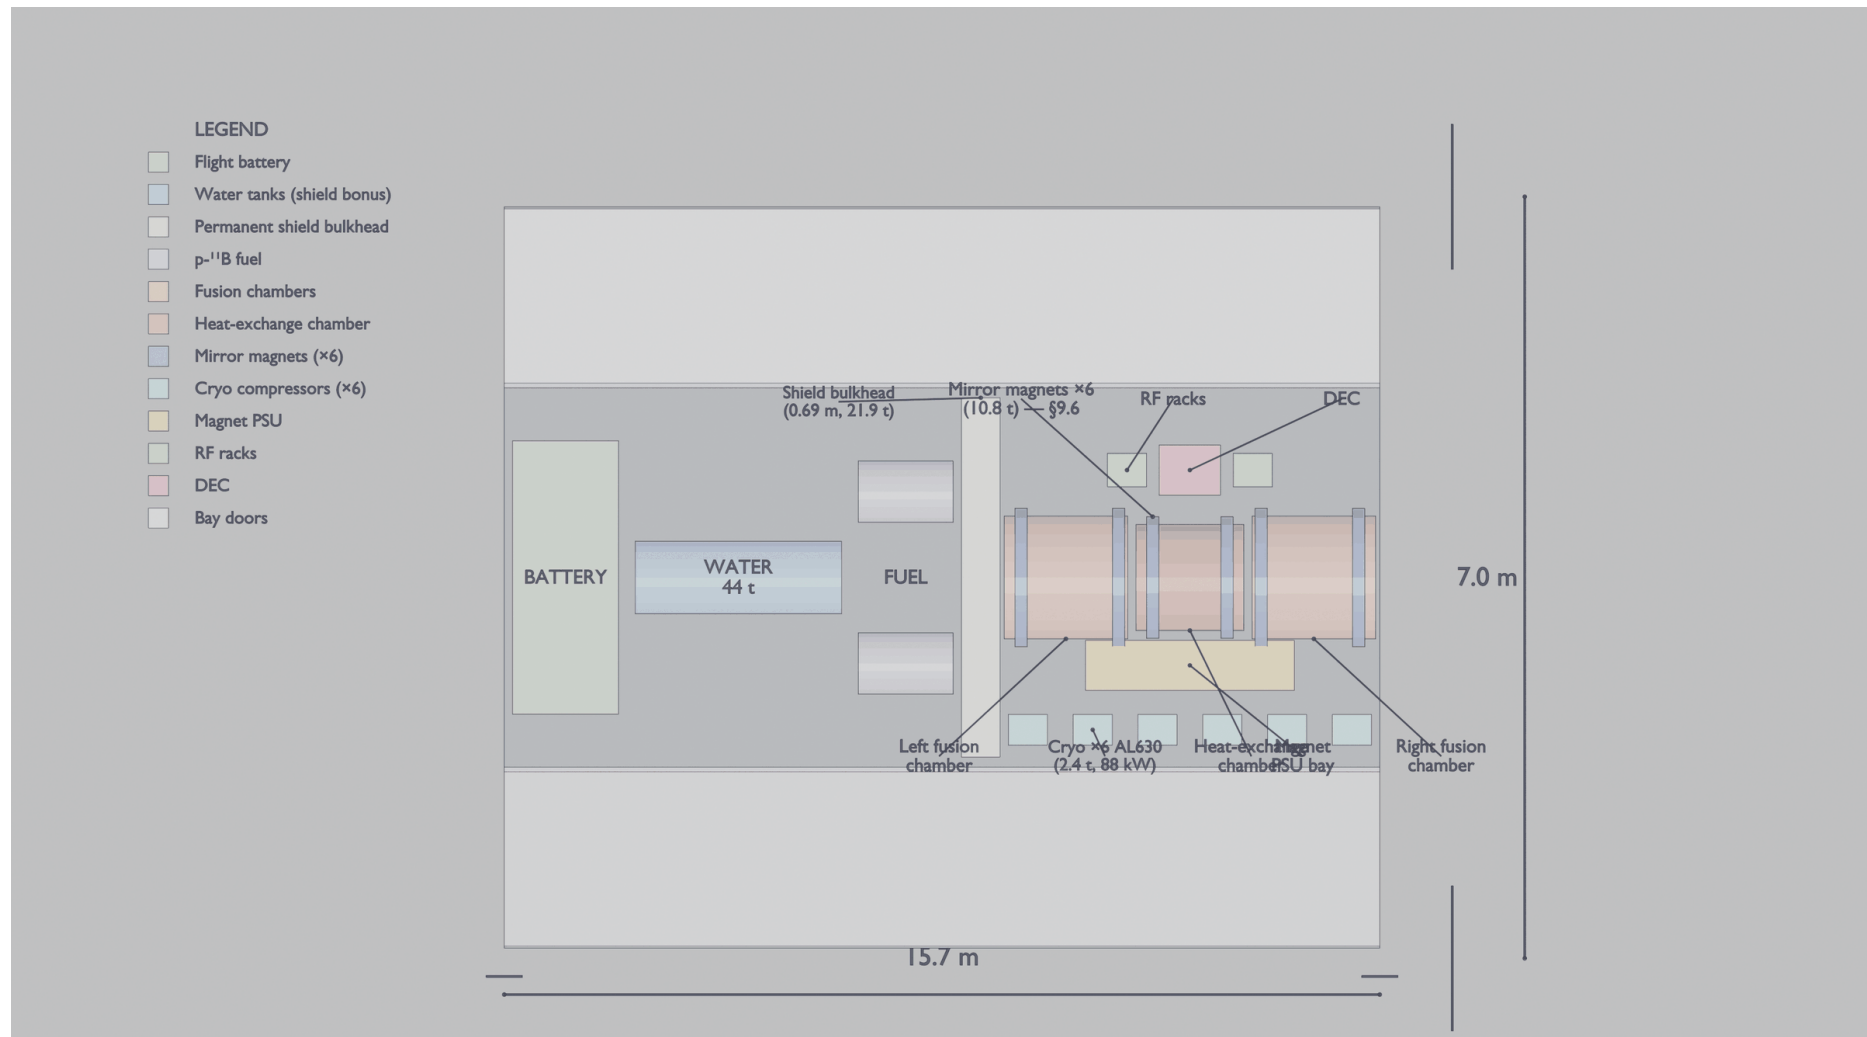


**Figure 8** Fusion plant skid, Blender top-down cutaway from assembly.json: flight battery, relocated water tanks (radiation-shield buffer, \$9.9), p-11B fuel, permanent shield bulkhead, chamber string, 6 mirror magnets, 6-unit cryo compressor bay, magnet PSU, RF, and DEC.

## 1.4 Fusion electric plant (assembly SSOT)

Fig.~9 is auto-generated from `research/figures/cad/assembly.json` on every build (`scripts/update_arxiv_mermaid.py`, same visible-set algorithm as the interactive outliner — see `research/figures/cad/lib/m_builder.py`). Boxes are plant parts/collections, not a separate physics cartoon; this figure is hard-scoped to the fusion plant assembly, so the one connection leaving it (to the combined-cycle engine) is drawn as a dashed boundary stub rather than pulling in the engine's own parts.




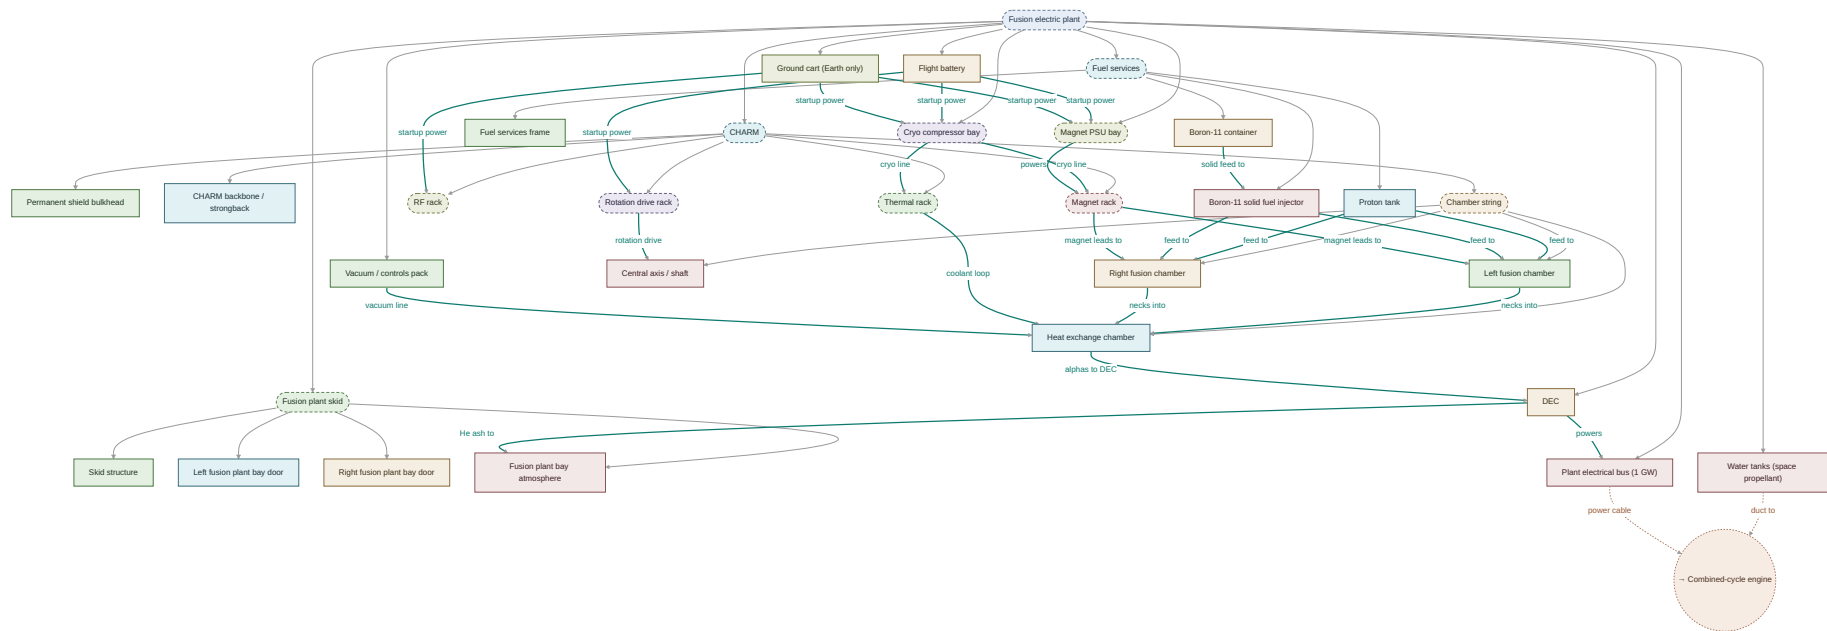

**Figure 9** Fusion electric plant (assembly.json).

## 1.5 Profile stations

Stations match assembly envelopes: crew 0–11 m, airlock 11–15 m, cargo 15–33.3 m, fusion plant 33.3–49 m (battery + water + fuel + CHARM on one skid — water relocated ahead of CHARM as a supplemental shield, §9.9), engine 49–52 m. Fig.~10 is auto-generated (whole-vehicle scope, one level into the fusion plant and engine) by the same `scripts/update_arxiv_mermaid.py` pipeline as Fig.~9.

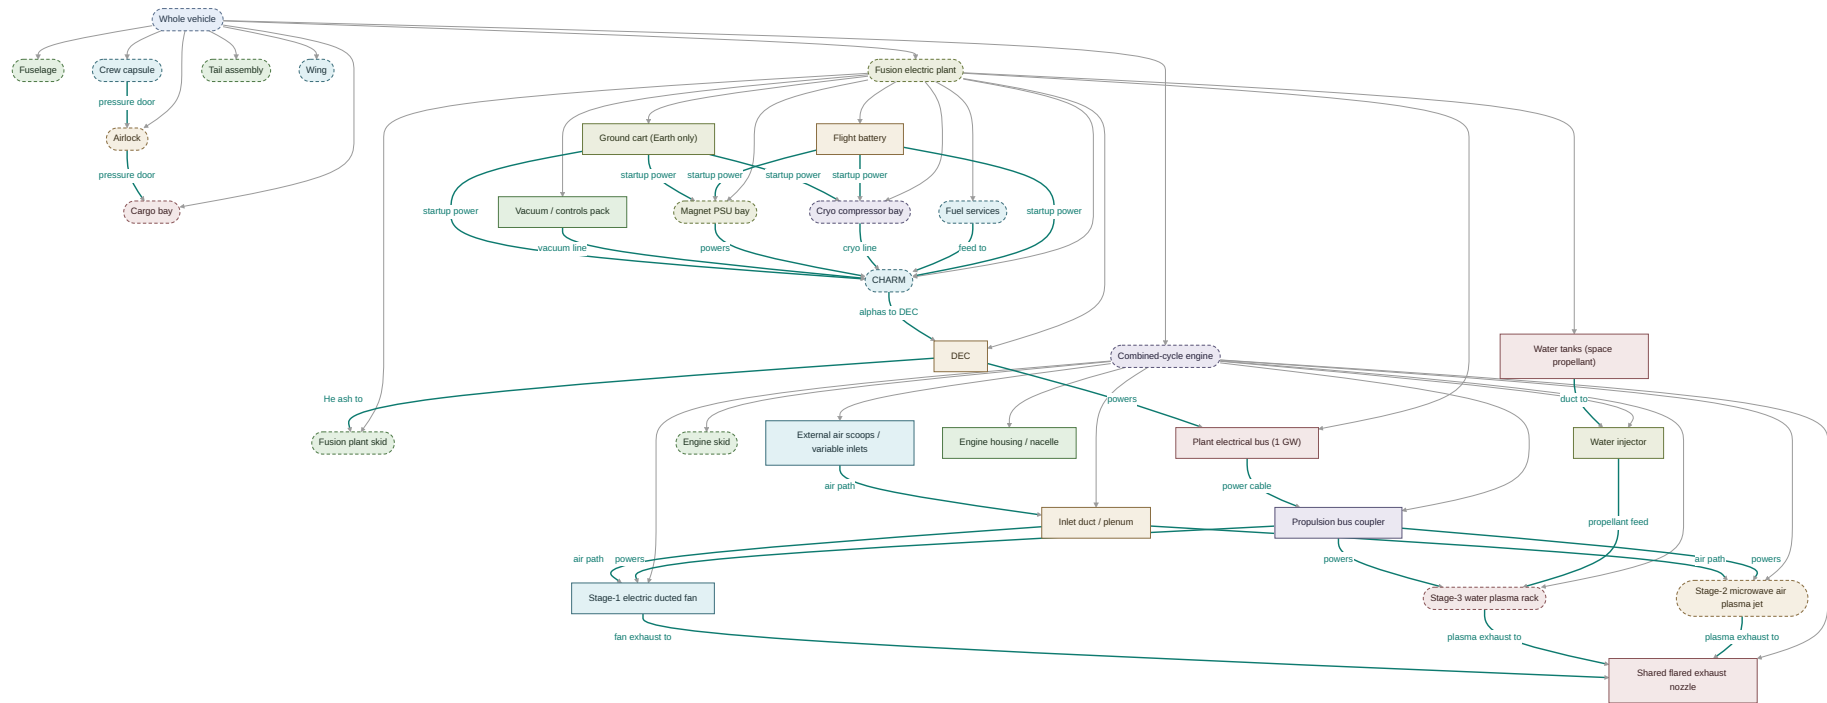

**Figure 10** Profile stations from assembly envelopes.

## 2 Design goals (the plane)

**Table 1** Design goals for the plane.

| ID  | Goal                     | Statement                                                                                                                                             |
|-----|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| G1  | <b>SSTO</b>              | Single stage from runway to ISS-class LEO; no discarded boosters or external tank                                                                     |
| G2  | <b>Shuttle style</b>     | Orbiter-like airframe: wing-body, thermal protection system (TPS), runway landing, gear, control surfaces; crew systems (toilet, ECLSS, food)         |
| G2b | <b>Single-deck crew</b>  | Flatten Shuttle cabin to one deck: flight deck; six reclining seats; $O_2/N_2$ + ECLSS; luggage; forward/side ground door; large aft airlock into bay |
| G2c | <b>Length</b>            | Stretch OML as needed for airlock, ECLSS tanks, battery, and fusion-fuel tanks—reference $L \approx 52$ m                                             |
| G3  | <b>Shuttle cargo bay</b> | Usable bay $\approx 18.3$ m $\times$ 4.6 m class for payload—not filled with reactors                                                                 |
| G4  | <b>Payload</b>           | Shuttle-class cargo: $m_{pl} = 24\,400$ kg reference                                                                                                  |
| G5  | <b>Destination</b>       | Circular LEO compatible with ISS altitude ( $\approx 400$ km); plane-change to $51.6^\circ$ treated as margin                                         |
| G6  | <b>Municipal airport</b> | Takeoff/landing on long civil runways; first gear cool enough for noise/oversight; no vertical pad                                                    |
| G7  | <b>One engine</b>        | Single combined-cycle propulsion string; deadstick glide if plant fails                                                                               |
| G8  | <b>Clean fuel</b>        | $p + {}^{11}\text{B} \rightarrow 3\alpha + 8.7\text{ MeV}$ ; CHARM bottle; DEC-first electricity                                                      |
| G9  | <b>Power</b>             | Plant electrical bus peak $P_\star = 1$ GW (design target)                                                                                            |

**Not goals:** expendable stages; D–T breeding plant; filling the bay with the fusion island.

## 3 Constants and symbols

**Table 2** Physical constants and reference symbols.

| Symbol           | Meaning            | Reference value                                       |
|------------------|--------------------|-------------------------------------------------------|
| $R_E$            | Earth radius       | $6.371 \times 10^6$ m                                 |
| $\mu_E$          | $GM_E$             | $3.986 \times 10^{14}$ m <sup>3</sup> /s <sup>2</sup> |
| $h_{\text{ISS}}$ | ISS-class altitude | $4.00 \times 10^5$ m                                  |

| Symbol          | Meaning              | Reference value               |
|-----------------|----------------------|-------------------------------|
| $r$             | Orbit radius         | $R_E + h_{\text{ISS}}$        |
| $g_0$           | Standard gravity     | $9.80665 \text{ m/s}^2$       |
| $m_{\text{pl}}$ | Cargo-bay payload    | $2.44 \times 10^4 \text{ kg}$ |
| $P_\star$       | CHARM bus peak power | $1.00 \times 10^9 \text{ W}$  |

Masses (all kg):

**Table 3** Mass symbol definitions.

| Symbol            | Meaning                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------|
| $m_{\text{af}}$   | Airframe primary: fuselage, wings, TPS (excl. gear/controls)                                                                       |
| $m_{\text{gear}}$ | Landing gear (nose + mains), doors, actuators                                                                                      |
| $m_{\text{ctrl}}$ | Control surfaces + actuators (elevons, rudder, speed brake / body flap equiv.)                                                     |
| $m_{\text{crew}}$ | Crew cabin systems: ECLSS, O <sub>2</sub> /N <sub>2</sub> tanks, pressure control, toilet, galley, food, luggage, airlock fittings |
| $m_{\text{str}}$  | $m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$                                                              |
| $m_{\text{eng}}$  | Combined-cycle engine + inlets + nozzles + ducts                                                                                   |
| $m_{\text{C}}$    | CHARM island (chambers, magnets, radio-frequency (RF), DEC, local shield, cryo, bath)                                              |
| $m_{\text{bat}}$  | Flight battery / auxiliary power unit (APU) (restart + hotel)                                                                      |
| $m_{\text{f}}$    | $p\text{-}^{11}\text{B}$ fuel                                                                                                      |
| $m_{\text{w}}$    | Water carried at takeoff (vacuum reaction mass)                                                                                    |
| $m_{\text{dry}}$  | All mass except water                                                                                                              |
| $m_0$             | Gross liftoff mass (GLOW)                                                                                                          |
| $m_{\text{ins}}$  | Mass at LEO insertion (after water burn)                                                                                           |

## 4 MWh budget: Shuttle-class mass to ISS LEO

### 4.1 Ideal orbital specific energy

$$r = R_E + h_{\text{ISS}}, \quad v_{\text{orb}} = \sqrt{\frac{\mu_E}{r}}, \quad \varepsilon_{\text{orb}} = -\frac{\mu_E}{2r}, \quad \varepsilon_{\text{surf}} \approx -\frac{\mu_E}{R_E}.$$

$$\Delta\varepsilon = \varepsilon_{\text{orb}} - \varepsilon_{\text{surf}} = \frac{\mu_E}{R_E} - \frac{\mu_E}{2r} \approx 3.31 \times 10^7 \text{ J/kg} = 33.1 \text{ MJ/kg}.$$

Numerical anchors:

$$v_{\text{orb}} \approx 7.67 \text{ km/s}, \quad \Delta\varepsilon \approx 9.19 \text{ kWh/kg}.$$

## 4.2 Orbital energy of the inserted vehicle

Everything that arrives at ISS altitude is still aboard (SSTO):

$$E_{\text{orb}} = m_{\text{ins}} \Delta\varepsilon.$$

In MWh:

$$E_{\text{orb}}^{(\text{MWh})} = m_{\text{ins}} \cdot \frac{\Delta\varepsilon}{3.6 \times 10^9}.$$

**Table 4** Orbital energy for representative inserted masses.

| $m_{\text{ins}}$            | $E_{\text{orb}}$ | $E_{\text{orb}}$ |
|-----------------------------|------------------|------------------|
| 100 t (orbiter+cargo class) | 3.31 TJ          | 920 MWh          |
| 150 t                       | 4.97 TJ          | 1380 MWh         |
| 200 t                       | 6.62 TJ          | 1840 MWh         |

## 4.3 Source energy (plant must supply)

Air-breathing and rocket/plasma paths leave energy in the wake and fight drag/gravity. Define a mission multiplier  $\kappa_E \geq 1$ :

$$E_{\text{src}} = \kappa_E E_{\text{orb}} = \kappa_E m_{\text{ins}} \Delta\varepsilon.$$

Working band for planning:

$$\kappa_E \in [2, 4] \quad \Rightarrow \quad E_{\text{src}}^{(\text{MWh})} \approx (18\text{--}37) m_{\text{ins},100\text{t}}$$

i.e. about 1.8–3.7 GWh of source energy per 100 t inserted, scaling linearly with  $m_{\text{ins}}$ .

Time at constant bus power  $P_\star$ :

$$t_{\text{src}} = \frac{E_{\text{src}}}{P_\star} = \frac{\kappa_E m_{\text{ins}} \Delta\varepsilon}{P_\star}.$$

For  $m_{\text{ins}} = 1.9 \times 10^5$  kg,  $\kappa_E = 3$ ,  $P_\star = 1$  GW:

$$E_{\text{src}} \approx 18.9 \text{ TJ} \approx 5240 \text{ MWh}, \quad t_{\text{src}} \approx 5.2 \text{ h}.$$

So a 1 GW CHARM bus is an **energy-throughput** match for Shuttle-class SSTO only if the climb/insert lasts hours at high average power—or peak  $P_\star$  is used with  $\kappa_E$  toward the low end and a lighter  $m_{\text{ins}}$ .

**ISS note.** Matching ISS inclination adds plane-change  $\Delta v$ . Fold into vacuum  $\Delta v$  margin (§5) rather than into  $\Delta\varepsilon$ .

## 5 Flight regimes: three electric stages

One propulsion string, three stages. No scramjet claim. Plant couples only by **power cable** (DEC  $\rightarrow$  bus).



**Table 5** Combined-cycle stages (reaction mass and thruster family).

| Stage                                  | Ambient           | Reaction mass                | Thruster family (anchor lit.)                          |
|----------------------------------------|-------------------|------------------------------|--------------------------------------------------------|
| <b>1</b> Munici-<br>pal /<br>dense air | Free air          | Ingested air                 | Electric ducted fan (EDF)                              |
| <b>2</b> Climb<br>/ scarce<br>air      | Free air          | Ingested +<br>compressed air | Microwave <b>air</b> plasma jet [23]                   |
| <b>3</b><br>Vacuum<br>/ LEO<br>insert  | Intakes<br>sealed | Carried <b>water</b>         | Microwave <b>water</b> plasma thruster lineage<br>[24] |

Cutoff: intakes seal at density/Mach command  $\rho \leq \rho_{\text{seal}}$  (or crew/auto seal for reentry); stage 3 begins.

Energy split (schematic):

$$E_{\text{src}} = E_1 + E_2 + E_3 + E_{\text{hotel}} + E_{\text{loss}}.$$

With free reaction mass in stages 1–2, plant energy primarily raises vehicle mechanical energy and pays drag:

$$P_{\text{prop}}(t) \approx \frac{D(t) v(t)}{\eta_p(t)}, \quad \int P_{\text{prop}} dt \subset E_1 + E_2.$$

In stage 3, jet power for exhaust speed  $v_e$  and water mass flow  $\dot{m}_w$  is

$$P_{\text{jet}} = \frac{1}{2} \dot{m}_w v_e^2, \quad T = \dot{m}_w v_e \quad \Rightarrow \quad P_{\text{jet}} = \frac{1}{2} T v_e.$$

## 6 Water mass as a function of whole dry mass

Water is used only in stage 3. Let

$$m_{\text{dry}} = m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + m_{\text{C}} + m_{\text{bat}} + m_{\text{f}},$$

$$m_0 = m_{\text{dry}} + m_w, \quad m_{\text{ins}} = m_{\text{dry}}$$

(all water expended by insertion). Rocket equation for vacuum  $\Delta v_{\text{vac}}$ :

$$\Delta v_{\text{vac}} = v_e \ln \left( \frac{m_{\text{dry}} + m_w}{m_{\text{dry}}} \right) = v_e \ln \mu, \quad \mu = e^{\Delta v_{\text{vac}}/v_e}.$$

**Water constraint (closed form):**

$$m_w = m_{\text{dry}} \left( e^{\Delta v_{\text{vac}}/v_e} - 1 \right) = m_{\text{dry}} (\mu - 1)$$

$$m_0 = m_{\text{dry}} \mu = m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}$$

Vacuum  $\Delta v$  budget:

$$\Delta v_{\text{vac}} = v_{\text{orb}} - v_{\text{ab}} + \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} + \Delta v_{\text{ISS plane}}.$$

Reference planning values:

$$v_{\text{ab}} = 3.5 \text{ km/s}, \quad \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} = 0.8 \text{ km/s}, \quad \Delta v_{\text{ISS plane}} = 0.2 \text{ km/s} \Rightarrow \Delta v_{\text{vac}} \approx 5.2 \text{ km/s}.$$

Optimistic air-breathing ( $v_{\text{ab}} = 5 \text{ km/s}$ , small margins)  $\rightarrow \Delta v_{\text{vac}} \approx 3.5\text{--}4 \text{ km/s}$ .

Exhaust speed from specific impulse:

$$v_e = I_{\text{sp}} g_0.$$

**Table 6** Water mass fraction versus vacuum  $\Delta v$  and  $I_{\text{sp}}$ .

| $\Delta v_{\text{vac}}$ | $I_{\text{sp}}$ | $v_e$     | $\mu$ | $m_{\text{w}}/m_{\text{dry}}$ |
|-------------------------|-----------------|-----------|-------|-------------------------------|
| 4 km/s                  | 2000 s          | 19.6 km/s | 1.226 | 0.226                         |
| 4 km/s                  | 3000 s          | 29.4 km/s | 1.146 | 0.146                         |
| 5.2 km/s                | 2000 s          | 19.6 km/s | 1.302 | 0.302                         |
| 5.2 km/s                | 5000 s          | 49.0 km/s | 1.112 | 0.112                         |

## 7 Vehicle sizing equations

### 7.1 Structure, crew, gear, controls, and bay

Cargo bay geometry (goal G3):

$$L_{\text{bay}} = 18.3 \text{ m}, \quad D_{\text{bay}} = 4.6 \text{ m}, \quad V_{\text{bay}} \approx \frac{\pi}{4} D_{\text{bay}}^2 L_{\text{bay}} \approx 304 \text{ m}^3.$$

Payload density check:

$$\bar{\rho}_{\text{pl}} = \frac{m_{\text{pl}}}{V_{\text{bay}}} \approx 80 \text{ kg/m}^3$$

(compatible with mixed cargo; bay remains payload volume).

**Crew (Shuttle functions, single deck).** Forward **flight deck**: commander and pilot **facing forward** into windows and a full control-panel wall [14,21]. Living volume: **six forward-facing passenger seats** (Crew Dragon-like rows, stretched cabin) plus the flight-deck pair; **waste collection system (WCS)**; **galley/food station without a kitchen sink** (0g); **crew luggage** with doors into the aisle; **ECLSS with O<sub>2</sub>/N<sub>2</sub> tankage inside the pressure vessel**. **Solid port side hatch** (Earth/runway only) and **solid aft pressure hatch** to the airlock. **Airlock** oversized vs a suit-closet: dual-hatch volume on the aft cabin bulkhead facing the **cargo bay**, sized for suited egress (Shuttle middeck airlock pattern, not undersized) [21].

**Landing gear and control surfaces** are explicit mass lines (not buried only in a lump “structure” number):

$$\begin{aligned} m_{\text{af}} &= 7.20 \times 10^4 \text{ kg} && \text{(longer fuselage, wings, TPS, doors),} \\ m_{\text{gear}} &= 4.00 \times 10^3 \text{ kg} && \text{(nose + dual main trucks; mass bill only—see profile),} \\ m_{\text{ctrl}} &= 3.00 \times 10^3 \text{ kg} && \text{(elevons, rudder, speed-brake equiv. + actuators),} \\ m_{\text{crew}} &= 8.50 \times 10^3 \text{ kg} && \text{(ECLSS, O}_2\text{/N}_2\text{, WCS, galley, food, luggage, airlock),} \\ m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}} = 8.75 \times 10^4 \text{ kg.} \end{aligned}$$

CHARM and propulsion water **do not** consume  $V_{\text{bay}}$ . Plant volume sits in a **fuselage island** (spine / aft of bay / wing carry-through), subject to

$$V_C \leq V_{\text{island}}^{\text{max}} \approx 80\text{--}150 \text{ m}^3 \quad (\text{guesstimate for pancaked Shuttle envelope}).$$

## 7.2 CHARM mass hole

Define island specific power on the **electrical bus**:

$$\alpha_C = \frac{P_\star}{m_C} \quad \Rightarrow \quad \boxed{m_C = \frac{P_\star}{\alpha_C}}.$$

**Table 7** CHARM island mass versus specific power at 1 GW.

| $\alpha_C$ | $m_C$ at $P_\star = 1 \text{ GW}$ | Com-<br>ment                                                             |
|------------|-----------------------------------|--------------------------------------------------------------------------|
| 5 kW/kg    | 200 t                             | Heavy;<br>fights<br>SSTO                                                 |
| 10 kW/kg   | 100 t                             | Stretch                                                                  |
| 15 kW/kg   | 67 t                              | <b>Refer-<br/>ence<br/>hole</b> —<br>bottom-<br>up<br>roll-up in<br>§9.6 |
| 25 kW/kg   | 40 t                              | Aggres-<br>sive                                                          |

Volume consistency:

$$\bar{p}_C = \frac{P_\star}{V_C} \quad \Rightarrow \quad V_C = \frac{P_\star}{\bar{p}_C}.$$

For  $V_C \leq 120 \text{ m}^3$ :  $\bar{p}_C \geq 8.3 \text{ MW/m}^3$  bus-averaged over the island—severe packaging.

## 7.3 Engine and battery holes

$m_{\text{eng}} = m_{\text{EDF}} + m_{\mu\text{air}} + m_{\text{wth}} + m_{\text{shared}} = 1.5 \times 10^4 \text{ kg}$  (reference packaging hole; closed in §10.6),

$$m_{\text{bat}} = 2.0 \times 10^3 \text{ kg} \quad (\text{restart} + \text{hotel}; \text{ground cart does first light}),$$

$$m_{\text{f}} = 5.0 \times 10^2 \text{ kg} \quad (p\text{-}^{11}\text{B} + \text{H inventory}; \text{water dominates expendables}; \text{§10.6}).$$

## 7.4 Closed dry / wet mass

$$\begin{aligned}
m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}, \\
m_{\text{dry}} &= m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + \frac{P_{\star}}{\alpha_{\text{C}}} + m_{\text{bat}} + m_{\text{f}}, \\
m_{\text{w}} &= m_{\text{dry}} \left( e^{\Delta v_{\text{vac}}/v_e} - 1 \right), \\
m_0 &= m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}, \\
m_{\text{ins}} &= m_{\text{dry}}.
\end{aligned}$$

## 8 Solved reference vehicle (all-up mass)

**Freeze:**

$$\begin{aligned}
P_{\star} &= 1 \text{ GW}, \quad \alpha_{\text{C}} = 15 \text{ kW/kg}, \quad \Delta v_{\text{vac}} = 4.0 \text{ km/s}, \\
I_{\text{sp}} &= 2000 \text{ s}, \quad v_e = I_{\text{sp}} g_0 = 19.61 \text{ km/s}.
\end{aligned}$$

**Solve:**

$$m_{\text{C}} = \frac{10^9}{1.5 \times 10^4} = 6.67 \times 10^4 \text{ kg} \quad (\text{bottom-up roll-up: §9.6}).$$

$$m_{\text{str}} = 72\,000 + 4\,000 + 3\,000 + 8\,500 = 8.75 \times 10^4 \text{ kg},$$

$$m_{\text{dry}} = 87\,500 + 24\,400 + 15\,000 + 66\,667 + 2\,000 + 500 = 1.961 \times 10^5 \text{ kg} \quad (196.1 \text{ t}),$$

$$\mu = e^{4000/19613} = 1.226, \quad m_{\text{w}} = 0.226 m_{\text{dry}} = 4.44 \times 10^4 \text{ kg} \quad (44.4 \text{ t}),$$

$$m_0 = 2.404 \times 10^5 \text{ kg} \quad (\mathbf{240 \text{ t GLOW}}),$$

$$m_{\text{ins}} = 196.1 \text{ t}.$$

**Mass bill (reference):**

**Table 8** Reference vehicle mass bill.

| Item                                                                                       | Mass   |
|--------------------------------------------------------------------------------------------|--------|
| Airframe + TPS (longer OML)                                                                | 72.0 t |
| Landing gear                                                                               | 4.0 t  |
| Control surfaces + actuators                                                               | 3.0 t  |
| Crew systems (ECLSS, O <sub>2</sub> /N <sub>2</sub> , WCS, galley, food, luggage, airlock) | 8.5 t  |
| Payload (cargo bay)                                                                        | 24.4 t |
| Combined-cycle engine (EDF 5.0 + air-plasma 4.4 + water thruster 3.1 + shared 2.5)         | 15.0 t |
| CHARM island (bottom-up roll-up: magnets + cryo + unsized remainder, §9.6)                 | 66.7 t |
| Flight battery                                                                             | 2.0 t  |

| Item                                               | Mass   |
|----------------------------------------------------|--------|
| $p\text{-}^{11}\text{B}$ / proton fuel (+ tankage) | 0.5 t  |
| Water (vacuum propellant)                          | 44.4 t |
| <b>GLOW</b>                                        | 240 t  |

**Energy at this mass:**

$$E_{\text{orb}} = 6.49 \text{ TJ} = 1800 \text{ MWh}, \quad E_{\text{src}}(\kappa_E = 3) = 5410 \text{ MWh}, \quad t_{\text{src}}(1 \text{ GW}) = 5.4 \text{ h}.$$

**Sensitivity (same  $\Delta v_{\text{vac}}, I_{\text{sp}}; m_{\text{str}}$  fixed):**

**Table 9** Sensitivity of dry and wet mass to specific power.

| $\alpha_C$ | $m_C$ | $m_{\text{dry}}$ | $m_{\text{w}}$ | $m_0$        |
|------------|-------|------------------|----------------|--------------|
| 10 kW/kg   | 100 t | 229 t            | 52 t           | 281 t        |
| 15 kW/kg   | 67 t  | 196 t            | 44 t           | <b>240 t</b> |
| 25 kW/kg   | 40 t  | 169 t            | 38 t           | 208 t        |

Municipal takeoff weight  $\sim 210\text{--}280 \text{ t}$  is heavy vs airliners but in the large-military / 747-class band—not a Citation.

## 9 Constraints on the CHARM power plant

Summarize as a requirement vector  $\mathcal{R}_C$ :

### 9.1 Power and mass

$$P_{\text{bus}}(t) \geq P_{\text{prop}}(t) + P_{\text{hotel}}(t), \quad \max P_{\text{bus}} = P_{\star} = 1 \text{ GW},$$

$$m_C = \frac{P_{\star}}{\alpha_C}, \quad \alpha_C \geq 15 \text{ kW/kg (reference; } \geq 10 \text{ kW/kg hard floor for SSTO)}.$$

$$V_C \leq 120 \text{ m}^3, \quad \bar{p}_C = P_{\star}/V_C \geq 8 \text{ MW/m}^3.$$

### 9.2 Fuel and ash

$$\dot{N}_{p^{11}\text{B}} = \frac{P_{\text{fusion}}}{8.7 \text{ MeV}}, \quad m_{\text{f}}(t_{\text{mission}}) \ll m_{\text{w}}.$$

Ash (He) strained per CHARM multi-chamber design; DEC captures charged-product free energy.

### 9.3 DEC

$$P_{\text{bus}} = \eta_{\text{DEC}} P_{\alpha, \text{ordered}} + \eta_{\text{th}} P_{\text{thermal reject}}, \quad \eta_{\text{DEC}} \gtrsim 0.4\text{--}0.7 \text{ (design target band)}.$$

Thermal reject (X-ray, wall, inefficiencies) must be dumped to:

- air path (stage-1/2 heat exchanger / microwave reject), and/or
- island bath  $\rightarrow$  compact turbine, and/or
- radiators only after exo-atmospheric (limited area).

### 9.4 Restartable in space

$$E_{\text{restart}} \leq \eta_{\text{bat}} m_{\text{bat}} e_{\text{bat}},$$

with  $m_{\text{bat}} = 2 \text{ t}$  reference and  $e_{\text{bat}} \sim 0.15\text{--}0.25 \text{ kWh/kg} \Rightarrow 300\text{--}500 \text{ kWh}$  class store—enough for **pilot-chamber relight + cascade**, not for ascent.

$$\text{Ground cart: } P_{\text{cart}} \geq P_{\text{light-off}}, \quad \text{not carried.}$$

Doctrine: continuous burn nominally; pilot-string kindling from  $m_{\text{bat}}$  if segmented; glide if relight fails.

### 9.5 Continuous operation / no beam farm

Recirculating power is RF walls, rotation, magnets, vacuum, cryo:

$$P_{\text{recirc}} = f_r P_{\text{fusion}}, \quad P_{\text{bus}} = (1 - f_r) P_{\text{fusion, net to bus}}.$$

Design intent:  $f_r$  small enough that 1 GW **bus** does not require multi-MW neutral-beam injection (NBI).

### 9.6 CHARM island bottom-up mass roll-up: magnets and cryo, sized; RF/shield-/structure, not yet

[1] gives no magnet field, magnet technology, or cryostat design — CHARM’s own public materials are pure confinement/ash/DEC physics with zero cryogenics content. §7.2/§9.1’s  $m_C = P_*/\alpha_C$  is a **top-down** target, not a sum of parts. This subsection replaces two of that budget’s line items — magnets and the cryo compressor bay — with explicit, literature-anchored bottom-up numbers computed by `constants_model.py` (plain numpy, no fitting), and is honest about what still isn’t independently sized. All boxed numbers below are program-generated (`‘spans’`); `re-running python research/figures/cad/constants_model.py regenerates them from theParams` at the top of that file.

**Magnets — anchor: WHAM, not SPARC.** SPARC’s TF coil is a tokamak magnet; CHARM is a chambered rotating **mirror**. The much closer real-hardware analog is the Wisconsin HTS Axisymmetric Mirror (WHAM), an ARPA-E-funded, currently-operating HTS mirror machine whose two magnets — built by Commonwealth Fusion Systems (CFS) — are real, delivered, tested hardware:  $< 2 \text{ t}$  each, 17 T in the warm bore / 20 T on tape, REBCO, “self-contained systems” bundling cryogenic refrigeration, vacuum, and controls on the magnet itself [34,35,36]. Take

$N_{\text{coil}} = 6$  (two WHAM-style end-mirror coils per fusion chamber,  $\times 2$  chambers, + 2 shaping coils at the head)

$$m_{\text{magnets}} = N_{\text{coil}} \times 1.8 \text{ t} = 10.8 \text{ t}$$

(WHAM’s “self-contained” description means the on-coil cold head is already inside that 1.8 t figure — only the skid-mounted compressor package is a separate line item, below).

**Cryo compressor bay — 6 flight-remanufactured AL630-class compressors.** One dedicated Cryomech AL630-class compressor **package** per magnet (echoing WHAM/CFS’s “self-contained per-magnet” cryo philosophy); the cold head stays on the magnet (counted above), only the CPA1114 compressor package sits on the skid. Bare datasheet: 191 kg, 12.7 kW electrical (60 Hz), 100 W at 20 K per cold head [33].

$$N_{\text{AL630}} = 6 \quad \Rightarrow \quad Q_{20\text{K}} = N_{\text{AL630}} \times 100 \text{ W} = 600 \text{ W} \quad (\approx 100 \text{ W/coil}).$$

This  $\approx 100 \text{ W/coil}$  is **six times lighter** than the 600 W/coil SPARC actually measured on its TFMC test coil (next subsection) — flagged plainly as an aggressive assumption resting on WHAM-style production coils (optimized current leads, no test-article instrumentation) rather than anything measured for CHARM.

We do not have vendor or test data for re-engineering an AL630 to fly (vibration qualification; swapping the water-cooled compressor for a radiator/pumped-loop interface). **This multiplier is a guess, flagged as such:**

$$\text{flight mass multiplier} = 1.5\times, \quad \text{flight power penalty} = 1.15\times$$

(“remanufacturing a proven, efficient ground design for flight qualification is assumed cheaper in mass than developing new lightweight cryocooler tech from scratch — no vendor or test data backs either number”). With the same  $\times 1.4$  integration margin as before (cryostat structure, transfer lines, manifolds — also a guess):

$$m_{\text{cryo}} = N_{\text{AL630}} \times 191 \text{ kg} \times 1.5 \times 1.4 = 2.41 \text{ t}, \quad P_{\text{cryo}} = 87.6 \text{ kW}$$

**CHARM island roll-up.** Compare the parts we can now ground (magnets + cryo) against the existing top-down target:

$$m_{\text{bottom-up,known}} = m_{\text{magnets}} + m_{\text{cryo}} = 13.2 \text{ t}, \quad m_{\text{C,target}} = \frac{P_{\star}}{\alpha_{\text{C}}} = 66.7 \text{ t}.$$

RF launchers/amplifiers, Bremsstrahlung/neutron shielding, and the CHARM backbone/chamber structure are **not independently sized in this pass** — no citable specific-mass number for gyrotron/RF-launcher hardware or  $p\text{-}^{11}\text{B}$  photon-shield areal density was found that we trust enough to present as engineering (one search result claimed an RF specific mass near 0.5 kg/kW, which is implausibly light for gyrotron + waveguide + power-supply hardware and is deliberately **not used**). Rather than fabricate precision, the model carries the gap as one honestly-labeled remainder:

$$m_{\text{remainder}} = m_{\text{C,target}} - m_{\text{bottom-up,known}} = 53.5 \text{ t} \quad (\text{"RF + shielding + backbone/chamber structure + margin})$$

§9.9 below sources the first real piece of this bucket — a permanent radiation-shield bulk-head, 21.9 t — leaving 31.5 t still unsized (RF hardware + backbone/chamber structure).

$$m_{\text{C}} = \max(m_{\text{C,target}}, m_{\text{bottom-up,known}}) = 66.7 \text{ t} \quad \Rightarrow \quad \alpha_{\text{C,implied}} = 15.00 \text{ kW/kg}$$

i.e. magnets are 16.2% of  $m_{\text{C}}$ , cryo is 3.6%, and the unsized remainder is 80.2%. Because the known bottom-up pieces fit comfortably inside the existing 67 t target,  $m_{\text{C}}$ ,  $m_{\text{dry}}$ , and **GLOW**

in §7.4/§8 do not move — but the mechanism is live: `m_C = max(...)` in `constants_model.py` means a future RF/shield/structure sizing pass (or a heavier magnet/cryo number) would cascade into  $m_0$  automatically rather than needing another hand edit.

**Conservative risk case — SPARC TFMC per-coil heat load.** If CHARM’s production coils do **not** beat the 600 W/coil SPARC actually measured on its Toroidal Field Model Coil (TFMC) — a real 10,058 kg REBCO coil tested at 20.1 T, cooled by eight Cryomech AL630s in a liquid-free loop [29,30] — the bracket is much heavier. For  $N_{\text{coil}} = 4\text{--}8$ :

$$Q_{20\text{K}}^{\text{TFMC}} = N_{\text{coil}} \times 600 \text{ W} = 2.4\text{--}4.8 \text{ kW} \Rightarrow N_{\text{AL630}} = 24\text{--}48 \text{ units},$$

$$m_{\text{cryo}}^{\text{risk}} \approx 7.9\text{--}15.8 \text{ t}, \quad P_{\text{cryo}}^{\text{risk}} \approx 305\text{--}610 \text{ kW}.$$

This is still  $\ll$  the 53.5 t remainder, so it would not by itself force  $m_C$  up — but it is the number to reach for if the 100 W/coil baseline assumption above turns out to be too optimistic.

**Sanity check against a real full-scale plant (“why not a warehouse”).** The Politico/CFS reporting on SPARC’s actual cryoplant hall is the right gut-check, and the real numbers back the instinct that it’s a *categorically* bigger machine, for reasons that don’t apply here: SPARC’s production TF magnet is 18,025 kg per coil, eighteen of them ( $\gtrsim 324$  t of TF magnet alone, before poloidal-field/central-solenoid coils, cryostat, or vacuum vessel) [29], and its full cryoplant needs 17 kW steady-state (4.5 K-equivalent) plus a separate 2.9 MW blowdown system to absorb the heat pulse from each  $\gtrsim 1$  GJ-class shot — infrastructure that fills a dedicated cryoplant building and helium storage yard next to the tokamak hall [31]. Even the conservative TFMC-anchored risk case above is 14–28% of SPARC’s *steady-state* number alone, for a coil inventory two orders of magnitude lighter — defensible **only** because (i)  $p\text{--}^{11}\text{B}$  is aneutronic, so there is no nuclear heating of the magnets/shield that dominates a D–T tokamak’s cryoplant sizing, and (ii) CHARM runs continuously rather than in pulses, so there is no SPARC-style blowdown/buffer system to size at all. Neither of those is a CHARM-specific result; both are architecture-level consequences of the fuel choice already assumed elsewhere in this note (G8, §9.2).

**Ceiling check — flight-cryocooler technology instead of a remanufactured ground unit.** If remanufacturing an AL630 for flight turns out not to work and a clean-sheet space-qualified cryocooler is needed instead, NASA’s own 20 W/20 K reverse turbo-Brayton flight-cryocooler program is the closest public benchmark: state-of-the-art specific mass is 18.7 kg/W (vs. that program’s own 4.4–5.5 kg/W *goal*, not yet demonstrated) [32] —  $12\text{--}45\times$  heavier than our  $2.4 \text{ t}/600 \text{ W} \approx 4.0 \text{ kg/W}$  flight-remanufactured-AL630 assumption. Applied to the conservative TFMC-level risk-case load instead of the optimistic baseline:

$$m_{\text{cryo}}^{\text{ceiling}} = Q_{20\text{K}}^{\text{TFMC}} \times 18.7 \text{ kg/W} \approx 45\text{--}90 \text{ t}$$

— up to, or beyond, the *entire* 67 t CHARM island budget by itself. This stays tracked as its own named unobtainium (§13.3 item 6) rather than silently absorbed into  $\alpha_C$ ; it is also the reason “remanufacture, don’t clean-sheet” is load-bearing for this vehicle closing at all.

**Reference point carried forward.**  $N_{\text{coil}} = 6$ ,  $N_{\text{AL630}} = 6$ ,  $m_{\text{magnets}} \approx 10.8 \text{ t}$ ,  $m_{\text{cryo}} \approx 2.4 \text{ t}$ ,  $P_{\text{cryo}} \approx 88 \text{ kW}$  (0.009% of the 1 GW bus — negligible next to RF/magnet recirculating power, consistent with §9.5) are the working numbers carried into `assembly.json`’s `charm_magnet_rack` (6 magnet nodes) and `cryo_compressor_bay` (6 compressor nodes). The 53.5 t remainder stays an explicit, tracked placeholder — not a rounding error, and not yet real engineering.

## 9.7 Municipal and flight safety

- No tritium breeding inventory.



- Shield so that ramp and cabin doses meet civil constraints with plant running in fan mode.
- Single-string plant: accept engine-out  $\equiv$  plant-out  $\rightarrow$  glide.

## 9.8 How CHARM is lit (and how much energy)

CHARM is **not** lit with a neutral-beam farm. Published architecture lights a **rotating open-field mirror** with **species-separated chambers** and **RF / ponderomotive walls** [1,8,9]. A practical light-off sequence for this vehicle is:

**Table 10** CHARM light-off sequence.

| Step | Action                                                                            | Power plant elements                                      |
|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|
| 0    | Evacuate,<br>interlocks,<br>ground-cart<br>connect                                | Vacuum, controls                                          |
| 1    | Energize mirror /<br>chamber <b>magnets</b>                                       | Magnet PSU $\leftarrow$ cart or battery                   |
| 2    | Spin up <b>plasma</b><br><b>rotation</b><br>(centrifugal boron<br>trap)           | Rotation drive; energy later recoverable in principle [1] |
| 3    | Raise <b>RF one-way</b><br>/ <b>ponderomotive</b><br><b>barriers</b>              | RF units                                                  |
| 4    | Inject <b>protons</b> and<br><b>boron</b> into<br>separated regions               | Fuel injectors + $p$ / $^{11}\text{B}$ tanks              |
| 5    | Establish fusion<br>cell; route alphas to<br><b>heat-exchange /</b><br><b>DEC</b> | DEC electrodes / wave couplers                            |
| 6    | Disconnect cart;<br>bus takes hotel +<br>propulsion                               | Continuous burn doctrine                                  |

**Energy scale (engineering estimate — CHARM papers do not publish a flight kWh bill of materials (BOM)):**

Magnet + RF + rotation spin-up for a segmented 1 GW island is treated as 50–200 kWh class to first useful plasma (seconds–minutes of MW-class RF/magnet draw), not **MWh-class beams**. That is why

$$E_{\text{restart}} \leq 300\text{--}500 \text{ kWh} \quad (m_{\text{bat}} = 2 \text{ t})$$

is booked for **on-orbit relight**, while **first light on Earth** uses the ground cart. One-way RF walls can be energetically expensive if overused [1]; the vehicle concept of operations (CONOPS) keeps barriers as needed for separation, not as a continuous full-power sink that eats the 1 GW bus.

**Pilot-string kindling:** battery (or cart) lights a fraction of chambers  $\rightarrow$  DEC/RF bus cascades the rest.

## 9.9 Radiation and RF shielding: permanent bulkhead (baseline), water relocation (bonus), RF leakage (separate)

Crew/cargo safety must not depend on the water tank’s fill state — water is a consumable that can legitimately be empty (post-insertion, pre-fueling, or after an early dump). This is therefore **three separate, independently-motivated additions**, computed by `constants_model.py` (plain numpy, no fitting) and reported as “spans”. All three are explicitly-flagged, 1D slab, order-of-magnitude estimates — no real photon/neutron spectrum, scatter, or 3D solid-angle coverage is modeled, and no CHARM-specific source term exists in [1] or the CHARM literature search behind §9.6.

**Shared methodology.** A representative bremsstrahlung/X-ray photon energy of  $\sim 300$  keV is assumed (flagged guess, informed by the 100s-of-keV electron temperatures discussed for radiation-trapping  $p$ - $^{11}\text{B}$  regimes [7]), with NIST XCOM mass-attenuation coefficients [39] for water and polyethylene at that energy. A residual-neutron source term is also carried even though  $p$ - $^{11}\text{B}$  is billed as aneutronic: secondary/contamination reactions give a small non-zero yield, flagged at  $\lesssim 1\%$  of a D-T-equivalent yield per general  $p$ - $^{11}\text{B}$  literature, attenuated using standard polyethylene/water fast-neutron removal cross sections [40] (a different physical mechanism than the photon  $\mu/\rho$  above, reported separately). A **target attenuation** of 30 dB (10.0 half-value layers,  $1000\times$  flux reduction) is the flagged baseline design requirement — a planning choice, absent a real CHARM source-term/dose calculation, applied identically to both B1 and B2 below.

**B1 — Permanent dedicated shield bulkhead (baseline, sized for zero water present).** A polyethylene (or borated-polyethylene) bulkhead between CHARM and the forward vehicle — the standard aerospace choice for combined photon+neutron shielding (hydrogen-rich; the NASA/ISS/Orion reference material) — spans the fuselage cross-section ( $34\text{ m}^2$ , reused from §10.2’s aero frontal-area estimate) and is thick enough to hit the target attenuation against **both** hazards independently:

$$t_\gamma = N_{\text{HVL}} \times \text{HVL}_{\gamma,\text{poly}} \approx 61\text{ cm}, \quad t_n = N_{\text{HVL}} \times \text{HVL}_{n,\text{poly}} \approx 69\text{ cm},$$

$$t_{\text{B1}} = \max(t_\gamma, t_n) \approx 0.69\text{ m} \quad \Rightarrow \quad m_{\text{B1}} = t_{\text{B1}} \times A \times \rho_{\text{poly}} \approx 21.9\text{ t}$$

This mass becomes the **first real, sourced line item** inside the 53.5 t “RF + shielding + backbone/chamber structure” remainder carried since §9.6 — 41% of it, leaving 31.5 t still unsized (RF hardware and backbone/chamber structure). It is a partial de-risking, not a closure —  $m_{\text{C}}$  does not move, since the bottom-up known total (magnets + cryo + B1) still fits inside the top-down target.

**B2 — Relocate water tanks (bonus/supplemental shield, unchanged station lengths).** Moving the water tanks from aft-of-CHARM (§1/§11, previously shielding nothing) to between CHARM and the forward vehicle adds *supplemental* shielding on top of B1 whenever the tank is full — new layout: crew  $\rightarrow$  airlock  $\rightarrow$  cargo  $\rightarrow$  battery  $\rightarrow$  water  $\rightarrow$  fuel  $\rightarrow$  charm  $\rightarrow$  engine (§1/§11). At the full-tank slab depth (44 t reference load, 4.0 m envelope), water alone provides:

$$206\text{ dB (photon)}, \quad 179\text{ dB (neutron)}$$

— both far beyond the 30 dB B1 baseline target, i.e. a full water tank is vastly better shielding than the permanent bulkhead alone, but B1 is what remains when it is empty.

**B3 — RF/microwave leakage (separate physics, own brief treatment).** “Damaging RF energy” — stray microwave/RF leakage from the RF confinement racks, a non-ionizing occupational-exposure hazard — is a **different shielding problem** from B1/B2: solved by continuous conductive (Faraday-cage) enclosure, not mass shielding. At a flagged representative

frequency of 2.45 GHz (CHARM’s actual RF launcher frequency is unspecified in [1]), the skin depth in aluminum is  $1.7\ \mu\text{m}$ , so a 1 mm structural skin ( $\approx 582$  skin depths) gives

$$\text{SE} \approx 5054\ \text{dB}$$

— i.e. the airframe/backbone structure and B1’s likely metal facesheets already provide near-total RF attenuation at **zero incremental mass**. This is explicitly **not a mass driver**; the real engineering risk is penetrations and seams (hatches, feedthroughs) needing EMI gaskets, called out qualitatively rather than mass-costed.

## 10 Combined-cycle engine (detail)

One propulsion string with stage index  $\sigma \in \{1, 2, 3\}$ . Plant couples **only** by power cable. Stages 1–2 burn **free air** (reaction mass not carried). Stage 3 burns **carried water**. Fusion fuel  $m_f$  is not propellant for the nozzle.

### 10.1 Stage map and literature anchors

**Table 11** Stages, reaction mass, and primary literature (one family each — not a survey).

| $\sigma$ | Name                                   | Reaction mass                | Primary lit.                                                                                                            | What we take from it                                                                                                                                                                                                                                                                              |
|----------|----------------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | Elec-<br>tric<br>ducted<br>fan         | Free air                     | NASA HEMM<br>megawatt motor<br>[25]                                                                                     | $\alpha_{\text{mot}} \sim 16\ \text{kW/kg}$ (EM<br>mass), $\eta_m \gtrsim 0.98$ stretch /<br>0.90 system                                                                                                                                                                                          |
| 2        | Mi-<br>crowave<br>air<br>plasma<br>jet | Free compressed<br>air       | Ye et<br>al. microwave air<br>plasma [23];<br>efficiency<br>comment [26]                                                | <b>Architecture</b> (magnetron<br>→ compressed-air plasma<br>duct). Do <b>not</b> use Ye’s<br>28 N/kW thrust claim —<br>control-volume comment<br>shows stagnation-pressure<br>artifact [26]                                                                                                      |
| 3        | Water<br>plasma<br>thruster            | Carried $\text{H}_2\text{O}$ | Nakagawa water<br>microwave ion<br>thruster [24];<br>water MPD<br>high- $I_{\text{sp}}$ path<br>[27]; water MET<br>[28] | Water + microwave/EM<br>plasma is real [24], [28].<br>Demo $I_{\text{sp}} \sim 400\text{--}665\ \text{s}$<br>(gridded) [24]; water-MPD<br>$I_{\text{sp}} \sim 3000\ \text{s}$ class at low $\eta$<br>[27]. Vehicle reference uses<br>$I_{\text{sp}} = 2000\ \text{s}$ as a mid<br>stretch (§10.6) |

Switching:

$$\sigma = \begin{cases} 1 & \rho > \rho_{12},\ M < M_{12}, \\ 2 & \rho > \rho_{\text{seal}},\ M \geq M_{12}, \\ 3 & \rho \leq \rho_{\text{seal}} \text{ or intakes sealed.} \end{cases}$$

## 10.2 Performance constants (frozen for sizing)

**Table 12** Frozen stage constants (literature-anchored; packaging  $\alpha$  are design holes like  $\alpha_C$ ).

| Symbol                                | Stage | Meaning                                             | Freeze                                                                                                                                                   |
|---------------------------------------|-------|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\eta_m$                              | 1     | Motor + drive electrical efficiency                 | 0.90 [25]                                                                                                                                                |
| $\eta_{\text{prop}}$                  | 1     | Fan propulsive efficiency ( $Tv/P_{\text{shaft}}$ ) | 0.80                                                                                                                                                     |
| $\eta_l = \eta_m \eta_{\text{prop}}$  | 1     | Bus $\rightarrow Tv$                                | 0.72                                                                                                                                                     |
| $(T/W)_{\text{min}}$                  | 1     | Takeoff thrust / weight                             | 0.25                                                                                                                                                     |
| $C_{L,\text{max}}^{\text{TO}}$        | 1     | Takeoff max lift (high-lift / flaps)                | Flagged 1.65 — clean VSPAERO<br>$C_L(M=0.3, \alpha=8^\circ) \approx 0.48$ is not enough alone                                                            |
| $k_{\text{lof}}$                      | 1     | $V_{\text{lof}}/V_s$                                | 1.12                                                                                                                                                     |
| $v_{\text{to}} \equiv V_{\text{lof}}$ | 1     | Liftoff speed (EDF power reference)                 | 113 m/s from $V_s = \sqrt{2W/(\rho S C_{L,\text{max}})}$                                                                                                 |
| $k_{\text{fan}}$                      | 1     | Fan+duct+inverter mass / EM motor mass              | 1.35                                                                                                                                                     |
| $\alpha_{\text{mot}}$                 | 1     | Motor specific power (EM)                           | 16 kW/kg [25]                                                                                                                                            |
| $\eta_\mu$                            | 2     | Bus $\rightarrow$ microwave power in plasma         | 0.55                                                                                                                                                     |
| $\eta_{j,2}$                          | 2     | Plasma enthalpy $\rightarrow$ directed jet          | 0.45                                                                                                                                                     |
| $v_{j,2}$                             | 2     | Reference jet speed (electrothermal)                | 600 m/s                                                                                                                                                  |
| $\eta_{\text{jet}}$                   | 3     | Bus $\rightarrow$ jet kinetic power                 | 0.55 (stretch vs water-MPD demo $\sim 0.07\text{--}0.11$ [27])                                                                                           |
| $I_{\text{sp}}$                       | 3     | Vacuum specific impulse (reference)                 | 2000 s                                                                                                                                                   |
| $v_e = I_{\text{sp}} g_0$             | 3     | Exhaust speed                                       | 19.61 km/s                                                                                                                                               |
| $P_{\text{hotel}}$                    | all   | Hotel / plant recirculating floor                   | 5 MW                                                                                                                                                     |
| $C_{\text{cap}}$                      | 1–2   | Inlet capture coefficient                           | $\leq 1$ (free air; not a carried mass)                                                                                                                  |
| $\rho(h)$                             | 2     | US Standard Atmosphere 1976 [37]                    | Closed-form piecewise layers (textbook, not a guess)                                                                                                     |
| $S$                                   | 2     | Wing reference area                                 | 229 m <sup>2</sup> — computed from <code>vehicle_spec.json</code> 's double-delta geometry (§1); cross-checks OpenVSP's own $\approx 229$ m <sup>2</sup> |

| Symbol              | Stage | Meaning                                         | Freeze                                                                                                                                                              |
|---------------------|-------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $C_D(M)$            | 2     | Generic hypersonic lifting-body drag table [38] | Flagged for hypersonic; subsonic/transonic now cross-checked by OpenVSP/VS-PAERO (§10.2.1). Table freeze still 0.045 subsonic, 0.09 transonic peak, 0.05 hypersonic |
| $Q_{\text{ascent}}$ | 2     | Design ascent dynamic pressure                  | Flagged guess, X-15/Shuttle-class order: 25 kPa                                                                                                                     |
| $v_1$               | 1→2   | Stage 1→2 transition speed                      | Flagged guess (transonic handoff): 300 m/s                                                                                                                          |

### 10.2.1 OpenVSP / VSPAERO digital wind tunnel (subsonic–transonic)


The living exterior (`.vsp3` from `vehicle_spec.json` / `make cad-figures`) is run through the bundled **VSPAERO** vortex-lattice solver (`make cad-vspaero`; gear pods deleted for the working copy). Reference area is the OpenVSP MAIN\_WING component ( $S \approx 229 \text{ m}^2$ , same as the paper freeze). This is a **potential-flow digital tunnel**, not hypersonic CFD and not a stage-2/3 propulsion aero model — it qualifies the *outline* in the regime VSPAERO is built for.

**Table 13** VSPAERO polar on `catskills_ssto.vsp3` (gear retracted;  $Re_c/10^6 = 10$ ; thin-surface VLM). Source: `research/figures/cad/vspaero/polar.csv`.

| $M$  | $\alpha = 0^\circ$ : $C_D$ | $\alpha = 4^\circ$ : $C_L, C_D, L/D$ | $\alpha = 8^\circ$ : $C_L, C_D, L/D$ |
|------|----------------------------|--------------------------------------|--------------------------------------|
| 0.30 | 0.027                      | 0.232, 0.021, 10.9                   | 0.478, 0.038, 12.6                   |
| 0.60 | 0.033                      | 0.250, 0.028, 8.9                    | 0.515, 0.047, 10.9                   |
| 0.80 | 0.108                      | 0.237, 0.096, 2.5                    | 0.534, 0.111, 4.8                    |
| 0.95 | 0.077                      | 0.350, 0.075, 4.7                    | 0.680, 0.106, 6.4                    |

**Read against the §10.2  $C_D(M)$  freeze.** At  $\alpha = 0$  the VLM zero-lift drag is  $\sim 0.027$  subsonic (lighter than the frozen 0.045 floor — VSPAERO under-counts some parasite/excrescence) and peaks near 0.11 at  $M = 0.8$  (same *order* as the frozen 0.09 transonic peak). Best  $L/D$  in this grid is  $\approx 12.6$  at  $M = 0.3$ ,  $\alpha = 8^\circ$ . The climb energy integral in §10.4 still uses the conservative generic table [38]; replacing that table with a VSPAERO-fitted  $C_D(M)$  (and extending past Mach 1 with real hypersonic CFD) is future work — Mach  $\gtrsim 1.2$  cases on this full airframe did not converge in practical wall time under VLM.

**Stage 1 pass analysis.** Stage 1 (electric ducted fan, municipal runway through the transonic handoff at  $v_1$ ) is the propulsion segment whose airframe loads sit inside VSPAERO’s credible band. Treating the digital tunnel as a **Stage 1 outline go / no-go**:

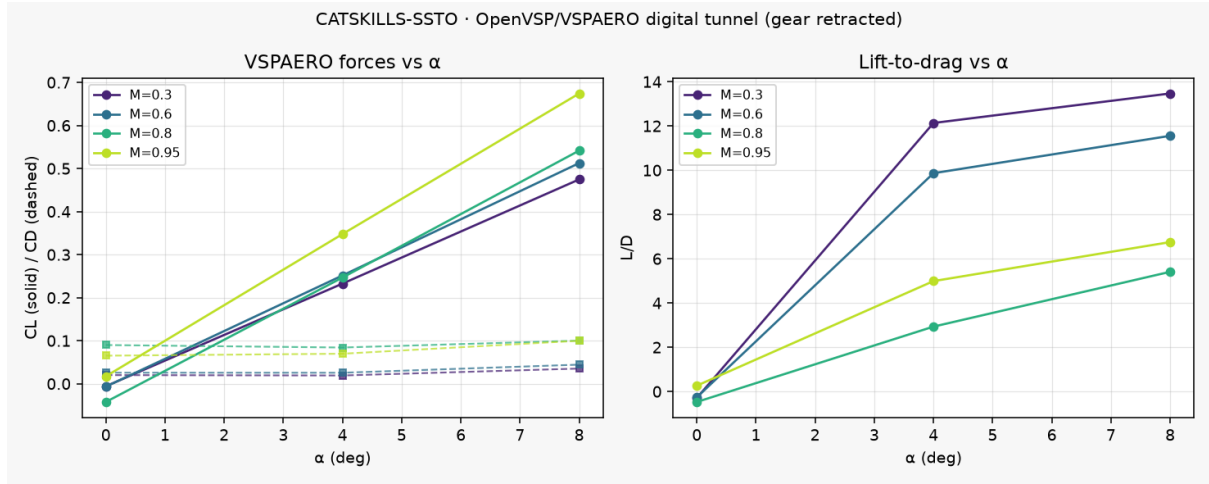


**Figure 11** Stage 1 VSPAERO polar (Mach $\times\alpha$  digital tunnel on `catskills_ssto.vsp3`).

| Check                                      | Verdict            | Note                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Solver ran; polar written                  | <b>Pass</b>        | 12 cases ( $M \in \{0.3, 0.6, 0.8, 0.95\}$ , $\alpha \in \{0^\circ, 4^\circ, 8^\circ\}$ )<br>$\approx 229 \text{ m}^2$ matches the paper freeze<br>$C_D \sim 0.11$ at $M = 0.8$ , $\alpha = 0$ vs frozen $\sim 0.09$<br>VSPAERO $\sim 0.027$ vs frozen $0.045$ — solver optimistic on parasite; paper keeps the heavier floor |
| Reference area $S$                         | <b>Pass</b>        |                                                                                                                                                                                                                                                                                                                               |
| Transonic drag peak                        | <b>Pass</b>        |                                                                                                                                                                                                                                                                                                                               |
| Subsonic $C_D$ floor                       | <b>Soft pass</b>   |                                                                                                                                                                                                                                                                                                                               |
| Exterior hex mesh + layers (snappyHexMesh) | <b>Pass (mesh)</b> | Flight OML (gear retracted); <b>checkMesh</b> OK ( <b>make cad-snappy</b> ). Layer coverage partial on thin features                                                                                                                                                                                                          |
| Wing-flow smoke (potentialFoam)            | <b>Soft pass</b>   | Inviscid streamlines over the port wing at $\sim M = 0.3$ , $\alpha = 4^\circ$ ( <b>make cad-flow</b> ) — poster check, not a polar                                                                                                                                                                                           |
| Turbulent wing smoke (SA RANS)             | <b>Soft pass</b>   | <b>simpleFoam</b> + Spalart–Allmaras on the snappy mesh ( <b>make cad-rans</b> ) — optics / eddy-viscosity field, not a polar                                                                                                                                                                                                 |

| Check                              | Verdict                  | Note                                                                                                                             |
|------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Takeoff lift / ground roll (§10.3) | <b>Pass (with flaps)</b> | $V_{\text{lof}} \approx 113 \text{ m/s}$ ,<br>$s_g \approx 3.34 \text{ km}$ on a<br>3500 m runway; <b>clean wing alone fails</b> |

CHARM SSTO · snappyHexMesh WALL · full airframe

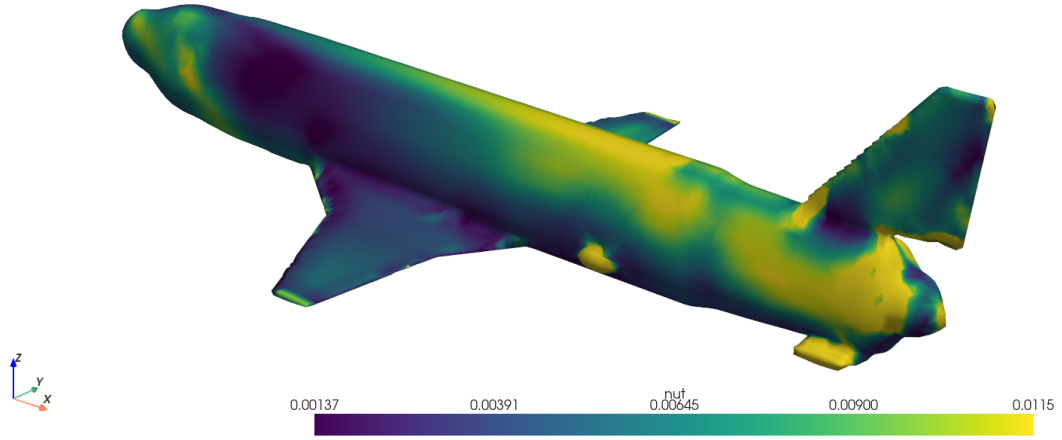

**Figure 12** Stage 1 snappyHexMesh wall on the OpenVSP exterior (full airframe in frame; unbroken tube OML — bay doors live on the cargo-skid drop-in, not as roof wings). Colour = wall eddy viscosity  $\nu_t$  from the Stage 1 RANS dump.


**Verdict:** Stage 1 **passes** this outline check — the planform is sane in the subsonic–transonic band and nothing in VSPAERO breaks the Stage 1 power/drag story (§10.3). Takeoff **requires the flagged high-lift**  $C_{L,\text{max}}$  (clean VSPAERO  $C_L$  alone needs  $\gtrsim 16 \text{ km}$  of runway). Stage 2 and Stage 3 have their own pass analyses (§10.4, §10.5); they are not VSPAERO freestream polars.

**Reaction-mass utilization:** - Stages 1–2: utilization of **carried** propellant is zero (air is free). Inlet capture  $C_{\text{cap}}$  only limits available  $\dot{m}_{\text{air}}$ . - Stage 3: mass accounting assumes all loaded water is expelled ( $u_w = 1$ ); power conversion is  $\eta_{\text{jet}}$  (not all bus power becomes  $\frac{1}{2}\dot{m}v_e^2$ ).

### 10.3 Stage 1 — takeoff lift, power, and mass

**Can it get off the runway before Stage 2?** Thrust alone is not enough — the wing must lift  $m_0 g_0$  at a municipal  $V_{\text{lof}}$ . With the VSPAERO clean-wing  $C_L \approx 0.48$  ( $M=0.3$ ,  $\alpha=8^\circ$ ) the stall speed is  $\sim 187 \text{ m/s}$  and the ground roll is  $\sim 15197 \text{ m}$  — **fail**. Closing municipal takeoff therefore freezes a **flagged high-lift**  $C_{L,\text{max}}^{\text{TO}} = 1.65$  (flaps / elevon droop; not yet in the OpenVSP exterior):


$$V_s = \sqrt{\frac{2 m_0 g_0}{\rho_{\text{SL}} S C_{L,\text{max}}^{\text{TO}}}}, \quad V_{\text{lof}} = k_{\text{lof}} V_s, \quad s_g = \int_0^{V_{\text{lof}}} \frac{V \, dV}{a(V)}$$

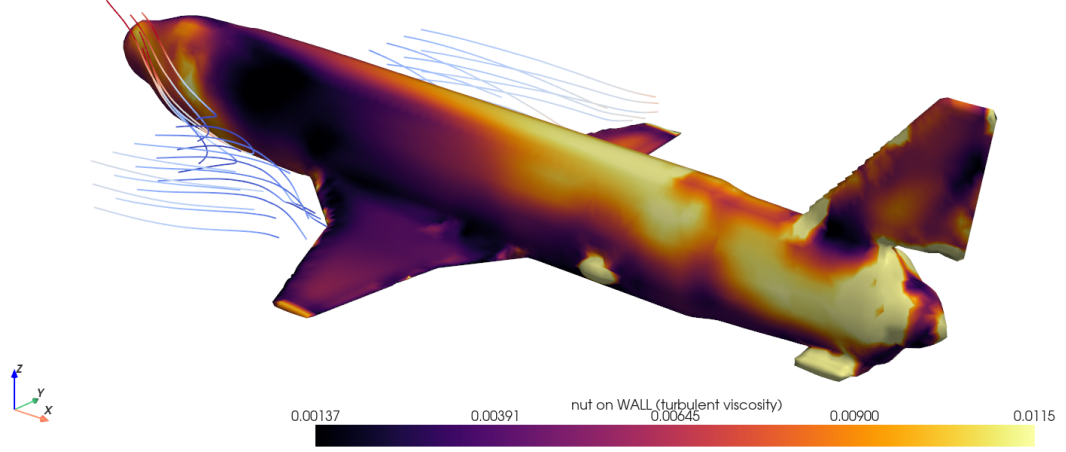

**Figure 13** Stage 1 turbulent flow: OpenFOAM Spalart–Allmaras RANS ( $\sim M = 0.3$ ,  $\alpha = 4^\circ$ ), full airframe. Wall coloured by eddy viscosity  $\nu_t$ ; streamlines over the forward fuselage and wing root.

with  $a = (T_1 - D - \mu(W - L))/m_0$  during the roll ( $C_L, C_D$  frozen at gear+flaps values). At  $m_0 = 240$  t:

$$V_{\text{lof}} \approx 113 \text{ m/s}, \quad s_g \approx 3.34 \text{ km on a 3500 m runway (margin 156 m)}.$$

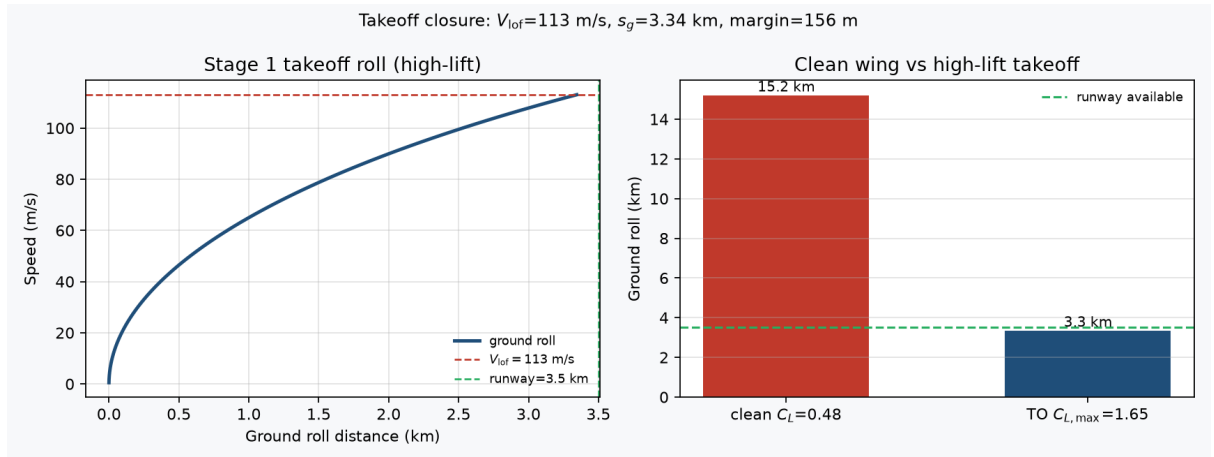

**Figure 14** Stage 1 takeoff closure: ground-roll speed vs distance (left); clean-wing vs high-lift runway demand (right).

EDF bus power is referenced at liftoff (not an arbitrary 80 m/s):

$$T_1 \geq (T/W)_{\min} m_0 g_0, \quad P_1 = \frac{T_1 V_{\text{lof}}}{\eta_1}, \quad m_{\text{EDF}} = k_{\text{fan}} \frac{P_1}{\alpha_{\text{mot}}}.$$



$$T_1 \approx 589 \text{ kN}, \quad P_1 \approx 93 \text{ MW}, \quad m_{\text{EDF}} \approx 7.8 \text{ t (HEMM-class } \alpha_{\text{mot}}; \text{ within the 15 t engine budget)}.$$

Municipal segment is **not** the  $P_\star$  driver: ground roll + accel to  $v_1$  gives  $t_1 \approx 133 \text{ s}$ ,  $E_1 \approx 3.4 \text{ MWh}$  — still small next to stages 2–3. **Optics caveat:** takeoff **passes only with the high-lift freeze**; a clean double-delta does not municipal-takeoff this GLOW.

#### 10.4 Stage 2 — power and mass (electrothermal, not Ye’s N/kW)

Energy-consistent thrust-to-power (comment [26] kills super-unity claims):

$$\boxed{\frac{T_2}{P_2} = \frac{2\eta_\mu \eta_{j,2}}{v_{j,2}} \approx 0.825 \text{ N/kW} \quad (v_{j,2} = 600 \text{ m/s}).}$$

(Ye’s reported  $\sim 28 \text{ N/kW}$  [23] would imply  $\gg 100\%$  efficiency and is discarded [26].)

$$\dot{m}_{\text{air}} = \rho A_i v C_{\text{cap}}, \quad \Delta h = \frac{\eta_\mu P_2}{\dot{m}_{\text{air}}}, \quad P_2 \leq P_\star - P_{\text{hotel}}.$$

Climb still sets the bus:

$$D_{\text{ram}} = \frac{1}{2} \rho v^2 C_D S = Q C_D(M) S, \quad P_{\text{need}} \approx \frac{(D_{\text{ram}} - T_{\text{excess}})v}{\eta_p}.$$

**Freeze for sizing:**  $P_2^\star = P_\star - P_{\text{hotel}} = 995 \text{ MW} \rightarrow T_2 = (2\eta_\mu \eta_{j,2}/v_{j,2}) P_2^\star \approx 821 \text{ kN}$ , constant along the climb since  $P_2$  sits at the ceiling and  $v_{j,2}$  is frozen.

**Why  $P_2^\star = P_3^\star$  does not mean stage 2 and stage 3 look alike.** Both freezes above are taken *at the same ceiling*  $P_\star - P_{\text{hotel}}$  — that is a packaging/bus-sizing choice, not a claim that the two mission phases consume comparable energy. Under a **constant ascent dynamic pressure**  $Q_{\text{ascent}}$  climb schedule (Bryson-style energy-height method [38]:  $E_s = h + v^2/2g_0$ ,  $dE_s/dt = (T - D)v/(mg_0)$ ), the path  $h(v)$  is fixed by  $\rho(h) = 2Q_{\text{ascent}}/v^2$  (US Standard Atmosphere 1976 [37]), collapsing the 2D trajectory to a 1D quadrature

$$\boxed{\frac{dt}{dv} = \frac{m_0 \left( g_0 \frac{dh}{dv} + v \right)}{(T_2 - Q_{\text{ascent}} C_D(M) S) v}}$$


integrated numerically (`integrate_stage2_climb` in `constants_model.py`, plain numpy quadrature) from  $v_1$  to the existing air-breathing handoff speed  $v_{\text{ab}} = 3.5 \text{ km/s}$  (§6 — reused, not re-guessed). Mass is held at  $m_0$  (stages 1–2 burn free air; no carried propellant depletes). The sealing altitude is **not** assumed — it falls out as  $h(v_{\text{ab}})$ :

$$\boxed{t_2 \approx 28.7 \text{ min}, \quad h_{\text{seal}} \approx 39.6 \text{ km}, \quad M_{\text{seal}} \approx 11.0}$$

$$E_2 = P_2^\star t_2 \approx 476 \text{ MWh}.$$

**Stage 2 pass analysis.** Stage 2 is microwave air plasma on a hypersonic constant- $Q$  climb — **not** a VSPAERO freestream polar. The smoke tests that exist today are energy / climb bookkeeping and literature anchors, not a duct CFD:

| Check                                                           | Verdict                   | Note                                                                                                           |
|-----------------------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------|
| Climb quadrature closes<br>( $T_2 > D$ along path)              | <b>Pass</b>               | <code>integrate_stage2_climb</code> returns finite $t_2$ ,<br>$h_{\text{seal}}$ , $M_{\text{seal}}$ at $P_2^*$ |
| Electrothermal $T/P$ (not Ye<br>N/kW)                           | <b>Pass (physics)</b>     | $T_2/P_2 = 2\eta_\mu\eta_{j,2}/v_{j,2}$ —<br>energy-consistent;<br>super-unity claims<br>rejected [26]         |
| $E_2 = P_2^*t_2$ vs top-down $\kappa_E$                         | <b>Soft pass</b>          | Bottom-up stage<br>energies land inside the<br>§4 $\kappa_E \in [2, 4]$ band<br>(§10.5 reconciliation)         |
| Hypersonic airframe $C_D(M)$                                    | <b>Not tested</b>         | Generic table [38];<br>VSPAERO did not<br>finish Mach $\gtrsim 1.2$                                            |
| Subsonic volume-CFD<br>airframe smoke                           | <b>Inherited</b>          | §10.2.1 SU2 Euler is a<br>Stage1-band exterior<br>check only — it does<br><b>not</b> clear hypersonic $C_D$    |
| GW-class air-plasma<br>thruster + packaging<br>$\sim 230$ kW/kg | <b>Fail / unobtainium</b> | Lab ducts exist [23];<br>vehicle-scale power and<br>specific mass do not<br>(§13.3)                            |

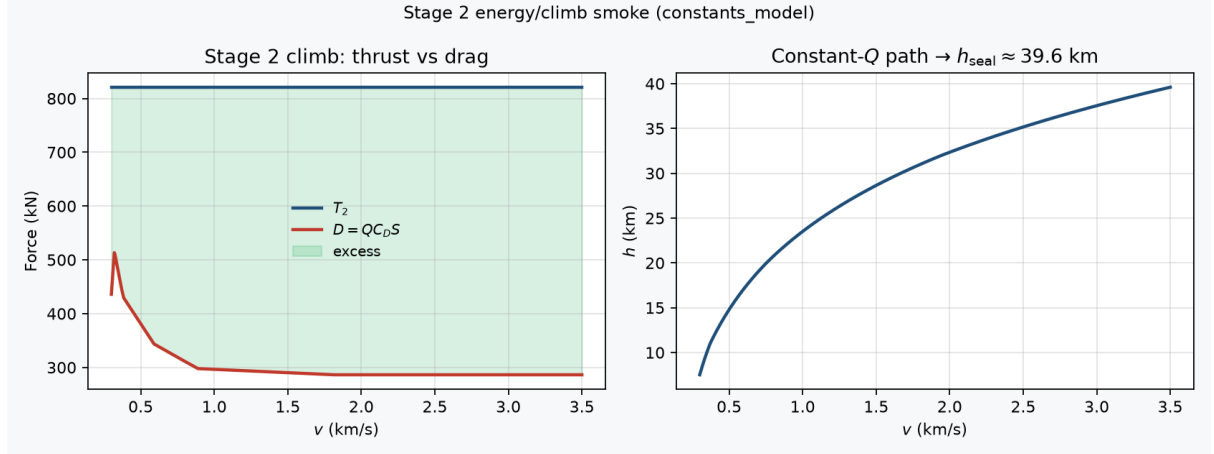

**Figure 15** Stage 2 climb smoke: constant- $Q$  path with  $T_2$  vs  $D = QC_D S$  (left) and  $h(v)$  to seal (right).

**Verdict:** Stage 2 **passes the energy/climb smoke** (the trajectory integral and  $T/P$  physics close on paper) and **fails the thruster/package smoke** until a real MW $\rightarrow$ GW air-plasma string exists. The exterior CFD figure in §10.2.1 is deliberately **not** re-used as a Stage2 hypersonic clearance. Next smoke tests worth building: (i) a 1D inlet + applicator mass-flow /  $\Delta h$  model at  $Q_{\text{ascent}}$  that must recover  $\dot{m}_{\text{air}}$  and  $T_2$  without magic  $C_{\text{cap}}$ ; (ii) OpenVSP **actuator-disk** or jet boundary on the same `.vsp3` (still not plasma CFD); (iii) OpenFOAM **snappyHexMesh** (+ layers)  $\rightarrow$  RANS/Euler on the true STL, then a high-Mach solver before touching the frozen  $C_D(M)$  table; (iv) subscale literature replay — reproduce published microwave-air thrust/power within a factor of a few before trusting the vehicle freeze.

## 10.5 Stage 3 — water, power, and $I_{\text{sp}}$ cases

$$T_3 = \frac{2\eta_{\text{jet}}P_3}{v_e}, \quad \dot{m}_{\text{w}} = \frac{T_3}{v_e}, \quad P_3 \leq P_{\star} - P_{\text{hotel}},$$

$$m_{\text{w}} = m_{\text{dry}}(e^{\Delta v_{\text{vac}}/v_e} - 1) \quad (u_{\text{w}} = 1).$$

With  $P_3 = 995$  MW,  $\eta_{\text{jet}} = 0.55$ ,  $I_{\text{sp}} = 2000$  s:

$$T_3 \approx 56 \text{ kN}, \quad \dot{m}_{\text{w}} \approx 2.85 \text{ kg/s}.$$

$E_3$  is a **physical invariant, independent of the  $P_3$  ceiling**. Unlike stage 2 (§10.4), stage 3's total energy does not depend on which power ceiling gets assumed — the closed form

$$E_3 = \frac{1}{2} m_{\text{w}} v_e^2 / \eta_{\text{jet}} \approx 4309 \text{ MWh}$$

follows purely from  $(m_{\text{w}}, v_e, \eta_{\text{jet}})$  — pick a *smaller*  $P_3$  and  $t_3$  simply grows in proportion ( $t_3 = E_3/P_3$ ), the total energy delivered to the water is the same. At the  $P_3^{\star}$  ceiling this gives the burn time already used above (§10.6):  $t_3 \approx m_{\text{w}}/\dot{m}_{\text{w}} \approx 4.33$  h, and  $P_3^{\star}t_3 \equiv E_3$  exactly by construction (same physics, not a coincidence).

**Table 16** Water store versus stage-3  $I_{\text{sp}}$  at fixed  $m_{\text{dry}} = 196$  t,  $\Delta v_{\text{vac}} = 4$  km/s.

| $I_{\text{sp}}$ | Anchor                             | $m_{\text{w}}$ | $m_0$ | Note                                                                        |
|-----------------|------------------------------------|----------------|-------|-----------------------------------------------------------------------------|
| 665 s           | Nakagawa<br>water ion<br>demo [24] | 166 t          | 362 t | Archi-<br>tecture<br>real;<br>SSTO<br>water<br>brutal                       |
| 2000 s          | <b>Refer-<br/>ence<br/>stretch</b> | 44 t           | 240 t | Be-<br>tween<br>gridded<br>water<br>and<br>water-<br>MPD<br>$I_{\text{sp}}$ |
| 3150 s          | Water<br>MPD class<br>[27]         | 27 t           | 223 t | Demo $\eta$<br>much<br>lower<br>than<br>our $\eta_{\text{jet}}$<br>freeze   |

Path: tanks  $\rightarrow$  pump/injector  $\rightarrow$  vaporizer  $\rightarrow$  microwave/EM plasma  $\rightarrow$  shared nozzle [24], [27], [28].

**Stage 3 pass analysis.** Stage 3 is carried-water plasma in vacuum — **no atmosphere**, so no wind tunnel. The smoke tests that exist today are propellant / power bookkeeping and demo-literature anchors:

| Check                                               | Verdict                    | Note                                                                                                           |
|-----------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------|
| Rocket-equation water mass $m_w(I_{sp})$            | <b>Pass</b>                | Closed form at fixed $m_{dry}$ , $\Delta v_{vac}$ (table above)                                                |
| $E_3 = \frac{1}{2}m_w v_e^2 / \eta_{jet}$ invariant | <b>Pass</b>                | Independent of $P_3$ ceiling; $P_3^* t_3 \equiv E_3$ by construction                                           |
| $T_3$ , $\dot{m}_w$ , $t_3$ consistency             | <b>Pass</b>                | $T_3 = 2\eta_{jet} P_3 / v_e$ ,<br>$t_3 = m_w / \dot{m}_w$                                                     |
| Reference $I_{sp} = 2000$ s at $\eta_{jet} = 0.55$  | <b>Soft fail / stretch</b> | Between gridded water-ion demos [24] and high- $I_{sp}$ /low- $\eta$ water-MPD [27] — not jointly demonstrated |
| Packaging $\sim 320$ kW/kg in 3.1 t                 | <b>Fail / unobtainium</b>  | Same class hole as stage 2 (§10.6, §13.3)                                                                      |

**Verdict:** Stage 3 **passes the propellant/energy smoke** (water,  $\Delta v$ , and bus energy close on paper) and **does not pass the thruster-performance or packaging smoke** at the reference freeze. Next smoke tests worth building: (i) a 0D thruster I/O block ( $P, \eta_{jet}, I_{sp}$ )  $\rightarrow$  ( $T, \dot{m}_w$ ) with hard bounds from [24], [27], [28] that flags when the vehicle freeze leaves the demo envelope; (ii) burn the 44 t water store in that block and check  $\Delta v$  vs 4 km/s; (iii) tank  $\rightarrow$  injector feed pressure / vaporizer power draw as a hotel-load line item; (iv) later, FlightGear/JSBSim vacuum coast+burn using that same I/O map — orbit is where stage 3 actually lives.

**Stage energy comparison — same peak power, very different mission phases.**  $P_2^* = P_3^*$  is a **bus-ceiling coincidence**, not a claim that the two phases are alike: stage 2 is a short, low-mass-flow hypersonic climb; stage 3 is a long, power-limited vacuum burn that expends the entire water store.

**Table 18** Stage energy comparison at the closed reference vehicle ( $m_0 = 240$  t).

| Stage            | Peak $P^*$ | Duration | Energy   | Why                                            |
|------------------|------------|----------|----------|------------------------------------------------|
| 1 — EDF          | 93 MW      | 133 s    | 3.4 MWh  | Ground roll / initial climb only               |
| 2 — air plasma   | 995 MW     | 28.7 min | 476 MWh  | Short, steep constant- $Q$ climb to $h_{seal}$ |
| 3 — water plasma | 995 MW     | 4.33 h   | 4309 MWh | Long, power-limited vacuum insertion burn      |

| Stage                  | Peak $P^\star$ | Duration          | Energy   | Why                                   |
|------------------------|----------------|-------------------|----------|---------------------------------------|
| Hotel                  | 5 MW           | $t_1 + t_2 + t_3$ | 24.2 MWh | Continuous recirculating floor (§9.5) |
| <b>Bottom-up total</b> | —              | —                 | 4812 MWh | $E_1 + E_2 + E_3 + E_{\text{hotel}}$  |

Same peak power ( $P_2^\star = P_3^\star$  by ceiling), but  $t_2 \ll t_3$  and  $E_2 \ll E_3$  by **actual physics** — this is the answer to why stage 2 and stage 3 previously looked identical on paper: the ceiling was the only number ever shown; duration and energy were never independently derived until this pass.

**Reconciliation against the §4/§8 top-down energy budget.** §4/§8 assume  $E_{\text{src}} = \kappa_E E_{\text{orb}}$  with  $\kappa_E \in [2, 4]$  as a chain-efficiency guess, without a bottom-up check. Summing the stage energies above against  $E_{\text{orb}} = 6.49 \text{ TJ}$  (§4.1):

$$\kappa_{E,\text{implied}} = \frac{E_1 + E_2 + E_3 + E_{\text{hotel}}}{E_{\text{orb}}} \approx 2.67$$

— inside the assumed  $[2, 4]$  band (not forced to agree by construction; the two derivations are independent), and 89% of the top-down  $\kappa_E = 3$  figure of 5408 MWh used to freeze the reference vehicle in §8. This is an honesty check, not a new closure — §7/§8’s mass chain is not re-solved against this bottom-up number.

## 10.6 Closed solve: powers, component masses, fuels

**Power ratings (required outputs):**

|                                   |                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------|
| $P_1^\star \approx 93 \text{ MW}$ | (stage 1 at $m_0 = 240 \text{ t}$ ),                                        |
| $P_2^\star = 995 \text{ MW}$      | (stage 2 sizes $P_\star$ ; $t_2 \approx 28.7 \text{ min}$ ),                |
| $P_3^\star = 995 \text{ MW}$      | (stage 3 vacuum; $T_3 \sim 56 \text{ kN}$ ; $t_3 \approx 4.33 \text{ h}$ ). |

$P_2^\star = P_3^\star$  by the shared bus ceiling — §10.4/§10.5 now derive  $t_2$ ,  $h_{\text{seal}}$ , and  $E_2$  independently of that ceiling coincidence, and show  $E_2 \ll E_3$  despite it (comparison table, §10.5).

**How to read the equal peak loads.** The plant is sized so that a feasible flight envelope exists in *both* stage 2 and stage 3 when the bus is run at its ceiling  $P_\star - P_{\text{hotel}}$ . The CHARM plant is assumed throttleable (§5; stage 1 only needs  $\sim P_1^\star$ ), but the reference mission holds stages 2 and 3 at that same maximum: stage 2 because the constant- $Q$  climb *requires* that power to close  $t_2$  and  $h_{\text{seal}}$  on a municipal-runway GLOW; stage 3 because  $E_3$  is fixed by  $(m_w, I_{\text{sp}})$  and  $t_3 = E_3/P_3$ , so running below the ceiling only lengthens an already multi-hour insertion. The equal ratings therefore imply an asymmetry of *need*, not of physics: **stage 2 is the power-sizing driver** (it sets how large  $P_\star$  must be for the envelope to close), while **stage 3 is somewhat underpowered** relative to a short vacuum burn — even flat-out at the stage-2-sized plant it still takes  $t_3 \sim 4.33 \text{ h}$ . A bigger plant would shorten stage 3 without changing  $E_3$ ; a smaller plant would break stage 2 first.

**Engine mass budget** (reference hole  $m_{\text{eng}} = 15 \text{ t}$ ):

**Table 19** Engine component mass allocation and implied packaging specific power.

| Component                                            | Mass  | Sized to  | Implied $\alpha = P/m$                                           |
|------------------------------------------------------|-------|-----------|------------------------------------------------------------------|
| Stage-1 EDF<br>(motor+fan+duct)                      | 5.0 t | $P_1^*$   | $\sim 13 \text{ kW/kg}$ (near HEMM [25] after $k_{\text{fan}}$ ) |
| Stage-2 MW<br>farm +<br>applicator +<br>precompress  | 4.4 t | $P_2^*$   | $\sim 230 \text{ kW/kg}$ ( <b>packaging unobtainium</b> )        |
| Stage-3 thruster<br>head +<br>vaporizer/feed         | 3.1 t | $P_3^*$   | $\sim 320 \text{ kW/kg}$ ( <b>packaging unobtainium</b> )        |
| Shared nacelle /<br>nozzle / inlets /<br>bus coupler | 2.5 t | structure | —                                                                |
| <b>Engine total</b>                                  | 15 t  | §8 freeze | —                                                                |

If stage-2/3 hardware were packaged at a more literal  $\alpha_\mu \sim 8 \text{ kW/kg}$ ,  $m_{\text{eng}}$  would jump to  $\mathcal{O}(100 \text{ t})$  and GLOW to  $\sim 400 \text{ t}$ . The 15 t engine line is therefore a **same-class hole** as  $\alpha_C = 15 \text{ kW/kg}$  — called out in §13 — while **power** and **water** closes are on firmer ground.

**Fusion fuel (not nozzle propellant):** mission bus energy  $E_{\text{src}} = \kappa_E m_{\text{ins}} \Delta \varepsilon$ . Stoichiometric  $p\text{-}^{11}\text{B}$  rest-mass for that energy is  $\ll 1 \text{ kg}$  at ideal conversion; with chain efficiency  $\sim 0.25$  still  $\sim 1 \text{ kg}$ . Freeze  $m_f = 0.5 \text{ t}$  covers tankage, residuals, and margin — **water dominates expendables**.

**Vacuum burn time** at constant  $T_3$ :  $t_3 \approx m_w / \dot{m}_w \approx 4.33 \text{ h}$  — long insertion, consistent with power-limited electric thrust, and  $\gg t_2 \approx 28.7 \text{ min}$  (§10.5 comparison table).

## 10.7 Physical envelope

- One nacelle with **external air scoops** (OML lips + close-off shutters) feeding an **inlet duct/plenum**.
- Stage-1 EDF sits **in-duct** behind the scoops (not a bare fan on the skid face); duct also feeds stage-2 precompressor.
- **Shared flared** aft nozzle — common exit for **all three** stages (stage-1 EDF bypass + stages 2–3 plasma).
- Water tanks moved to the **fusion plant skid**, ahead of CHARM ( $m_w \approx 44 \text{ t} \approx 44 \text{ m}^3$  at the reference  $I_{\text{sp}}$ ; envelope 35.5–39.5 m, not small service bottles) — a supplemental radiation shield when full, §9.9; fed to the engine skid by a long cross-skid duct (`j_water_to_injector`). MW farm shared in packaging intent between stages 2 and 3.
- $m_{\text{eng}} = 15 \text{ t}$  reference as in §10.6.

## 10.8 Audio signature in atmosphere

There is no muffler for this. A jet, a fan, and a plasma torch are all doing the same physical thing — dumping kinetic energy into a compressible fluid — and every way of doing that quietly

amounts to spreading the same thrust over more mass flow at a lower exit velocity (exactly how a modern high-bypass turbofan buries the shriek of a 1960s low-bypass one, at equal thrust). CHARM SSTO’s three propulsion regimes sit at three very different points on that trade, so the atmospheric soundprint is expected to **change character across the ascent**, not hold one hum like a cruising airliner:

- **Stage 1 (EDF, municipal takeoff/climb).** An electric ducted fan has no combustor and no turbine — the two loudest tonal sources on a jet engine are simply absent. What is left is blade-passage tone(s) plus broadband turbulent-mixing “whoosh,” the same two mechanisms that make a modern turbofan’s fan stage its dominant noise source.
- **Stage 2 (microwave air plasma, hypersonic climb).** A hotter, faster heated-air jet ( $v_{j,2} = 600 \text{ m/s}$ , §10.4) — mechanically a jet, physically indifferent to how the enthalpy got there (combustion or microwaves) — so the same turbulent-mixing jet-noise physics applies, and at a materially higher jet velocity than Stage 1 or a legacy low-bypass turbojet.
- **Stage 3 (water plasma, vacuum).** Intakes are sealed (§10.4’s  $h_{\text{seal}}$ ) — there is no external medium left to carry airborne noise. Atmospheric acoustic signature is, by construction, a Stage-1/Stage-2-only question.

**A real calibration, not textbook  $v^8$  taken on faith.** Lighthill’s classic result [41] is that subsonic jet-mixing acoustic power scales as  $\dot{m} v_{\text{jet}}^n$  with  $n \approx 8$  in the far field. Rather than adopt that exponent by citation alone, this section calibrates  $n$  from real hardware: NASA’s JT8D→JT8D-109 “Refan” program [41] cut the JT8D’s mixed takeoff jet velocity from 1470 to 1140 ft/s ( $448.1 \rightarrow 347.5 \text{ m/s}$ ) and measured a 7–8 EPNdB reduction on a B727-200 at the FAR Part 36 measuring stations — a real ( $\Delta v, \Delta \text{dB}$ ) pair, not a simulation:

$$P_{\text{acoustic}} \propto \dot{m} v_{\text{jet}}^n, \quad n = \frac{\Delta \text{EPNdB}}{10 \log_{10}(v_{727}/v_{727,\text{refan}})} \approx 6.79$$

— close to Lighthill’s  $n = 8$ , not identical, which is exactly what a real measured EPNL (loudness/duration/tone-corrected) should look like next to an idealized far-field acoustic-power law.

**Own-vehicle jet velocities and mass flows**, backed out of numbers already frozen in §10.3/§10.4 (not new design choices): Stage 1’s  $v_{j,1}$  comes from inverting the already-assumed  $\eta_{\text{prop}} = T v / P_{\text{shaft}} = 0.80$  through ideal actuator-disk (Froude) theory,  $\eta_{\text{prop}} = 2V / (V + v_{j,1})$  — a flagged modeling assumption, since  $\eta_{\text{prop}}$  was frozen as a flat efficiency, not derived from a jet velocity in §10.3:

$$v_{j,1} = V_{\text{lof}} \left( \frac{2}{\eta_{\text{prop}}} - 1 \right) \approx 170 \text{ m/s}, \quad \dot{m}_1 = \frac{T_1}{v_{j,1} - V_{\text{lof}}} \approx 10430 \text{ kg/s}.$$

That implied mass flow is enormous — roughly 7–10× a modern widebody turbofan’s — which is itself a **flagged packaging caveat** (no fan diameter this large is sized anywhere in §10.3/§10.7); it is also *why* Stage 1 comes out quiet despite  $T_1 \approx 589 \text{ kN}$  being nearly 3× a whole 727’s static thrust. Stage 2’s mass flow follows directly from the already-frozen  $T_2$ ,  $v_{j,2}$  (§10.4):  $\dot{m}_2 = T_2 / v_{j,2} \approx 1368 \text{ kg/s}$ .

**Table 20** Atmospheric acoustic order-of-magnitude estimate vs. a real, comparably sized reference jet.


|                                                      | $v_{\text{jet}}$ | $\dot{m}$  | rel. to 727 (dB) | $\approx$ EPNdB |
|------------------------------------------------------|------------------|------------|------------------|-----------------|
| 727 (3 $\times$<br>JT8D-9, ref.)<br>[41], [42], [43] | 448 m/s          | 434 kg/s   | 0                | 100 (ref.)      |
| <b>Stage 1</b> —<br><b>EDF</b>                       | 170 m/s          | 10430 kg/s | −15              | $\sim$ 85       |
| <b>Stage 2</b> — <b>air</b><br><b>plasma</b>         | 600 m/s          | 1368 kg/s  | +14              | $\sim$ 114      |

Reading these as everyday loudness (a rough translation, not a rigorous EPNdB $\rightarrow$ dBA conversion):  $\sim$  85 dB is heavy truck traffic at the curb — noticeable, not hazardous;  $\sim$  114 dB is jackhammer/front-row-concert territory — genuinely hazardous without hearing protection at close range, and louder than an unmodified 727 was. **Stage 1, despite carrying 3 $\times$  a 727’s static thrust, is estimated  $\sim$  15 dB *quieter* than a 727 at the reference distance** — the same “spread the thrust over more mass flow at lower velocity” trade that quieted every high-bypass turbofan since the 1970s, taken further by an electric fan with no combustor. **Stage 2 is estimated  $\sim$  14 dB *louder*** — a real, flagged community-noise problem for the portion of the climb still low enough to matter, not resolved by “it’s not chemical.”

**Sonic boom.** The constant- $Q$  climb path already integrated in §10.4 crosses  $M = 1$  at  $h \approx 8.0$  km (own atmosphere model, not an assumption) — far lower than Concorde’s  $\sim$  16–18 km supersonic-cruise altitude, where its well-documented  $\sim$  1–2 psf boom overpressure was already enough to end civil overland supersonic flight. No boom-overpressure model is applied here (that requires a dedicated ascent-corridor acoustic study, flagged as future work, §13), but boom overpressure falls off with slant range from the shock, so a crossing at half Concorde’s altitude points toward a **louder** ground boom, not a quieter one — an unresolved noise-abatement problem, not a solved one.

**A stylized listen.** [charm\\_ssto\\_ascent\\_soundscape.wav](#) (repo,  $\sim$  52 s stereo, generated by [emit\\_audio\\_signature.py](#)) is a **time-compressed sound-design pass**, not a validated psychoacoustic or CFD acoustic simulation: real stage durations are  $t_1 \approx 133$  s,  $t_2 \approx 29$  min,  $t_3 \approx 4.3$  h (§10.5/§10.6), obviously not literal audio length. What *is* grounded in the numbers above: the two “roars” really are mixed at the  $\dot{m} v_{\text{jet}}^n$  ratio from the table (dynamic range compressed 2 $\times$  for audibility, not hidden), and a stylized N-wave “crack” transient sits exactly at the timeline fraction corresponding to the  $M = 1$  crossing computed above. Frequencies and timbre are illustrative — no fan blade count, duct geometry, or Strouhal-scaled spectrum exists for this airframe to compute a real one — but each stage is still built from a distinct, motivated mechanism rather than one flat noise wash: Stage 1 spools up from standstill and builds with ground-roll speed toward  $V_{\text{lof}}$  (§10.3), with a faint high-frequency inverter/PWM whine (visible as the wavering band near 7 kHz in the figure below) marking it as *electric*, not turbine; Stage 2 adds a sizzling plasma-discharge crackle and a slow turbulent “surge” on top of the broadband roar, since a real microwave/arc air-plasma jet buzzes and spits rather than just hissing like a clean thermal jet. The final segment renders the Stage-3 vacuum silence from the cabin’s perspective: no jet roar reaches the hull once there is no air outside it to carry one — but that does **not** mean nothing is audible. It is deliberately a **“bump and grind,”** not a hum alone: magnet/pump tonal whine, a low broadband bearing-friction “grind” texture, and a periodic percussive cold-head knock (synthesized as a short decaying broadband impulse at the cryocooler’s own cycle rate, not a smooth sine swell — a real Gifford-McMahon cold head’s displacer stroke is a knock, per §9.5/§9.6), all mixed well below the atmospheric-flight levels above but with real presence, not near-silence.



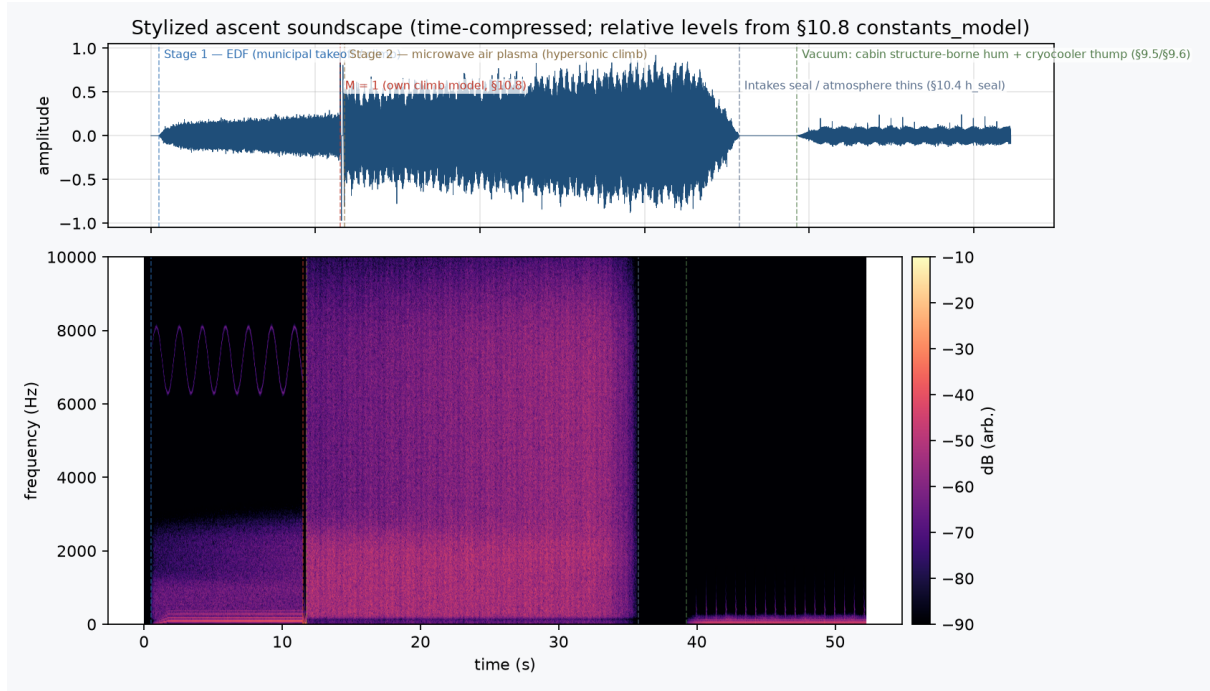

**Figure 16** Ascent soundscape: waveform (top) and spectrogram (bottom) of the stylized audio signature — Stage 1 EDF, the modeled  $M = 1$  crack, Stage 2 air-plasma roar, and the Stage-3 vacuum hum, in relative-loudness proportion from the table above.

## 11 Layout details


Station map for the vision figures in §1. The **top-down bay connectivity** diagram is a reading aid for the floorplan; gear remains on the exterior profile only.

**Table 21** Longitudinal station and bay layout.

| Station (m) | Bay         | Contents                                                                                                                                                                                                                   |
|-------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0–11        | Crew module | Forward-facing CDR/PLT flight deck; <b>six</b> forward-facing passenger seats; WCS; galley (no sink); <b>luggage stowage</b> ; <b>ECLSS + O<sub>2</sub>/N<sub>2</sub></b> inside pressure vessel; solid side + aft hatches |
| —           | Ground door | <b>Forward/port crew door (side hatch)</b> — terrestrial ingress only                                                                                                                                                      |
| 11–15       | Airlock     | <b>Suited-crew airlock</b> ( $\sim 2.5$ m class clear), aft bulkhead facing <b>into cargo bay</b>                                                                                                                          |
| 15–33.3     | Cargo       | 18.3 m $\times$ 4.6 m payload bay (no reactors)                                                                                                                                                                            |
| 33.3–35.5   | Battery     | Flight battery $\approx 2$ t (restart / hotel)                                                                                                                                                                             |

| Station (m) | Bay         | Contents                                                                                                     |
|-------------|-------------|--------------------------------------------------------------------------------------------------------------|
| 35.5–39.5   | Water       | $\approx 44\text{ t H}_2\text{O}$ — relocated ahead of CHARM: supplemental radiation shield when full (§9.9) |
| 39.5–41.5   | Fusion fuel | Proton / $^{11}\text{B}$ feed tanks + plumbing (low mass, real volume)                                       |
| 41.5–49     | CHARM       | Reactor island incl. permanent shield bulkhead ( $\lesssim 120\text{ m}^3$ , $66.7\text{ t}$ )               |
| 49–52       | Engine      | Combined-cycle nacelle + nozzle                                                                              |
| Wings       | Controls    | Elevons, rudder (gear not drawn on this figure)                                                              |

**Doors (Shuttle pattern).** (1) **Side/forward crew door** — runway/ground only; (2) **airlock** — on-orbit cabin  $\leftrightarrow$  cargo bay / vacuum for suited operations [21]. Fig.~17 is auto-generated (whole-vehicle scope; crew capsule expanded to system level, airlock/cargo bay as single boxes, plant/engine one level) by the same pipeline as Figs.~9–10.

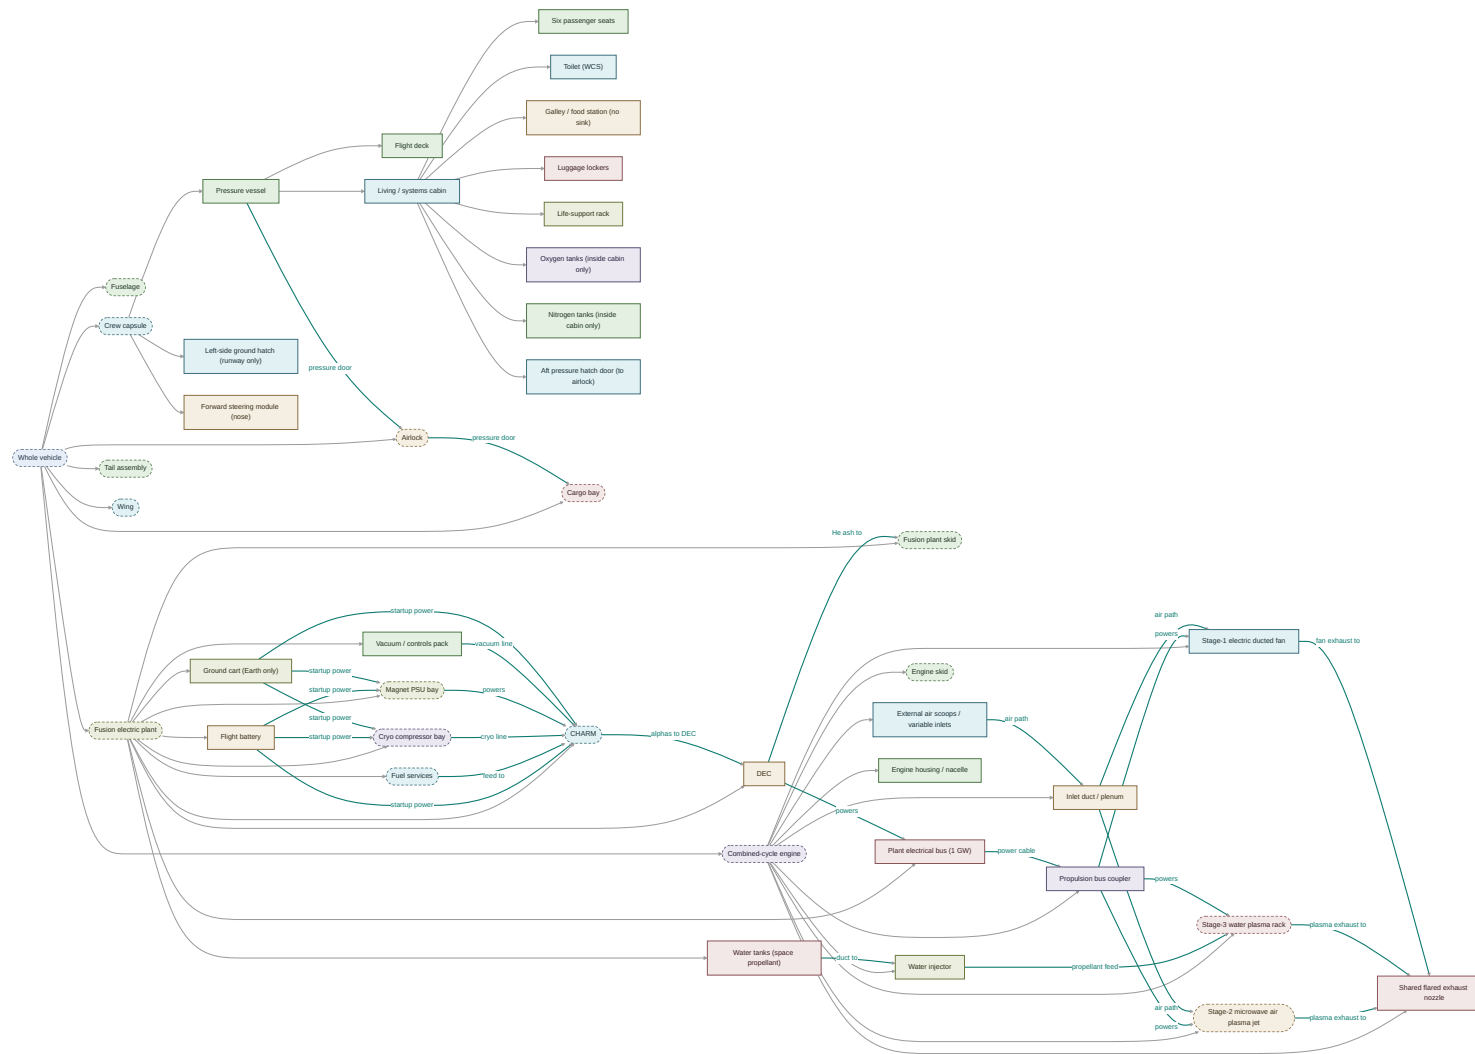

**Figure 17** Top-down floorplan from assembly.json.

## 12 Systems checklist (equations $\rightarrow$ constraints)

**Table 22** Systems checklist: equations to constraints.

| Step       | Governing relations                                                                             | Binding output                                                            |
|------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Goals      | G1–G9 + single-deck crew                                                                        | Shuttle bay + municipal SSTO to ISS                                       |
| LEO energy | $E_{\text{orb}} = m_{\text{ins}}\Delta\varepsilon$ , $E_{\text{src}} = \kappa_E E_{\text{orb}}$ | $\sim 1.8$ GWh orbital @ 196 t;<br>$\sim 5.4$ GWh source @ $\kappa_E = 3$ |
| Regimes    | Stages 1–3 mass-flow logic                                                                      | EDF $\rightarrow$ microwave air plasma $\rightarrow$ water plasma         |
| Water      | $m_w = m_{\text{dry}}(e^{\Delta v_{\text{vac}}/v_e} - 1)$                                       | $\sim 23\%$ <b>of dry mass</b> @ ref                                      |
| Structure  | $m_{\text{str}} = m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$          | 87.5 t<br>incl. gear/controls/ECLSS+O <sub>2</sub> /lug-gage/airlock      |
| CHARM      | $m_C = P_\star/\alpha_C$ , DEC, restart                                                         | 67 t @ 15 kW/kg                                                           |
| Light-off  | Magnets + RF + rotation; no NBI                                                                 | 50–200 kWh est.; cart / 2 t battery                                       |
| Solve      | $m_0 = m_{\text{dry}}e^{\Delta v_{\text{vac}}/v_e}$                                             | $m_0 \approx 240$ t; $L \approx 52$ m                                     |
| Engine     | $P_1^\star \approx 65$ MW; $P_2^\star = P_3^\star \approx 995$ MW; $m_w(I_{\text{sp}})$         | §10.6; lit [23]–[28]                                                      |

## 13 Imputed CHARM plant specs, gap to present design, and unobtainiums

### 13.1 Specs this vehicle imputes to CHARM

The SSTO solve does not invent new plasma physics; it **back-solves** a power island that must fit the airframe. Reference imputed plant:

**Table 23** Imputed CHARM plant requirements for this SSTO.

| Quantity              | Imputed requirement                                                | Source in this note       |
|-----------------------|--------------------------------------------------------------------|---------------------------|
| Fuel                  | Continuous $p$ - <sup>11</sup> B                                   | G8; §2                    |
| Architecture          | Multi-chamber rotating mirror; species separation; ash strain; DEC | §3, §9, §1; [1,8–11]      |
| Electrical bus peak   | $P_\star = 1$ GW                                                   | G9; Phase B/C power       |
| Mission source energy | $\sim 5$ GWh class per ascent ( $\kappa_E \sim 3$ )                | §4, §8                    |
| Island mass           | $m_C \approx 67$ t                                                 | $\alpha_C = 15$ kW/kg     |
| Specific power (bus)  | $\alpha_C \geq 15$ kW/kg (floor $\sim 10$ kW/kg)                   | §7.2, §9.1                |
| Island volume         | $V_C \lesssim 120$ m <sup>3</sup>                                  | Fuselage bay aft of cargo |
| Volumetric power      | $\bar{p}_C \gtrsim 8$ MW/m <sup>3</sup>                            | $P_\star/V_C$             |

| Quantity                                                     | Imputed requirement                                                               | Source in this note |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------|
| DEC                                                          | $\eta_{\text{DEC}} \sim 0.4\text{--}0.7$ on ordered $\alpha$ / wave channel       | §9.3                |
| Aux heating                                                  | RF + rotation + magnets; <b>no</b> multi-MW NBI farm                              | §9.5, §9.8          |
| Magnets (6, WHAM-anchored)                                   | $\approx 10.8\text{ t}$ (16.2% of $m_C$ )                                         | §9.6                |
| Cryo compressor bay (6 AL630, flight-remanufactured)         | $\approx 2.4\text{ t}$ , $\approx 88\text{ kW}$ (3.6% of $m_C$ )                  | §9.6                |
| Permanent radiation shield bulkhead (poly, sized empty-tank) | $\approx 21.9\text{ t}$ (0.69 m), first sourced piece of the remainder            | §9.9                |
| RF + back-bone/chamber structure                             | $\approx 31.5\text{ t}$ remaining, <b>not independently sized</b>                 | §9.6, §9.9          |
| Light-off energy                                             | $\sim 50\text{--}200\text{ kWh}$ to useful plasma (est.)                          | §9.8                |
| Space restart                                                | Pilot-string from $\sim 2\text{ t}$ battery ( $\sim 300\text{--}500\text{ kWh}$ ) | §6, §9.4            |
| Duty                                                         | Continuous burn through climb/insert; throttleable bus                            | §5                  |
| Environment                                                  | Flight loads, TPS-adjacent thermal, municipal dose with fan-mode plant            | G6, §9.7            |

### 13.2 Where published CHARM stands today

Relative to that invoice, the Fisch / Advanced Research Projects Agency–Energy (ARPA-E) / Pale Blue line today is a **physics and intellectual-property (IP) program**, not a flight power plant [1,2]:

**Table 24** Gap between present CHARM and vehicle need.

| Gate            | Present CHARM (public)                                                                                                      | Vehicle need                                  |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Fuel / kinetics | Strong papers on hybrid fast–thermal $p\text{-}^{11}\text{B}$ , alpha channeling, ash poisoning [3–7]                       | Same fuel family — <b>aligned in intent</b>   |
| Chambering      | Architecture + patent filings for separated reactants, ponderomotive walls, open-trap HV, differential confinement [1,8–11] | Must work <b>together</b> in one island       |
| Lawson / $Q$    | Component studies and 0D balances; <b>integrated self-consistent power-positive reactor not demonstrated</b> [1]            | Net bus power after recirculating RF/rotation |
| Hardware        | No public GW-class (or even pilot) CHARM machine; software-first / early company path                                       | Flyable 67 t island                           |
| DEC             | Themes in theory and open-trap high-voltage (HV) patents [1,10]                                                             | Flight-qualified $\eta_{\text{DEC}}$ at GW    |

| Gate             | Present CHARM (public)                                      | Vehicle need                                          |
|------------------|-------------------------------------------------------------|-------------------------------------------------------|
| Mass /<br>volume | Not published as kW/kg or MW/m <sup>3</sup> plant envelopes | 15 kW/kg, $\gtrsim 8$ MW/m <sup>3</sup>               |
| Operations       | Lab/site thinking                                           | Continuous ascent, g-load, restart, airport licensing |

**Gap in one line:** CHARM has a credible **aneutronic architecture story**; this vehicle needs a **closed, flight-packaged, gigawatt, high specific-power product** that does not yet exist on paper as an engineered BOM.

### 13.3 Unobtainiums in the gap

Call a requirement **unobtainium** if it is not implied by present CHARM results and would break the SSTO close if false. Ranked for this airframe:

1. **Integrated  $p$ -<sup>11</sup>B power balance with chambered species + ash removal + tolerable synchrotron/bremsstrahlung simultaneously** — components suggest feasibility; full self-consistency is explicitly still open [1].
2. **Centrifugal / rotating-mirror differential confinement at useful density and confinement time**, including rotation sustainment **without intolerable wall voltage drops** [1].
3. **Selective RF / ponderomotive “one-way” walls** that regulate ion traffic at acceptable recirculating power (slides note one-way walls can be energetically costly if overused) [1,9].
4. **Wave-mediated ash extraction / alpha channeling into protons (or DEC)** fast enough that helium does not poison the cell [3,6].
5. **Ultra-high DC / open-field electrode structures** that survive  $\alpha$  and X-ray loads while feeding a GW bus [10].
6. **Flight specific power  $\alpha_C \sim 15$  kW/kg and  $\bar{p}_C \gtrsim 8$  MW/m<sup>3</sup>** including magnets, RF, shield, cryo, and structure — beyond any published CHARM packaging study. §9.6 now sizes magnets ( $\approx 10.8$  t, WHAM-anchored) and cryo ( $\approx 2.4$  t, 6 flight-remanufactured AL630s) bottom-up, and §9.9 now sizes a permanent radiation-shield bulkhead ( $\approx 21.9$  t, sized for the empty-water-tank case) bottom-up; on demonstrated flight-cryocooler specific mass instead of the remanufactured-AL630 guess, cryo alone could reach 45–90 t — i.e., **flight-weight cryocooler specific mass is its own unobtainium**, not just a rounding term inside  $\alpha_C$ . The remaining  $\approx 31.5$  t (RF hardware + backbone/chamber structure) is **still an unsized placeholder**, not fabricated engineering — the largest unresolved piece of  $\alpha_C$ .
7. **Continuous GW-class operation** through a multi-hour ascent with vibration, thrust-vector loads, and thermal transients — not part of the present ARPA-E scope.

8. **Pilot-string light-off / space restart** at 50–200 kWh class — engineering estimate only; not a CHARM experimental result.
9. **Stage-2/3 thruster packaging** at  $\sim 200\text{--}300\text{ kW/kg}$  inside a 15 t engine (§10.6) — HEMM-class stage 1 is nearer [25]; microwave air / water plasma at GW in a few tonnes is not [23], [24], [26], [27].
10. **Stage-3**  $I_{\text{sp}} \sim 2000\text{ s}$  at  $\eta_{\text{jet}} \sim 0.55$  on water — between demonstrated water-ion  $I_{\text{sp}}$  [24] and water-MPD  $I_{\text{sp}}$  at much lower  $\eta$  [27].

Items 1–5 are **physics/architecture unobtainiums** shared with any CHARM plant. Items 6–10 are **aerospace packing / propulsion unobtainiums** imposed by SSTO. If 1–5 fail, no amount of airframe cleverness saves the mission; if 1–5 hold but 6–10 fail, CHARM may still be a ground plant while this spaceplane does not close.

### 13.4 How to read the rest of this paper

Sections 1–12 are a **requirements mirror** held up to CHARM: they say what a successful bottle must look like to fly Shuttle-class cargo from a municipal runway to ISS altitude. They are **not** a claim that Pale Blue / Princeton has those numbers. Closing the gap is future plasma physics, materials, and packaging work—tracked against the unobtainium list above.

---

## 14 Conclusion

Design goals fix a **Shuttle-style SSTO** with a **real cargo bay**, municipal runway ops, and ISS-altitude LEO. Closing  $P_\star = 1\text{ GW}$  at  $\alpha_C = 15\text{ kW/kg}$  yields a reference vehicle of about 196 t **dry**, 44 t **water**, 240 t **GLOW**. Vision figures (Figs.~3–10) show the interior floorplan, exterior profile, drop-in cutaways, and assembly trees that those numbers must fit.

### 14.1 CHARM reactor performance goals (what this airframe invoices)

The plant that closes the mass/energy budget must deliver, as a single flight-packaged island:

- **Continuous  $p\text{-}^{11}\text{B}$  fusion** with multi-chamber rotating-mirror confinement, species separation, ash strain, and **DEC** onto a 1 GW **electrical bus**.
- **Mission source energy**  $\sim 5\text{ GWh}$  class per ascent ( $\kappa_E \sim 3$ ), not a pulsed shot.
- **Island mass / volume**  $m_C \approx 67\text{ t}$ ,  $V_C \lesssim 120\text{ m}^3 \Rightarrow \alpha_C \geq 15\text{ kW/kg}$  and  $\bar{p}_C \gtrsim 8\text{ MW/m}^3$ .
- **Light-off / space restart** at 50–200 kWh class from a  $\sim 2\text{ t}$  battery (no multi-MW NBI farm).
- **Continuous throttleable duty** through climb and multi-hour insertion, under flight loads and airport-compatible dose with the plant in fan mode.

These are the numbers the in-silico CHARM plant must satisfy; they are a requirements mirror, not a claim that present CHARM hardware has them (§13).

## 14.2 Unmet materials-science and packaging challenges

The still-open gaps that would break this close if false are materials/packageing as much as plasma physics (§13.3):

- **Flight-weight cryogenics** for six HTS mirror magnets — remanufactured industrial AL630-class coolers are assumed; demonstrated flight cryocooler specific mass alone could consume most of  $m_C$ .
- **REBCO / cryostat structure** that survives ascent vibration and  $\alpha$ /X-ray loads at WHAM-class field without a tokamak-scale cryoplant hall.
- **DEC electrodes / open-field HV structures** that take continuous  $\alpha$  and bremsstrahlung while feeding a GW bus.
- **Permanent radiation/RF shield** (polyethylene bulkhead + Faraday skin) already carved out of the mass remainder; **RF hardware and backbone/chamber structure** ( $\approx 31.5$  t) remain an **unsized placeholder**, not fabricated engineering.
- **Integrated  $p$ - $^{11}\text{B}$  power balance** with chambered species, ash removal, and tolerable synchrotron/bremsstrahlung simultaneously — still open in the CHARM literature.

## 14.3 Propulsion maturity: stages 1, 2, and 3

| Stage                           | Maturity judgment for this vehicle                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1 — Electric ducted fan</b>  | <b>Relatively vanilla engineering</b> at the architecture level. NASA HEMM-class MW motors [25] and ducted-fan propulsion are demonstrated families; the stretch is packaging a $\sim 65$ MW string at the assumed motor/fan mass, not inventing a new thruster physics.                                                                                                                                             |
| <b>2 — Microwave air plasma</b> | <b>Experimental / unproven at vehicle scale.</b> Lab microwave-air-plasma ducts exist [23], but published thrust claims are contested [26], and there is <b>no</b> demonstrated GW-class, flight-packaged, air-breathing microwave plasma jet. Architecture is real; the power, $C_D(M)$ , and specific-mass closes are not.                                                                                         |
| <b>3 — Water plasma</b>         | <b>Experimental / unproven at the reference point.</b> Water microwave / MET thrusters and water-MPD paths are real [24], [27], [28], but demo $I_{sp}$ and $\eta$ do <b>not</b> jointly support the vehicle freeze ( $I_{sp} = 2000$ s at $\eta_{jet} \sim 0.55$ in a few tonnes). Stage 3 is a mid-stretch between gridded water-ion demos and high- $I_{sp}$ /low- $\eta$ MPD — not flight-qualified engineering. |

In short: **stage 1 is near-term electric-propulsion packaging; stages 2 and 3 are the propulsion unobtainiums.** If CHARM physics closes but stages 2–3 packaging fails, CHARM may still be a ground plant while this spaceplane does not.

## Acknowledgments

CHARM denotes the chambered aneutronic rotating-mirror architecture developed at Princeton Plasma Physics Laboratory (PPPL) under the ARPA-E economical  $p$ - $^{11}\text{B}$  program [1]–[11] and discussed toward Pale Blue Fusion. This vehicle sketch is an independent systems exercise and does not speak for that program.



## 14.4 AI-assisted development

The human author retains sole responsibility for the vehicle-sizing methodology, every modeling choice, and every technical claim in this work; no large language model or image model is listed as a co-author. We gratefully acknowledge assistance from the following tools (auto-generated from `scripts/ai_model_cards.py` when building `arxiv.tex`):

- **Cursor** [44] — agent-assisted development environment for this repository: the CAD/CFD figure pipeline (OpenVSP, OpenFOAM `snappyHexMesh`/RANS, SU2 Euler, VSPAERO, Blender drop-in cutaways), the `constants_model.py` sizing derivations, the interactive assembly outliner, and drafting/maintaining this narrative (`arxiv.md`).
- **xAI Grok 4.5** [45] — primary agent model for large stretches of the vehicle-packaging and CFD-pipeline work: OpenVSP geometry iteration (body flap, OMS pods), `snappyHexMesh`/SU2/VSPAERO debugging, the CHARM bottom-up mass roll-up in `constants_model.py`, and the `assembly.json`-driven Blender drop-in figures. Used via the Cursor agent environment.
- **Anthropic Claude Sonnet 5** [46] — session work including full-airframe CFD camera framing and streamline-artifact fixes on the OpenFOAM/SU2 renders, the \$10.8 audio-signature derivation and stylized ascent-soundscape synthesis (`emit_audio_signature.py`), and narrative maintenance (table of contents, appendix reordering, this AI-assistance disclosure). Used via the Cursor agent environment.
- **Google Nano Banana Pro (Gemini 3 Pro Image)** [47] — generated Fig.~1, an illustrative exterior concept render of the vehicle taking off from a municipal airport, and Fig.~2, a companion flight-deck interior render at the same moment, both prompted from the CAD floorplan/profile wireframes as reference images (Figs.~3, 4). Concept art only — proportions, panel lines, cabin layout, and the runway scene are AI interpretation, not CAD; the wireframe figures remain the dimensioned source of truth.

All derived numbers, pipeline code, and final prose were reviewed by the human author, who takes full responsibility for them.

---

## References

- [1] N. J. Fisch et al. (Princeton Plasma Physics Laboratory), “Why pB11?” ARPA-E Fusion Annual Meeting slides (Day2\_08\_Fisch.pdf), Aug. 2025. Primary public overview of the Chambered Aneutronic Rotating Mirror (CHARM) / chambered rotating-mirror  $p$ - $^{11}\text{B}$  architecture. [Online]. Available: [https://arpa-e.energy.gov/sites/default/files/2025-08/Day2\\_08\\_Fisch.pdf](https://arpa-e.energy.gov/sites/default/files/2025-08/Day2_08_Fisch.pdf)
- [2] Advanced Research Projects Agency–Energy (ARPA-E), “Economical Proton-Boron11 Fusion,” Award No. DE-AR0001554, OPEN 2021.
- [3] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Wave-supported hybrid fast-thermal  $p$ - $^{11}\text{B}$  fusion,” *Phys. Plasmas*, vol. 29, no. 11, Art. no. 110701, 2022, doi: 10.1063/5.0118337.
- [4] I. E. Ochs, E. J. Kolmes, M. E. Mlodik, T. Rubin, and N. J. Fisch, “Improving the feasibility of economical proton–boron-11 fusion via alpha channeling with a hybrid fast and thermal proton scheme,” arXiv:2210.08076 [physics.plasm-ph], 2022.
- [5] I. E. Ochs and N. J. Fisch, “Lowering the reactor breakeven requirements for proton–boron 11 fusion,” *Phys. Plasmas*, 2024, doi: 10.1063/5.0184945. (ARPA-E DE-AR0001554.)
- [6] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “Preventing ash from poisoning proton–boron 11 fusion,” *Phys. Plasmas*, 2025. [Online]. Available: <https://w3.pppl.gov/~fisch/fischpapers/2025/Ochs.poisoning.POP2025.pdf>

- [7] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “On the feasibility of radiation-trapping regimes in compressed proton-boron-11 plasmas,” *Phys. Plasmas*, vol. 32, no. 2, Art. no. 022504, 2025, doi: 10.1063/5.024504.
- [8] N. J. Fisch, I. E. Ochs, E. J. Kolmes, M. E. Mlodik, and T. Rubin, “Nonthermal Proton-Boron11 Fusion with Separated Reactant Regions,” U.S. Patent Application 19/083,790, filed Mar. 19, 2025.
- [9] T. Rubin, J.-M. Rax, N. J. Fisch, I. E. Ochs, and E. J. Kolmes, “Enhanced Particle Confinement with Positive and Negative Ponderomotive Potentials,” U.S. Patent Application 19/084,168, filed Mar. 19, 2025.
- [10] N. J. Fisch et al., “Systems and Methods for Producing Ultra-high DC Voltages in Open Field Line Traps...,” U.S. Patent Application 19/175,473, filed Apr. 10, 2025.
- [11] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Method and Apparatus for Differential Confinement, Mixing, and Demixing...,” U.S. Provisional Patent 63/794,470, filed Apr. 25, 2025.
- [12] N. J. Fisch, “Theory of current drive in plasmas,” *Rev. Mod. Phys.*, vol. 59, no. 1, pp. 175–208, 1987, doi: 10.1103/RevModPhys.59.175. (Alpha-channeling / wave-particle foundations.)
- [13] N. J. Fisch and J.-M. Rax, “Interaction of energetic alpha particles with intense lower hybrid waves,” *Phys. Rev. Lett.*, vol. 69, no. 4, pp. 612–615, 1992, doi: 10.1103/PhysRevLett.69.612.
- [14] National Aeronautics and Space Administration, *Space Shuttle Orbiter / OV-105 Atlantis* dimensional and mass data (cargo bay  $18.3 \times 4.6$  m; payload to LEO  $\approx 24\,400$  kg; empty mass  $\approx 78\,000$  kg class). NASA fact sheets and Orbiter inventory documentation.
- [15] International Space Station Program, nominal orbital altitude  $\approx 400$  km and inclination  $51.6^\circ$ . NASA ISS reference.
- [16] D. A. Vallado, *Fundamentals of Astrodynamics and Applications*, 4th ed. Hawthorne, CA: Microcosm Press / Springer, 2013. (Two-body orbital energy; LEO  $\Delta\epsilon$ .)
- [17] G. P. Sutton and O. Biblarz, *Rocket Propulsion Elements*, 9th ed. Hoboken, NJ: Wiley, 2017. (Rocket equation;  $I_{sp}-v_e$  relation.)
- [18] J. D. Anderson Jr., *Modern Compressible Flow*, 3rd ed. New York, NY: McGraw-Hill, 2003. (Ram drag / inlet thermo context for stage-2 air path.)
- [19] W. J. D. Escher, E. H. Hyde, and D. M. Anderson, “A preliminary systems assessment of the ‘Star-Raker’... airbreathing SSTO concept,” AIAA Paper, 1980s SABRE/airbreathing SSTO literature context for multi-regime airbreathing logic (this paper replaces scramjet claims with microwave air plasma [23]).
- [20] T. H. Rider, “Fundamental limitations on plasma fusion systems not in thermodynamic equilibrium,” Ph.D. dissertation, Massachusetts Institute of Technology, Cambridge, MA, 1995. (Non-equilibrium / radiation-limit context motivating chambered  $p\text{-}^{11}\text{B}$  approaches.)
- [21] NASA, *Space Shuttle Vehicle Familiarization* (SSV FAM), crew module description: flight deck; middeck galley, personal hygiene, airlock, and **side hatch** for ground ingress/egress; equipment bay ECLSS. Training document SSV-FAM-1107 and NASA *Space Shuttle News Reference* crew-cabin arrangement figures (flight deck p. 3-9; middeck p. 3-10).
- [22] NASA, “A Walk Around the Space Shuttle,” crew compartment summary: flight deck controls; middeck living; side hatch; airlock hatch into the cargo bay. [Online]. Available: [https://www.nasa.gov/wp-content/uploads/2016/08/113009main\\_walkaround.pdf](https://www.nasa.gov/wp-content/uploads/2016/08/113009main_walkaround.pdf)
- [23] D. Ye, J. Li, and J. Tang, “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, no. 5, Art. no. 055002, 2020, doi: 10.1063/5.0005814. (Stage-2 anchor: magnetron  $\rightarrow$  compressed-air microwave plasma jet.)
- [24] Y. Nakagawa, H. Koizumi, H. Kawahara, and K. Komurasaki, “Performance characterization of a miniature microwave discharge ion thruster operated with water,” *Acta Astronautica*, vol. 157, pp. 294–299, 2019, doi: 10.1016/j.actaastro.2018.12.031. (Stage-3 architecture: water

+ microwave plasma; demo  $I_{sp} \sim 665$  s,  $\mu$ N thrust.)

[25] R. H. Jansen et al., “High Efficiency Megawatt Motor conceptual design,” AIAA Propulsion and Energy Forum, 2018 (NASA/TM / NTRS). (Stage-1:  $\gtrsim 16$  kW/kg EM mass,  $\eta \gtrsim 0.98$  stretch for MW-class motors.)

[26] Comment on Ye et al., “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, 2020, doi: 10.1063/5.0013575. (Stage-2: Ye’s  $\sim 28$  N/kW is stagnation pressure, not jet thrust — use electrothermal  $T/P = 2\eta/v_j$ .)

[27] D. Komatsu, K. Nishii, and A. Kakami, “Study on electrodes design for MPD thruster using water propellant,” *Trans. JSASS*, vol. 68, 2025, doi: 10.2322/tjsass.68.108. (Stage-3 high- $I_{sp}$  water-MPD path:  $\sim 3150$  s class at  $\eta \sim 0.07$ – $0.11$ ,  $\sim 5$  mN/kW.)

[28] J. E. Brandenburg, J. Kline, and D. Sullivan, “The microwave electro-thermal (MET) thruster using water vapor propellant,” *IEEE Trans. Plasma Sci.*, vol. 33, no. 2, pp. 776–782, 2005, doi: 10.1109/TPS.2005.845252. (Stage-3 water MET / electrothermal lineage;  $I_{sp} \gtrsim 800$  s reported class.)

[29] Z. S. Hartwig et al., “The SPARC Toroidal Field Model Coil Program,” *IEEE Trans. Appl. Supercond.*, vol. 34, no. 2, Art. no. 0600316, Mar. 2024, doi: 10.1109/TASC.2023.3332613; arXiv:2308.12301. (§9.6 anchor: 10,058 kg TFMC test coil at 20.1 T; 18,025 kg per production SPARC TF coil, 18 coils per tokamak.)

[30] P. C. Michael et al., “A 20-K, 600-W, Cryocooler-Based, Supercritical Helium Circulation System for the SPARC Toroidal Field Model Coil Program,” *IEEE Trans. Appl. Supercond.*, vol. 34, no. 2, Art. no. 0600313, Mar. 2024, doi: 10.1109/TASC.2023.3332266. (§9.6 anchor: measured 600 W at 20 K via eight Cryomech AL630 cryocoolers, cooling one HTS test coil.)

[31] A. Dalesandro et al., “The SPARC cryogenic system,” *IOP Conf. Ser.: Mater. Sci. Eng.*, vol. 1301, Art. no. 012107, 2024, doi: 10.1088/1757-899X/1301/1/012107. (§9.6 full-scale contrast: 17 kW steady-state 4.5 K-equivalent cryoplant plus a separate 2.9 MW blowdown system for pulse heat removal.)

[32] B. T. Nugent, R. J. Grotenrath, and W. L. Johnson (NASA Glenn Research Center), “20 Watt 20 Kelvin Reverse Turbo-Brayton Cycle Cryocooler Testing and Applications,” 22nd Int. Cryocooler Conf. (ICC), Bethlehem, PA, Jun. 27–30, 2022, NASA/TM (NTRS 20220009350). (§9.6 flight-cryocooler ceiling check: 4.4–5.5 kg/W goal vs. 18.7 kg/W state-of-the-art specific mass at 20 K.)

[33] Cryomech, Inc., “AL630 Gifford-McMahon Cryocooler” datasheet: 100 W at 20 K, 44 kg cold head + 191 kg CPA1114 compressor package, 11.7–12.7 kW electrical input. [Online]. Available: <https://bluefors.com/products/gifford-mcmahon-cryocoolers/al630-gifford-mcmahon-cryocooler/>

[34] Commonwealth Fusion Systems, “Commonwealth Fusion Systems Delivers Superconducting Magnets to University of Wisconsin’s WHAM Project,” press release, Jul. 12, 2024. (§9.6 magnet anchor: two  $< 2$  t REBCO magnets, 17 T warm bore / 20 T on tape, self-contained with integrated cryo/vacuum/controls.) [Online]. Available: <https://www.cfs.energy/news-and-media/commonwealth-fusion-systems-delivers-hts-magnets-to-uw-wham-project/>

[35] A. Radovsky et al., “Design of High Field HTS Coils for Magnetic Mirror,” *IEEE Trans. Appl. Supercond.*, vol. 33, no. 5, 2023, doi: 10.1109/TASC.2023.3240377. (§9.6 magnet anchor: preliminary design of the  $< 2$  t,  $\sim 20$  T-on-tape, conduction-cooled WHAM mirror coil.)

[36] “Manufacturing and Testing HTS Coils for Magnetic Mirror,” *IEEE Trans. Appl. Supercond.*, vol. 35, 2025, doi: 10.1109/TASC.2025.3542351. (§9.6 magnet anchor: as-built/tested confirmation of the  $< 2$  t WHAM magnet pair, conduction-cooled to 20 K.)

[37] National Oceanic and Atmospheric Administration (NOAA), National Aeronautics and Space Administration (NASA), and U.S. Air Force, *U.S. Standard Atmosphere, 1976*, NOAA-S/T 76-1562. (§10.2/§10.4 atmosphere model: closed-form piecewise density/temperature/pressure layers used by the stage-2 climb integrator in `constants_model.py`.)

[38] J. D. Anderson Jr., *Hypersonic and High-Temperature Gas Dynamics*, 3rd ed. Re-

ston, VA: American Institute of Aeronautics and Astronautics (AIAA), 2019. (§10.4 generic hypersonic lifting-body  $C_D(M)$  drag-coefficient shape and constant-dynamic-pressure ascent-trajectory design point — a flagged non-CHARM-specific stand-in for the stage-2 climb, in lieu of any CFD/wind-tunnel data for this airframe.)

[39] National Institute of Standards and Technology (NIST), “X-Ray Mass Attenuation Coefficients (XCOM),” NIST Standard Reference Database 8. (§9.9 photon-shielding order-of-magnitude estimate:  $\mu/\rho$  for water and polyethylene.) [Online]. Available: <https://www.nist.gov/pml/xcom-photon-cross-sections-database>

[40] J. K. Shultis and R. E. Faw, *Fundamentals of Nuclear Science and Engineering*, 3rd ed. Boca Raton, FL: CRC Press, 2016. (§9.9 neutron-shielding order-of-magnitude estimate: standard fast-neutron removal cross sections for water and polyethylene.)

[41] J. B. Large, T. G. Wilkinson, and D. W. Hoefs (Boeing Commercial Airplane Company), “Reduction of JT8D Powered Aircraft Noise by Engine Refanning,” NASA CR-134855, 1974, NTRS 19740015229. (§10.8 acoustic anchor: JT8D-9→JT8D-109 refan cut mixed takeoff jet velocity from 1470 to 1140 ft/s for a measured 7–8 EPNdB reduction on a B727-200 at FAR Part 36 stations — calibrates the §10.8  $\dot{m} v_{\text{jet}}^n$  exponent from real hardware instead of assuming Lighthill’s textbook  $n = 8$ ; also the source of Lighthill’s own jet-noise theory reference frame.) M. J. Lighthill, “On sound generated aerodynamically I. General theory,” *Proc. R. Soc. Lond. A*, vol. 211, no. 1107, pp. 564–587, 1952, doi: 10.1098/rspa.1952.0060.

[42] Pratt & Whitney, JT8D turbofan family technical data: JT8D-9 rated air mass flow 144.7 kg/s (19,140 lb/min), max thrust class 54–77 kN depending on variant. (§10.8: reference engine for the 727 three-engine mass-flow baseline.)

[43] Federal Aviation Administration, *Advisory Circular AC 36-1H: Noise Levels for U.S. Certificated and Foreign Aircraft*, type-certification noise data under 14 CFR Part 36 Appendix C. (§10.8: B727-200/JT8D-15QN, 190,500 lb configuration, 100.0 EPNdB takeoff — reference EPNdB level; unmodified pre-hush-kit JT8D-9/-17 727-200s measured 7–8 EPNdB higher per [41], consistent with why the type needed hush kits at all.)

AI development-tool references (§ Acknowledgments, auto-generated from `scripts/ai_model_cards.py`):

[44] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).

[45] xAI. *Grok 4.5*. Model documentation, <https://docs.x.ai/developers/models/grok-4.5>; Cursor announcement, <https://cursor.com/blog/grok-4-5> (accessed 2026).

[46] Anthropic. *Claude Sonnet 5*. System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).

[47] Google DeepMind. *Nano Banana Pro (Gemini 3 Pro Image)*. Product announcement, <https://blog.google/innovation-and-ai/products/nano-banana-pro/>; model documentation, <https://ai.google.dev/gemini-api/docs/image-generation> (accessed 2026).

---

## A Design software

This appendix inventories **software still in active use** for the vehicle packaging model and this paper’s figure/PDF pipeline. Tools tried and discarded are omitted. Further subsections will be added as the toolchain grows.

### A.1 Imported packages actually used

**Table 26** External packages and tools used by the living design / paper build.

| Package / tool                                                                               | Role in this project                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Python</b> $\geq 3.12$ + <b>Poetry</b>                                                    | Project environment; CAD scripts; assembly JSON tooling; paper build driver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>NumPy</b>                                                                                 | OpenVSP figure export; <code>constants_model.py</code> sizing / Stage2 climb smoke                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Matplotlib</b>                                                                            | OpenVSP floorplan/profile rasters; VSPAERO polar; Stage2 climb check                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>OpenVSP</b> (optional Poetry group; upstream .deb + Python API; NOSA 1.3)                 | Parametric vehicle CAD (.vsp3); source of the orthographic floorplan and profile figures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>VSPAERO</b> (bundled with OpenVSP; NOSA 1.3)                                              | Digital wind tunnel on <code>catskills_ssto.vsp3</code> — Mach $\times\alpha$ VLM polar ( <code>make cad-vspaero</code> → <code>research/figures/cad/vspaero/</code> ); Stage1 outline check (§10.2.1)                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SU2</b> v8.x (OpenMP binary under <code>third_party/su2/</code> )                         | Scripted compressible CFD — NACA0012 proof ( <code>make su2-naca</code> ) and coarse 3D Euler on the SSTO exterior ( <code>make su2-ssto</code> → §10.2.1 figure)                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>OpenFOAM</b> (host apt; <b>not</b> Poetry)                                                | <code>snappyHexMesh</code> exterior mesh + prism layers on the true OpenVSP STL ( <code>make cad-snappy</code> → <code>research/figures/cad/openfoam/</code> ); next step above the voxel/TetGen plushy mesh                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Gmsh</b> / <b>TetGen</b> / <b>trimesh</b> / <b>pyvista</b> / <b>scikit-image</b> (Poetry) | STL cleanup, coarse tet far-field (interim), and off-screen CFD renders for the paper figures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Blender</b> 5.x (snap /snap/bin/blender)                                                  | Drop-in cutaways from <code>assembly.json</code> (crew capsule, airlock, cargo skid, fusion plant skid top-down; <code>make cad-drop-ins</code> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>NumPy</b><br>( <code>research/figures/cad/constants_model.py</code> )                     | Single source for every sizing-constraint number in §6–§9 and the CHARM bottom-up mass roll-up (§9.6); regenerates ‘spans in this file and patchesassembly.json/vehicle_spec.json– plain arithmetic, never an LLM call     <b>**Pillow**</b>   Image handling when the paper build ingests raster figure assets     <b>**Pandoc**</b>   arxiv.md→ LaTeX body conversion   <code>insidescripts/build_arxiv_tex.py</code>     <b>**Mermaid CLI**</b> (mmdc/@mermaid-js/mermaid-cli)   Paper mermaid fences →figures/figure-NNN.pdf     <b>**latexmk**</b> + <b>**LuaLaTeX**</b>   <code>Localarxiv.pdf/zenodo.pdfcompile (.latexmkrc)</code> |
| <b>Mermaid.js</b> v11 (CDN, browser)                                                         | Live diagram engine inside the assembly outliner (§A.2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

Python’s standard library (`json`, `http.server`, etc.) serves assembly I/O and the outliner static server; it is not listed as an imported third-party package.

## A.2 Assembly outliner

The **assembly outliner** is a small local web app under `research/figures/cad/hierarchy_app/`. It is the interactive view of the vehicle packaging tree.

**Source of truth.** `research/figures/cad/assembly.json` holds the hierarchy (collections vs parts), ports, and joints. Paper mermaid plant/station figures are reconciled to this file (§1). A companion emitter writes `assembly_hierarchy.mmd` for offline diffs.

**UI.** Left pane: Blender-style tree (expand/collapse, collections marked). Right pane: Mermaid flowchart of the **visible** subtree — grey containment edges, teal functional joints; collapsed mates **proxy** to the nearest expanded ancestor; neighboring expanded siblings get distinct tints so stage-1/2/3 (and plant sub-racks) read at a glance.

**How to run.** From the repo root: `make cad-outliner` (or `./research/figures/cad/serve_hierarchy_app.sh`) → open `http://127.0.0.1:8765/hierarchy_app/`. The server sends `Cache-Control: no-store`; use **Reload data** after editing `assembly.json`.

**Stack.** Static HTML/CSS/JS; Mermaid.js in the browser; no build step. The serve script is a tiny Python `ThreadingHTTPServer`.

### A.3 Blender drop-in cutaways

Layout-critical packaging figures (hatches, seat rows, aisle clearances, bay doors, magnet/cryo layout) are built as **editable Blender geometry** from `assembly.json`, not AI image prompts. Four modules are done this way — crew capsule, airlock, cargo skid, and fusion plant skid:

```
make cad-drop-ins
# research/figures/{crew_capsule_top,airlock_top,cargo_skid_top,fusion_plant_skid_top}.png
# research/figures/cad/{crew_capsule_cutaway,airlock_cutaway,cargo_skid_cutaway,
#   fusion_plant_skid_cutaway}.blend
./bl.sh # GUI edit (crew capsule; edit the path for the others)
```

### A.4 Generated numeric constants


Every numeric value wrapped in a machine-readable HTML comment pair in this document (the CHARM mass/power/cryo chain of §6–§9, most visibly §9.6) is **program-controlled**, not hand-typed: it is written by `scripts/update_arxiv_constants.py`, which re-runs `research/figures/cad/compile_model.py` (pure NumPy + Python stdlib, no LLM in the loop) and regex-replaces only the text between each marker pair, leaving surrounding prose untouched. The same run also writes `research/figures/cad/constants.generated.json`, which `scripts/apply_constants_to_assembly.py` reads to patch `assembly.json`’s magnet/cryocooler node counts and `size` blocks, and which `build_fusion_plant_skid_blender.py` reads for its magnet/cryocooler counts — so the paper, the JSON single source of truth, and the Blender renders can never numerically disagree. `make paper-render` runs the whole chain; it is a dependency of `make arxiv` and `make zenodo-tex`.

Each figure has its own placement script — `build_crew_capsule_blender.py`, `build_airlock_blender.py`, `build_cargo_skid_blender.py` — sharing common primitives, hatch/shell/door “kits”, and camera setup from `research/figures/cad/lib/` (`assembly_parser.py`, `procedural_geometry.py`, `render_utils.py`). The fusion-plant skid (CHARM chambers) and combined-cycle engine skid (scoops/duct/nozzle/water tanks) are not yet migrated — those need real procedural modeling of hardware that has no library equivalent, and remain AI concept sketches for now.

### A.5 Aerodynamics figure toolchain

How the Stage1 / Stage2 aerodynamics check diagrams in §10.2.1 and §10.4 are produced. Host tools (OpenVSP, OpenFOAM, SU2 binary) sit outside Poetry; Python deps for meshing/plotting are in the Poetry environment.

Make targets:

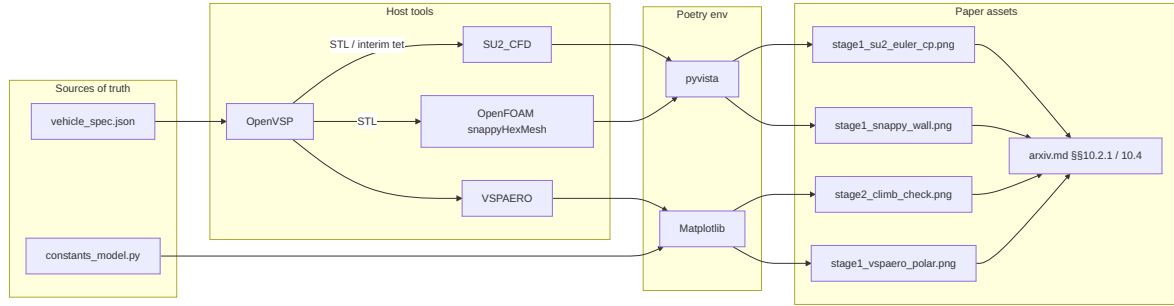

**Figure 18** A.5 Aerodynamics figure toolchain.

```

make cad-vspaero
make cad-snappy
make su2-ssto
poetry run python research/figures/cad/emit_stage2_climb_plot.py
poetry run python research/figures/cad/emit_audio_signature.py
make arxiv

```

---

*Working draft for HAL.science deposit. Not a license to operate a reactor.*