

SSTO fusion powered spaceplane using CHARM architecture with p-¹¹B fuel

Lars Warren Ericson¹

¹Catskills Research Company
¹lars.ericson@catskillsresearch.com

July 24, 2026

ORCID: 0000-0001-8299-9361

Source repository: <https://github.com/catskillsresearch/p11b>

Abstract

We specify a single-stage-to-orbit (SSTO) spaceplane that flies Space Shuttle-style operations—including a Shuttle-class cargo bay—from a municipal airport to International Space Station (ISS) altitude in low Earth orbit (LEO), powered by a continuous Chambered Aneutronic Rotating Mirror (CHARM) p-¹¹B plant [1] with direct energy conversion (DEC). Flight regimes use three electric stages: ducted fan on free air, microwave air plasma on climb, then carried-water plasma with intakes sealed. Each design step is written as a closed set of equations. We guesstimate the reactor mass hole, constrain water as a function of dry mass and vacuum Δv , impose a 1 GW plant with space restart and DEC, and solve a reference all-up mass. Combined-cycle engine maps and CHARM size/performance constraints follow.

List of Figures

1	Vehicle floor plan.	4
2	Vehicle profile view.	5
3	Fusion electric plant (assembly.json).	6
4	Profile stations from assembly envelopes.	9
5	Top-down floorplan from assembly.json.	24

List of Tables

1	Design goals for the plane.	6
2	Physical constants and reference symbols.	7
3	Mass symbol definitions.	7
4	Orbital energy for representative inserted masses.	8
5	Combined-cycle stages (reaction mass and thruster family).	10
6	Water mass fraction versus vacuum Δv and I_{sp}	11
7	CHARM island mass versus specific power at 1 GW.	12
8	Reference vehicle mass bill.	14
9	Sensitivity of dry and wet mass to specific power.	14
10	CHARM light-off sequence.	16
11	Stages, reaction mass, and primary literature (one family each — not a survey).	17
12	Frozen stage constants (literature-anchored; packaging α are design holes like α_C).	18
13	Water store versus stage-3 I_{sp} at fixed $m_{dry} = 196\text{ t}$, $\Delta v_{vac} = 4\text{ km/s}$	19
14	Engine component mass allocation and implied packaging specific power.	20
15	Longitudinal station and bay layout.	21
16	Systems checklist: equations to constraints.	21
17	Imputed CHARM plant requirements for this SSTO.	22
18	Gap between present CHARM and vehicle need.	23

1 Vehicle vision

Municipal runway to ISS-class LEO: a Shuttle-style SSTO spaceplane with a real cargo bay, a single-deck crew module, and a continuous CHARM $p\text{-}^{11}\text{B}$ plant driving a three-stage combined-cycle engine (electric ducted fan $\rightarrow$ microwave air plasma $\rightarrow$ water plasma). The figures below are the vehicle picture; the equations that close the mass and energy budgets follow.

1.1 Interior floorplan and exterior profile

Crew volume flattens the **Space Shuttle crew module** from two decks to **one** [14,21], then **stretches** the pressurized nose so life support and a suited airlock are not cartoon-thin. Reference overall length $L \approx 52\text{ m}$. ECLSS = **Environmental Control and Life Support System**. Depth $\approx 6.5\text{--}7\text{ m}$, span $\approx 28\text{ m}$.

Figures 1 and 2 are orthographic CAD views of the same station map as `assembly.json` (nose left, length 52 m): crew capsule 0–11 m (flight deck + seats, internal O_2/N_2 , port **ground-only** side hatch); airlock 11–15 m (hatches cabin $\leftrightarrow$ airlock and airlock $\leftrightarrow$ bay only); cargo bay 15–33.3 m ($18.3 \times 4.6\text{ m}$, top clamshell doors); **fusion electric plant** 33.3–45 m on one skid (flight battery 33.3–35.5 m, fuel services 35.5–37.5 m, CHARM island 37.5–45 m); **combined-cycle engine** 45–52 m (water tanks 45–49 m on the engine skid, stages 1–3 + nozzle). The plant schematic (Fig.~3) is 1–1 with that JSON tree. The floorplan is a top-down cutaway (no landing gear). The profile shows white upper OML, dark TPS belly, extended gear, the port crew hatch, and closed top bay doors.

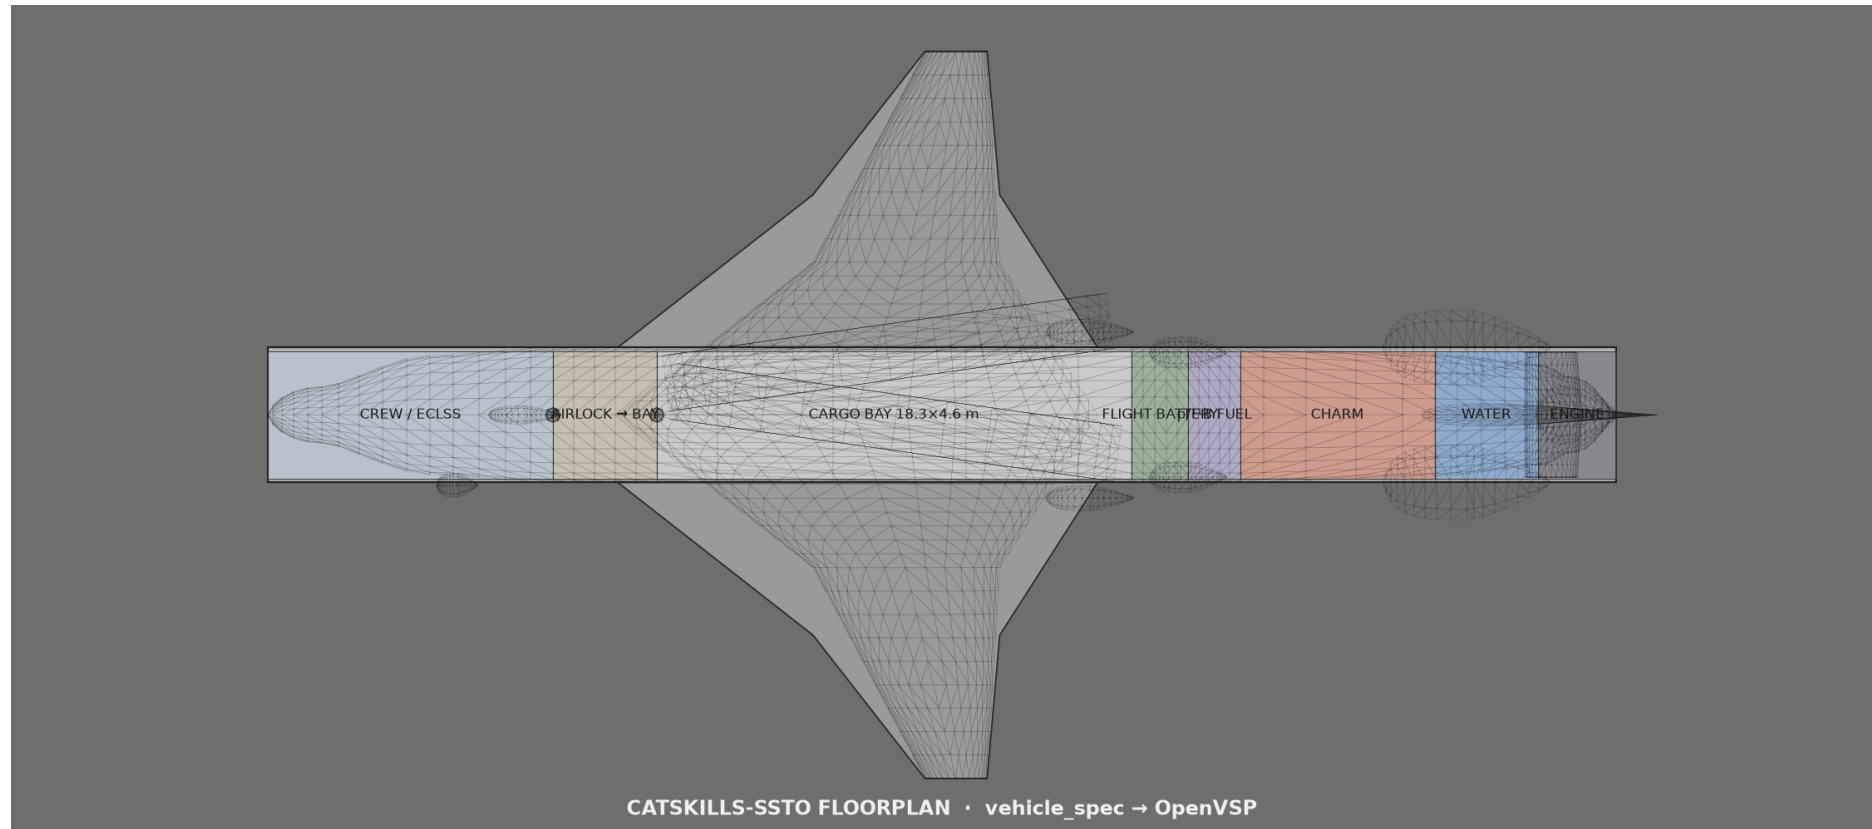


Figure 1 Vehicle floor plan.

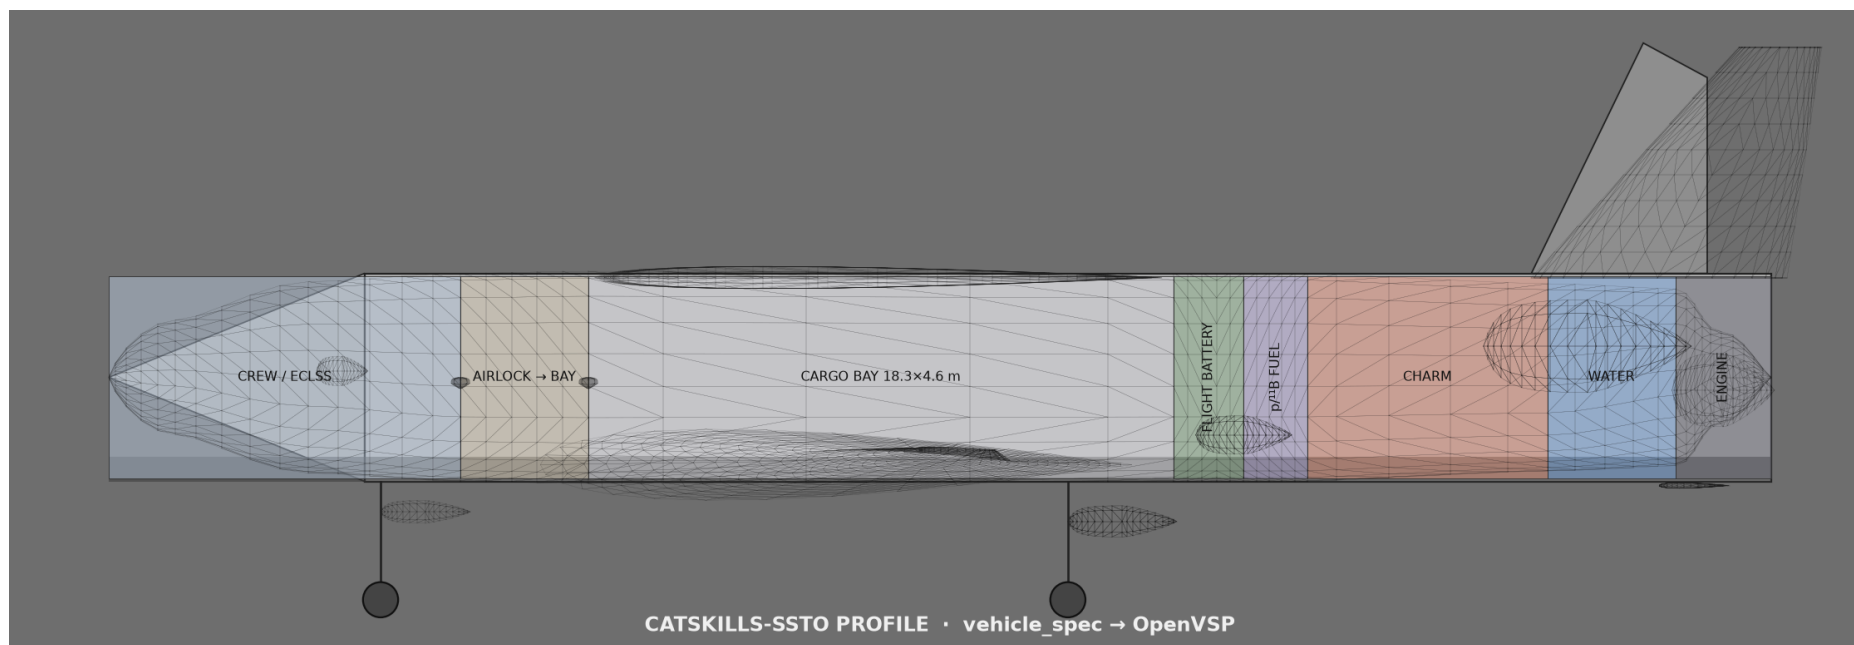


Figure 2 Vehicle profile view.

1.2 Fusion electric plant (assembly SSOT)

Schematic below is drawn from `research/figures/cad/assembly.json` (same tree as the interactive outliner). Boxes are plant parts/collections, not a separate physics cartoon.

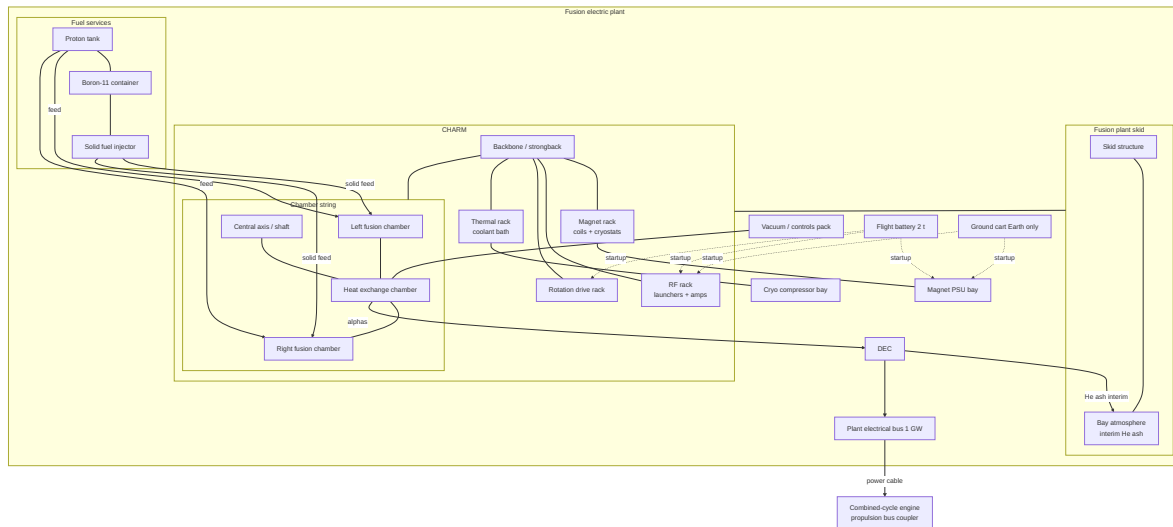


Figure 3 Fusion electric plant (assembly.json).

1.3 Profile stations

Stations match assembly envelopes: crew 0–11 m, airlock 11–15 m, cargo 15–33.3 m, fusion plant 33.3–45 m (battery + fuel + CHARM on one skid), engine 45–52 m (water tanks on engine skid).

2 Design goals (the plane)

Table 1 Design goals for the plane.

ID	Goal	Statement
G1	SSTO	Single stage from runway to ISS-class LEO; no discarded boosters or external tank
G2	Shuttle style	Orbiter-like airframe: wing–body, thermal protection system (TPS), runway landing, gear, control surfaces; crew systems (toilet, ECLSS, food)
G2b	Single-deck crew	Flatten Shuttle cabin to one deck: flight deck; six reclining seats; O ₂ /N ₂ + ECLSS; luggage; forward/side ground door; large aft airlock into bay
G2c	Length	Stretch OML as needed for airlock, ECLSS tanks, battery, and fusion-fuel tanks—reference $L \approx 52$ m
G3	Shuttle cargo bay	Usable bay $\approx 18.3\text{ m} \times 4.6\text{ m}$ class for payload—not filled with reactors

ID	Goal	Statement
G4	Payload	Shuttle-class cargo: $m_{\text{pl}} = 24\,400$ kg reference
G5	Destination	Circular LEO compatible with ISS altitude (≈ 400 km); plane-change to 51.6° treated as margin
G6	Municipal airport	Takeoff/landing on long civil runways; first gear cool enough for noise/oversight; no vertical pad
G7	One engine	Single combined-cycle propulsion string; deadstick glide if plant fails
G8	Clean fuel	$p + {}^{11}\text{B} \rightarrow 3\alpha + 8.7\text{ MeV}$; CHARM bottle; DEC-first electricity
G9	Power	Plant electrical bus peak $P_\star = 1$ GW (design target)

Not goals: expendable stages; D–T breeding plant; filling the bay with the fusion island.

3 Constants and symbols

Table 2 Physical constants and reference symbols.

Symbol	Meaning	Reference value
R_E	Earth radius	6.371×10^6 m
μ_E	GM_E	$3.986 \times 10^{14} \text{ m}^3/\text{s}^2$
h_{ISS}	ISS-class altitude	4.00×10^5 m
r	Orbit radius	$R_E + h_{\text{ISS}}$
g_0	Standard gravity	9.80665 m/s^2
m_{pl}	Cargo-bay payload	2.44×10^4 kg
$P_\star$	CHARM bus peak power	1.00×10^9 W

Masses (all kg):

Table 3 Mass symbol definitions.

Symbol	Meaning
m_{af}	Airframe primary: fuselage, wings, TPS (excl. gear/controls)
m_{gear}	Landing gear (nose + mains), doors, actuators
m_{ctrl}	Control surfaces + actuators (elevons, rudder, speed brake / body flap equiv.)
m_{crew}	Crew cabin systems: ECLSS, O_2/N_2 tanks, pressure control, toilet, galley, food, luggage, airlock fittings
m_{str}	$m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$

Symbol	Meaning
m_{eng}	Combined-cycle engine + inlets + nozzles + ducts
m_{C}	CHARM island (chambers, magnets, radio-frequency (RF), DEC, local shield, cryo, bath)
m_{bat}	Flight battery / auxiliary power unit (APU) (restart + hotel)
m_{f}	$p\text{-}^{11}\text{B}$ fuel
m_{w}	Water carried at takeoff (vacuum reaction mass)
m_{dry}	All mass except water
m_0	Gross liftoff mass (GLOW)
m_{ins}	Mass at LEO insertion (after water burn)

4 MWh budget: Shuttle-class mass to ISS LEO

4.1 Ideal orbital specific energy

$$r = R_E + h_{\text{ISS}}, \quad v_{\text{orb}} = \sqrt{\frac{\mu_E}{r}}, \quad \varepsilon_{\text{orb}} = -\frac{\mu_E}{2r}, \quad \varepsilon_{\text{surf}} \approx -\frac{\mu_E}{R_E}.$$

$$\Delta\varepsilon = \varepsilon_{\text{orb}} - \varepsilon_{\text{surf}} = \frac{\mu_E}{R_E} - \frac{\mu_E}{2r} \approx 3.31 \times 10^7 \text{ J/kg} = 33.1 \text{ MJ/kg}.$$

Numerical anchors:

$$v_{\text{orb}} \approx 7.67 \text{ km/s}, \quad \Delta\varepsilon \approx 9.19 \text{ kWh/kg}.$$

4.2 Orbital energy of the inserted vehicle

Everything that arrives at ISS altitude is still aboard (SSTO):

$$E_{\text{orb}} = m_{\text{ins}} \Delta\varepsilon.$$

In MWh:

$$E_{\text{orb}}^{(\text{MWh})} = m_{\text{ins}} \cdot \frac{\Delta\varepsilon}{3.6 \times 10^9}.$$

Table 4 Orbital energy for representative inserted masses.

m_{ins}	E_{orb}	E_{orb}
100 t (orbiter+cargo class)	3.31 TJ	920 MWh
150 t	4.97 TJ	1380 MWh
200 t	6.62 TJ	1840 MWh

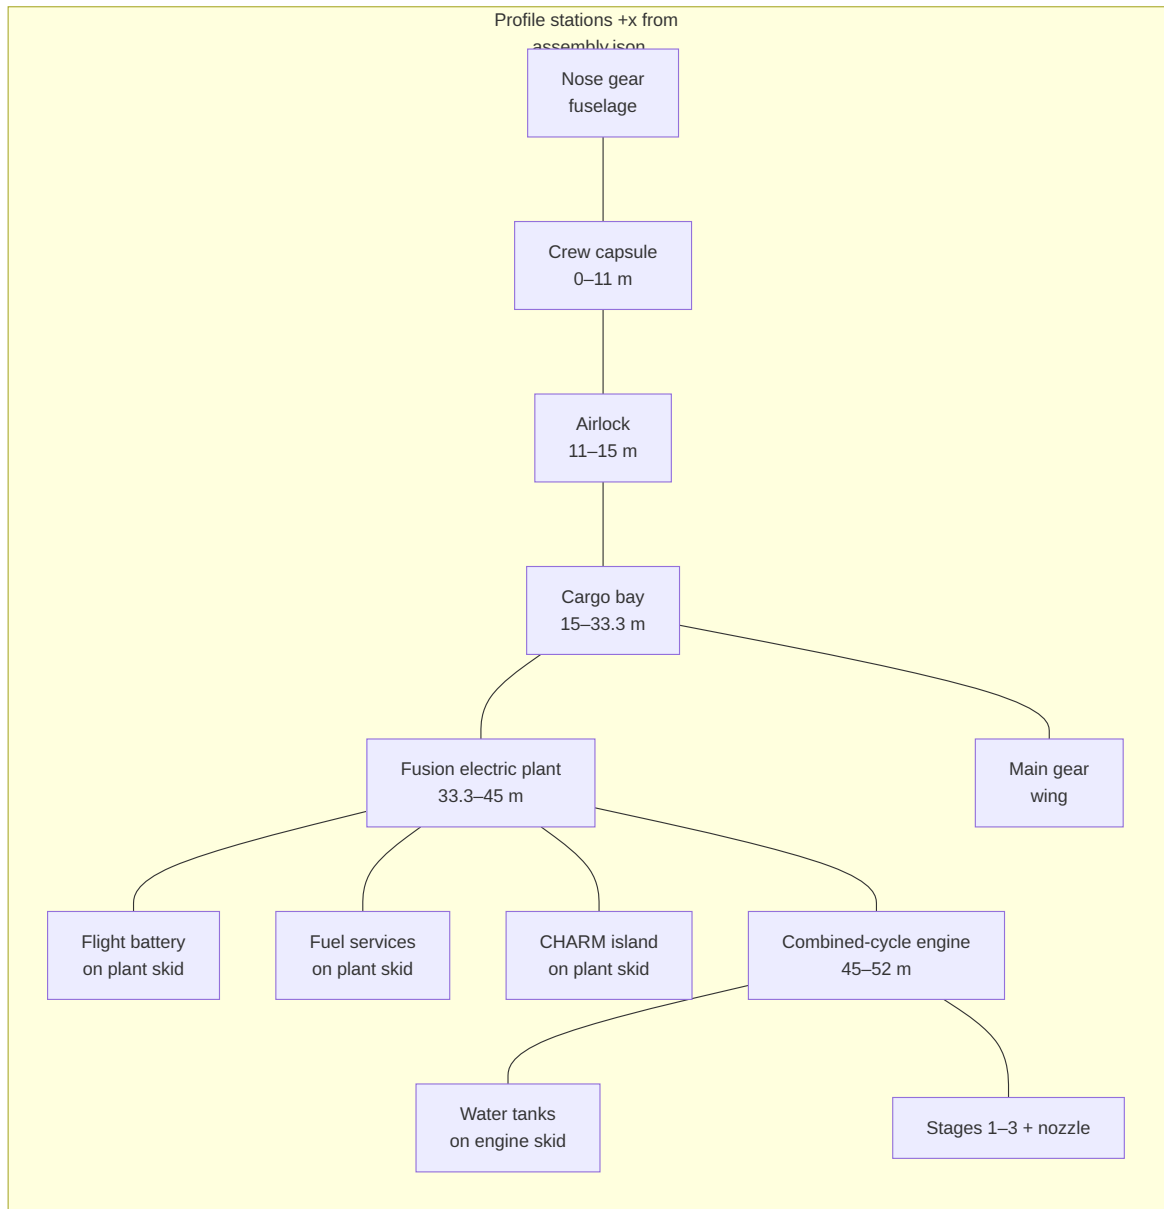


Figure 4 Profile stations from assembly envelopes.

4.3 Source energy (plant must supply)

Air-breathing and rocket/plasma paths leave energy in the wake and fight drag/gravity. Define a mission multiplier $\kappa_E \geq 1$:

$$E_{\text{src}} = \kappa_E E_{\text{orb}} = \kappa_E m_{\text{ins}} \Delta \varepsilon.$$

Working band for planning:

$$\kappa_E \in [2, 4] \Rightarrow E_{\text{src}}^{(\text{MWh})} \approx (18\text{--}37) m_{\text{ins},100\text{t}}$$

i.e. about 1.8–3.7 GWh of source energy per 100 t inserted, scaling linearly with m_{ins} .

Time at constant bus power $P_\star$:

$$t_{\text{src}} = \frac{E_{\text{src}}}{P_\star} = \frac{\kappa_E m_{\text{ins}} \Delta \varepsilon}{P_\star}.$$

For $m_{\text{ins}} = 1.9 \times 10^5 \text{ kg}$, $\kappa_E = 3$, $P_\star = 1 \text{ GW}$:

$$E_{\text{src}} \approx 18.9 \text{ TJ} \approx 5240 \text{ MWh}, \quad t_{\text{src}} \approx 5.2 \text{ h}.$$

So a 1 GW CHARM bus is an **energy-throughput** match for Shuttle-class SSTO only if the climb/insert lasts hours at high average power—or peak $P_\star$ is used with κ_E toward the low end and a lighter m_{ins} .

ISS note. Matching ISS inclination adds plane-change Δv . Fold into vacuum Δv margin (§5) rather than into $\Delta \varepsilon$.

5 Flight regimes: three electric stages

One propulsion string, three stages. No scramjet claim. Plant couples only by **power cable** (DEC $\rightarrow$ bus).

Table 5 Combined-cycle stages (reaction mass and thruster family).

Stage	Ambient	Reaction mass	Thruster family (anchor lit.)
1 Municipal / dense air	Free air	Ingested air	Electric ducted fan (EDF)
2 Climb / scarce air	Free air	Ingested + compressed air	Microwave air plasma jet [23]
3 Vacuum / LEO insert	Intakes sealed	Carried water	Microwave water plasma thruster lineage [24]

Cutoff: intakes seal at density/Mach command $\rho \leq \rho_{\text{seal}}$ (or crew/auto seal for reentry); stage 3 begins.

Energy split (schematic):

$$E_{\text{src}} = E_1 + E_2 + E_3 + E_{\text{hotel}} + E_{\text{loss}}.$$

With free reaction mass in stages 1–2, plant energy primarily raises vehicle mechanical energy and pays drag:

$$P_{\text{prop}}(t) \approx \frac{D(t) v(t)}{\eta_p(t)}, \quad \int P_{\text{prop}} dt \subset E_1 + E_2.$$

In stage 3, jet power for exhaust speed v_e and water mass flow $\dot{m}_w$ is

$$P_{\text{jet}} = \frac{1}{2} \dot{m}_w v_e^2, \quad T = \dot{m}_w v_e \Rightarrow P_{\text{jet}} = \frac{1}{2} T v_e.$$

6 Water mass as a function of whole dry mass

Water is used only in stage 3. Let

$$m_{\text{dry}} = m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + m_{\text{C}} + m_{\text{bat}} + m_{\text{f}},$$

$$m_0 = m_{\text{dry}} + m_w, \quad m_{\text{ins}} = m_{\text{dry}}$$

(all water expended by insertion). Rocket equation for vacuum Δv_{vac} :

$$\Delta v_{\text{vac}} = v_e \ln \left(\frac{m_{\text{dry}} + m_w}{m_{\text{dry}}} \right) = v_e \ln \mu, \quad \mu = e^{\Delta v_{\text{vac}}/v_e}.$$

Water constraint (closed form):

$$m_w = m_{\text{dry}} \left(e^{\Delta v_{\text{vac}}/v_e} - 1 \right) = m_{\text{dry}} (\mu - 1)$$

$$m_0 = m_{\text{dry}} \mu = m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}$$

Vacuum Δv budget:

$$\Delta v_{\text{vac}} = v_{\text{orb}} - v_{\text{ab}} + \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} + \Delta v_{\text{ISS plane}}.$$

Reference planning values:

$$v_{\text{ab}} = 3.5 \text{ km/s}, \quad \Delta v_{g,\text{vac}} + \Delta v_{\text{steer}} = 0.8 \text{ km/s}, \quad \Delta v_{\text{ISS plane}} = 0.2 \text{ km/s} \Rightarrow \Delta v_{\text{vac}} \approx 5.2 \text{ km/s}.$$

Optimistic air-breathing ($v_{\text{ab}} = 5 \text{ km/s}$, small margins) $\rightarrow \Delta v_{\text{vac}} \approx 3.5\text{--}4 \text{ km/s}$.

Exhaust speed from specific impulse:

$$v_e = I_{\text{sp}} g_0.$$

Table 6 Water mass fraction versus vacuum Δv and I_{sp} .

Δv_{vac}	I_{sp}	v_e	μ	m_w/m_{dry}
4 km/s	2000 s	19.6 km/s	1.226	0.226
4 km/s	3000 s	29.4 km/s	1.146	0.146
5.2 km/s	2000 s	19.6 km/s	1.302	0.302
5.2 km/s	5000 s	49.0 km/s	1.112	0.112

7 Vehicle sizing equations

7.1 Structure, crew, gear, controls, and bay

Cargo bay geometry (goal G3):

$$L_{\text{bay}} = 18.3 \text{ m}, \quad D_{\text{bay}} = 4.6 \text{ m}, \quad V_{\text{bay}} \approx \frac{\pi}{4} D_{\text{bay}}^2 L_{\text{bay}} \approx 304 \text{ m}^3.$$

Payload density check:

$$\bar{\rho}_{\text{pl}} = \frac{m_{\text{pl}}}{V_{\text{bay}}} \approx 80 \text{ kg/m}^3$$

(compatible with mixed cargo; bay remains payload volume).

Crew (Shuttle functions, single deck). Forward **flight deck**: commander and pilot **facing forward** into windows and a full control-panel wall [14,21]. Living volume: **six seats** with moderate nap recline; **waste collection system (WCS)**; **galley/food**; **crew luggage / personal stowage**; **ECLSS** with explicit **oxygen and nitrogen / pressure-control tankage** (not a token rack). **Forward/port crew door (side hatch)** for terrestrial ingress only. **Airlock** oversized vs a suit-closet: dual-hatch volume on the aft cabin bulkhead facing the **cargo bay**, sized for suited egress (Shuttle middeck airlock pattern, not undersized) [21].

Landing gear and control surfaces are explicit mass lines (not buried only in a lump “structure” number):

$$\begin{aligned} m_{\text{af}} &= 7.20 \times 10^4 \text{ kg} && \text{(longer fuselage, wings, TPS, doors),} \\ m_{\text{gear}} &= 4.00 \times 10^3 \text{ kg} && \text{(nose + dual main trucks; mass bill only—see profile),} \\ m_{\text{ctrl}} &= 3.00 \times 10^3 \text{ kg} && \text{(elevons, rudder, speed-brake equiv. + actuators),} \\ m_{\text{crew}} &= 8.50 \times 10^3 \text{ kg} && \text{(ECLSS, O}_2\text{/N}_2\text{, WCS, galley, food, luggage, airlock),} \\ m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}} = 8.75 \times 10^4 \text{ kg.} \end{aligned}$$

CHARM and propulsion water **do not** consume V_{bay} . Plant volume sits in a **fuselage island** (spine / aft of bay / wing carry-through), subject to

$$V_C \leq V_{\text{island}}^{\text{max}} \approx 80\text{--}150 \text{ m}^3 \quad (\text{guesstimate for pancaked Shuttle envelope}).$$

7.2 CHARM mass hole

Define island specific power on the **electrical bus**:

$$\alpha_C = \frac{P_\star}{m_C} \quad \Rightarrow \quad \boxed{m_C = \frac{P_\star}{\alpha_C}}.$$

Table 7 CHARM island mass versus specific power at 1 GW.

α_C	m_C at $P_\star = 1 \text{ GW}$	Com- ment
5 kW/kg	200 t	Heavy; fights SSTO
10 kW/kg	100 t	Stretch

α_C	m_C at $P_\star = 1 \text{ GW}$	Com- ment
15 kW/kg	67 t	Refer- ence hole
25 kW/kg	40 t	Aggres- sive

Volume consistency:

$$\bar{p}_C = \frac{P_\star}{V_C} \Rightarrow V_C = \frac{P_\star}{\bar{p}_C}.$$

For $V_C \leq 120 \text{ m}^3$: $\bar{p}_C \geq 8.3 \text{ MW/m}^3$ bus-averaged over the island—severe packaging.

7.3 Engine and battery holes

$$m_{\text{eng}} = m_{\text{EDF}} + m_{\mu\text{air}} + m_{\text{wth}} + m_{\text{shared}} = 1.5 \times 10^4 \text{ kg} \quad (\text{reference packaging hole; closed in §10.6}),$$

$$m_{\text{bat}} = 2.0 \times 10^3 \text{ kg} \quad (\text{restart} + \text{hotel; ground cart does first light}),$$

$$m_{\text{f}} = 5.0 \times 10^2 \text{ kg} \quad (p\text{-}^{11}\text{B} + \text{H inventory; water dominates expendables; §10.6}).$$

7.4 Closed dry / wet mass

$$\begin{aligned} m_{\text{str}} &= m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}, \\ m_{\text{dry}} &= m_{\text{str}} + m_{\text{pl}} + m_{\text{eng}} + \frac{P_\star}{\alpha_C} + m_{\text{bat}} + m_{\text{f}}, \\ m_{\text{w}} &= m_{\text{dry}} \left(e^{\Delta v_{\text{vac}}/v_e} - 1 \right), \\ m_0 &= m_{\text{dry}} e^{\Delta v_{\text{vac}}/v_e}, \\ m_{\text{ins}} &= m_{\text{dry}}. \end{aligned}$$

8 Solved reference vehicle (all-up mass)

Freeze:

$$\begin{aligned} P_\star &= 1 \text{ GW}, \quad \alpha_C = 15 \text{ kW/kg}, & \Delta v_{\text{vac}} &= 4.0 \text{ km/s}, \\ I_{\text{sp}} &= 2000 \text{ s}, \quad v_e = I_{\text{sp}} g_0 = 19.61 \text{ km/s}. \end{aligned}$$

Solve:

$$m_C = \frac{10^9}{1.5 \times 10^4} = 6.67 \times 10^4 \text{ kg}.$$

$$m_{\text{str}} = 72\,000 + 4\,000 + 3\,000 + 8\,500 = 8.75 \times 10^4 \text{ kg},$$

$$m_{\text{dry}} = 87\,500 + 24\,400 + 15\,000 + 66\,700 + 2\,000 + 500 = 1.961 \times 10^5 \text{ kg} \quad (196.1 \text{ t}),$$

$$\mu = e^{4000/19613} = 1.226, \quad m_{\text{w}} = 0.226 m_{\text{dry}} = 4.43 \times 10^4 \text{ kg} \quad (44.3 \text{ t}),$$

$$m_0 = 2.404 \times 10^5 \text{ kg} \quad (\mathbf{240 \text{ t GLOW}}),$$

$$m_{\text{ins}} = 196.1 \text{ t}.$$

Mass bill (reference):

Table 8 Reference vehicle mass bill.

Item	Mass
Airframe + TPS (longer OML)	72.0 t
Landing gear	4.0 t
Control surfaces + actuators	3.0 t
Crew systems (ECLSS, O ₂ /N ₂ , WCS, galley, food, luggage, airlock)	8.5 t
Payload (cargo bay)	24.4 t
Combined-cycle engine (EDF 5.0 + air-plasma 4.4 + water thruster 3.1 + shared 2.5)	15.0 t
CHARM island	66.7 t
Flight battery	2.0 t
$p\text{-}^{11}\text{B}$ / proton fuel (+ tankage)	0.5 t
Water (vacuum propellant)	44.3 t
GLOW	240 t

Energy at this mass:

$$E_{\text{orb}} = 6.49 \text{ TJ} = 1800 \text{ MWh}, \quad E_{\text{src}}(\kappa_E = 3) = 5410 \text{ MWh}, \quad t_{\text{src}}(1 \text{ GW}) = 5.4 \text{ h}.$$

Sensitivity (same Δv_{vac} , I_{sp} ; m_{str} fixed):

Table 9 Sensitivity of dry and wet mass to specific power.

α_C	m_C	m_{dry}	m_{w}	m_0
10 kW/kg	100 t	229 t	52 t	281 t
15 kW/kg	67 t	196 t	44 t	240 t
25 kW/kg	40 t	169 t	38 t	208 t

Municipal takeoff weight $\sim 210\text{--}280 \text{ t}$ is heavy vs airliners but in the large-military / 747-class band—not a Citation.

9 Constraints on the CHARM power plant

Summarize as a requirement vector $\mathcal{R}_C$:

9.1 Power and mass

$$P_{\text{bus}}(t) \geq P_{\text{prop}}(t) + P_{\text{hotel}}(t), \quad \max P_{\text{bus}} = P_{\star} = 1 \text{ GW},$$

$$m_{\text{C}} = \frac{P_{\star}}{\alpha_{\text{C}}}, \quad \alpha_{\text{C}} \geq 15 \text{ kW/kg (reference; } \geq 10 \text{ kW/kg hard floor for SSTO)}.$$

$$V_{\text{C}} \leq 120 \text{ m}^3, \quad \bar{p}_{\text{C}} = P_{\star}/V_{\text{C}} \geq 8 \text{ MW/m}^3.$$

9.2 Fuel and ash

$$\dot{N}_{p^{11}\text{B}} = \frac{P_{\text{fusion}}}{8.7 \text{ MeV}}, \quad m_{\text{f}}(t_{\text{mission}}) \ll m_{\text{w}}.$$

Ash (He) strained per CHARM multi-chamber design; DEC captures charged-product free energy.

9.3 DEC

$$P_{\text{bus}} = \eta_{\text{DEC}} P_{\alpha, \text{ordered}} + \eta_{\text{th}} P_{\text{thermal reject}}, \quad \eta_{\text{DEC}} \gtrsim 0.4\text{--}0.7 \text{ (design target band)}.$$

Thermal reject (X-ray, wall, inefficiencies) must be dumped to:

- air path (stage-1/2 heat exchanger / microwave reject), and/or
- island bath $\rightarrow$ compact turbine, and/or
- radiators only after exo-atmospheric (limited area).

9.4 Restartable in space

$$E_{\text{restart}} \leq \eta_{\text{bat}} m_{\text{bat}} e_{\text{bat}},$$

with $m_{\text{bat}} = 2 \text{ t}$ reference and $e_{\text{bat}} \sim 0.15\text{--}0.25 \text{ kWh/kg} \Rightarrow 300\text{--}500 \text{ kWh}$ class store—enough for **pilot-chamber relight + cascade**, not for ascent.

$$\text{Ground cart: } P_{\text{cart}} \geq P_{\text{light-off}}, \quad \text{not carried.}$$

Doctrine: continuous burn nominally; pilot-string kindling from m_{bat} if segmented; glide if relight fails.

9.5 Continuous operation / no beam farm

Recirculating power is RF walls, rotation, magnets, vacuum, cryo:

$$P_{\text{recirc}} = f_{\text{r}} P_{\text{fusion}}, \quad P_{\text{bus}} = (1 - f_{\text{r}}) P_{\text{fusion, net to bus}}.$$

Design intent: f_{r} small enough that 1 GW **bus** does not require multi-MW neutral-beam injection (NBI).

9.6 Municipal and flight safety

- No tritium breeding inventory.
- Shield so that ramp and cabin doses meet civil constraints with plant running in fan mode.
- Single-string plant: accept engine-out $\equiv$ plant-out $\rightarrow$ glide.

9.7 How CHARM is lit (and how much energy)

CHARM is **not** lit with a neutral-beam farm. Published architecture lights a **rotating open-field mirror** with **species-separated chambers** and **RF / ponderomotive walls** [1,8,9]. A practical light-off sequence for this vehicle is:

Table 10 CHARM light-off sequence.

Step	Action	Power plant elements
0	Evacuate, interlocks, ground-cart connect	Vacuum, controls
1	Energize mirror / chamber magnets	Magnet PSU $\leftarrow$ cart or battery
2	Spin up plasma rotation (centrifugal boron trap)	Rotation drive; energy later recoverable in principle [1]
3	Raise RF one-way / ponderomotive barriers	RF units
4	Inject protons and boron into separated regions	Fuel injectors + p / ^{11}B tanks
5	Establish fusion cell; route alphas to heat-exchange / DEC	DEC electrodes / wave couplers
6	Disconnect cart; bus takes hotel + propulsion	Continuous burn doctrine

Energy scale (engineering estimate — CHARM papers do not publish a flight kWh bill of materials (BOM)):

Magnet + RF + rotation spin-up for a segmented 1 GW island is treated as 50–200 kWh class to first useful plasma (seconds–minutes of MW-class RF/magnet draw), not **MWh-class beams**. That is why

$$E_{\text{restart}} \leq 300\text{--}500 \text{ kWh} \quad (m_{\text{bat}} = 2 \text{ t})$$

is booked for **on-orbit relight**, while **first light on Earth** uses the ground cart. One-way RF walls can be energetically expensive if overused [1]; the vehicle concept of operations

(CONOPS) keeps barriers as needed for separation, not as a continuous full-power sink that eats the 1 GW bus.

Pilot-string kindling: battery (or cart) lights a fraction of chambers $\rightarrow$ DEC/RF bus cascades the rest.

10 Combined-cycle engine (detail)

One propulsion string with stage index $\sigma \in \{1, 2, 3\}$. Plant couples **only** by power cable. Stages 1–2 burn **free air** (reaction mass not carried). Stage 3 burns **carried water**. Fusion fuel m_f is not propellant for the nozzle.

10.1 Stage map and literature anchors

Table 11 Stages, reaction mass, and primary literature (one family each — not a survey).

σ	Name	Reaction mass	Primary lit.	What we take from it
1	Elec- tric ducted fan	Free air	NASA HEMM megawatt motor [25]	$\alpha_{\text{mot}} \sim 16 \text{ kW/kg}$ (EM mass), $\eta_m \gtrsim 0.98$ stretch / 0.90 system
2	Mi- crowave air plasma jet	Free compressed air	Ye et al. microwave air plasma [23]; efficiency comment [26]	Architecture (magnetron $\rightarrow$ compressed-air plasma duct). Do not use Ye’s 28 N/kW thrust claim — control-volume comment shows stagnation-pressure artifact [26]
3	Water plasma thruster	Carried H ₂ O	Nakagawa water microwave ion thruster [24]; water MPD high- I_{sp} path [27]; water MET [28]	Water + microwave/EM plasma is real [24], [28]. Demo $I_{\text{sp}} \sim 400\text{--}665 \text{ s}$ (gridded) [24]; water-MPD $I_{\text{sp}} \sim 3000 \text{ s}$ class at low η [27]. Vehicle reference uses $I_{\text{sp}} = 2000 \text{ s}$ as a mid stretch (§10.6)

Switching:

$$\sigma = \begin{cases} 1 & \rho > \rho_{12}, \ M < M_{12}, \\ 2 & \rho > \rho_{\text{seal}}, \ M \geq M_{12}, \\ 3 & \rho \leq \rho_{\text{seal}} \text{ or intakes sealed.} \end{cases}$$

10.2 Performance constants (frozen for sizing)

Table 12 Frozen stage constants (literature-anchored; packaging α are design holes like α_C).

Symbol	Stage	Meaning	Freeze
η_m	1	Motor + drive electrical efficiency	0.90 [25]
η_{prop}	1	Fan propulsive efficiency (Tv/P_{shaft})	0.80
$\eta_1 = \eta_m \eta_{\text{prop}}$	1	Bus $\rightarrow Tv$	0.72
$(T/W)_{\text{min}}$	1	Takeoff thrust / weight	0.25
v_{to}	1	Takeoff / early climb reference speed	80 m/s
k_{fan}	1	Fan+duct+inverter mass / EM motor mass	1.35
α_{mot}	1	Motor specific power (EM)	16 kW/kg [25]
η_μ	2	Bus $\rightarrow$ microwave power in plasma	0.55
$\eta_{j,2}$	2	Plasma enthalpy $\rightarrow$ directed jet	0.45
$v_{j,2}$	2	Reference jet speed (electrothermal)	600 m/s
η_{jet}	3	Bus $\rightarrow$ jet kinetic power	0.55 (stretch vs water-MPD demo $\sim 0.07\text{--}0.11$ [27])
I_{sp}	3	Vacuum specific impulse (reference)	2000 s
$v_e = I_{\text{sp}} g_0$	3	Exhaust speed	19.61 km/s
P_{hotel}	all	Hotel / plant recirculating floor	5 MW
C_{cap}	1–2	Inlet capture coefficient	≤ 1 (free air; not a carried mass)

Reaction-mass utilization: - Stages 1–2: utilization of **carried** propellant is zero (air is free). Inlet capture C_{cap} only limits available $\dot{m}_{\text{air}}$. - Stage 3: mass accounting assumes all loaded water is expelled ($u_w = 1$); power conversion is η_{jet} (not all bus power becomes $\frac{1}{2}\dot{m}v_e^2$).

10.3 Stage 1 — power and mass

$$T_1 \geq (T/W)_{\text{min}} m_0 g_0, \quad P_1 = \frac{T_1 v_{\text{to}}}{\eta_1}, \quad m_{\text{EDF}} = k_{\text{fan}} \frac{P_1}{\alpha_{\text{mot}}}.$$

At reference $m_0 = 240$ t:

$$T_1 \approx 589 \text{ kN}, \quad P_1 \approx 65 \text{ MW}, \quad m_{\text{EDF}} \approx 5.5 \text{ t (HEMM-class } \alpha_{\text{mot}}; \text{ within the 15 t engine budget)}.$$

Municipal segment is **not** the $P_\star$ driver.

10.4 Stage 2 — power and mass (electrothermal, not Ye’s N/kW)

Energy-consistent thrust-to-power (comment [26] kills super-unity claims):

$$\boxed{\frac{T_2}{P_2} = \frac{2\eta_\mu \eta_{j,2}}{v_{j,2}} \approx 0.825 \text{ N/kW} \quad (v_{j,2} = 600 \text{ m/s}).}$$

(Ye's reported $\sim 28 \text{ N/kW}$ [23] would imply $\gg 100\%$ efficiency and is discarded [26].)

$$\dot{m}_{\text{air}} = \rho A_i v C_{\text{cap}}, \quad \Delta h = \frac{\eta_\mu P_2}{\dot{m}_{\text{air}}}, \quad P_2 \leq P_\star - P_{\text{hotel}}.$$

Climb still sets the bus:

$$D_{\text{ram}} = \frac{1}{2} \rho v^2 C_D S, \quad P_{\text{need}} \approx \frac{(D_{\text{ram}} - T_{\text{excess}})v}{\eta_p}.$$

Freeze for sizing: $P_2^\star = P_\star - P_{\text{hotel}} = 995 \text{ MW} \rightarrow T_2 \approx 821 \text{ kN}$ at the $v_{j,2}$ freeze (order-of; real trajectory integrates $\rho(h), M$).

10.5 Stage 3 — water, power, and I_{sp} cases

$$\boxed{T_3 = \frac{2\eta_{\text{jet}} P_3}{v_e}, \quad \dot{m}_w = \frac{T_3}{v_e}, \quad P_3 \leq P_\star - P_{\text{hotel}},}$$

$$m_w = m_{\text{dry}} (e^{\Delta v_{\text{vac}}/v_e} - 1) \quad (u_w = 1).$$

With $P_3 = 995 \text{ MW}$, $\eta_{\text{jet}} = 0.55$, $I_{\text{sp}} = 2000 \text{ s}$:

$$T_3 \approx 56 \text{ kN}, \quad \dot{m}_w \approx 2.85 \text{ kg/s}.$$

Table 13 Water store versus stage-3 I_{sp} at fixed $m_{\text{dry}} = 196 \text{ t}$, $\Delta v_{\text{vac}} = 4 \text{ km/s}$.

I_{sp}	Anchor	m_w	m_0	Note
665 s	Nakagawa water ion demo [24]	166 t	362 t	Archi- tecture real; SSTO water brutal
2000 s	Refer- ence stretch	44 t	240 t	Be- tween gridded water and water- MPD I_{sp}
3150 s	Water MPD class [27]	27 t	223 t	Demo η much lower than our η_{jet} freeze

Path: tanks $\rightarrow$ pump/injector $\rightarrow$ vaporizer $\rightarrow$ microwave/EM plasma $\rightarrow$ shared nozzle [24], [27], [28].

10.6 Closed solve: powers, component masses, fuels

Power ratings (required outputs):

$$\begin{aligned} P_1^* &\approx 65 \text{ MW} && (\text{stage 1 at } m_0 = 240 \text{ t}), \\ P_2^* &= 995 \text{ MW} && (\text{stage 2 sizes } P_\star), \\ P_3^* &= 995 \text{ MW} && (\text{stage 3 vacuum; } T_3 \sim 56 \text{ kN}). \end{aligned}$$

Engine mass budget (reference hole $m_{\text{eng}} = 15 \text{ t}$):

Table 14 Engine component mass allocation and implied packaging specific power.

Component	Mass	Sized to	Implied $\alpha = P/m$
Stage-1 EDF (motor+fan+duct)	5.0 t	P_1^*	$\sim 13 \text{ kW/kg}$ (near HEMM [25] after k_{fan})
Stage-2 MW farm + applicator + precompress	4.4 t	P_2^*	$\sim 230 \text{ kW/kg}$ (packaging unobtainium)
Stage-3 thruster head + vaporizer/feed	3.1 t	P_3^*	$\sim 320 \text{ kW/kg}$ (packaging unobtainium)
Shared nacelle / nozzle / inlets / bus coupler	2.5 t	structure	—
Engine total	15 t	§8 freeze	—

If stage-2/3 hardware were packaged at a more literal $\alpha_\mu \sim 8 \text{ kW/kg}$, m_{eng} would jump to $\mathcal{O}(100 \text{ t})$ and GLOW to $\sim 400 \text{ t}$. The 15 t engine line is therefore a **same-class hole** as $\alpha_C = 15 \text{ kW/kg}$ — called out in §13 — while **power** and **water** closes are on firmer ground.

Fusion fuel (not nozzle propellant): mission bus energy $E_{\text{src}} = \kappa_E m_{\text{ins}} \Delta \varepsilon$. Stoichiometric $p\text{-}^{11}\text{B}$ rest-mass for that energy is $\ll 1 \text{ kg}$ at ideal conversion; with chain efficiency ~ 0.25 still $\sim 1 \text{ kg}$. Freeze $m_f = 0.5 \text{ t}$ covers tankage, residuals, and margin — **water dominates expendables**.

Vacuum burn time at constant T_3 : $t_3 \approx m_w / \dot{m}_w \approx 4.3 \text{ h}$ — long insertion, consistent with power-limited electric thrust.

10.7 Physical envelope

- One nacelle; variable inlets with shutters; shared nozzle (stages 2–3 plasma path; stage-1 bypass into same aft exhaust).
- Water tanks on the engine skid; MW farm shared in packaging intent between stages 2 and 3.
-

11 $m_{\text{eng}} = 15 \text{ t}$ reference as in §10.6.

12 Layout details

Station map for the vision figures in §1. The **top-down bay connectivity** diagram is a reading aid for the floorplan; gear remains on the exterior profile only.

Table 15 Longitudinal station and bay layout.

Station (m)	Bay	Contents
0–11	Crew module	Forward-facing commander (CDR) / pilot (PLT) + flight deck; four more nap-recline seats (six total); WCS; galley; luggage stowage; ECLSS + O₂/N₂ / pressure tanks
—	Ground door	Forward/port crew door (side hatch) — terrestrial ingress only
11–15	Airlock	Suited-crew airlock ($\sim 2.5 \text{ m}$ class clear), aft bulkhead facing into cargo bay
15–33.3	Cargo	$18.3 \text{ m} \times 4.6 \text{ m}$ payload bay (no reactors)
33.3–35.5	Battery	Flight battery $\approx 2 \text{ t}$ (restart / hotel)
35.5–37.5	Fusion fuel	Proton / ^{11}B feed tanks + plumbing (low mass, real volume)
37.5–45	CHARM	Reactor island ($\lesssim 120 \text{ m}^3$, 67 t)
45–49	Water	$\approx 44 \text{ t H}_2\text{O}$
49–52	Engine	Combined-cycle nacelle + nozzle
Wings	Controls	Elevons, rudder (gear not drawn on this figure)

Doors (Shuttle pattern). (1) **Side/forward crew door** — runway/ground only; (2) **airlock** — on-orbit cabin $\leftrightarrow$ cargo bay / vacuum for suited operations [21].

13 Systems checklist (equations $\rightarrow$ constraints)

Table 16 Systems checklist: equations to constraints.

Step	Governing relations	Binding output
Goals	G1–G9 + single-deck crew	Shuttle bay + municipal SSTO to ISS

Step	Governing relations	Binding output
LEO energy	$E_{\text{orb}} = m_{\text{ins}}\Delta\varepsilon$, $E_{\text{src}} = \kappa_E E_{\text{orb}}$	~ 1.8 GWh orbital @ 196 t; ~ 5.4 GWh source @ $\kappa_E = 3$
Regimes	Stages 1–3 mass-flow logic	EDF $\rightarrow$ microwave air plasma $\rightarrow$ water plasma
Water	$m_w = m_{\text{dry}}(e^{\Delta v_{\text{vac}}/v_e} - 1)$	$\sim 23\%$ of dry mass @ ref
Structure	$m_{\text{str}} = m_{\text{af}} + m_{\text{gear}} + m_{\text{ctrl}} + m_{\text{crew}}$	87.5 t incl. gear/controls/ECLSS+O ₂ /lug-gage/airlock
CHARM	$m_C = P_{\star}/\alpha_C$, DEC, restart	67 t @ 15 kW/kg
Light-off	Magnets + RF + rotation; no NBI	50–200 kWh est.; cart / 2 t battery
Solve	$m_0 = m_{\text{dry}}e^{\Delta v_{\text{vac}}/v_e}$	$m_0 \approx 240$ t; $L \approx 52$ m
Engine	$P_1^* \approx 65$ MW; $P_2^* = P_3^* \approx 995$ MW; $m_w(I_{\text{sp}})$	§10.6; lit [23]–[28]

14 Imputed CHARM plant specs, gap to present design, and unobtainiums

14.1 Specs this vehicle imputes to CHARM

The SSTO solve does not invent new plasma physics; it **back-solves** a power island that must fit the airframe. Reference imputed plant:

Table 17 Imputed CHARM plant requirements for this SSTO.

Quantity	Imputed requirement	Source in this note
Fuel	Continuous $p\text{-}^{11}\text{B}$	G8; §2
Architecture	Multi-chamber rotating mirror; species separation; ash strain; DEC	§3, §9, §1; [1,8–11]
Electrical bus peak	$P_{\star} = 1$ GW	G9; Phase B/C power
Mission source energy	~ 5 GWh class per ascent ($\kappa_E \sim 3$)	§4, §8
Island mass	$m_C \approx 67$ t	$\alpha_C = 15$ kW/kg
Specific power (bus)	$\alpha_C \geq 15$ kW/kg (floor ~ 10 kW/kg)	§7.2, §9.1
Island volume	$V_C \lesssim 120$ m ³	Fuselage bay aft of cargo
Volumetric power	$\bar{p}_C \gtrsim 8$ MW/m ³	$P_{\star}/V_C$
DEC	$\eta_{\text{DEC}} \sim 0.4\text{--}0.7$ on ordered α / wave channel	§9.3
Aux heating	RF + rotation + magnets; no multi-MW NBI farm	§9.5, §9.7
Light-off energy	$\sim 50\text{--}200$ kWh to useful plasma (est.)	§9.7
Space restart	Pilot-string from ~ 2 t battery ($\sim 300\text{--}500$ kWh)	§6, §9.4

Quantity	Imputed requirement	Source in this note
Duty	Continuous burn through climb/insert; throttleable bus	§5
Environment	Flight loads, TPS-adjacent thermal, municipal dose with fan-mode plant	G6, §9.6

14.2 Where published CHARM stands today

Relative to that invoice, the Fisch / Advanced Research Projects Agency–Energy (ARPA-E) / Pale Blue line today is a **physics and intellectual-property (IP) program**, not a flight power plant [1,2]:

Table 18 Gap between present CHARM and vehicle need.

Gate	Present CHARM (public)	Vehicle need
Fuel / kinetics	Strong papers on hybrid fast–thermal $p\text{-}^{11}\text{B}$, alpha channeling, ash poisoning [3–7]	Same fuel family — aligned in intent
Chambering	Architecture + patent filings for separated reactants, ponderomotive walls, open-trap HV, differential confinement [1,8–11]	Must work together in one island
Lawson / Q	Component studies and 0D balances; integrated self-consistent power-positive reactor not demonstrated [1]	Net bus power after recirculating RF/rotation
Hardware	No public GW-class (or even pilot) CHARM machine; software-first / early company path	Flyable 67 t island
DEC	Themes in theory and open-trap high-voltage (HV) patents [1,10]	Flight-qualified η_{DEC} at GW
Mass / volume	Not published as kW/kg or MW/m ³ plant envelopes	15 kW/kg, $\gtrsim$ 8 MW/m ³
Operations	Lab/site thinking	Continuous ascent, g-load, restart, airport licensing

Gap in one line: CHARM has a credible **aneutronic architecture story**; this vehicle needs a **closed, flight-packaged, gigawatt, high specific-power product** that does not yet exist on paper as an engineered BOM.

14.3 Unobtainiums in the gap

Call a requirement **unobtainium** if it is not implied by present CHARM results and would break the SSTO close if false. Ranked for this airframe:

1. **Integrated $p\text{-}^{11}\text{B}$ power balance with chambered species + ash removal + tolerable synchrotron/bremsstrahlung simultaneously** — components suggest feasibility; full self-consistency is explicitly still open [1].
2. **Centrifugal / rotating-mirror differential confinement at useful density and confinement time**, including rotation sustainment **without intolerable wall voltage drops** [1].

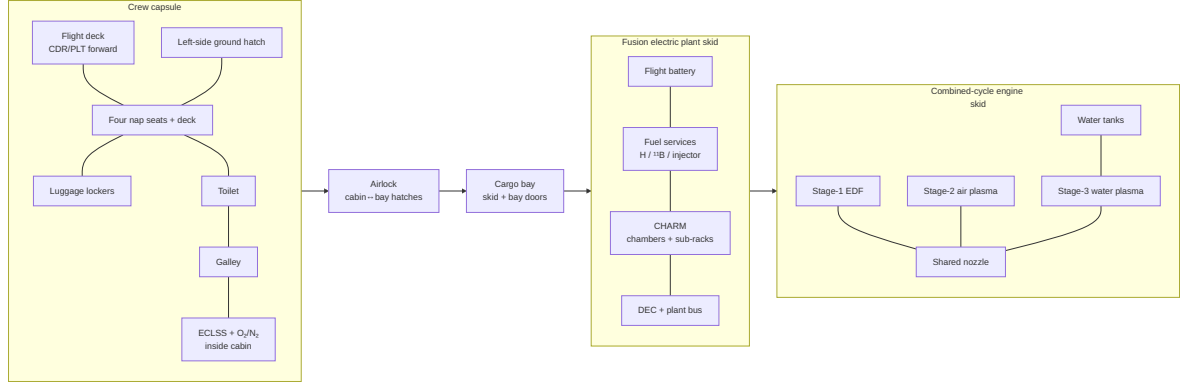


Figure 5 Top-down floorplan from assembly.json.

3. **Selective RF / ponderomotive “one-way” walls** that regulate ion traffic at acceptable recirculating power (slides note one-way walls can be energetically costly if overused) [1,9].
4. **Wave-mediated ash extraction / alpha channeling into protons (or DEC)** fast enough that helium does not poison the cell [3,6].
5. **Ultra-high DC / open-field electrode structures** that survive α and X-ray loads while feeding a GW bus [10].
6. **Flight specific power** $\alpha_C \sim 15 \text{ kW/kg}$ and $\bar{p}_C \gtrsim 8 \text{ MW/m}^3$ including magnets, RF, shield, cryo, and structure — beyond any published CHARM packaging study.
7. **Continuous GW-class operation** through a multi-hour ascent with vibration, thrust-vector loads, and thermal transients — not part of the present ARPA-E scope.
8. **Pilot-string light-off / space restart** at 50–200 kWh class — engineering estimate only; not a CHARM experimental result.
9. **Stage-2/3 thruster packaging** at $\sim 200\text{--}300 \text{ kW/kg}$ inside a 15 t engine (§10.6) — HEMM-class stage 1 is nearer [25]; microwave air / water plasma at GW in a few tonnes is not [23], [24], [26], [27].
10. **Stage-3** $I_{sp} \sim 2000 \text{ s}$ at $\eta_{jet} \sim 0.55$ on water — between demonstrated water-ion I_{sp} [24] and water-MPD I_{sp} at much lower η [27].

Items 1–5 are **physics/architecture unobtainiums** shared with any CHARM plant. Items 6–10 are **aerospace packing / propulsion unobtainiums** imposed by SSTO. If 1–5 fail, no amount of airframe cleverness saves the mission; if 1–5 hold but 6–10 fail, CHARM may still be a ground plant while this spaceplane does not close.

14.4 How to read the rest of this paper

Sections 1–12 are a **requirements mirror** held up to CHARM: they say what a successful bottle must look like to fly Shuttle-class cargo from a municipal runway to ISS altitude. They are **not** a claim that Pale Blue / Princeton has those numbers. Closing the gap is future plasma physics, materials, and packaging work—tracked against the unobtainium list above.

15 Conclusion

Design goals fix a **Shuttle-style SSTO** with a **real cargo bay**, municipal runway ops, and ISS-altitude LEO. The pressurized nose is **lengthened** (≈ 52 m **OML**) so the cabin can hold a real **ECLSS with O₂/N₂, luggage**, a **suited-size airlock** into the bay, plus visible **battery** and **fusion-fuel tank** bays. Crew: **forward-facing flight deck**, **six nap-recline seats**, **ground crew door**, **aft airlock into cargo**. **Landing gear** (4t) and **control surfaces** (3t) sit in the mass bill (gear drawn on the profile, not the floorplan). The MWh budget is linear in inserted mass: about 9.2 kWh **per kg** orbital, times $\kappa_E \sim 2\text{--}4$ at the CHARM bus. Water scales only with **dry mass** and vacuum $\Delta v/I_{sp}$. Closing $P_\star = 1$ GW at $\alpha_C = 15$ kW/kg yields a reference vehicle of about 196 t **dry**, 44 t **water**, 240 t **GLOW**, with CHARM as a 67 t, $\lesssim 120$ m³ island using **DEC**, lit by **magnets + RF + rotation** (50–200 kWh class light-off; space restart from a 2 t battery), and a **single combined-cycle engine** spanning electric ducted fan $\rightarrow$ microwave air plasma $\rightarrow$ water plasma. Vision figures (§1) show planform, plant, and profile. Those are the numbers the in-silico CHARM plant and engine maps must satisfy.

16 Acknowledgments

CHARM denotes the chambered aneutronic rotating-mirror architecture developed at Princeton Plasma Physics Laboratory (PPPL) under the ARPA-E economical $p\text{--}^{11}\text{B}$ program [1]–[11] and discussed toward Pale Blue Fusion. This vehicle sketch is an independent systems exercise and does not speak for that program.

17 References

- [1] N. J. Fisch et al. (Princeton Plasma Physics Laboratory), “Why pB11?” ARPA-E Fusion Annual Meeting slides (Day2_08_Fisch.pdf), Aug. 2025. Primary public overview of the Chambered Aneutronic Rotating Mirror (CHARM) / chambered rotating-mirror $p\text{--}^{11}\text{B}$ architecture. [Online]. Available: https://arpa-e.energy.gov/sites/default/files/2025-08/Day2_08_Fisch.pdf
- [2] Advanced Research Projects Agency–Energy (ARPA-E), “Economical Proton-Boron11 Fusion,” Award No. DE-AR0001554, OPEN 2021.
- [3] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Wave-supported hybrid fast-thermal $p\text{--}^{11}\text{B}$ fusion,” *Phys. Plasmas*, vol. 29, no. 11, Art. no. 110701, 2022, doi: 10.1063/5.0118337.
- [4] I. E. Ochs, E. J. Kolmes, M. E. Mlodik, T. Rubin, and N. J. Fisch, “Improving the feasibility of economical proton–boron-11 fusion via alpha channeling with a hybrid fast and thermal proton scheme,” arXiv:2210.08076 [physics.plasm-ph], 2022.
- [5] I. E. Ochs and N. J. Fisch, “Lowering the reactor breakeven requirements for proton–boron 11 fusion,” *Phys. Plasmas*, 2024, doi: 10.1063/5.0184945. (ARPA-E DE-AR0001554.)

- [6] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “Preventing ash from poisoning proton–boron 11 fusion,” *Phys. Plasmas*, 2025. [Online]. Available: <https://w3.pppl.gov/~fisch/fischpapers/2025/Ochs.poisoning.POP2025.pdf>
- [7] I. E. Ochs, E. J. Kolmes, and N. J. Fisch, “On the feasibility of radiation-trapping regimes in compressed proton-boron-11 plasmas,” *Phys. Plasmas*, vol. 32, no. 2, Art. no. 022504, 2025, doi: 10.1063/5.024504.
- [8] N. J. Fisch, I. E. Ochs, E. J. Kolmes, M. E. Mlodik, and T. Rubin, “Nonthermal Proton-Boron11 Fusion with Separated Reactant Regions,” U.S. Patent Application 19/083,790, filed Mar. 19, 2025.
- [9] T. Rubin, J.-M. Rax, N. J. Fisch, I. E. Ochs, and E. J. Kolmes, “Enhanced Particle Confinement with Positive and Negative Ponderomotive Potentials,” U.S. Patent Application 19/084,168, filed Mar. 19, 2025.
- [10] N. J. Fisch et al., “Systems and Methods for Producing Ultra-high DC Voltages in Open Field Line Traps...,” U.S. Patent Application 19/175,473, filed Apr. 10, 2025.
- [11] E. J. Kolmes, I. E. Ochs, and N. J. Fisch, “Method and Apparatus for Differential Confinement, Mixing, and Demixing...,” U.S. Provisional Patent 63/794,470, filed Apr. 25, 2025.
- [12] N. J. Fisch, “Theory of current drive in plasmas,” *Rev. Mod. Phys.*, vol. 59, no. 1, pp. 175–208, 1987, doi: 10.1103/RevModPhys.59.175. (Alpha-channeling / wave–particle foundations.)
- [13] N. J. Fisch and J.-M. Rax, “Interaction of energetic alpha particles with intense lower hybrid waves,” *Phys. Rev. Lett.*, vol. 69, no. 4, pp. 612–615, 1992, doi: 10.1103/PhysRevLett.69.612.
- [14] National Aeronautics and Space Administration, *Space Shuttle Orbiter / OV-105 Atlantis* dimensional and mass data (cargo bay 18.3×4.6 m; payload to LEO $\approx 24\,400$ kg; empty mass $\approx 78\,000$ kg class). NASA fact sheets and Orbiter inventory documentation.
- [15] International Space Station Program, nominal orbital altitude ≈ 400 km and inclination 51.6° . NASA ISS reference.
- [16] D. A. Vallado, *Fundamentals of Astrodynamics and Applications*, 4th ed. Hawthorne, CA: Microcosm Press / Springer, 2013. (Two-body orbital energy; LEO $\Delta\epsilon$.)
- [17] G. P. Sutton and O. Biblarz, *Rocket Propulsion Elements*, 9th ed. Hoboken, NJ: Wiley, 2017. (Rocket equation; I_{sp} – v_e relation.)
- [18] J. D. Anderson Jr., *Modern Compressible Flow*, 3rd ed. New York, NY: McGraw-Hill, 2003. (Ram drag / inlet thermo context for stage-2 air path.)
- [19] W. J. D. Escher, E. H. Hyde, and D. M. Anderson, “A preliminary systems assessment of the ‘Star-Raker’... airbreathing SSTO concept,” AIAA Paper, 1980s SABRE/airbreathing SSTO literature context for multi-regime airbreathing logic (this paper replaces scramjet claims with microwave air plasma [23]).
- [20] T. H. Rider, “Fundamental limitations on plasma fusion systems not in thermodynamic equilibrium,” Ph.D. dissertation, Massachusetts Institute of Technology, Cambridge, MA, 1995. (Non-equilibrium / radiation-limit context motivating chambered p - ^{11}B approaches.)
- [21] NASA, *Space Shuttle Vehicle Familiarization* (SSV FAM), crew module description: flight deck; middeck galley, personal hygiene, airlock, and **side hatch** for ground ingress/egress; equipment bay ECLSS. Training document SSV-FAM-1107 and NASA *Space Shuttle News Reference* crew-cabin arrangement figures (flight deck p. 3-9; middeck p. 3-10).
- [22] NASA, “A Walk Around the Space Shuttle,” crew compartment summary: flight deck controls; middeck living; side hatch; airlock hatch into the cargo bay. [Online]. Available: https://www.nasa.gov/wp-content/uploads/2016/08/113009main_walkaround.pdf
- [23] D. Ye, J. Li, and J. Tang, “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, no. 5, Art. no. 055002, 2020, doi: 10.1063/5.0005814. (Stage-2 anchor: magnetron $\rightarrow$ compressed-air microwave plasma jet.)

- [24] Y. Nakagawa, H. Koizumi, H. Kawahara, and K. Komurasaki, “Performance characterization of a miniature microwave discharge ion thruster operated with water,” *Acta Astronautica*, vol. 157, pp. 294–299, 2019, doi: 10.1016/j.actaastro.2018.12.031. (Stage-3 architecture: water + microwave plasma; demo $I_{sp} \sim 665$ s, μ N thrust.)
- [25] R. H. Jansen et al., “High Efficiency Megawatt Motor conceptual design,” AIAA Propulsion and Energy Forum, 2018 (NASA/TM / NTRS). (Stage-1: $\gtrsim 16$ kW/kg EM mass, $\eta \gtrsim 0.98$ stretch for MW-class motors.)
- [26] Comment on Ye et al., “Jet propulsion by microwave air plasma in the atmosphere,” *AIP Advances*, vol. 10, 2020, doi: 10.1063/5.0013575. (Stage-2: Ye’s ~ 28 N/kW is stagnation pressure, not jet thrust — use electrothermal $T/P = 2\eta/v_j$.)
- [27] D. Komatsu, K. Nishii, and A. Kakami, “Study on electrodes design for MPD thruster using water propellant,” *Trans. JSASS*, vol. 68, 2025, doi: 10.2322/tjsass.68.108. (Stage-3 high- I_{sp} water-MPD path: ~ 3150 s class at $\eta \sim 0.07$ – 0.11 , ~ 5 mN/kW.)
- [28] J. E. Brandenburg, J. Kline, and D. Sullivan, “The microwave electro-thermal (MET) thruster using water vapor propellant,” *IEEE Trans. Plasma Sci.*, vol. 33, no. 2, pp. 776–782, 2005, doi: 10.1109/TPS.2005.845252. (Stage-3 water MET / electrothermal lineage; $I_{sp} \gtrsim 800$ s reported class.)

Working draft for arxiv-style systems sizing. Not a license to operate a reactor.