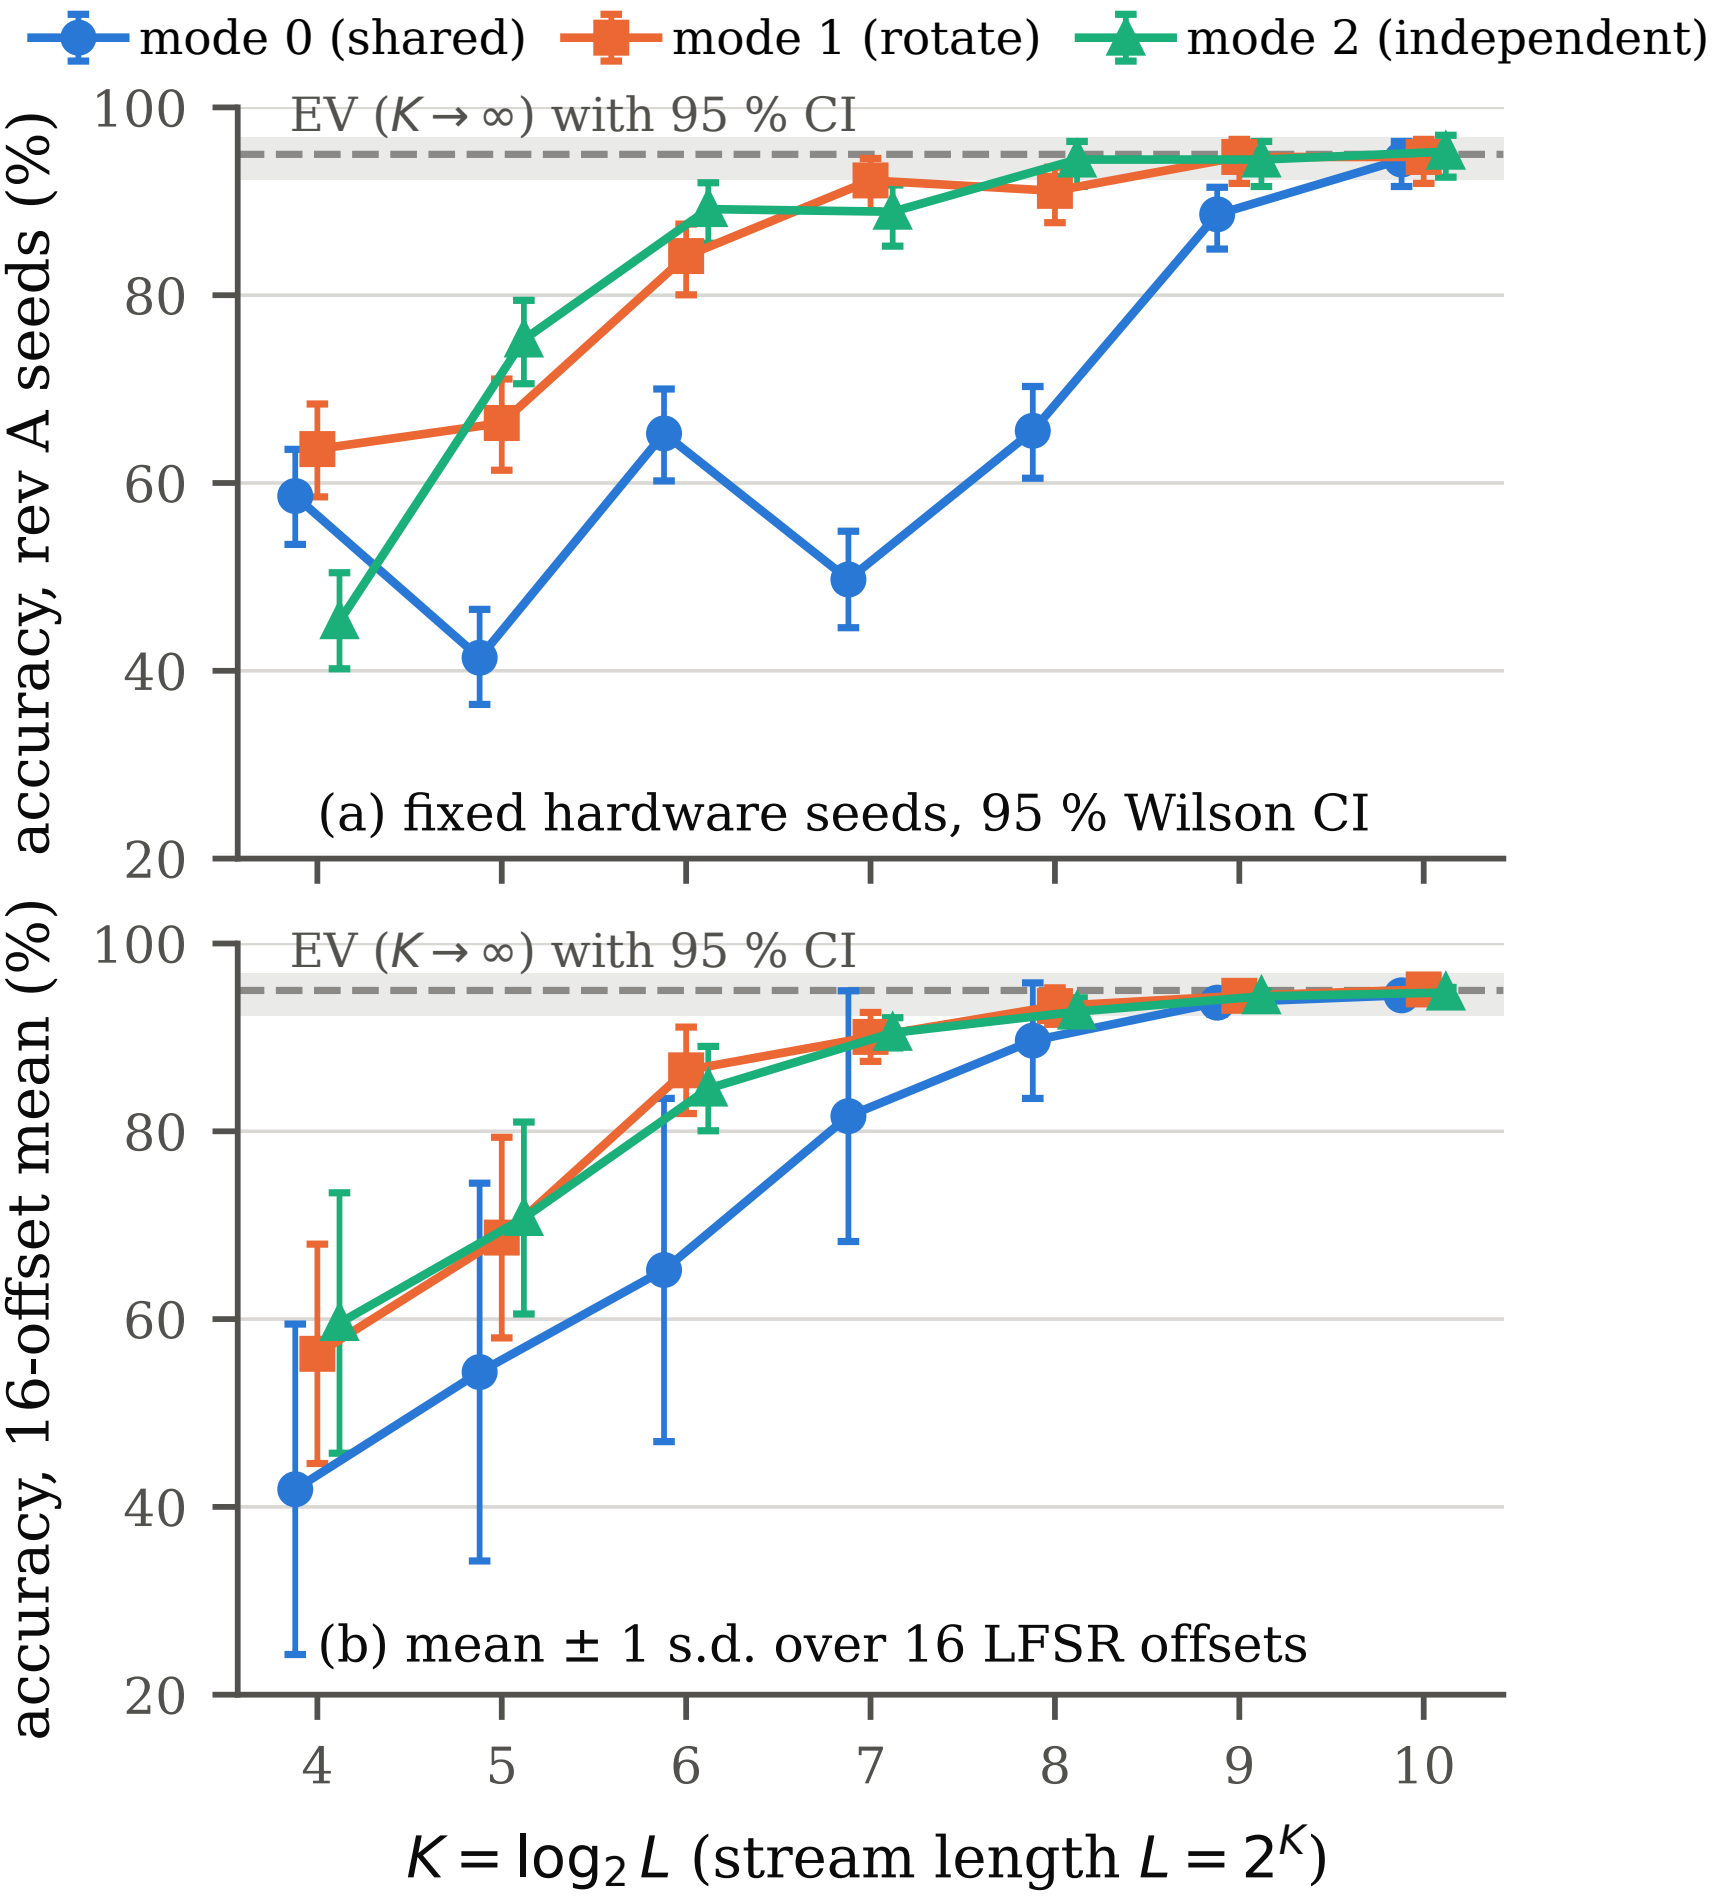
mode 0 (shared)
mode 1 (rotate)
mode 2 (independent)
EV ($K \to \infty$) with 95 % CI
(a) fixed hardware seeds, 95 % Wilson CI
EV ($K \to \infty$) with 95 % CI
(b) mean ± 1 s.d. over 16 LFSR offsets
accuracy, 16-offset mean (%) accuracy, rev A seeds (%)
100
80
60
40
20
4
5
6
7
8
9
10
$K = \log_2 L$ (stream length $L = 2^K$)