Drive Kinematics: Skid Steer & Mecanum (ROS Twist included)

by David Kohanbash *on* June 22, 2016

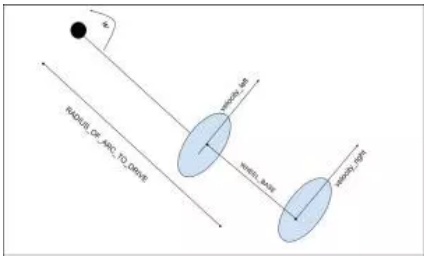

Hi all

I am often in need of the basic kinematic motion equations for skid steer vehicles. I have also recently been working with mecanum wheeled vehicles. The skid steer equations are fairly simple and easy to find, however I will include it in different versions and include a ROS approach. The mecanum wheel equations are harder to find and there are different versions floating around. The first version I found had a lot of trig and mostly worked. The version I present here is easier to intuitively understand and seems to work better (I don't need a random scale factor for this version), I also include a ROS approach for them.

Skid Steer / Differential Drive

Here is some math for 2 and 4 wheel differential drive vehicles, 2 wheels and a castor, or skid steer tracked vehicles.

Arc based commands

The basic skid steer equations are:

velocity_right = w(RADIUS_OF_ARC_TO_DRIVE + WHEEL_BASE/2)
velocity_left = w(RADIUS_OF_ARC_TO_DRIVE – WHEEL_BASE/2)

Where w is the angular rotation, RADIUS_OF_ARC_TO_DRIVE is the arc radius that the robot should drive, and the WHEEL_BASE is the distance from the center of the left wheel to the center of the right wheel (See image above).

This can also be written as:

```
w = (velocity_right-velocity_left)/WHEEL_BASE
```

There are two special cases:

```
IF velocity_right == velocity_left :
THEN the radius of the arc is infinite so the robot will drive straight.

IF velocity_right == -velocity_left :
THEN the radius of the arc is 0, and the robot rotates in place (ie. point turn)
```

Linear & Angular Velocity Commands for ROS

In ROS if using the Twist topic (which is the default for drive messages) (message name is often cmd_vel) you will often set linear_velocity in the linear.x field and angular_velocity in the angular.z field.

```
velocity_left_cmd = (linear_velocity – angular_velocity * WHEEL_BASE / 2.0)/WHEEL_RADIUS;

velocity_right_cmd = (linear_velocity + angular_velocity * WHEEL_BASE / 2.0)/WHEEL_RADIUS;
```

Mecanum Wheel Math

Mecanum wheels from Andymark

In ROS if using the Twist message you will often set the linear.x, linear.y and angular.z fields.
One unrelated note is that if you are operating on uneven terrain then doing mecanum type motions will fail and have a lot of slip. Skid steer type motions will often work better (using the mecanum wheels).

```
WHEEL_SEPARATION_WIDTH = DISTANCE_LEFT_TO_RIGHT_WHEEL / 2

WHEEL_SEPARATION_LENGTH = DISTANCE_FRONT_TO_REAR_WHEEL / 2
```

Forward kinematics

Wheel commands units are in rad/s

Top Posts & Pages

Upcoming Robotics Conferences & Events List
PID Control (with code), Verification, and Scheduling
Kalman Filtering - A Practical Implementation Guide (with code!)
Royal Caribbean Cruise Kosher Food Menu
LIDAR vs RADAR: A Detailed Comparison
chrony with GPS for Time Synchronization - Kicks NTP's A$$
Drive Kinematics: Skid Steer & Mecanum (ROS Twist included)
Cruising on a Cruise Ship on Shabbat (or Shabbos)

Categories

Computing & Networking
Electrical & Electronics
Mechanical
Misc
Research
Robots
Software & Algorithms
Systems & Sensors
Testing
Uncategorized

Upcoming Events

MON **15** JUL 2019 — ***Automated Vehicles 2019 Symposium***

THU **22** AUG 2019 — ***CASE 2019 Conference***

THU **22** — ***MRS 2019 Conference***

```
wheel_front_left = (1/WHEEL_RADIUS) * (linear.x – linear.y –
(WHEEL_SEPARATION_WIDTH + WHEEL_SEPARATION_LENGTH)*angular.z);

wheel_front_right = (1/WHEEL_RADIUS) * (linear.x + linear.y +
(WHEEL_SEPARATION_WIDTH + WHEEL_SEPARATION_LENGTH)*angular.z);

wheel_rear_left = (1/WHEEL_RADIUS) * (linear.x + linear.y –
(WHEEL_SEPARATION_WIDTH + WHEEL_SEPARATION_LENGTH)*angular.z);

wheel_rear_right = (1/WHEEL_RADIUS) * (linear.x – linear.y +
(WHEEL_SEPARATION_WIDTH + WHEEL_SEPARATION_LENGTH)*angular.z);
```

To drive a robot you will probably need to also invert one side since the motors are mounted opposite the other side. For example:

```
wheel_front_right = -1 * wheel_front_right

wheel_rear_right = -1 * wheel_rear_right
```

Also this gives an output in rad/s. If your motor controller is operating with encoder counts as the unit you will need to convert the units.

Inverse Kinematics

```
linear.x = (wheel_front_left + wheel_front_right + wheel_rear_left + wheel_rear_right) *
(WHEEL_RADIUS/4)

linear.y = ( -wheel_front_left + wheel_front_right + wheel_rear_left – wheel_rear_right) *
(WHEEL_RADIUS/4)

angular.z = ( -wheel_front_left + wheel_front_right – wheel_rear_left + wheel_rear_right) *
(WHEEL_RADIUS/(4 * (WHEEL_SEPARATION_WIDTH + WHEEL_SEPARATION_LENGTH)))
```

Source for mecanum wheel math: here. There are other versions of how to compute the wheel velocities but this is the one I like best.

I know this post was terser than most of my posts but I hope this math helps you.

Liked it? Take a second to support David Kohanbash on Patreon!

BECOME A PATRON

Share this:

Facebook LinkedIn Twitter Reddit Email More

Related

AUG 2019

THU **29** AUG 2019 **FSR 2019**

MON **02** SEP 2019 **IEEE SSRR**

See All Events

Drive Selection - Wheels, tracks and more
July 25, 2016
In "Mechanical"



Wheel & Grouser Design
September 29, 2014
In "Mechanical"



Book Review: Mastering ROS for Robotics Programming by Lentin Joseph
March 17, 2016
In "Misc"

Tags: differential, drive, kinematics, mecanum, motion, ROS, skid, steer, twist, wheels

Categories: Software & Algorithms

Comments

Joseph Salmon

June 22, 2016 at 11:20 am

Please keep me informed.

Reply

David Kohanbash

June 22, 2016 at 11:24 am

Informed about what?

Reply

Drive Selection - Wheels, tracks and more - Robots For Roboticists

July 25, 2016 at 11:02 am

[...] the past we have looked at wheel design and the kinematics of skid steer and mecanum wheels. In this post we will take a quick look at different types of mobility types (ie. wheels, tracks, [...]

Reply

Tweets by @DavidKohanbash

David Kohanbash
@DavidKohanbash

Using Hydraulics for Robots: Introduction
robotsforroboticists.com/using-hydrauli...

Using Hydraulics for R...
Hydraulics are someti...
robotsforroboticists.c...

May 3, 2019

David Kohanbash
@DavidKohanbash

Wiring Oriental Motor Series Motors
robotsforroboticists.com/wiring-orienta...

Wiring Oriental Motor ...
Wiring Oriental Motor ...
robotsforroboticists.c...

Dec 20, 2018

David Kohanbash
@DavidKohanbash

From Cherno-bots to Iron Man suits: the development of nuclear waste robotics
power-technology.com/features/clean...
via @Power_OnlineMag

Cleaning up nuclear w...
Cleaning up nuclear w...
power-technology.com

Dec 20, 2018

David Kohanbash
@DavidKohanbash

Deep Dive Into Tesla's Autopilot & Self-Driving Architecture vs Lidar-Based Systems cleantechnica.com/2018/11/04/dee...

Deep Dive Into Tesla's Autopilot & S...
In this article, I'm going to try to tak...
cleantechnica.com

Nov 4, 2018

Embed View on Twitter

Kevin Mulligan

October 12, 2016 at 4:57 pm

Leave a Reply

Enter your comment here...

RSS Feeds

RSS - Posts

Links

eevblog
hizook
Robots Pod Casts
Robotics Online
Society of Robots

The information contained in this website is for general information purposes only. The information is provided freely by Robots for Roboticists and while we endeavor to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the website or the information, products, services, or related graphics contained on the website for any purpose. Any

reliance you place on such information is therefore strictly at your own risk.