Lesson 21 Relay

Introduction

In this lesson, you will learn how to use a relay.

Hardware Required

✓   1 * RexQualis Mega 2560

✓   1 * Breadboard

✓   1 * Breadboard Power Supply Module

✓   1 * Fan blade and 3-6v dc motor

✓   1 * L293D IC

✓   1 * 5v Relay

✓   1 * 9V 1A   Adapter

✓   8 * M-M Jumper Wire

Principle

Relay

Relays are switches that open and close circuits electromechanically or electronically. Relays control one electrical circuit by opening and closing contacts in another circuit. As relay diagrams show, when a relay contact is normally open (NO), there is an open contact when the relay is not energized. When a relay contact is Normally Closed (NC), there is a closed contact when the relay is not energized. In either case, applying electrical current to the contacts will change their state.

Relays are generally used to switch smaller currents in a control circuit and do not usually control power consuming devices except for small motors and

Solenoids that draw low amps. Nonetheless, relays can "control" larger voltages and amperes by having an amplifying effect because a small voltage applied to a relays coil can result in a large voltage being switched by the contacts.

Protective relays can prevent equipment damage by detecting electrical abnormalities, including overcurrent, undercurrent, overloads and reverse currents. In addition, relays are also widely used to switch starting coils, heating elements, pilot lights and audible alarms.
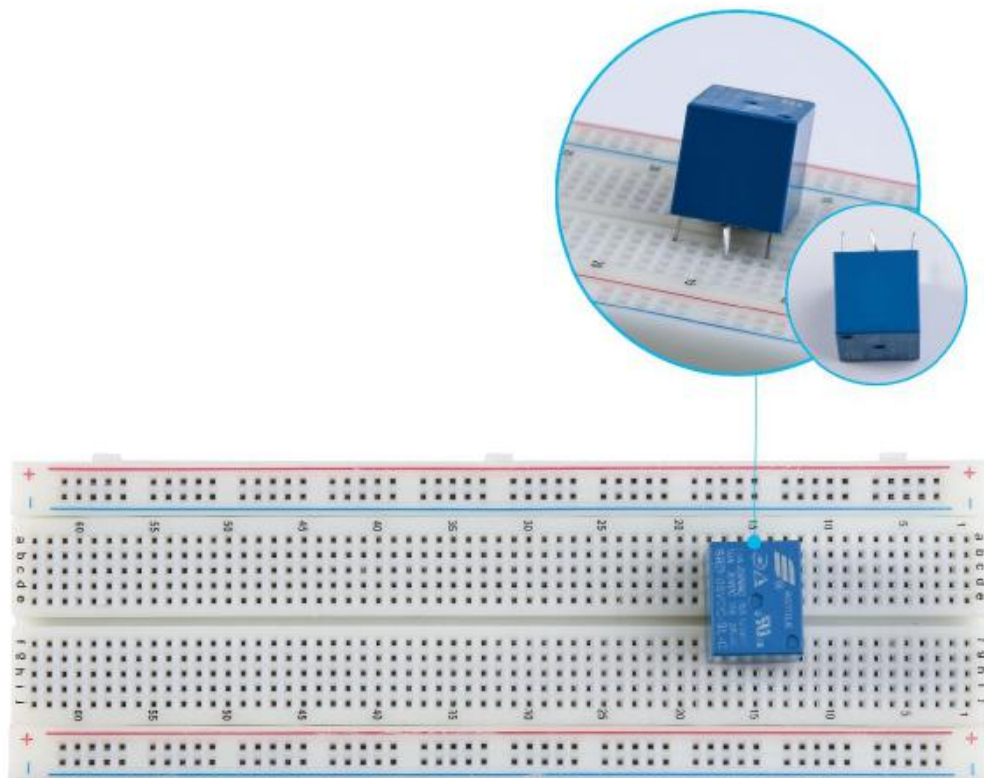
Code interpretation

#define E1 5 // Enable Pin for motor

#define I1 3 // Control pin 1 for motor

#define I2 4 // Control pin 2 for motor

```
int i;

void setup() {

  //---set pin direction

  pinMode(E1,OUTPUT);

  pinMode(I1,OUTPUT);

  pinMode(I2,OUTPUT);

  Serial.begin(9600);

}

void loop() {

//---back and forth example

    Serial.println("One way, then reverse");

    digitalWrite(E1,HIGH); // enable on

    for (i=0;i<5;i++) {

    digitalWrite(I1,HIGH); //one way

    digitalWrite(I2,LOW);

    delay(1000);

    digitalWrite(I1,LOW); //reverse

    digitalWrite(I2,HIGH);

    delay(1000);

  }

  digitalWrite(E1,LOW); // disable

    delay(3000);
```
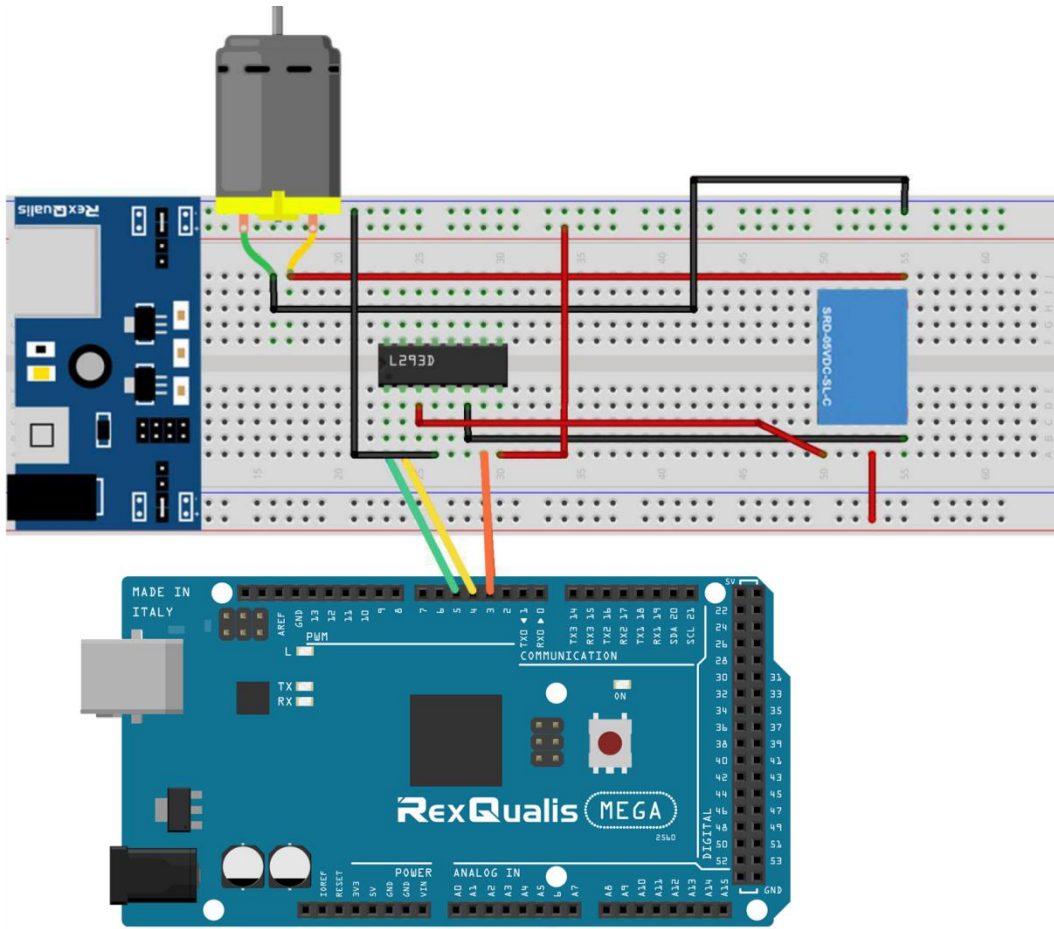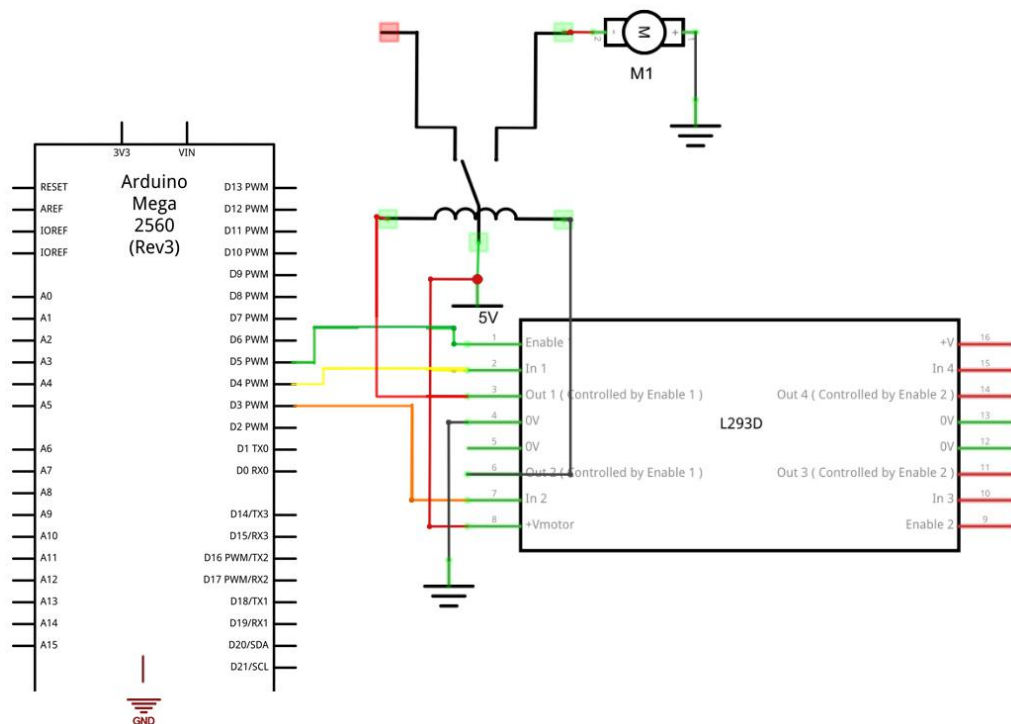
```
    for (i=0;i<5;i++) {

digitalWrite(I1,HIGH); //one way

digitalWrite(I2,LOW);

delay(1000);

digitalWrite(I1,LOW);   //reverse

digitalWrite(I2,HIGH);

delay(1000);

  }

digitalWrite(E1,LOW); // disable

delay(3000);

}
```
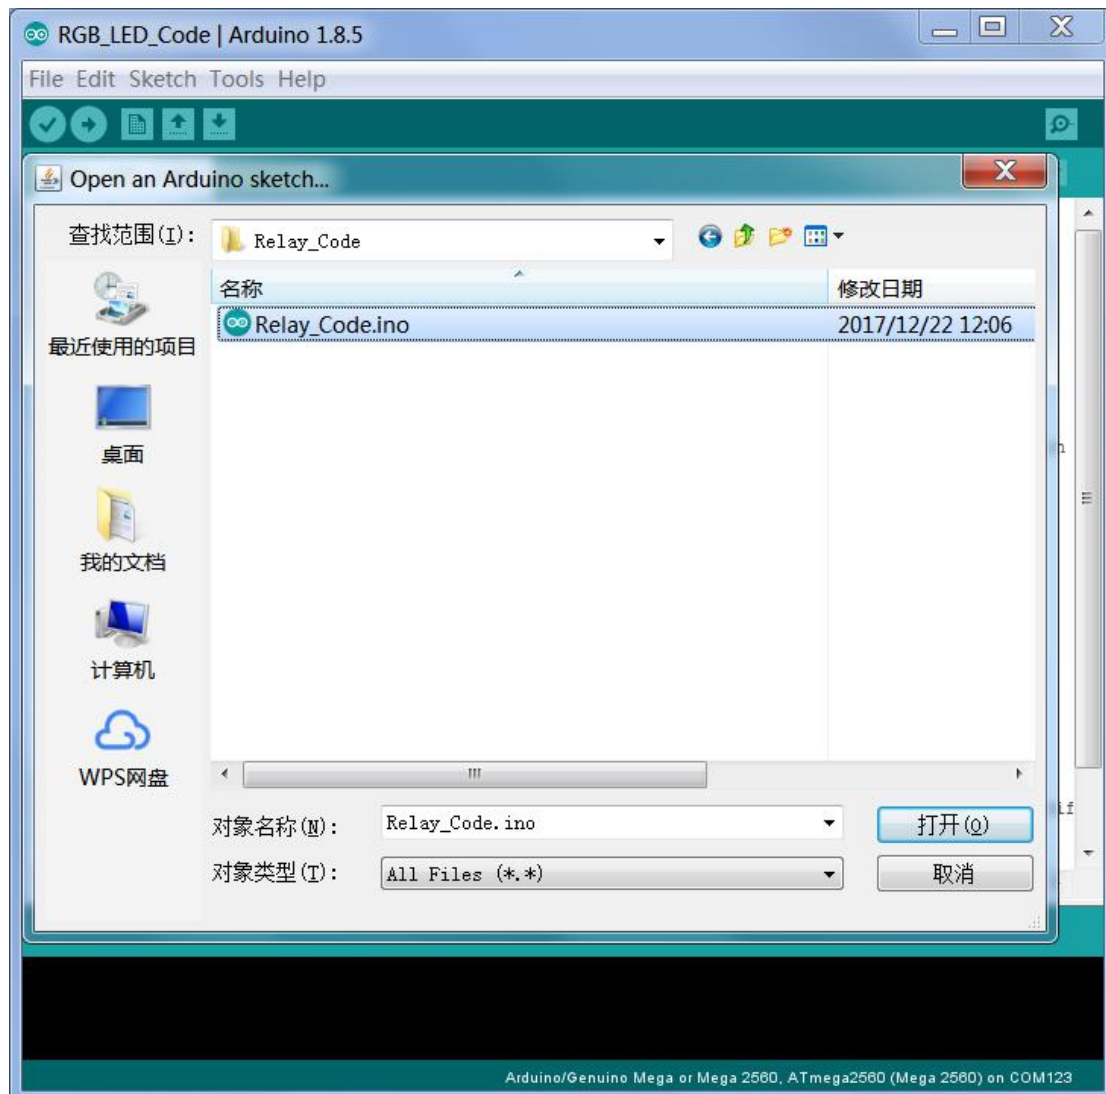
Experimental Procedures

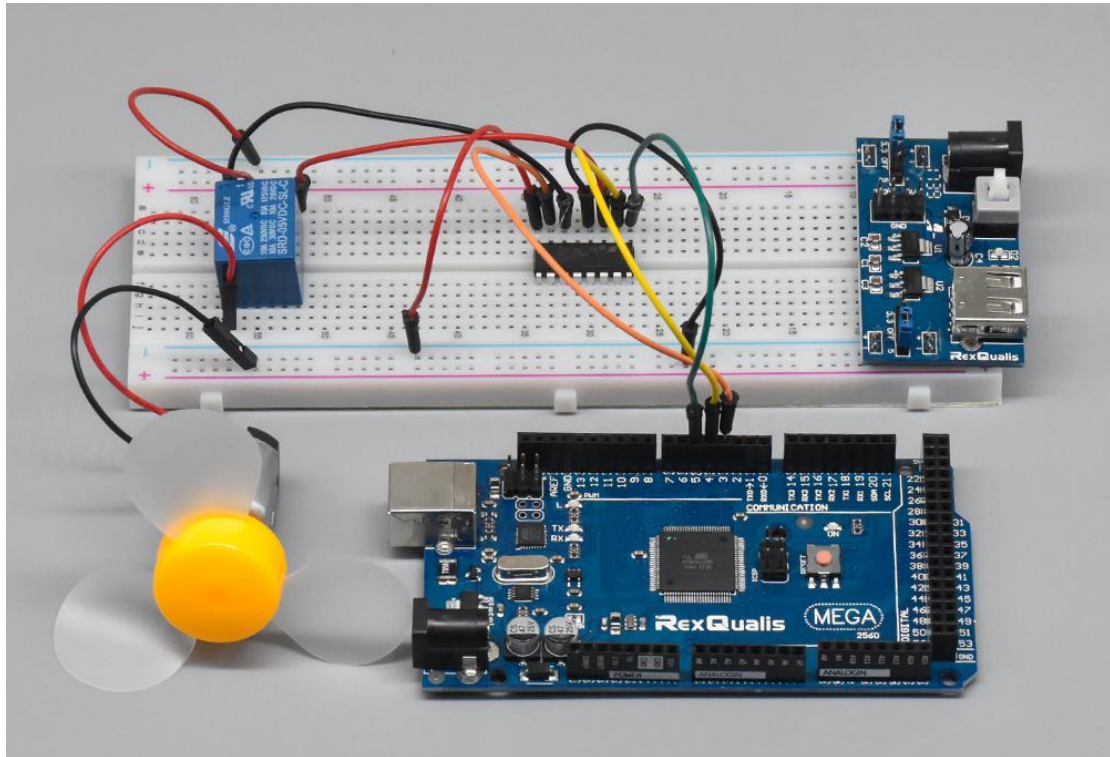## Step 1:Build the circui

Schematic Diagram

Step 2:Open the code:Relay_Code

Step 3:Attach Arduino Mega 2560 board to your computer via USB cable and check that the 'Board Type' and 'Serial Port' are set correctly.

Step 4:Upload the code to the RexQualis Mega 2560 board.

You can see the video of the experiment results on YouTube:

https://youtu.be/izk85YivoIA

If it isn't working, make sure you have assembled the circuit correctly, verified and uploaded the code to your board.For how to upload the code and install the library, check Lesson 0 Preface.