Lesson 2 RGB LED

Introduction

In this lesson, you will learn what RGB LED is and how to use it with the RexQualis Mega 2560 Board.

Hardware Required

- ✓ 1 * RexQualis Mega 2560

- ✓ 1 * Breadboard

- ✓ 4 * M-M Jumper Wires

- ✓ 1 * RGB LED

- ✓ 3 * 220 ohm Resistorr

Principle

RGB

The RGB LED can emit different colors by mixing the 3 basic colors red, green and blue. So it actually consists of 3 separate LEDs red, green and blue packed in a single case. That's why it has 4 leads, one lead for each of the 3 colors and one common cathode or anode depending of the RGB LED type. In this tutorial I will be using a common cathode one.
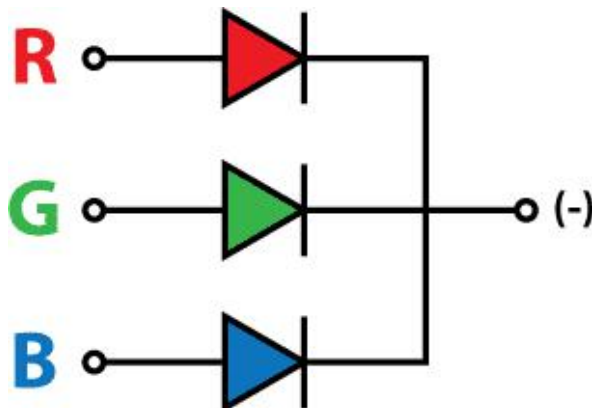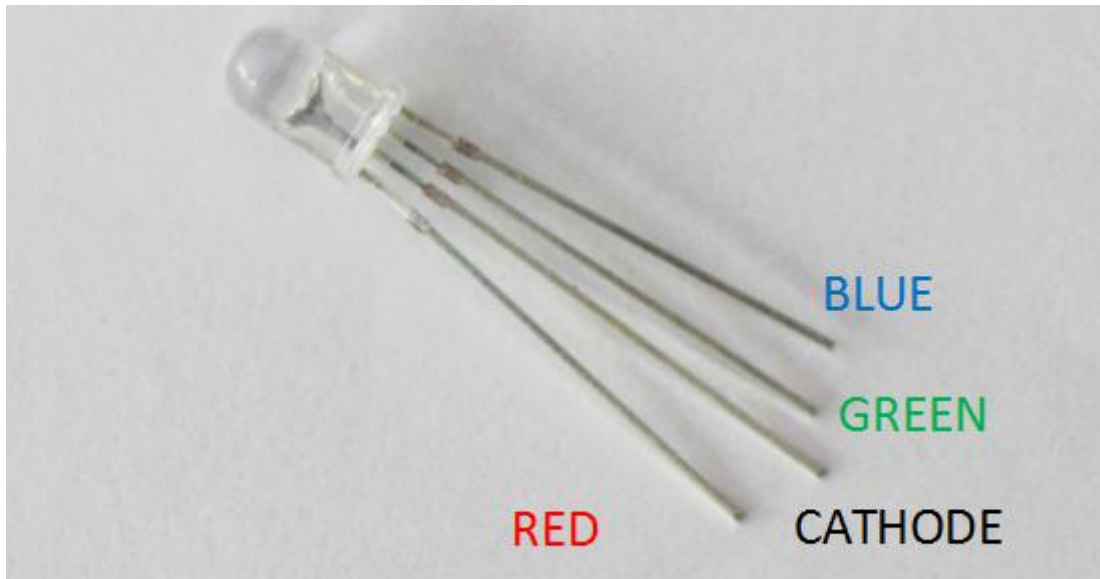
We will use PWM for simulating analog output which will provide different voltage levels to the LEDs so we can get the desired colors.
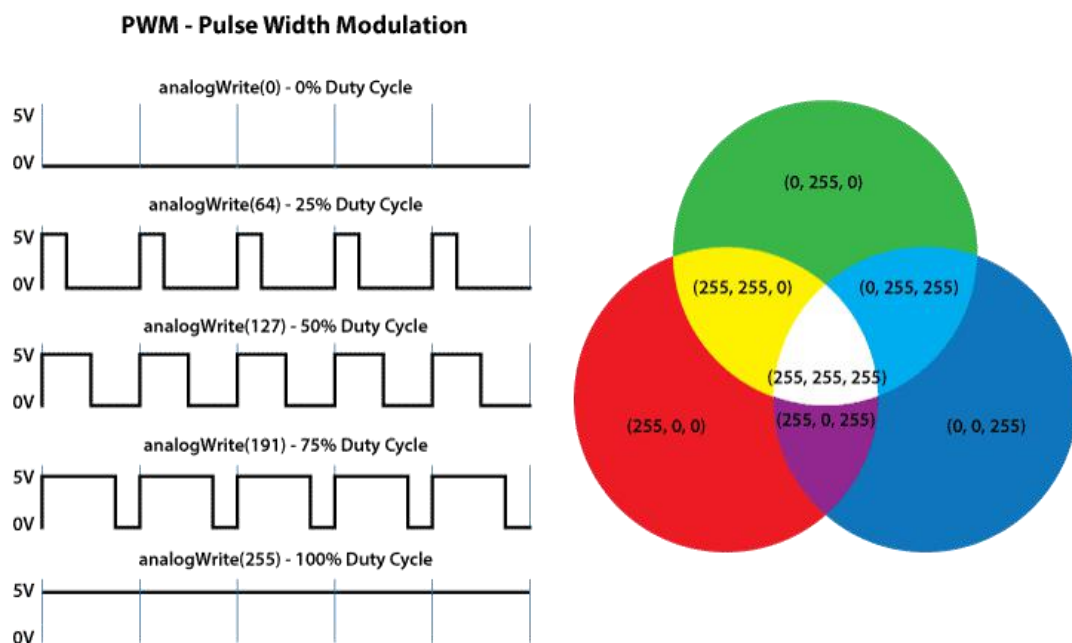
Code interpretation

int redPin= 3;**// Red Color to pin 3 on the Arduino**

int greenPin = 5;**//Green Color to pin 5 on the Arduino**

int bluePin = 6;**//Blue Color to pin 6 on the Arduino**

```
void setup() {

  pinMode(redPin, OUTPUT);

  pinMode(greenPin, OUTPUT);

  pinMode(bluePin, OUTPUT);

}
```

//These arguments represents the brightness of the LEDs or the duty cycle of the PWM signal which is created using the analogWrite() function. These values can vary from 0 to 255 which represents 100 % duty cycle of the PWM signal or maximum LED brightness.

//we will make our program which will change the color of the LED each a second

```
void loop() {

  setColor(255, 0, 0); // Red Color

  delay(1000);

  setColor(0, 255, 0); // Green Color

  delay(1000);

  setColor(0, 0, 255); // Blue Color

  delay(1000);

  setColor(255, 255, 255); // White Color

  delay(1000);

  setColor(180, 0, 255); // Purple Color
```
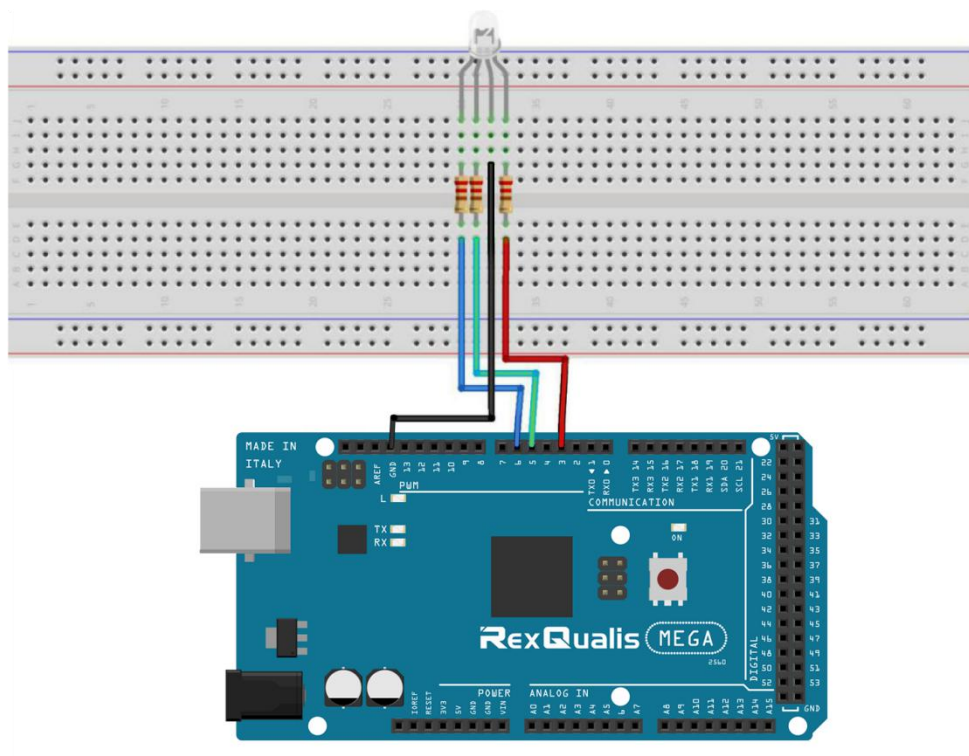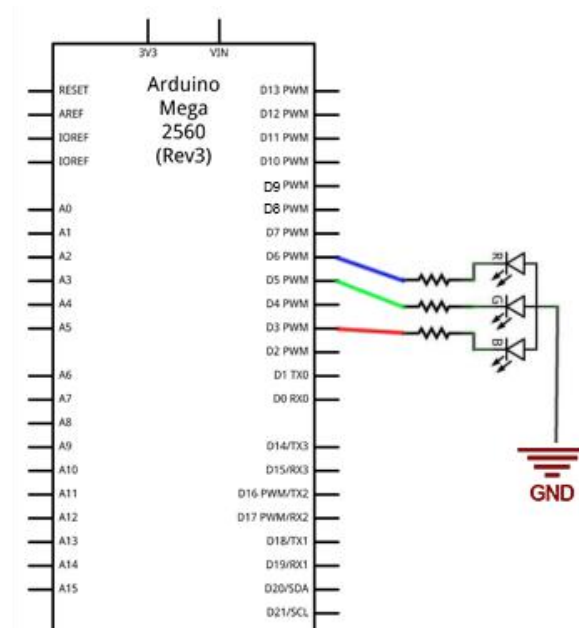
delay(1000);

}

```
void setColor(int redValue, int greenValue, int blueValue) {

    analogWrite(redPin, redValue);

    analogWrite(greenPin, greenValue);

    analogWrite(bluePin, blueValue);

}
```
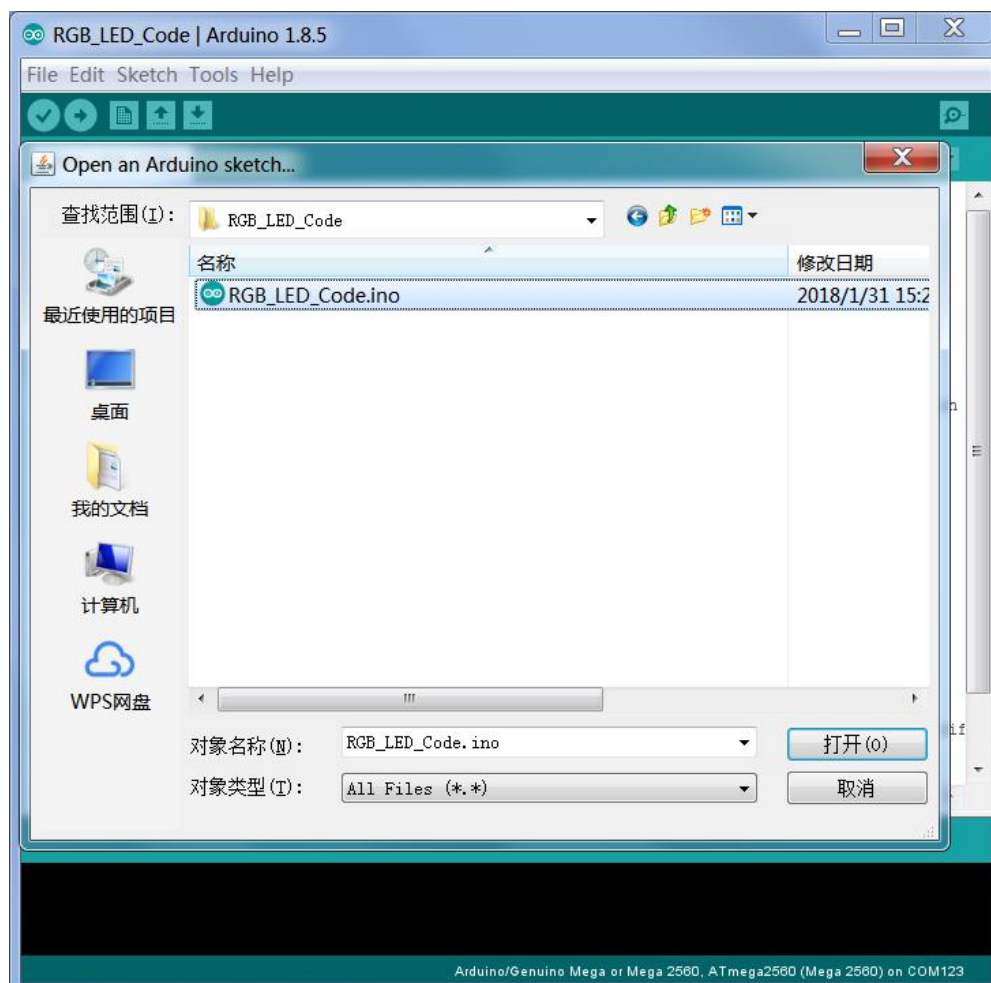
Experimental Procedures
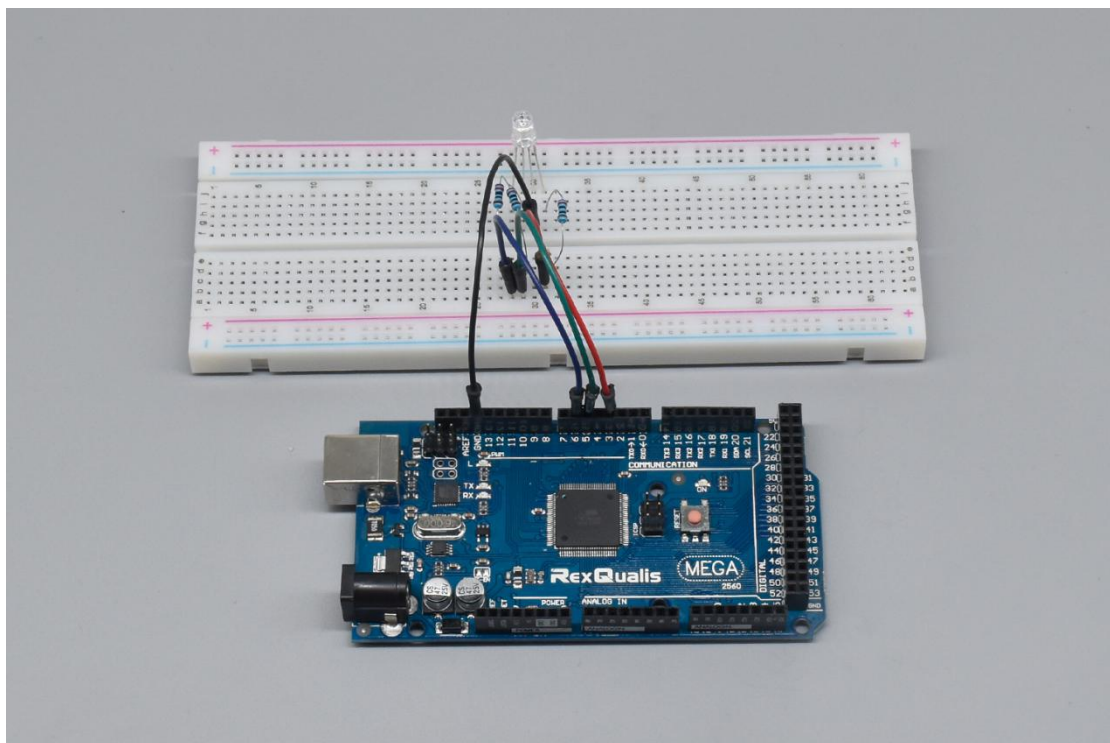
Step 1:Build the circuit

Schematic Diagram

Step 2:Open the code:RGB_LED_Code

Step 3:Attach Arduino Mega 2560 board to your computer via USB cable and check that the 'Board Type' and 'Serial Port' are set correctly.

Step 4:Upload the code to the RexQualis Mega 2560 board.

Now, You should now see that the RGBLED flash flashes red, green, blue, white, and purple in turn.

You can see the video of the experiment results on YouTube:

https://youtu.be/GpgQcRI76ac

If it isn't working, make sure you have assembled the circuit correctly, verified and uploaded the code to your board.For how to upload the code and install the library, check Lesson 0 Preface.