

| S.No. | TECHNICAL SPECIFICATIONS                     |                                                     | COMPLIANCE<br>YES/NO |
|-------|----------------------------------------------|-----------------------------------------------------|----------------------|
| 1     | <b>DESKTOP COMPUTER</b>                      | <b>MAKE &amp; MODEL</b>                             |                      |
|       | Processor Make                               | Intel                                               |                      |
|       | Processor Generation                         | 13                                                  |                      |
|       | Number of Cores per Processor                | 16                                                  |                      |
|       | Processor Base Frequency (GHz)               | 2.1                                                 |                      |
|       | Processor Description                        | Intel Core i7                                       |                      |
|       | Processor Number                             | Intel Core i7 13700                                 |                      |
|       | Out of Band Management                       | NA                                                  |                      |
|       | Cache (MB)                                   | 30                                                  |                      |
|       | Chipset Series                               | Intel H Series                                      |                      |
|       | Chipset Number                               | Intel H610                                          |                      |
|       | Graphics Type                                | Integrated                                          |                      |
|       | Operating System (Factory Pre-Loaded)        | Windows 11 Professional DVD                         |                      |
|       | OS Certification                             | CD/DVD                                              |                      |
|       | Type of RAM                                  | DDR4                                                |                      |
|       | RAM Size (GB)                                | 16                                                  |                      |
|       | RAM Speed (MHz)                              | 3200                                                |                      |
|       | Total Numbers of DIMM Slots Available        | 2                                                   |                      |
|       | Number of DIMM Slots populated               | 1                                                   |                      |
|       | RAM Expandability up to                      | 64                                                  |                      |
|       | Type of Drives used to populate              | SSD                                                 |                      |
|       | Number of Internal Bays populated with SSD   | 1                                                   |                      |
|       | Total SSD Capacity (GB)                      | 1000                                                |                      |
|       | Cabinet Form Factor                          | Tower (13.1 to 26 Litres)                           |                      |
|       | Cabinet Volume (Litres)                      | 26                                                  |                      |
|       | External Bays (Number)                       | 1                                                   |                      |
|       | Optical Drive                                | N/A                                                 |                      |
|       | Number of Ethernet Ports                     | 1                                                   |                      |
|       | Type of Ethernet Ports                       | Integrated Gigabit Port                             |                      |
|       | Monitor Technology                           | IPS                                                 |                      |
|       | LED Backlit Monitor Size (INCHES)            | 23.8"                                               |                      |
|       | Monitor Resolution (PIXELS)                  | 1920x1080                                           |                      |
|       | TCO Certification for Monitor                | 8                                                   |                      |
|       | Power Supply Capacity (Watt)                 | 250                                                 |                      |
|       | Mouse Connectivity                           | Wired Optical Scroll                                |                      |
|       | Keyboard Connectivity                        | Wired Standard                                      |                      |
|       | On Site OEM Warranty (Year)                  | 3                                                   |                      |
| 2     | <b>INKTANK PRINTER</b>                       | <b>MAKE &amp; MODEL</b>                             |                      |
|       | Core Function                                | Print Only                                          |                      |
|       | Print Technology                             | Inkjet                                              |                      |
|       | Cartridge Technology                         | Ink Cartridge/Bottle                                |                      |
|       | Type of Printing                             | Colour                                              |                      |
|       | Paper Size                                   | A4                                                  |                      |
|       | RAM Size (in MB)                             | 64                                                  |                      |
|       | Operating System Compatibility               | Windows 10 and Above, Linux, Mac OS, Windows Server |                      |
|       | Min Print Speed/Minute A4 -Mono (in PPM)     | 11 to 15                                            |                      |
|       | Min Print Speed/Minute A4 -Colour (in PPM)   | 1 to 5                                              |                      |
|       | Auto Duplexing Printing (2-Sided Feature)    | No                                                  |                      |
|       | Number of Main Paper Trays                   | 1                                                   |                      |
|       | Total Paper Tray Capacity (Number) at 75 GSM | 51 to 100                                           |                      |
|       | Connectivity                                 | USB Port, Wi-Fi                                     |                      |
|       | Minimum Yield of the Cartridge/Ink/Toner     | 4000                                                |                      |









|          |                                              |                                                            |  |
|----------|----------------------------------------------|------------------------------------------------------------|--|
| <b>5</b> | <b>ALL IN ONE PC COREI5</b>                  | <b>MAKE &amp; MODEL</b>                                    |  |
|          | Processor Make                               | Intel                                                      |  |
|          | Processor Generation                         | 12                                                         |  |
|          | Processor Description                        | Intel Core i7 12400                                        |  |
|          | Chipset Series                               | Intel H Series                                             |  |
|          | Chipset Number                               | Intel H610                                                 |  |
|          | Expansion Slots (M Dot 2)                    | 1                                                          |  |
|          | Graphics Type                                | Integrated                                                 |  |
|          | Graphic Card Description                     | UHD Graphics 770                                           |  |
|          | Operating System (Factory Pre-Loaded)        | Windows 11 Professional                                    |  |
|          | Recovery Image Media                         | CD/DVD                                                     |  |
|          | Type of RAM                                  | DDR4                                                       |  |
|          | RAM Size (GB)                                | 16                                                         |  |
|          | RAM Speed (MHz)                              | 3200                                                       |  |
|          | Total Numbers of DIMM Slots Available        | 2                                                          |  |
|          | RAM Expandability up to                      | 64                                                         |  |
|          | Number of Internal Bays populated with SSD   | 1                                                          |  |
|          | Total SSD Capacity (GB)                      | 512                                                        |  |
|          | Optical Drive                                | No                                                         |  |
|          | Internal Speaker                             | Yes                                                        |  |
|          | Type of Ethernet Ports                       | Intel 10/100/1000                                          |  |
|          | Number of USB Version 2 Point 0 Ports        | 2                                                          |  |
|          | Number of USB Version 3 point 1, Gen 2 Ports | 3                                                          |  |
|          | Number of HDMI Ports                         | 2                                                          |  |
|          | Monitor Technology                           | IPS                                                        |  |
|          | LED Backlit Monitor Size (INCHES)            | 23.8                                                       |  |
|          | Monitor Resolution (PIXELS)                  | 1920x1080                                                  |  |
|          | Power Supply Capacity (Watt)                 | 180                                                        |  |
|          | Mouse Connectivity                           | Wired                                                      |  |
|          | Keyboard Connectivity                        | Wired                                                      |  |
|          | On Site OEM Warranty (Year)                  | 3                                                          |  |
| <b>6</b> | <b>BIOMETRIC ACCESS CONTROL</b>              | <b>MAKE &amp; MODEL</b>                                    |  |
|          | Biometric Access Control Hardware            | Device with in built Controller                            |  |
|          | Type of Biometric Device                     | Finger Print Scanning, PIN                                 |  |
|          | Biometric Access Control Software            | Web Based                                                  |  |
|          | Types of Biometric Credentials               | Finger + Pin                                               |  |
|          | Max Fingerprint Capacity (No)                | 100                                                        |  |
|          | Screen Type                                  | Touch                                                      |  |
|          | Microcontroller                              | 32 bit                                                     |  |
|          | RAM (MB)                                     | 64                                                         |  |
|          | USB Ports for Communication                  | Yes                                                        |  |
|          | Operating System Support                     | Windows 64-bit                                             |  |
|          | Database Server Support                      | MS SQL 2012 Standard                                       |  |
|          | Customized Report Generation                 | Yes                                                        |  |
|          | Power Source Requirement                     | PoE                                                        |  |
|          | Warranty (Years)                             | 1                                                          |  |
| <b>7</b> | <b>MULTIFUNCTIONAL PRINTER A3</b>            | <b>MAKE &amp; MODEL</b>                                    |  |
|          | Printing Technology                          | Laser                                                      |  |
|          | Cartridge Technology                         | Separate Drum and Toner                                    |  |
|          | Type of Printing                             | Monochrome (Black)                                         |  |
|          | Operating System Compatibility               | Microsoft Windows, Linux, Mac OS, Microsoft Windows Server |  |
|          | RAM Size (MB)                                | 512                                                        |  |
|          | Min Print Speed/Minute A4 -Mono (in PPM)     | 20 to 24                                                   |  |
|          | Auto Duplexing Printing                      | Yes                                                        |  |





|          |                                              |                             |  |
|----------|----------------------------------------------|-----------------------------|--|
|          | Reduction and Enlargement Feature            | Yes                         |  |
|          | Maximum Scan Area (Platen/ADF)               | A3, A4 and Legal            |  |
|          | A4 Scan Speed - Colour @ 200 x 200 dpi       | 31 to 40 (Image Per Minute) |  |
|          | Scan To Functions                            | Folder,Email                |  |
|          | Original Document Feeder Type                | Platen                      |  |
|          | Number of Main Paper Tray                    | 1                           |  |
|          | Total Main Paper Tray Capacity               | 201 to 300                  |  |
|          | Bypass Tray Facility                         | Yes                         |  |
|          | Bypass Tray Capacity at 75 GSM               | 100 to 149                  |  |
|          | Connectivity                                 | USB Port,Ethernet Port      |  |
|          | Duty Cycle (Number of Prints/Month)          | 50,000 to 79,999            |  |
|          | On Site Warranty (in Year)                   | 1                           |  |
| <b>8</b> | <b>INK TANK PRINTER COLOUR</b>               | <b>MAKE &amp; MODEL</b>     |  |
|          | Print Technology                             | Inkjet                      |  |
|          | Type of Machine                              | Multifunction Machine       |  |
|          | Type of Printing                             | Colour                      |  |
|          | Cartridge Technology                         | Ink                         |  |
|          | Platen/Flatbed Size                          | A4                          |  |
|          | Paper Size (Original/Image)                  | A4/A4                       |  |
|          | RAM size (MB)                                | 512                         |  |
|          | Minimum Speed per Minute A4 Size-Mono        | 16                          |  |
|          | Minimum Speed per Minute A4 Size-Colour      | 7                           |  |
|          | Scanning Feature Availability                | Yes                         |  |
|          | Duplexing Feature Availability               | Yes                         |  |
|          | Networking Feature Availability              | Yes                         |  |
|          | If yes, Type of Network Interface            | Ethernet 10/100             |  |
|          | Original Document Feeder Type                | ADF                         |  |
|          | Feeder Capacity (Number)                     | 35                          |  |
|          | Number of Main Paper Tray                    | 1                           |  |
|          | Each Main Paper Tray Capacity (Number)       | 250                         |  |
|          | Bypass Facility                              | Yes                         |  |
|          | Duty Cycle (No of Prints/month)              | 30000                       |  |
|          | On Site OEM Warranty (Year)                  | 1                           |  |
| <b>9</b> | <b>ONLINE UPS 2KVA</b>                       | <b>MAKE &amp; MODEL</b>     |  |
|          | Rating in KVA                                | 2.0 KVA                     |  |
|          | Switching Technology                         | IGBT-PWM                    |  |
|          | Input Voltage                                | AC 160V - 260V 50Hz         |  |
|          | Output Voltage                               | AC 230V +/-1% 50 Hz         |  |
|          | Warranty for UPS (Years)                     | 2                           |  |
|          | Battery/Backup Bank Provided with Online UPS | With Battery                |  |
|          | Backup time (Minutes)                        | 30 Minutes                  |  |
|          | Battery capacity (Ah)                        | 26                          |  |
|          | Number of Batteries                          | 6                           |  |
|          | Warranty for battery (Years)                 | 2                           |  |
|          | Installation and Commissioning               | Provided                    |  |
|          | Overall Efficiency (%)                       | 92%                         |  |
|          | Power Factor Load Supported                  | 0.8 or better               |  |
|          | Overload limit                               | 50% Overload for 3 seconds  |  |
|          | Total Harmonic Distortion(THD) (%)           | 3% Maximum @ 100% Load      |  |
|          | Accessories                                  | Rack for Battery            |  |
|          | Additional Features                          | Pure Sinewave AC Output     |  |
|          | Type of Design / Construction                | Floor Standing              |  |
|          | Degree of Protection                         | IP21                        |  |
|          | DC Bus Voltage (In Volts)                    | 72                          |  |
|          | Other Requirements                           | ROHS compliance             |  |





| 10 | MEDIA CONVERTER                          | MAKE & MODEL                     |  |
|----|------------------------------------------|----------------------------------|--|
|    | Data Rate                                | 10/100/1000M (Copper)            |  |
|    | Forwarding Mode                          | Store and Forward                |  |
|    | Supports STP to form a redundant network | Yes                              |  |
|    | Speed, Mbps                              | 1000                             |  |
|    | Number of Copper Ports                   | 1                                |  |
|    | Mounting Type                            | Panel Mounted                    |  |
|    | Number of Fiber Ports                    | 2                                |  |
|    | Fiber Port Wavelength                    | 1310 nanometer                   |  |
|    | Copper Port Connector                    | RJ45                             |  |
|    | Packet Size                              | 1518 byte                        |  |
|    | Sensor                                   | Full Duplex Auto Sensed          |  |
|    | Maximum Transmission Distance            | 20 kilometer                     |  |
|    | MTBF                                     | >=1000000 hour                   |  |
|    | Mode                                     | Single Mode                      |  |
|    | Fiber Port Distance                      | 20 kilometer                     |  |
|    | Copper Port Distance                     | 100 meter                        |  |
|    | Inclusion                                | Desktop, Chassis                 |  |
|    | Power Consumption                        | 2 Watt                           |  |
|    | Flow Control                             | Full Duplex: Flow Control        |  |
|    | Fiber Port Connector                     | SC                               |  |
|    | Power Supply                             | 100 to 240 VAC                   |  |
|    | Warranty                                 | 2 year                           |  |
| 11 | UTP CABLE CAT6                           | MAKE & MODEL                     |  |
|    | Conductor                                | 23 AWG Solid bare Copper         |  |
|    | Description of store                     | Cat-6 UTP Ethernet cable         |  |
|    | No. of pair (in Nos.)                    | 4                                |  |
|    | Insulation                               | Polyethylene                     |  |
|    | Cable Diameter                           | 6.1 mm Nominal                   |  |
|    | Standard length                          | 305 m Length with spool          |  |
|    | Color code                               | White-Brown (for Pair No. 4)     |  |
|    | Characteristic Impedance                 | 100+/-15 ohm                     |  |
|    | Conductor resistance                     | <=9.38 ohm/100m                  |  |
|    | Insulation resistance (in M.Ohm)         | ≥ 100                            |  |
|    | Mutual Capacitance                       | < 5.6nF/100 m                    |  |
|    | Resistance unbalance                     | 5% Max                           |  |
|    | Capacitance unbalance                    | 330 pF/100m                      |  |
|    | Delay Skew                               | <45nS                            |  |
|    | NVP(%)                                   | ≥ 69%                            |  |
|    | Operating Voltage                        | 72 V                             |  |
|    | Dielectric Strength                      | 1.0KV dc or 0.75 KV ac for 1 Min |  |
|    | Bending Radius                           | <25.4mm -20 deg.C +/-1 deg.C     |  |
|    | Pulling Force                            | ≥ 11.5 Kg                        |  |
| 12 | RJ45 CONNECTOR                           | MAKE & MODEL                     |  |
|    | Nos of Pins in Input Plug (Nos)          | 8                                |  |
|    | Power on indication                      | No                               |  |
|    | Material of Socket                       | PLASTIC                          |  |
| 13 | VGA TO HDMI CONVERTER                    | MAKE & MODEL                     |  |
|    | Resolution support                       | Up to 4K                         |  |
|    | Colour                                   | Black                            |  |
|    | Input Connection                         | VGA                              |  |
|    | Output Connection                        | HDMI                             |  |
|    | HDMI resolution                          | 1080p @ 50 / 60Hz                |  |
|    | HDMI Compatibility                       | HDMI1.4                          |  |
|    | Data transfer rate, Gbps                 | 2.97                             |  |





|           |                                        |                                                                                                                |  |
|-----------|----------------------------------------|----------------------------------------------------------------------------------------------------------------|--|
|           | Power consumption                      | 4 Watt                                                                                                         |  |
|           | Warranty                               | 1 year                                                                                                         |  |
| <b>14</b> | <b>HDMI TO VGA CONVERTER</b>           | <b>MAKE &amp; MODEL</b>                                                                                        |  |
|           | Resolution support                     | Up to 4K                                                                                                       |  |
|           | Colour                                 | Black                                                                                                          |  |
|           | Input Connection                       | HDMI                                                                                                           |  |
|           | Output Connection                      | VGA                                                                                                            |  |
|           | VGA resolution                         | 1080p @ 50 / 60Hz                                                                                              |  |
|           | Data transfer rate, Gbps               | 2.97                                                                                                           |  |
|           | Warranty                               | 1 year                                                                                                         |  |
| <b>15</b> | <b>WIRELESS KEYBOARD &amp; MOUSE</b>   | <b>MAKE &amp; MODEL</b>                                                                                        |  |
|           | Keyboard Type                          | Standard keyboard                                                                                              |  |
|           | Mouse Type                             | Optical Movement                                                                                               |  |
|           | Keyboard Connectivity                  | Wireless                                                                                                       |  |
|           | Mouse Connectivity                     | Wireless                                                                                                       |  |
|           | Interface port                         | USB 2.0                                                                                                        |  |
|           | Number of keys on keyboard (Nos)       | 104                                                                                                            |  |
|           | Number of buttons in mouse (Nos)       | 3                                                                                                              |  |
|           | Mouse DPI (dpi)                        | 1000                                                                                                           |  |
|           | IP rating for keyboard                 | 600                                                                                                            |  |
|           | Power source for wireless keyboard     | Battery                                                                                                        |  |
|           | If Battery, type of battery            | 3 AA BATTERY'S                                                                                                 |  |
|           | Power source for wireless Mouse        | BATTERY                                                                                                        |  |
|           | Life Keyboard (Million key strokes)    | 200                                                                                                            |  |
|           | Warranty(Years)                        | 1                                                                                                              |  |
| <b>16</b> | <b>EXTERNAL DVD WRITER</b>             | <b>MAKE &amp; MODEL</b>                                                                                        |  |
|           | Type of DVD writer                     | External                                                                                                       |  |
|           | Interface                              | USB 2.0                                                                                                        |  |
|           | Buffer Memory (MB)                     | 0.75 megabyte                                                                                                  |  |
|           | Compatible disc type                   | CD/DVD                                                                                                         |  |
|           | M-disc Support                         | Available                                                                                                      |  |
|           | Read Speed                             | DVD-ROM 8X,CD-ROM 24X                                                                                          |  |
|           | Accessories to be supplied             | USB cable                                                                                                      |  |
|           | Write Speed                            | 24x                                                                                                            |  |
|           | Compatible OS                          | Windows,Linux                                                                                                  |  |
|           | Warranty (in Year)                     | 1                                                                                                              |  |
| <b>17</b> | <b>L2 MANAGEABLE SWITCH 8 PORT</b>     | <b>MAKE &amp; MODEL</b>                                                                                        |  |
|           | Type of Switch                         | Web Managed                                                                                                    |  |
|           | Technology                             | Non PoE                                                                                                        |  |
|           | Number of 1G Copper Ports              | 8                                                                                                              |  |
|           | Number of 1 G SFP Port (Uplink)        | 2                                                                                                              |  |
|           | Switching Capacity-Non Blocking (Gbps) | 20                                                                                                             |  |
|           | Throughput (MPPS)                      | 14.88                                                                                                          |  |
|           | Operating System                       | Available                                                                                                      |  |
|           | Basic Layer-3 Protocol                 | IPv6 Neighbor Discovery , 124 IPv4 static route entries • 50 IPv6 static route entries , 4 iINTERFACES         |  |
|           | Security Feature                       | 802.1X Authentication ,ARP Inspection,Traffic segmentation • SSH v2 • TLS v.1.2 • DoS attack prevention        |  |
|           | Management Protocol                    | ICMP v6 • IPv4/v6 Dual Stack , RMONv1 • Trusted host • Dual image • Dual configuration , Web GUI , Compact CLI |  |





|           |                                             |                                                                                                                          |  |
|-----------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--|
|           | QoS                                         | Bandwidth Control , 802.1p Quality of Service • 8 queues per port • Queue Handling • Strict • Weighted Round Robin (WRR) |  |
|           | IPv6 Ready from day one and dully certified | Yes                                                                                                                      |  |
|           | On Site OEM Warranty                        | 2 year                                                                                                                   |  |
| <b>18</b> | <b>HDMI KVM SWITCH 4 PORT</b>               | <b>MAKE &amp; MODEL</b>                                                                                                  |  |
|           | Housing                                     | Metal                                                                                                                    |  |
|           | Mounting                                    | Rack                                                                                                                     |  |
|           | Size (RU)                                   | 1                                                                                                                        |  |
|           | Type                                        | Analog                                                                                                                   |  |
|           | Number of Computer Connection Available     | 4                                                                                                                        |  |
|           | Port Selection Medium                       | Push Button,Hot Keys                                                                                                     |  |
|           | LED Indicators for various Interfaces       | Yes                                                                                                                      |  |
|           | Number of USB Type A (female) Ports         | 4                                                                                                                        |  |
|           | Number of HDMI (female) Ports Input         | 4                                                                                                                        |  |
|           | Number of USB Type A (female) Port          | 3                                                                                                                        |  |
|           | Number of HDMI (female) Port Output         | 1                                                                                                                        |  |
|           | Support for Cascading Multiple KVM switches | No                                                                                                                       |  |
|           | Multiplatform Support                       | Windows, Linux, Mac                                                                                                      |  |
|           | Supported Resolutions                       | 1920 x 1080                                                                                                              |  |
|           | Power on detection                          | Yes                                                                                                                      |  |
|           | Multi View Support                          | Yes                                                                                                                      |  |
|           | Power Source                                | DC (Through Adaptor)                                                                                                     |  |
|           | Maximum Power Consumption (Watt)            | 54                                                                                                                       |  |
|           | Certifications available                    | CE, FCC, RoHS                                                                                                            |  |
|           | On Site OEM Warranty (Year)                 | 1                                                                                                                        |  |
| <b>19</b> | <b>BROADBAND RADIO</b>                      | <b>MAKE &amp; MODEL</b>                                                                                                  |  |
|           | Architecture                                | Outdoor connectorized unit                                                                                               |  |
|           | PoE to ODU Interface                        | Outdoor CAT-5e; Maximum cable length: 10/100/1000BaseT                                                                   |  |
|           | Capacity                                    | 150Mbps                                                                                                                  |  |
|           | Frequency Band                              | 5.x : 4.9- 6.0 GHz                                                                                                       |  |
|           | Channel Bandwidth                           | Configurable: 10, 20, 40, 80 MHz; Dynamic Channel BW selection (20/40/80 MHz)                                            |  |
|           | Modulation                                  | MIMO-OFDM                                                                                                                |  |
|           | Adaptive Modulation & Coding                | Supported                                                                                                                |  |
|           | Auto selection MIMO / Diversity             | Supported                                                                                                                |  |
|           | Max Tx Power                                | 26dBm                                                                                                                    |  |
|           | Antenna                                     | External / Integrated                                                                                                    |  |
|           | Gain                                        | 25 Dbi                                                                                                                   |  |
|           | Duplex Technology                           | TDD                                                                                                                      |  |
|           | Regulation                                  | 5.x GHz: ETSI, WPC, MII, NCC, UNI                                                                                        |  |
|           | Encryption                                  | AES 128/ 256 <sup>1,2</sup>                                                                                              |  |
|           | Uplink / Downlink Allocation                | Configurable: Symmetric or Asymmetric                                                                                    |  |
|           | QoS                                         | Packet classification to 4 priority queues according to 802.1P or Diffserv                                               |  |
|           | VLAN Support                                | 802.1Q, QinQ, 4094 VLANs                                                                                                 |  |
|           | ODU Management                              | IPv4; IPv6; SNMP v1, SNMP v3; HTTP, HTTPS using web browser                                                              |  |
|           | Power                                       | 24V 0.5 Amps Gigabit POE                                                                                                 |  |
|           | Power Consumption                           | 13W                                                                                                                      |  |




|    |                                                                                          |                                                                                                                                                                                                                                   |  |
|----|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | Durability                                                                               | IP67                                                                                                                                                                                                                              |  |
| 20 | <b>INVERTER WITH BATTERY 5.5KVA</b>                                                      | <b>MAKE &amp; MODEL</b>                                                                                                                                                                                                           |  |
|    | Description of stores                                                                    | Inverters are used as emergency backup when there is power outage. It turns on the electrical appliances when the main supply is off. The function of an inverter is to convert Direct Current (DC) into Alternating Current (AC) |  |
|    | BIS CRS Compliance for the inverter                                                      | Yes, as per IS 16242(Part 1)                                                                                                                                                                                                      |  |
|    | Output Rating of the Inverter (in KVA)                                                   | 5.5                                                                                                                                                                                                                               |  |
|    | Input - Operating Voltage of the Inverter                                                | 1 phase 180V -260V, 50 Hz AC mains                                                                                                                                                                                                |  |
|    | Output Voltage of the Inverter                                                           | 1 phase 220V +/- 10 V, 50 Hz AC                                                                                                                                                                                                   |  |
|    | Inverter Efficiency Range (DC to AC)                                                     | 76 % - 80 %                                                                                                                                                                                                                       |  |
|    | Provision of battery with each inverter for backup                                       | Yes                                                                                                                                                                                                                               |  |
|    | Minimum Capacity of Each Battery ( in Ah) (hint: Write '0' in case battery not provided) | 150                                                                                                                                                                                                                               |  |
|    | Battery Voltage (in volts)(hint: Write '0' in case battery not provided)                 | 12                                                                                                                                                                                                                                |  |
|    | Number of Batteries for Each Inverter (hint: Write '0' in case battery not provided)     | 4                                                                                                                                                                                                                                 |  |
|    | DC Bus Voltage (in volts) (hint: Write '0' in case battery not provided)                 | 48                                                                                                                                                                                                                                |  |
|    | Type of waveform                                                                         | Sinewave                                                                                                                                                                                                                          |  |
|    | Total harmonic distortion (THD)                                                          | </= 5%                                                                                                                                                                                                                            |  |
|    | Power factor of load supported                                                           | >/= 0.6                                                                                                                                                                                                                           |  |
|    | Protection                                                                               | Protection for under voltage at battery terminal, Protection of over voltage, Over temperature protection, Overload protection, Short circuit protection, Short circuit protection at battery (as applicable)                     |  |
|    | Metering                                                                                 | Input Voltage, Output Voltage, Input Current, Output Current, Input Frequency, Output Frequency, Input Power, Output Power, Input Power Factor, Output Power Factor, Battery Voltage and Current, Remote Monitoring with IOT      |  |
|    | Alarms and Indications                                                                   | Indicator for Mains presence, Indicator for Battery Charging and Discharging, Indicator for Output Over Load, Audible Alarm for Low Battery                                                                                       |  |
|    | Other Constructional Features                                                            | Mains ON/OFF, Battery ON/OFF, Battery Fuse, Inverter Reset Push Button, Static by Pass Facility, Manual by Pass Facility                                                                                                          |  |
|    | Provision of Suitable Trolley/ Rack for Batteries                                        | Yes                                                                                                                                                                                                                               |  |
|    | Ingress Protection                                                                       | IP20                                                                                                                                                                                                                              |  |
|    | Minimum Warranty for inverter (in Years)                                                 | 1                                                                                                                                                                                                                                 |  |





|           |                                             |                         |  |
|-----------|---------------------------------------------|-------------------------|--|
|           | Minimum Warranty for battery ( in Years)    | 1                       |  |
| <b>21</b> | <b>HDMI CABLE 20 MTR</b>                    | <b>MAKE N MODEL</b>     |  |
|           | Resolution support                          | Up to 1080              |  |
|           | Conductor Material                          | Copper                  |  |
|           | Conductor gauge                             | 28 AWG                  |  |
|           | Cable Shield Type                           | Aluminum Foil           |  |
|           | Cable Jacket Type                           | PVC                     |  |
|           | Cable color                                 | Black/White             |  |
|           | Warranty (Year)                             | 1                       |  |
|           | Standard length of HDMI Cable (in metre)    | 20                      |  |
| <b>22</b> | <b>HDMI CABLE 10 MTR</b>                    | <b>MAKE &amp; MODEL</b> |  |
|           | Resolution support                          | Up to 1080              |  |
|           | Conductor Material                          | Copper                  |  |
|           | Conductor gauge                             | 28 AWG                  |  |
|           | Cable Shield Type                           | Aluminum Foil           |  |
|           | Cable Jacket Type                           | PVC                     |  |
|           | Cable color                                 | Black/White             |  |
|           | Warranty (Year)                             | 1                       |  |
|           | Standard length of HDMI Cable (in metre)    | 10                      |  |
| <b>23</b> | <b>HDMI CABLE 5 MTR</b>                     | <b>MAKE &amp; MODEL</b> |  |
|           | Resolution support                          | Up to 1080              |  |
|           | Conductor Material                          | Copper                  |  |
|           | Conductor gauge                             | 28 AWG                  |  |
|           | Cable Shield Type                           | Aluminum Foil           |  |
|           | Cable Jacket Type                           | PVC                     |  |
|           | Cable color                                 | Black/White             |  |
|           | Warranty (Year)                             | 1                       |  |
|           | Standard length of HDMI Cable (in metre)    | 5                       |  |
| <b>24</b> | <b>SERVER QUAD CORE</b>                     | <b>MAKE &amp; MODEL</b> |  |
|           | Processor Make                              | Intel                   |  |
|           | Number of Cores per Processor               | 4                       |  |
|           | Processor Base Frequency (GHz)              | 3.1                     |  |
|           | Processor Turbo Frequency (GHz)             | 4.6                     |  |
|           | Total Cache (L1+L2+L3)(MB)                  | 8                       |  |
|           | Processor Description/ Number               | Intel Xeon E-2324G      |  |
|           | Form Factor                                 | Tower                   |  |
|           | Graphic Card Description                    | Nvidia 8GB              |  |
|           | Chipset compatible with CPU                 | Intel C621              |  |
|           | Type of RAM                                 | DDR4 SDRAM with ECC     |  |
|           | Total Number of DIMM Slots available        | 4                       |  |
|           | DDR SDRAM Size(GB)                          | 32                      |  |
|           | DDR SDRAM upgradable upto (GB)              | 128                     |  |
|           | Total No of Slots available for SATA SSD    | 2                       |  |
|           | Number of Slot Populated with SATA SSD      | 1                       |  |
|           | Capacity offered per SATA SSD (GB)          | 480                     |  |
|           | Total Capacity Offered with SATA SSD (GB)   | 480                     |  |
|           | Type of Interface for Hard Disk Drive       | SATA                    |  |
|           | Total no. of Slots available for SATA Drive | 4                       |  |
|           | Number of Slots populated with SATA Drive   | 1                       |  |
|           | Capacity offered per SATA Drive (GB)        | 2000                    |  |
|           | SATA drive speed (hot plug or better) (RPM) | 7200                    |  |
|           | Network Card Supported                      | 1G                      |  |
|           | Number of Networking Interface Cards (LAN)  | 1                       |  |
|           | Whether Network Interface Card Embedded     | Yes                     |  |
|           | Total Number of Ethernet Ports              | 2x1G                    |  |

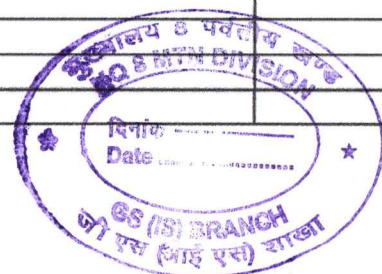



|                                     |                      |  |
|-------------------------------------|----------------------|--|
| Display                             | 31.5"                |  |
| Operating System                    | Microsoft Win 11 Pro |  |
| Keyboard                            | Yes                  |  |
| Mouse                               | Yes                  |  |
| DVD ROM (Internal/Exrternal)        | No                   |  |
| USB Ports (version 2point0/3point0) | 5                    |  |
| Power Supply Efficiency             | Bronze               |  |
| Server Main Supply                  | 230 +/- 10%Vac       |  |
| On Site OEM Warranty (Year)         | 3                    |  |

