

**JOB NO: OT/NC/16/CIF(R)/6617/2026-27 : PROVN OF 02 X COOK HOUSE
DINING HALL &
JOB NO: OT/NC/16/CIF(R)/6593/2026-27 : PROVN OF 03 X COOK HOUSE
DINING HALL IN THE AoR OF HQ CIF(R)**

S/ No	Brief specifications	Remark
1.	Scope of Work. Provn of Prefabricated Cook House Dining Hall (CHDH) of size 15.00 m x 6.10 m x 3.00 m clear height with front side verandah of 2.10 m wide. 02 Nos steel door, 03 Nos PUF panel door and 08 Nos aluminum windows will be provided. 02 Nos of store rooms for dry and fresh ration respectively of size 2.51 m x 2.99 m shall be provided. 0.63 mm thick pre colored pre coated profile sheet for roofing all as shown in drawing complete. Specifications and Technical details are as per succeeding paras:- Overall size. The overall size of the shelter shall be 15.00 m x 6.10 m with 2.10 m wide front verandah. The clear height up to bottom of the truss shall be 3.0 m. The various partitions in the shelter will be of following sizes :- (i) Cooking area of size 5.01 m x 6.02 m. (ii) Dining area of size 7.32 m x 6.02 m. (iii) Dry ration store of size 2.51 m x 2.99 m. (iv) Fresh ration store of size 2.51 m x 2.99 m. (v) Verandah of size 15.00 m x 2.10 m in front side of the shelter. (vi) Washing area should be provided outside of size 1.80 m x 1.80 m with covered roof as shown in drawing.	
2.	Details of Structural Members. Truss. Total of 07 Nos trusses made out of MS rectangular hollow section of size 66 x 33 x 2.9mm thick and weight not less than 4.07 Kg/Rm with sectional area 5.19 Sqcm [tolerance of 10% (±)] and @ 2.00 mtr c/c shall be provided as shown of Drg (Plan) att. The slope of the truss shall be maintained as 1:4 and of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008.	
3.	Main column (16 Nos). The MS Columns 14 Nos on outer perimeter of shelter and 02 Nos for partition rooms shall be made out of RH steel section of size 96 mm x 48 mm x 3.25 mm thick and weight not less than 6.71 Kg/Rm with sectional area 8.54 Sqcm [tolerance of 10% (±)]and of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008. MS plates of size 300 x 300 x 8mm thick with 4 Nos pre drilled holes of size 18mm dia for fixing 16mm dia and 450mm long MS fdn bolt incl necessary nuts and washers to be provided for fixing of column fdn. MS plate of size 200 x 200 x 8mm thick shall be welded on top of the column for the steel truss to rest upon.	
4.	Verandah Column (07 Nos + 02 Nos). (i) Columns of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008 grade YST-22. Columns shall be of cross sectional size 66 mm x 33 mm x 2.90 mm and wt not less than 6.71kg/mtr and sectional area 8.54 sqcm with tolerance 10% (±). The length of the column shall be 2.10 m. Each column shall have base plate of size 300 mm x 300mm x 8 mm with 4 holes for fixing spikes of 12 mm and top sole plate of size 200 mm x 200 mm x 8 mm with pre drilled holes of appropriate sizes for fixing with truss. (ii) 02 Nos columns for washing area as per above specifications.	
5.	Purlins. 9 Nos of purlins made out of 66 x 33x 2.9mm thick RH steel section shall be fixed on truss and rafter with MS cleats, welding, and bolts and nuts complete. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008.	
6.	Verandah Rafter. Verandah rafter made out of rectangular hollow section of size 66 x 33 x 2.9mm thick with MS plate of size 200 x 200 x 6mm thick welded to both ends of rafter with 02 Nos of pre drilled holes of 14mm dia to connect the main and verandah column. Necessary MS cleats and holes to be provided as per site requirement. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008.	

S/ No	Brief specifications	Remark
7.	Various Fasteners and Fittings. Fasteners and fittings of mild steel shall be supplied unless otherwise specified in and shall be fixed where reqd. Fastening means will be provided for the items to be fitted at the time of erection. 10% spare nuts, bolts, self tapping screws and washers etc, will be provided per shelter. The fasteners provided shall confirm to relevant BIS specification.	
8.	Roof. Roof slope shall be 1:4 approx. The roof shall be made of 0.63 mm pre-coated pre-colored steel profiled sheet with necessary fixing arrangement laid over a frame work of trusses, columns and purlins fixed using suitable fasteners. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 277-2003.	
9.	Ridge. Ridge shall be 0.63 mm thick and 0.450 m wide pre coated per coloured steel profile sheet of camouflage pattern matching with the purlins will also be provided on the roof sheet to be fixed on top junction of the roof using self tapping screws, over the entire length of the shelter. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 277-2003.	
10	Roof projection. The roof shall have minimum projection of 0.40m from the eaves wall and 0.30 m from the gable walls. The purlins will also be provided on the roof at the eaves and at gable roof extension (outside the structure) made from RHS section of size 66mm x 33mm x 2.9mm. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 277-2003.	
11	Wall Panels. All walls shall be made of GI metal skin PUF panels using 0.60mm PPGI Sheets with PUF thickness of 40 mm. The PUF insulation material in the panel shall have fire retarding and self-extinguishing properties as per international standard. PUF Panel Should be External surface camouflaged and internal off white colour. (Camouflage pattern to be approved by CO Engr Regt) Other details of wall panels are as follows :- (a) All material required for the manufacture of shelter shall be new. (b) The bulk density of PUF insulation should be 40 Kg/ Cum + 10% Kg/ Cum made from CFC free close cell polyurethane foam and the dispensing machinery should be kept with a PLC controlled panel for monitoring and controlling the injection rate to assure specified uniform density requirements. The total thickness of the finished composite panel should be 41mm. The tolerance in the panel can only be on the plus side. (c) The manufacture shall have facilities for conducting bend test, impact resistance test pencil hardness test, cross hatch adhesion test, paint coat thickness test to IS-14246 and for galvanizing test to IS-277. (d) The GI skin for the PUF Panels shall be hot dipped galvanized steel of 0.60mm thick TCT (Total coated thickness). Each panel should be supplied pre-painted with a colour coating of 50 microns of architectural polyester on a minimum 120 gms/m² base of Zinc coating on the finished surface only for protection against scratches during handling and transportation. Base metal of GI skin CRCA should be as per IS-513 and grade of zinc coating will be 275 as per IS-277. The pre coated GI sheet skin should have min coating of 4.5 micron epoxy primer and 25 micron polyester top coat on the finished surface and 7-8 micron primer Alkyd Backer on backside which is bounded to the polyurethane foam. The pre coated GI sheet should conform to IS 14246-1995 with manufacture test certificates conforming to specification. PUF Panel Joining arrangement :- The PUF panels shall have Tongue and groove type of joint formed on line on the forming machine integrated with PUF panel manufacture machine. The PUF Wall Panels will be of Make: LLYOD/JINDAL/BANSAL GEN LTD/MODERN PREFAB/ACME, BNAL or Equivalent to HS 9406. The Bottom track will be fixed to the concrete platform at plinth level by suitable fasteners. One track shall be providing at the top of the panel. Note: Camouflage pattern as approved by CO Engr Regt	

RESTRICTED

-4-

S/ No	Brief specifications	Remark
12	False Ceiling for Dining Area. (Gypsum board). Gypsum board false ceiling panel of size 595 x 595 mm 8 mm thick, along with powder coated aluminum snap grid frame work with suitable 'T' and 'L' section. The false ceiling panels are placed onto a suspended grid frame of size 600 x 600 mm made of Aluminum 'L' & 'T' sections of 0.60 mm. The false ceiling grid is suspended from the roof framework with the help of galvanized wire of 3.0 mm dia. The finished clear height of the false ceiling shall be 2.80 m. MAKE: ARMSTRONG/EVEREST/GYPROC(SAINT GOBIN) or Equivalent to IS 2547 (Part I). False ceiling will not be provided in verandah & cooking area.	
13	Verandah. Verandah shall be of 2.1 m in width. Roof of verandah covered with 0.63 mm thick pre-coated pre-colored steel profiled sheet fixed with self-drilling screws all as shown in drawing and specified. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 277-2003.	
14	Sunshades. Suitable sunshades, made out of 0.63 mm colored profiled sheets reinforced with angle iron frame, will be provided to all external windows and doors. The minimum projection for the sunshades will be 450mm and 300mm wider than the width of the opening. The sunshade should be fitted minimum one foot above the top of the windows/doors. These will be given suitable stiffening and fixing arrangements. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 277-2003.	
15	PUF Panel Door. 03 Nos PUF panel door with aluminum frame shall be provided of size 900 mm x 2100 mm 40 mm thick PUF panel to be fitted in the aluminum frame including lock with lever type handle on both sides, including aluminum high grade fittings. PUF panel door with external camouflage and internal teak finish. The main doors shall have been built in locking system of make Godrej / Harrison. Two Nos aluminum tower bolt of 200 mm size from inside and one aluminum sliding bolt 300 mm long and one aluminum bow handle 125 mm size on both side in and out side of each shelter. Aluminum section should be powder coated. Make: LLYOD/JINDAL/BANSAL GEN LTD/MODERN PREFAB/ACME, BNAL or Equivalent to HS 9406.	
16	Fly proofing Door Shutter(03Nos) The powder coated aluminum door shall be of size 0.90x2.10 m made of fly proof, wire mesh of 0.36mm nominal dia and average width of aperture 1.40mm should be stainless steel fitted in the outer aluminum with suitable beading and cornice aluminum strip frame including lock with lever type handle on both sides incl aluminum high grade fitting. Make JINDAL/ INDAL/ HINDALCO or Equivalent to IS 1948 (1961).	
17	Steel doors. 02 Nos of steel door frame of size 0.90x2.10m outer dimension shall be made from pressed steel 4 sided frame using CR steel of size 75mm x 45mm it will also have 4 Nos 100mm MS hinges welded on to the frame shutter shall be Flush shutter of 32mm thick. The door shutter shall be fixed with door frame with 4 Nos MS oxidized Hinges 100mm length. The door shall be provided with 2 Nos MS oxidized aldrops 300mm length, MS oxidized tower bolts of size 200mm at the top and 100mm at the bottom on each shutter and 2 Nos, 150mm long bow handles. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 808-1989.	
18	Serving Window. 01 Nos Sliding aluminum window of overall of size 2.44mx1.22m with two aluminum shutters of size 1.22x1.22m each. These shutters will roll over on aluminum channel which are fixed on wall panel with the help of nut bolt. Make JINDAL/ INDAL/ HINDALCO or Equivalent to IS 1948 (1961).	
19	Aluminum Windows. 08 Nos aluminum profile sliding windows with three channels of sliding 02 x glass windows and 01x wire mesh window all fitments shall be provided as indicated in the respective drawing. Window size will be 1.00x1.20mtr. The window frame and window shutter will be manufactured using suitable aluminum section. The window shutter will be of double leaf size with glazing of 6 mm clear grade LTED 6/2RS 1.3 Polycarbonate sheet. Each window will be fixed with fly proof stainless steel wire mesh of 0.36mm nominal dia and average width of aperture 1.40mm using automatic scrolled down mosquito nets open able from inside. Make JINDAL/ INDAL/ HINDALCO or Equivalent to IS 1948 (1961).	

EPO

JE, 8 ER

JE (Engr Br)

RESTRICTED

S/ No	Brief specifications	Remark
20	Smoke Exhaust. (i) 04 Nos of short columns, made of MS RHS 66 x 33 x 2.9mm of length 0.60m shall be fixed on the purlins in such a way that the horizontal distance between the short columns on either side (slope) of the roof is 1.5m. These short columns shall have a welded MS top plate and bottom plate of appropriate size and predrilled holes. Truss, of span 1.5m and slope 1:3 Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008; shall be made of rectangular hollow steel section of size 66 x 33 x 2.9mm. Truss shall be provided with base plate of appropriate size so that it can be fixed to short columns. 02 Nos of trusses shall be fixed on the short columns at a distance of 3.54m from right gable end. (ii) Purlins of length 2.44 m shall be provided for the structure of smoke exhaustion (i.e. on the top of cook house). After the structure is fixed at its place the vertical opening shall be covered with chicken wire mesh of appropriate size of aperture. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 4923: 1997 and amdt in Apr 2008.	
21	Exhaust fan. Two Nos exhaust fan heavy duty 18" sweep ISI marked will be provided in cooking area with suitable fixing arrangements for each cook house. Make : Khaitan/ Crompton/ Orient /Havells or Equivalent to IS 374-1979.	
22	Flooring. (i) Vitrified floor tiles of size 600x600x10mm thick shall be provided over 20mm thick screed bed in CM 1:4 over 100mm thick PCC 1:4:8 type D2 over 100 mm thick HC in dining hall and verandah. Make : Johnson/Orient/ Kajaria/Somany or Equivalent to IS 15622 (2006). (ii) Kota stone flooring 25 mm thick machine cut mirror polished of minimum size 280mm x280mm store room, washing point and cooking area over 20 mm thick screed bed in CM 1:4 over 100 mm thick PCC 1:4:8 type D2 over 100 mm thick H.C. Kota Stone shall be Conforming to IS 1130 (1969).	
23	Foundation for Columns. PCC1:2:4 type B1, (using 20mm graded stone agg)of size 300 x 300 x 750mm with four Nos foundation bolts of 16mm dia 450mm long and base plate of size 230 x 230x8mm thick with nuts for columns.	
24	DPC. 40 mm thick damp proofing course (DPC) will be provided in PCC (1:2:4) type B1 (using 20mm graded stone agg) with using water proofing compound Make Pidilite/ Dr Fixit or Equivalent to IS 2645-2003.	
25	Dwarf Wall. Plinth/Dwarf wall shall be of brick masonry wall 230 mm thick and 450 mm high above GL and 300 mm deep below GL built in cement mortar 1:6 laid over lean concrete PCC (1:5:10) type D2 100 mm thick.	
26	Plinth Protection. 750 mm wide plinth protection shall be provided at all external sides of the shelter. 75mm thick PCC 1:3:6 type C1 over 75mm thick hardcore of gauge 40 to 63mm over rammed earth as directed.	
27	Washing Area : Kota stone flooring 25 mm thick machine cut mirror polished (Min three coat) of min size 280 x 280 mm to be provided over 75 mm thick PCC 1:3:6 type C2 over 100 mm thick hard core and rammed earth. Kota Stone shall be Conforming to IS 1130 (1969). Washing area will be constructed with brick wall of thickness 230 mm and roof with Iron frame and pre painted Galvalume sheet shall be provided.	
28	Workmanship. (i) Connection. Welded connection will be providing unless otherwise specified in the drawings. The welded connections will conform to IS 806-1968. (ii) Fabrication. The general provisions in section 11 of IS 800 of 1984 will apply to all types of steel being used for fabrication. (iii) Steel Members. All steel members will be provided with 02 coats of red oxide / zinc chromate primer before supply.	
29	Soakage Pit cover. A Soakage pit of size 1.20 Mtr dia and 1.80 Mtr deep shall be constructed with 230mm thick concrete bricks in CM 1:6 upto 0.45 Mtr. Remaining portion upto liquid depth shall be constructed with 230mm thick honey combing brick work for one brick thickness , 75mm bore PVC pipe and vent Cowl shall be provided and as shown on Drg. MS cover made out of 2mm thick PGI sheet, supported with ISA 35 x 35 x 5mm thick Angle Iron, ISNT 30 x 30 x 5mm thick and necessary MS handle shall be provided, over MS frame of size 40 x 40 x 6mm thick. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 1786-2008.	

RESTRICTED

-6-

S/ No	Brief specifications	Remark
30	Over hanging Chimney. 01 No overhanging chimney with hood of 0.80 mm thick CRC sheet will be provided over cooking platform. The hood will be suspended 300mm below the truss bottom over the cooking platform with the help of chains & fasteners.	
31	Furniture. (a) Stainless Steel Storage Racks (02 Nos). 02 Nos storage racks made of pre-fabricated MS structure of angle 40 x 40 x 6 mm and 1.25 mm MS sheet. The size of rack shall be 1350x 1200 x 600 mm with four shelves. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 1786-2008 & Stainless Steel component should Conform to IS 6911 (1992). (b) Stainless steel serving platform (01 Nos). Stainless steel serving platform of size 2.44 x 0.60 x 0.85 m ht including one stainless steel shelf at bottom for keeping big utensils with six legs of 25 mm bore stainless steel tube 1.25 mm thick stainless steel sheet shall be fixed over the MS angle iron frame of size 35 x 35 x 5 mm with edges folded for top serving platform and bottom shelf. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 1786-2008 & Stainless Steel component should Conform to IS 6911 (1992). (c) Stainless steel vegetable cutting table (01 Nos). Stainless steel vegetable cutting table of size 1.83 x 0.60 x 0.85 m ht including two drawers for keeping cutting tools with four legs of 25mm bore stainless steel tube with top frame of MS angle iron 35 x 35 x 5 mm. Stainless steel sheet 1025 mm thick shall be fixed o angle iron frame with edges folded. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 1786-2008 & Stainless Steel component should Conform to IS 6911 (1992). (d) Preparation table (01 Nos). Preparation table of size 0.9m x 0.6m Made out of angle iron 30 x 30 x 5 mm section with granite stone top. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 1786-2008. (e) Deep freezer of 200 Ltr capacity for keeping meat ISI marked Make : VOLTAS/BLUESTAR/GODREJ or Equivalent to IS 302-2-7 (2010). (f) Grill/cage (01 Nos). Grill/cage of size 1.20 m x 0.45 m x 0.90 m made of MS angle iron 35 x 35 x 6 mm, 2 mm thick MS sheet for bottom and sides. XPM 50 x 50 x 6 mm on top to be welded to angle iron frame which will be enable from top with suitable locking arrangement for 03 Cylinders and 02 Nos pipes upto cooking ranges for with necessary opening and closing knobs and locking arrangement shall be provided. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 808 (1989). (g) Chula: Chula std size 12 x 44 x 10 inch (30.48 x 111.76 x 25.4 CM) three burner stainless steel body. (h) Dining Table. Dining table of 04 person seating each made out of wood with a polished top finish of size of 1200mm x 750 mm x 750 mm and table top of 18-20 mm thick. (j) Dining Chair (12 Nos) Dining Chair with a Stainless Steel Structure, backrest and polished teakwood seat of size 475 mm without cushion and armrest (k) Fire Extinguisher. One Kg Capacity of Make : CEASE FIRE/MILMEX or Equivalent to IS- 2878:2004	
32	Stainless steel sink. SS sink of overall size 1040x510mm with bowl size 510x450x250mm with drainage board of Make: Nirali/Diamond/Blue star or Equivalent to IS 13983 (1994).	
33	Wash hand basin. Vitereous china WHB of size 580x450mm incl all fittings and accessories of Make: Hindware/Parryware/Cera or Equivalent to IS 2556-4 (2004).	

EPO

JE, 8 ER

JE (Engr Br)

RESTRICTED

S/ No	Brief specifications	Remark
34	Electrification Internal/External. Electrical stores for Internal/External Electrification shall be provided as per store list att.	
35	Water supply store. The water supply stores shall be provided with each shelter as per store list att. (a) Water storage tank. Rotational moulded polyethylene water storage tank cylindrical vertical with closed lid (Colour - Black/Green/Blue) of capacity 1000 ltrs capacity, Make: SINTEX / SUPREME / VECTUS/ASTRAL/STAR or Equivalent to IS 12701: 1996 with GI tank nipple and GI socket of 20mm dia. (b) Water tank staging. 1.50x1.50x 2.5M size staging consisting of 65x65x6mm MS angle iron columns, 50x50x6mm MS angle bracings with 3mm thick MS sheet on the top of the staging supported with MS angle iron 65x65x6mm frame and ISMC 75x40mm diagonals all as shown in drg att. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS 808 (1989). (c) GI Tubing. GI tubing 20mm bore (medium grade) 30 RM and 15mm GI tubing (medium grade) qty -15 RM including all necessary fittings shall be provide on floor/wall cladding.	
36	Earthing. One earthing set per container comprising of the following shall be provided :- GI earthing plate 600mm x 600mmx 6mm thick - 01 No (ii) GI cover of size 290 x 290 x 6mm - 01 No (iii) GI pipe 40 mm dia medium grade - 04 M (iv) GI strip of size 25 x 4 mm - 08 M (v) Salt - 30 Kgs (vi) MS funnel with wire mesh - 01 No (vii) GI pipe 20 dia med grade ISI marked - 01 Mtr (viii) GI reducer 40 x 20 mm ISI marked - 01 No (ix) MS rod 6 mm dia 2' long - 01 No (x) Charcoal dust - 30 Kgs. (xi) 5 mm dia 30 mm long GI bolt with nut - 08 Nos	
37	Lightning Arrester System. Prefabricated gel earthing electrode of pipe in pipe technology. Two B class IS mild steel pipes, one inside the other, hot galvanized with 100-micron coating outside and about 300-micron coating dip inside, filled with high conductor and corrosion resistant crystalline mixture and back fill compound around electrode as per IS 3043/1987 as per Drawing att. (i) Earth Work. Excavation shall be carried out rocky soil for earthing pit of size 0.6 m x 0.6 mtr x 2.0 m depth including removal of surplus soil in low laying area. (ii) Down Conductors. Aluminium strip size 25 mm x 3 mm of length 9m ISI marked. (iii) Earthing Strip. Aluminium strip 32 mm x5 mm of length 3 m. Qty Nos 01 each. ISI marked. (iv) Air Terminal. GI nipple 20mm dia and 10 cm length one copper ball having 05 Nos copper prong of 15 cm length. Prongs and nipple fitted to copper ball with threading arrangements ISI marked. Note Air terminal and down conductors should be fixed above ridge roof sheet/roof sheet(middle of the shelter) /out side wall panel & earth surface with suitable insulators and fixing arrangements.	

EPO

JE, 8 ER

JE (Engr Br)

S/ No	Brief specifications	Remark
38	Man hole cover. 01 Nos Man hole cover of size 650x650x2mm thick MS sheet fixed with 30x30x5mm thick MS angle frame with two nos of bow handles of 20x3mm flat iron and four MS hold fast of flat iron 40x5mm. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS- 1726 (1991).	
39	Bldg Mtrl. (a) Cement of 43 grade OPC in sealed bags each weighing 50 kgs. The date of manufacture of cement should not be more than one month prior to the date of delivery. Make : ACC/Ambuja/UltraTech/JK Lakshmi or Equivalent to IS 8112:1989 (b) River sand conforming to IS 2116-1980. (c) Aggregate 20mm graded conforming to IS 383-1970. (d) Aggregate 40mm graded conforming to IS 383-1970. (e) PCC Bricks of size 230mmx115mmx75mm with min str of M 15 and conforming to IS-2185-2005. (f) Stone boulders for hard core of size 40-63mm conforming to IS 383-1970 (g) Brick Bats conforming to IS-456 of 1978.	
40	Erection Tools :- Erection tools as per store list.	

EPO

JE, 8 ER

JE (Engr Br)

STORE LIST

**JOB NO : OT/NC/16/CIF(R)/6617/26-27 : PROVN OF 02 X COOK HOUSE DINING HALL &
JOB NO : OT/NC/16/CIF(R)/6593/26-27 : PROVN OF 03 X COOK HOUSE DINING HALL
IN THE AoR OF CIF(R)**

S/ No	Item Title	Items	A/U	Qty
1	Provn of Prefabricated Cook House Dining Hall (CHDH) of size 15 point 00 m x 6 point 10 m x 3 point 00 m	Provn of Prefabricated Cook House Dining Hall (CHDH) of size 15.00 m x 6.10 m x 3.00 m clear height with front side verandah of 2.10 m wide. 02 Nos steel door, 03 Nos PUF panel door and 08 Nos aluminum windows will be provided. 02 Nos of store rooms for dry and fresh ration respectively of size 2.51 m x 2.99 m shall be provided. 0.63 mm thick pre colored pre coated profile sheet for roofing all as shown in drawing.	Nos	5
2	PVC Cable 16 Sqmm aluminum 2 core	Electrical Items (a) PVC Cable 16 Sqmm aluminum 2 core Make : POLYCAB/HAVELLS /FINOLEX or Equivalent to IS 732-1989.	Roll	5
3	PVC Cable 2 point 5 Sqmm copper conductor single core	(b) PVC Cable 2.5 Sqmm copper conductor single core Make : POLYCAB/ HAVELLS /FINOLEX or Equivalent to IS 732-1989.	Roll	10
4	PVC Cable 1 point 5 sqmm copper conductor single core	(c) PVC Cable 1.5 sqmm copper conductor single core Make : POLYCAB/ HAVELLS /FINOLEX or Equivalent to IS 732-1989.	Roll	10
5	PVC Cable 1 Sqmm copper conductor single core	(d) PVC Cable 1.0 Sqmm copper conductor single core Make : POLYCAB/ HAVELLS /FINOLEX or Equivalent to IS 732-1989.	Roll	10
6	Flexible wire PVC insulated twin twisted of size 23/0 point 0076 with copper conductor	(e) Flexible wire PVC insulated twin twisted of size 23/0.0076 with copper conductor Make : POLYCAB/ HAVELLS /FINOLEX or Equivalent to IS 732-1989.	RM	100
7	Insulation tape	(f) Insulation tape Make : Steelgrip/Standard or Equivalent to IS 7809-1 (1975).	Roll	25
8	Switch Socket combination 15 Amp	(g) Switch Socket combination 15 Amp Make : ANCHOR BY PANASONIC/ HAVELLS/ LEGRAND or Equivalent to IS 3854-1997.	Nos	30
9	Switch Socket combination 5 Amp	(h) Switch Socket combination 5 Amp Make : ANCHOR BY PANASONIC/ HAVELLS/ LEGRAND or Equivalent to IS 3854-1997.	Nos	30
10	PVC capping casing pipe 25mm with bends and junction boxes of	(j) PVC capping casing pipe 25mm with bends and junction boxes of Make : AKG/Pressfit or Equivalent to IS 14927-2 (2001).	Rm	500
11	PVC Ceiling Rose	(k) PVC Ceiling Rose Make : ANCHOR BY PANASONIC/ HAVELLS/LEGRAND or Equivalent to IS 3854-1997.	Nos	100
12	MS screw 6mm x 19mm in 100 Nos Pkt	(l) MS screw 6mm x 19mm in 100 Nos Pkt	Pkt	20
13	MS screw 4mm x 10mm in 100 Nos Pkt	(m) MS screw 4mm x 10mm in 100 Nos Pkt	Pkt	10

RESTRICTED

14	MS screw 6mm x 40mm long in 100 Nos Pkt	(n) MS screw 6mm x 40mm long in 100 Nos Pkt	Pkt	10
15	MCB DB 8 way including box	(o) MCB DB 8 way including box Make : L&T/ HAVELLS/LEGRAND or Equivalent to IS 60898-1 (2002).	Nos	5
16	MCB SP 6 to 32 Amp including box	(p) MCB SP 6-32 Amp including box Make : L&T/ HAVELLS/LEGRAND or Equivalent to IS 60898-1 (2002).	Nos	30
17	MCB SPN 63 Amp including box	(q) MCB SPN 63 Amp including box Make : L&T/ HAVELLS/LEGRAND or Equivalent to IS 60898-1 (2002).	Nos	5
18	PVC square box 4 inch x 4 inch	(r) PVC square box 4"x4"	Nos	140
19	Bulk Head Fitting with bulb 60W	(s) Bulk Head Fitting with bulb 60W Make : ANCHOR BY PANASONIC/HAVELLS/LEGRAND or Equivalent to IS 16102 - Part I.	Nos	20
20	Angle Holder	(t) Angle Holder Make : ANCHOR BY PANASONIC/HAVELLS/LEGRAND or Equivalent to IS 3854-1997.	Nos	50
21	LED Eco Lamp 6500K 14 Watt	(u) LED Eco Lamp 6500K 14 Watt suitable for angle holder complete of Make: Philips/Surya/ Syaka or Equivalent to IS 16102 - Part I.	Nos	70
22	LED tube light fittings of 18 oblique 20W	(v) LED tube light fittings of 18/20W strip batten fittings/fixing arrangement as reqd complete. Make: Philips/Surya/Syaka or Equivalent to IS 16102 - Part I.	Nos	40
23	Changeover switch 63 A 2 pole 240W	(w) Changeover switch 63 A 2 pole 240W Make : L&T/ HAVELLS/LEGRAND or Equivalent to IS 60898-1 (2002).	Nos	5
24	Exhaust fan 18 inch sweep 1400 RPM Metal Frame Heavy duty	(x) Exhaust fan 18" sweep 1400 RPM Metal Frame Heavy duty. Make : Khaitan/ Crompton/ Orient /Havells or Equivalent to IS 374-1979.	Nos	10
25	Switch Piano Type 5 Amp	(y) Switch Piano Type 5 Amp Make : ANCHOR BY PANASONIC/HAVELLS/LEGRAND or Equivalent to IS 3854-1997.	Nos	140
26	Teakwood switch board 10 inch x 12 inch with hylm sheet on top	(z) Teakwood switch board 10" x 12" with hylm sheet on top	Nos	30
27	Teakwood switch board 8 inch x 6 inch with hylm sheet on top	(aa) Teakwood switch board 8" x 6" with hylm sheet on top	Nos	30
28	Teakwood switch board 8 inch x 4 inch with hylm sheet on top	(ab) Teakwood switch board 8" x 4" with hylm sheet on top	Nos	30

RESTRICTED

RESTRICTED

29	Ceiling fan complete with blades	(ad) Ceiling fan complete with blades, down rods, electronic regulator and accessories, 230 Volt, 1200 mm sweep. Minimum air delivery 210 CFM with service value 6.00 BEE. Five star rated with brushless direct current motor (BLDC). Make : Khaitan/ Crompton/ Orient /Havells or Equivalent to IS 374-1979.	Nos	30
30	Water storage tank	<u>Plumbing</u> stores. (a) Water storage tank. Rotational moulded polythylene water storage tank tripple layer cylindrical vertical with closed lid (Colour - Black/Green/Blue) of capacity 1000 ltrs capacity, Make: SINTEX / SUPREME / VECTUS/ ASTRAL/STAR or Equivalent to IS 12701: 1996 with GI tank nipple and GI socket of 20mm dia.	Nos	5
31	Water tank staging	(b) Water tank staging. 1.50x1.50x 2.5M size staging consisting of 65x65x6mm MS angle iron columns, 50x50x6mm MS angle bracings with 3mm thick MS sheet on the top of the staging supported with MS angle iron 65x65x6mm frame and ISMC 75x40mm diagonals all as shown in drg att. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989)	Nos	5
32	Stainless steel sink	(c) Stainless steel sink. SS sink of overall size 1040x510mm with bowl size 510x450x250mm with drainage board of Make: Nirali/Diamond/Blue star or Equivalent to IS 13983 (1994).	Nos	5
33	Wash hand basin	(d) Wash hand basin. Vitereous china WHB of size 580x450mm incl all fittings and accessories of Make: Hindware/Parryware/Cera or Equivalent to IS 2556-4 (2004)	Nos	5
34	Soakege pit cover	(e) Soakege pit cover. Sockage pit cover in dia of size 1.66 m. Frame will be made of angle iron 40 x 40 x 5 mm and cover will be of angle iron 35 x 35 x 5 mm, ISNT 30 x 30 x 4 mm and cladded with MS Sheet 2 mm thick with 30 mm long and 6 mm dia nut, bolt and washers. 04 Nos MS bow handles of FI 20 x 3 mm and 04 Nos MS hold fast of FI 40 x 5 mm. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989).	Nos	5
35	Man hole cover	(f) Man hole cover. 01 Nos Man hole cover of size 650x650x2mm thick MS sheet fixed with 30x30x5mm thick MS angle frame with two nos of bow handles of 20x3mm flat iron and four MS hold fast of flat iron 40x5mm. Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS-1726 (1991).	Nos	5
36	GI nipple 20mm dia 100mm long	<u>Plumbing</u> stores. (a) GI nipple 20mm dia 100mm long, ISI marked	Nos	10
37	GI Elbow 20 mm	(b) GI Elbow 20 mm, ISI Marked	Nos	15

RESTRICTED

RESTRICTED

38	GI T 20mm	(c) GI 'T' 20mm, ISI Marked	Nos	10
39	GI socket 20mm	(d) GI socket 20mm, ISI Marked	Nos	15
40	GI tubing 20mm bore medium grade	(e) GI tubing 20mm bore (medium grade), ISI Marked	Rm	90
41	GI tubing 15mm bore medium grade	(f) GI tubing 15mm bore (medium grade), ISI Marked	Rm	30
42	GI reducer T 20mm to 15mm	(g) GI reducer 'T' 20mm to 15mm, ISI Marked	Nos	10
43	GI union 20mm	(h) GI union 20mm, ISI Marked	Nos	10
44	Stop cock Brass 20mm	(j) Stop cock Brass 20mm, ISI Marked	Nos	5
45	CP Bib cock brass 15m	(k) CP Bib cock brass 15mm, ISI Marked	Nos	15
46	Float valve with ball brass 20mm bore	(l) Float valve with ball brass 20mm bore, ISI Marked	Nos	5
47	PVC SWR floor trap of 75mm dia with grating	(m) PVC (SWR) floor trap of 75mm dia with grating.	Nos	5
48	PVC SWR gully trap of size 110mm dia	(n) PVC (SWR) gully trap of size 110mm dia	Nos	5
49	PVC pipe 100mm bore 20ft long	(o) PVC pipe 100mm bore 20' long, ISI Marked	Nos	20
50	PVC SWR 110 mm dia pipe with three socket	(p) PVC (SWR) 110 mm dia pipe with three socket	RM	60
51	Stainless Steel Storage Racks	Furnitures. Stainless Steel Storage Racks (02 Nos). 02 Nos storage racks made of pre-fabricated MS structure of angle 40 x 40 x 6 mm and 1.25 mm MS sheet. The size of rack shall be 1350x 1200 x 600 mm with four shelves. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989) & Stainless Steel component should Conform to IS 6911 (1992).	Nos	10
52	Stainless steel serving platform	Stainless steel serving platform (01 Nos). Stainless steel serving platform of size 2.44 x 0.60 x 0.85 m ht including one stainless steel shelf at bottom for keeping big utensils with six legs of 25 mm bore stainless steel tube 1.25 mm thick stainless steel sheet shall be fixed over the MS angle iron frame of size 35 x 35 x 5 mm with edges folded for top serving platform and bottom shelf. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989) & Stainless Steel component should Conform to IS 6911 (1992).	Nos	5
53	Stainless steel vegetable cutting table	Stainless steel vegetable cutting table (01 Nos). Stainless steel vegetable cutting table of size 1.83 x 0.60 x 0.85 m ht including two drawers for keeping cutting tools with four legs of 25mm bore stainless steel tube with top frame of MS angle iron 35 x 35 x 5 mm. Stainless steel sheet 1025 mm thick shall be fixed o angle iron frame with edges folded. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989) & Stainless Steel component should Conform to IS 6911 (1992).	Nos	5

RESTRICTED

RESTRICTED

54	Preparation table	Preparation table (01 Nos). Preparation table of size 0.9m x 0.6m Made out of angle iron 30 x 30 x 5 mm section with granite stone top. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989)	Nos	5
55	Deep freezer of 200 Ltr capacity	Deep freezer of 200 Ltr capacity for keeping meat ISI marked Make : VOLTAS/BLUESTAR/GODREJor Equivalent to IS 302-2-7 (2010).	Nos	5
56	Grill cage	Grill/cage (01 Nos). Grill/cage of size 1.20 m x 0.45 m x 0.90 m made of MS angle iron 35 x 35 x 6 mm, 2 mm thick MS sheet for bottom and sides. XPM 50 x 50 x 6 mm on top to be welded to angle iron frame which will be enable from top with suitable locking arrangement for 03 Cylinders and 02 Nos pipes upto cooking ranges for with necessary opening and closing knobs and locking arrangement shall be provided. Iron component should be of Make : TATA/SAIL/JINDAL/RINL or Equivalent to IS - 808 (1989)	Nos	5
57	Chula	Chula : Chula std size 12 x 44 x 10 inch (30.48 x 111.76 x 25.4 Cm) three burner stainless steel body.	Nos	5
58	Dining Table	Dining Table. Dining table of 04 person seating each made out of wood with a polished top finish of size of 1200mm x 750 mm x 750 mm and table top of 18-20 mm thick.	Nos	20
59	Dining Chair	Dining Chair (12 Nos) Dining Chair with a Stainless Steel Structure, backrest and polished teakwood seat of size 475 mm without cushion and armrest	Nos	60
60	Synthetic enamel paint dark brown 4ltr pack	Paints and painting. Paints 1st quality of following colors:-(a) Synthetic enamel paint dark brown (4ltr pack) Make: Asian/Berger/ Nerolac/Shalimar OR EQUIVALENT TO IS 2932(2003)	Ltrs	25
61	Synthetic enamel Paint OG 4ltr pack	(b) Synthetic enamel Paint OG (4ltr pack) Make: Asian/Berger/ Nerolac/Shalimar OR EQUIVALENT TO IS 2932(2003)	Ltrs	25
62	Thinner	(c) Thinner	Ltrs	25
63	Painting brush 50mm	(d) Painting brush 50mm, Make – Horse/Hippo/ Kripal OR EQUIVALENT TO IS 384-1(2012)	Nos	20
64	Painting brush 100mm	(e) Painting brush 100mm, Make – Horse/Hippo/ Kripal OR EQUIVALENT TO IS 384-1(2012)	Nos	20
65	Painting brush 125 mm	(f) Painting brush 125 mm, Make – Horse/Hippo/ Kripal OR EQUIVALENT TO IS 384-1(2012)	Nos	20

RESTRICTED

RESTRICTED

66	Cement base paint Weather proof	(g) Cement base paint (Weather proof) of approved make.SNOWCEM INDIA LTD/ICC/ASIN or Equivalent to IS 5410 (1992).	Ltrs	50
67	GI plate 600mm x 600mmx 6mm thick	Earthing Material. Earthing :- One erthingh set per container comprising of the following shall be provided (a) GI plate 600mm x 600mmx 6mm thick - 01 Nos	Nos	5
68	CI cover of size 290 x 290 x 6 mm	(b) CI cover of size 290 x 290 x 6 mm 01 No	Nos	5
69	Glpipe 40 mm dia medium grade 04 m	(c) GI pipe 40 mm dia medium grade - 04 m	Mtr	20
70	GI strip of size 25 x4 mm 08 m	(d) GI strip of size 25 x4 mm -08 m	Mtr	40
71	Salt	(e) Salt - 30 Kg	Kg	150
72	MS funnel with wire mesh 01 No	(f) MS funnel with wire mesh 01 No	Nos	5
73	GI pipe 20mm dia, med grade	(g) GI pipe 20mm dia, med grade ISI marked 1 Mtr	Mtr	5
74	GI reducer 40 x 20 mm ISI marked	(h) GI reducer 40 x 20 mm ISI marked 01 No	Nos	5
75	MS rod 6 mm dia 2 long	(j) MS rod 6 mm dia 2' long -01 No	Nos	5
76	Charcoal dust	(k) Charcoal dust -30 Kgs	Kg	150
77	5 mm dia 30 mm long GI bolt with nut	(l) 5 mm dia 30 mm long GI bolt with nut -08 Nos.	Nos	40
78	Air termination, single pointed copper rod 12mm dia and 300mm long	Lightening Arrestor System. Prefabricated gel earthing electrode of pipe in pipe technology. Two B class MS pipes one inside the other, hot dip galvanized with 100 micron thick coating outside and above 300 micron thick coating inside, filled with high conductor and corrosion resistant crystalline mixture and back fill compound all around the electrode. Conforming to IS-3043/1987 including the following:- (a) Air termination, single pointed, copper rod 12mm dia and 300mm long - 01 Nos	Nos	5
79	GI Pipe 100mm dia 2.00 m long medium grade with base plate	(b) GI Pipe 100mm dia, 2.00 m long medium grade with base plate Isi Marked, Make: Jindal/Bansal/Surya or equivalent to IS 1239 -01 Nos	Nos	5
80	Back fill compound	(c) Back fill compound - 01 Bag	Bag	5
81	CI manhole cover of size 30cm x 30 cm with Handles	(d) CI manhole cover of size 30cm x 30 cm with Handles- 01 Nos	Nos	5
82	Aluminium strip 25 x 3 mm	(e) Aluminium strip 25 x 3 mm, RM -09	RM	45
83	GI Strip 32 x 6 mm RM 03	(f) GI Strip 32 x 6 mm, RM -03.	RM	15
84	Insulator for fixing down conductors as per relevent IS 25 Nos	(g) Insulator for fixing down conductors as per relevent IS - 25 Nos	Nos	125
85	Vitrified floor coloured tiles	Misc (a) Vitrified floor coloured tiles of size 600 x 600 x 10 mm thick of 'A' grade. Make : Johnson/Orient/Kajaria/Somany or Equivalent to IS 15622 (2006).	Sqm	420
86	Anti skid coloured floor tiles	(b) Anti-skid coloured floor tiles of size 300x300x7-8mm for steps. MAKE :- KAJARIA/SOMANY/JOHNSON or Equivalent to IS-15622 (2006)	Sqm	15

RESTRICTED

RESTRICTED

87	Perforated type Gypsum board false ceiling panel	(c) Perforated type Gypsum board false ceiling panel of size 595 x 595 mm 8 mm thick, MAKE: ARMSTRONG/EVEREST/GYPROC or Equivalent to IS 2547 (Part I) , along with powder coated aluminium snap grid frame work with suitable 'T' and 'L' section. The false ceiling panels are placed onto a suspended grid frame of size 600 x 600 mm made of Aluminium 'L' & 'T' sections of 0.60 mm conforming to IS. The false ceiling grid is suspended from the roof framework with the help of galvanized wire of 3.0 mm dia.	Sqm	230
88	Kota stone flooring 25 mm thick	(d) Kota stone flooring 25 mm thick ,achine cut mirror polished of minimum size 280 mm x 280 mm Conforming to IS 1130 (1969) .	Sqm	270
89	Mild steel chromium plated 25 mm dia and 3mm thickness drapery rod	(e) Mild steel chromium plated 25 mm dia and 3mm thickness drapery rod of approved make coloured of size 1.20 m long with end caps, mounting brackets and 12 Nos of curtain rings.	Nos	40
90	Mild steel chromium plated 25 mm dia and 3mm thickness drapery rod	(f) Mild steel chromium plated 25 mm dia and 3mm thickness drapery rod of approved make coloured of size 1.50 m long with end caps, mounting brackets and 12 Nos of curtain rings.	Nos	25
91	Integral water proofing compound	(g) Integral water proofing compound Make Pidilite/ Dr Fixit or Equivalent to IS 2645-2003 .	Kg	50
92	White or coloured cement to match the floor finishes surface	(h) White or coloured cement to match the floor finishes surface.	Kg	100
93	Fire Extinguisher one Kg Capacity	(j) Fire Extinguisher one Kg Capacity of Make : CEASE FIRE/MILMEX or Equivalent to IS 15683 - 2018 .	Nos	5
94	Drill Bits 3 mm size	Erection Tools. 01 Set of erection tools will be provided for 04 CHDH. One set consists of following items :-(a) Drill Bits. Make: BOSCH Model No. GSB-13RE/JCB/HITACHI or Equivalent to IS 5441 (1986) . (i) 3 mm size - Qty 05 Nos	Nos	5
95	Drill Bits 6 mm size	(ii) 6 mm size - Qty 05 Nos	Nos	5
96	Drill Bits 8 mm size	(iii) 8 mm size - Qty 05 Nos	Nos	5
97	Drill Bits 10 mm size	(iv) 10 mm size - Qty 05 Nos	Nos	5
98	Drill Machine high speed heavy duty Qty	(b) Drill Machine high speed heavy duty Qty - 01 Nos Make: BOSCH /JCB/ HITACHI or Equivalent to IS 5441 (1986) .	Nos	1
99	Hacksaw frame with 5 bladeboth side teeth	(c) Hacksaw frame with 5 bladeboth side teeth Qty - 01 No. Make - Taparia or Equivalent to IS 5169 (1986) .	Nos	1
100	Screw driver, blade length 300 mm, blade dia 6 mm Qty	(d) Screw driver, blade length 300 mm, blade dia 6 mm Qty - 02 Nos Make - Taparia or Equivalent to IS 844-1 (1979) .	Nos	2
101	Hammer	(e) Hammer 0.50 kg. Qty- 01 Nos	Nos	1
102	Magnetic nut setter of size 8mm	(f) Magnetic nut setter of size 8mm. Qty - 02 Nos	Nos	2
103	Parthal wooden planks for shuttering	(g) Parthal wooden planks for shuttering 3.65 x 0.30 x 0.025 mtr - Qty - 04 Nos.	Nos	4

RESTRICTED


RESTRICTED

104	Circular Tile cutting Machine with 5 blade	(h) Circular Tile cutting Machine with 5 blade. Qty - 01 No Make: BOSCH /HITACHI/JCBor Equivalent to IS 5441 (1986).	Nos	1
105	Panel Steel cutting diamond blade	(j) Panel/Steel cutting diamond blade. Qty- 05 Nos Make: BOSCH /HITACHI/JCBor Equivalent to IS 5441 (1986).	Nos	5
106	Aluminium planer for mason	(k) Aluminium planer for mason 1.20 mtr length Qty-01 No	Nos	1
107	Brick Trowel	(l) Brick Trowel Qty-01 No	Nos	1
108	Brick Hammer	(m) Brick Hammer 1 Kg Qty - 01 No	Nos	1
109	Insulated Plaster side cutting 250 mm	(n) Insulated Plaster side cutting 250 mm - Qty-01 No.	Nos	1
110	Measuring Tape 30 Mtr long	(o) Measuring Tape 30 Mtr long Qty-01 No	Nos	1
111	(p) Water Level pipe L=20 mtr Qty-01	(p) Water Level pipe L=20 mtr Qty-01	Nos	1
112	Bonding Adhesive Make-Araldite	(q) Bonding Adhesive (Make-Araldite) qty - 0.5 Kg	Kg	0.5
113	Mild Steel Material Handling Trolley	(r) Mild Steel Material Handling Trolley of size 1200mm x 600mm x 300mm with weight loading capacity of 250 Kg supported by 2 wheel auto tyre based structure.	Nos	2


RESTRICTED

COOK HOUSE DINING HALL

S No	Marked	Description	Size	No
1	SD	DOOR	0.90 X 2.10M	02
2	ALD	MAIN DOOR	0.90X2.10M	03
3	ALW	WINDOW	1.00 X 1.20M	08
4	SW	SERVING WINDOW	2.44 X1.22 M	01

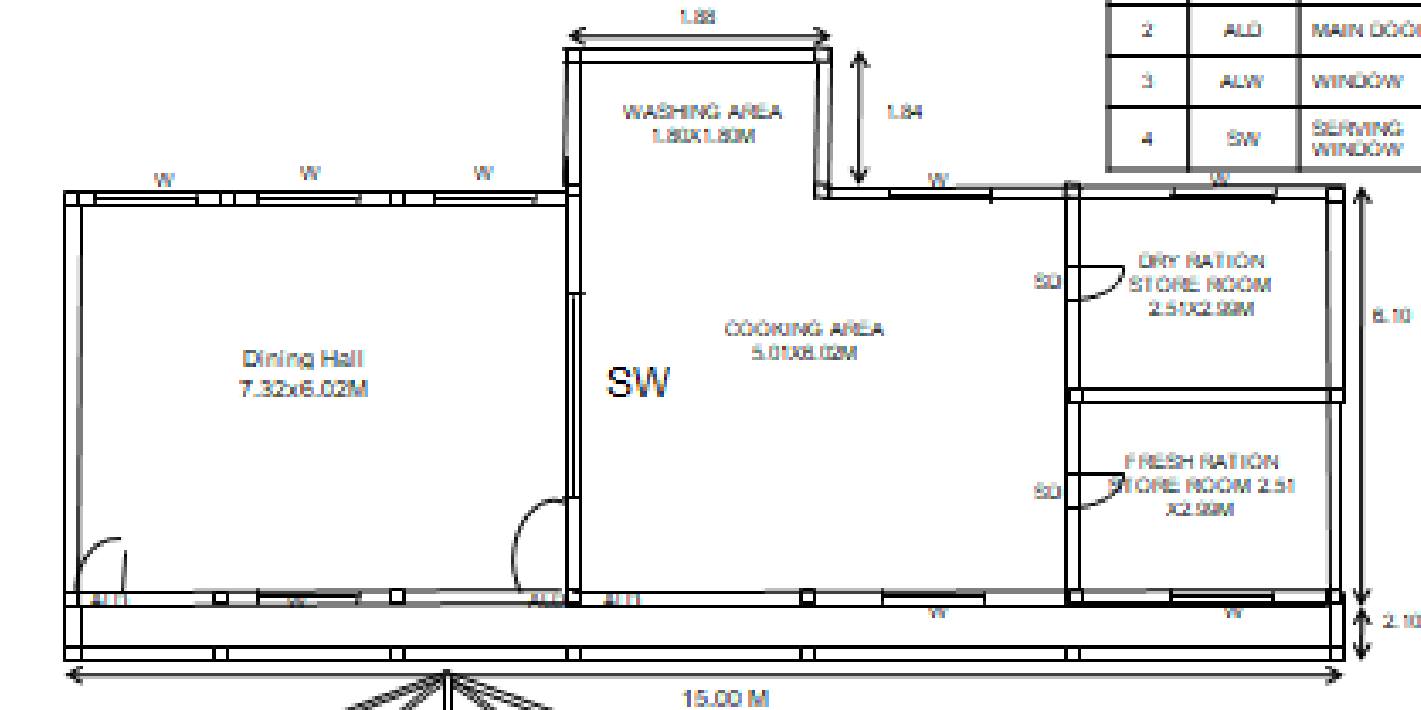


PLAN

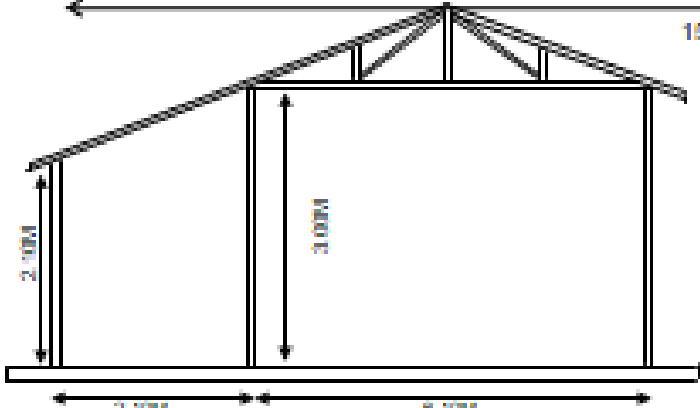

RIGHT SIDE ELEVATION

RESTRICTED

COOK HOUSE DINING HALL

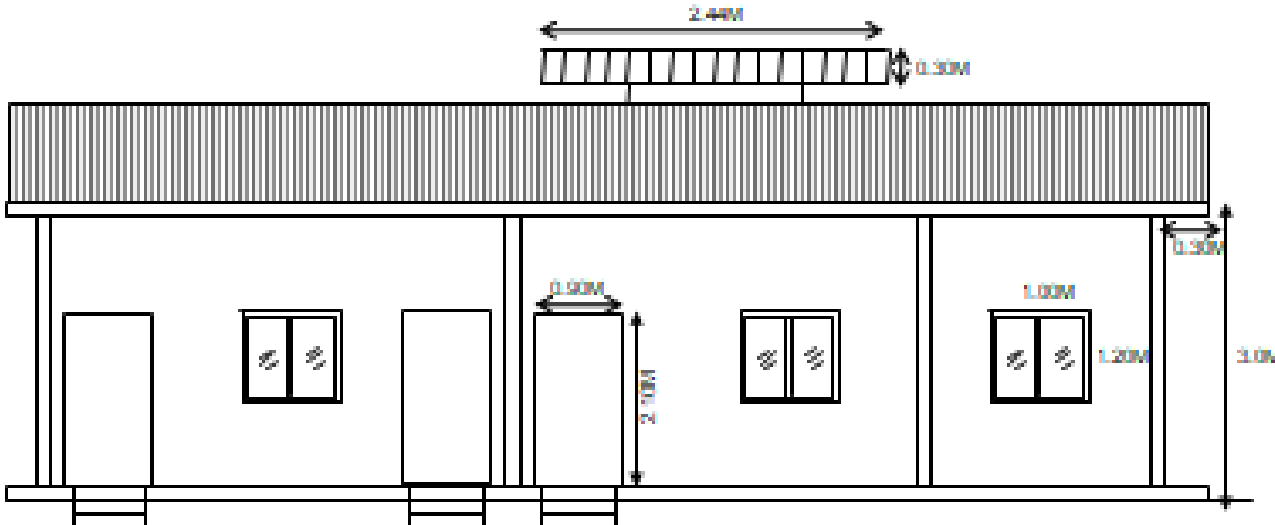


FRONT ELEVATION

RESTRICTED

RESTRICTED


COOK HOUSE DINING HALL

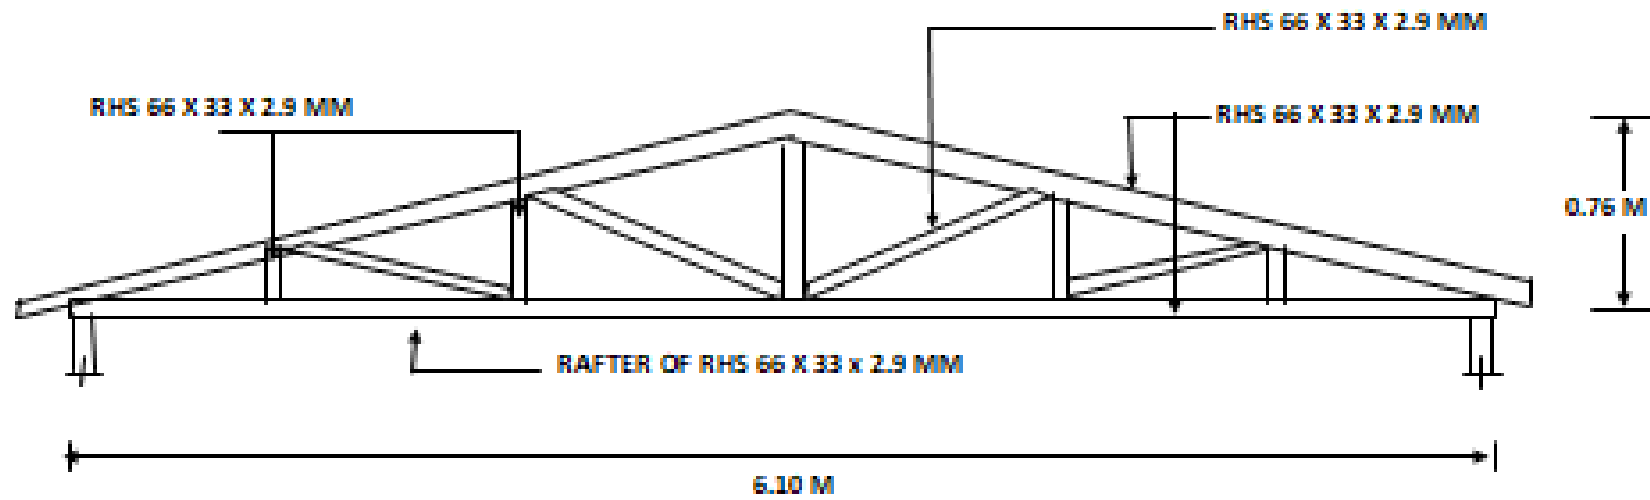

TRUSS


RESTRICTED

RESTRICTED

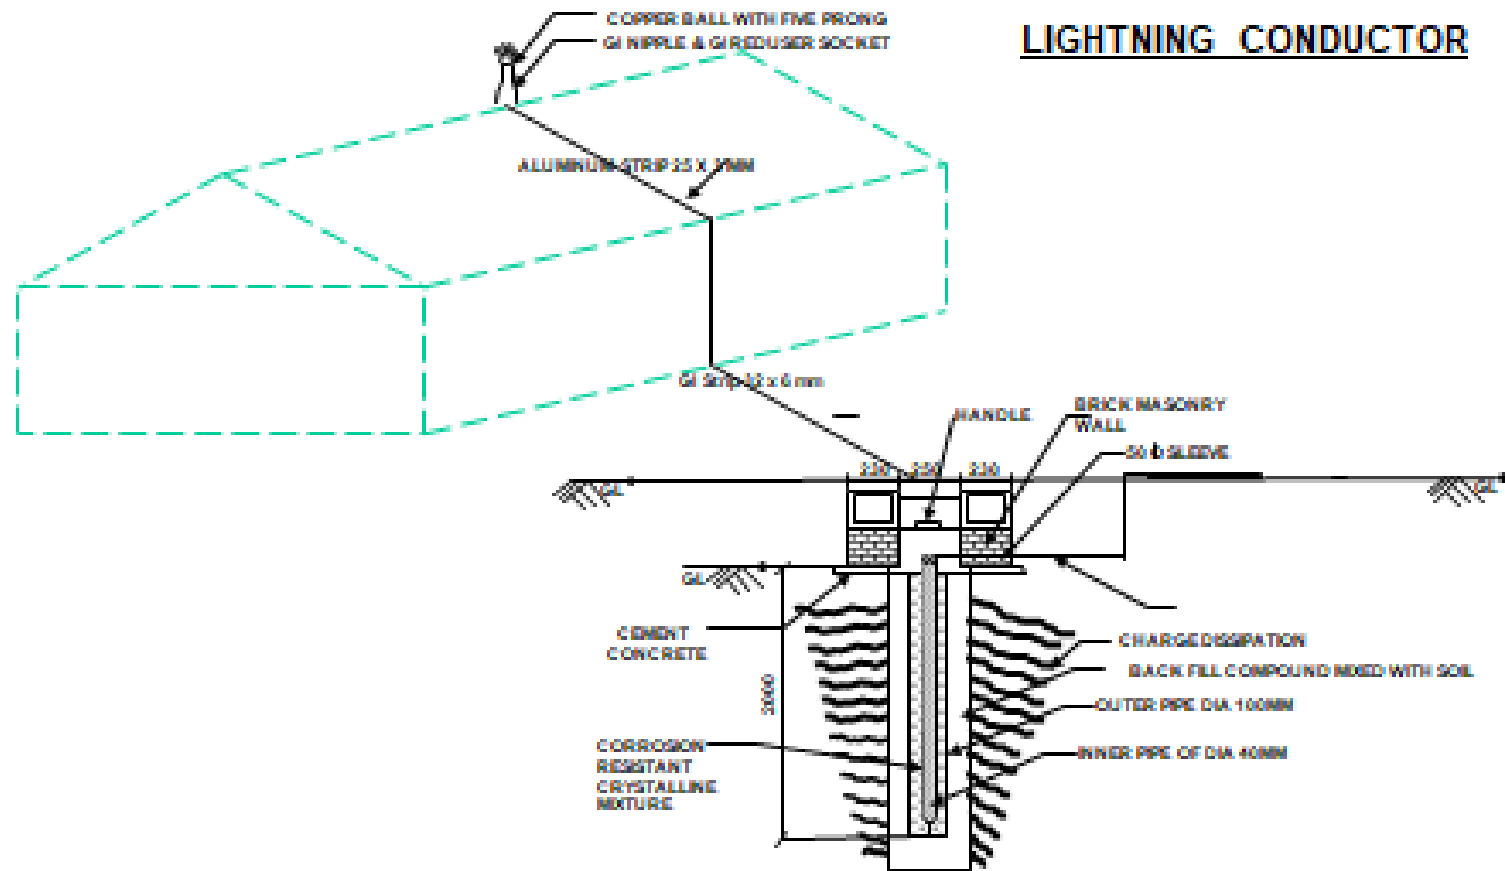

RESTRICTED


COOK HOUSE DINING HALL

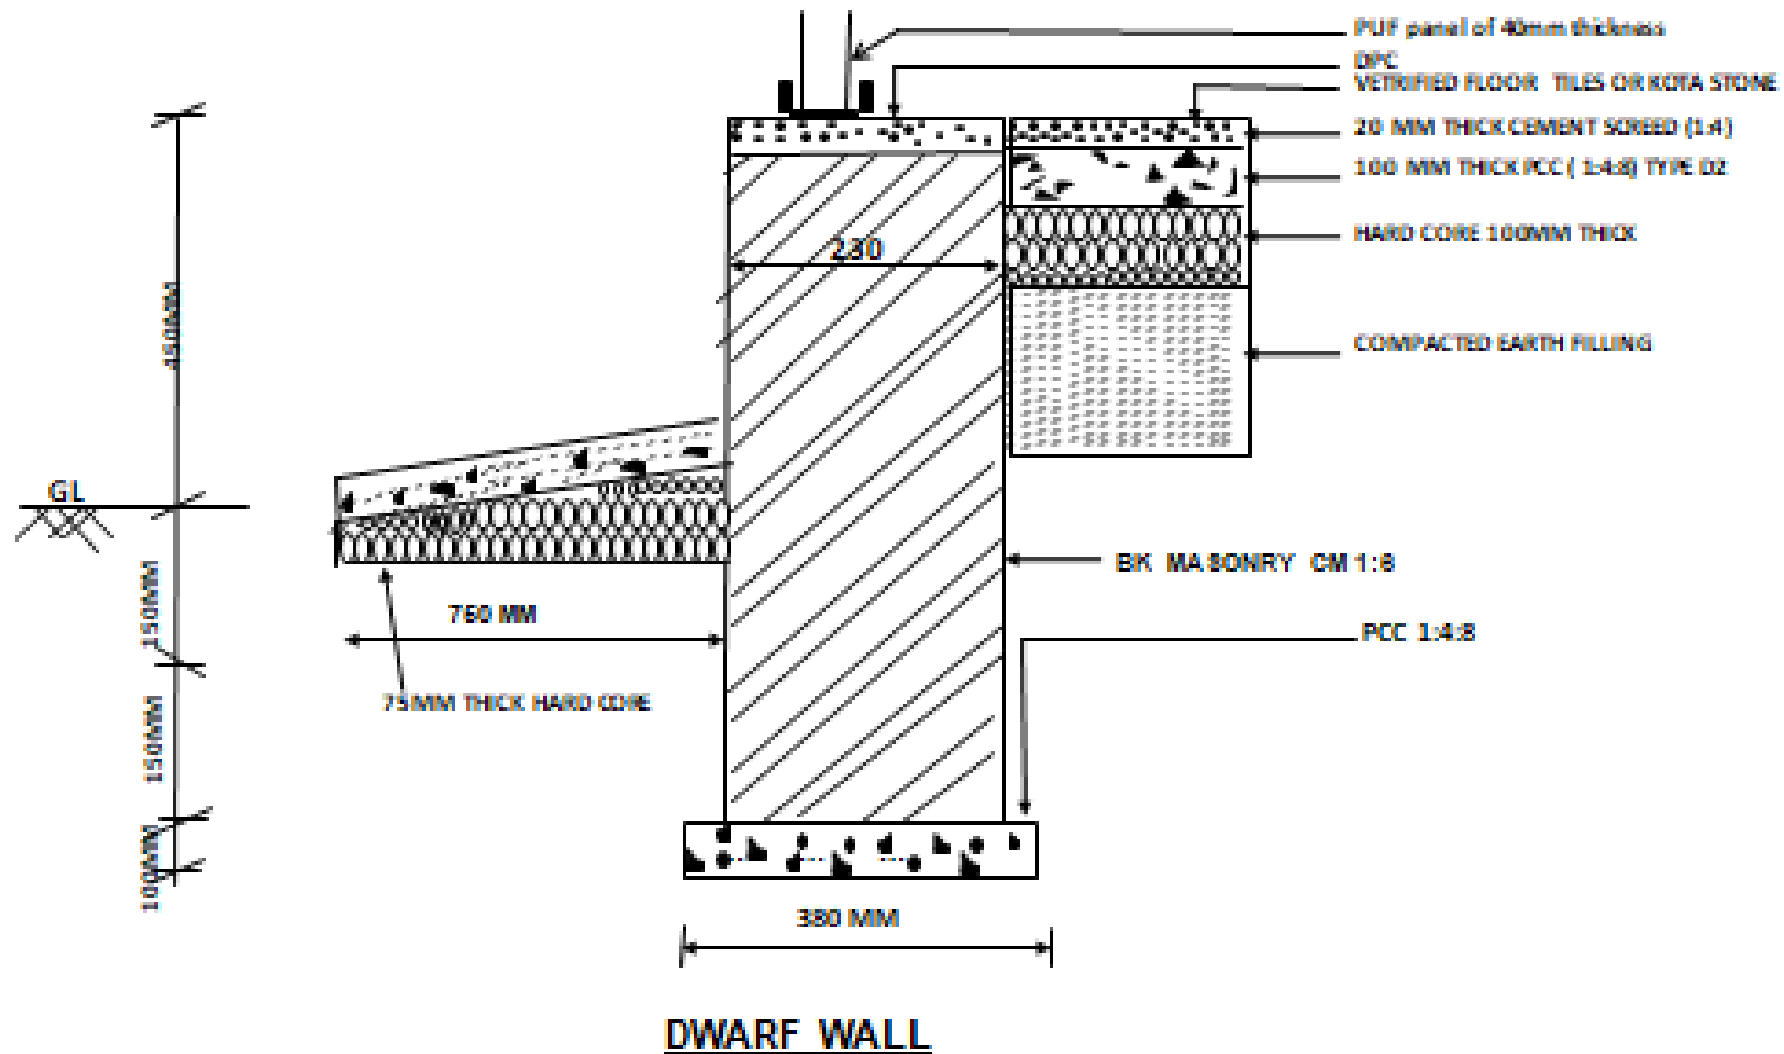

RESTRICTED

RESTRICTED


COOK HOUSE DINING HALL

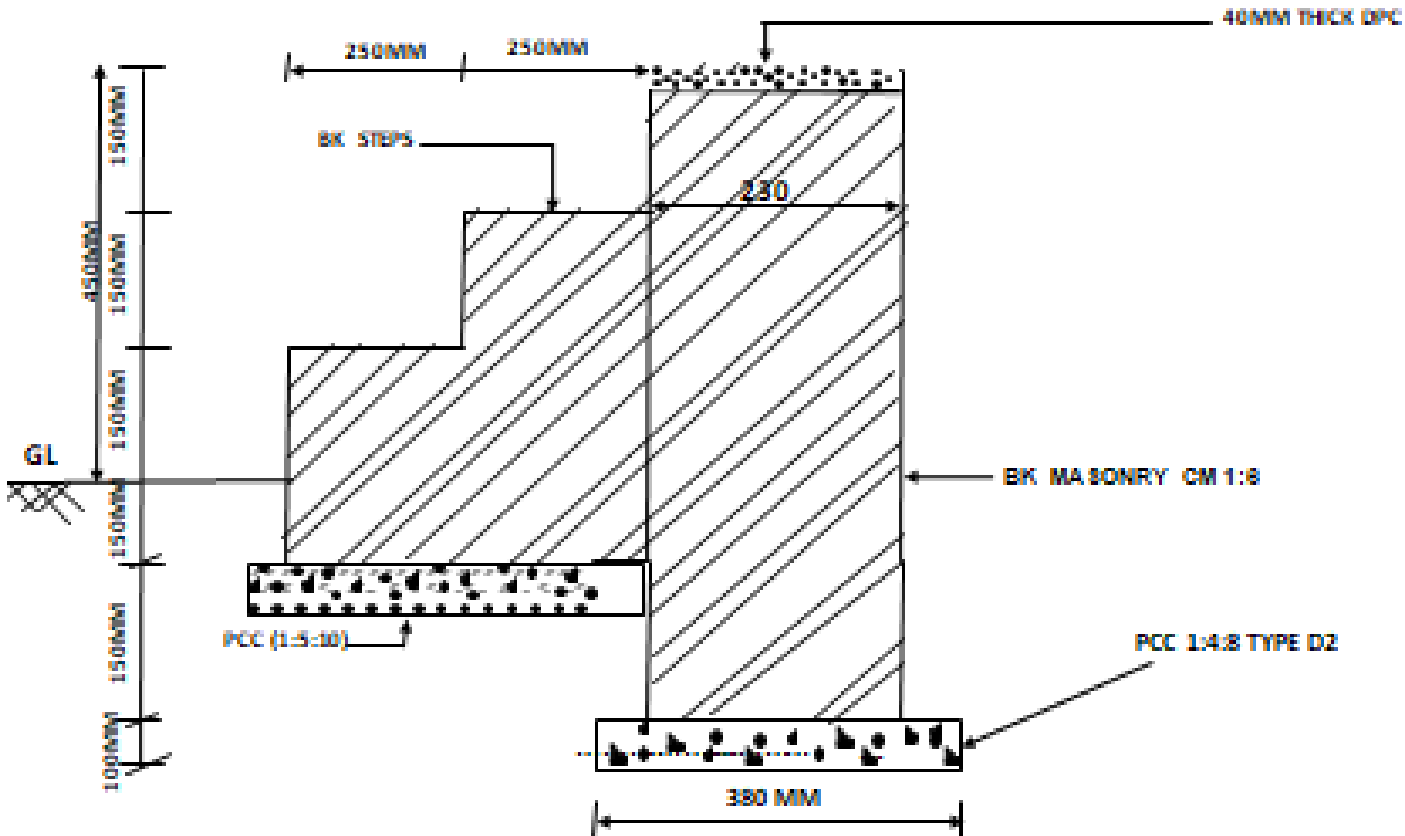

BRICK STEPS


RESTRICTED

COOK HOUSE DINING HALL

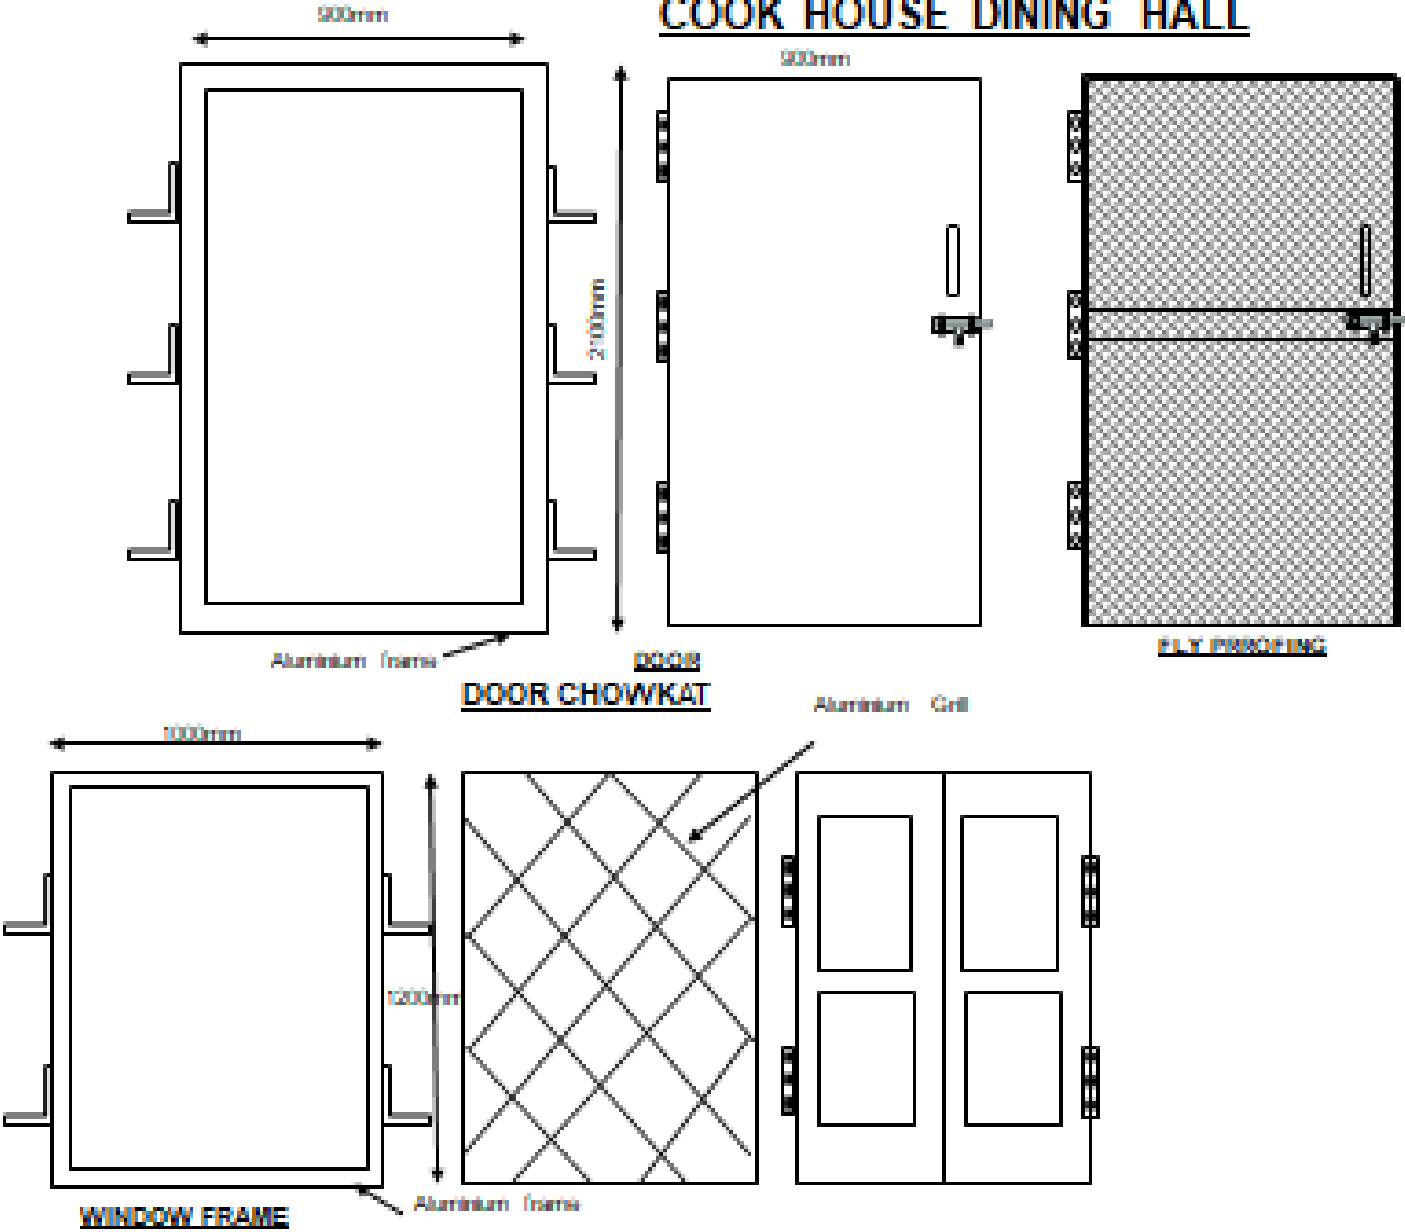


RESTRICTED

COOK HOUSE DINING HALL

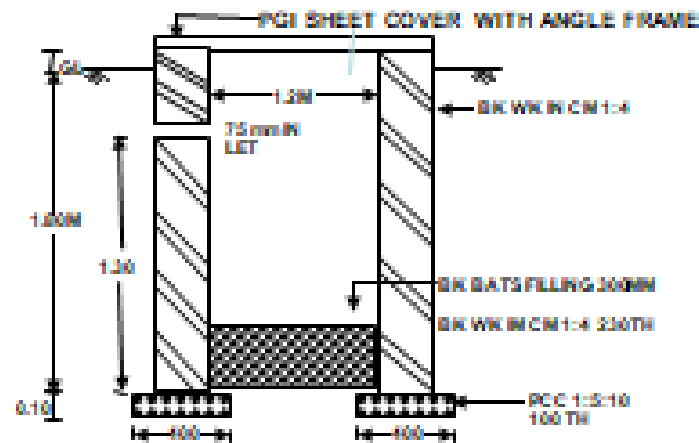

SECTION

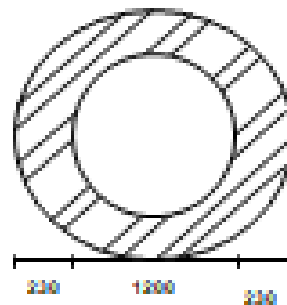

PLAN
SOAKAGE PIT

RESTRICTED