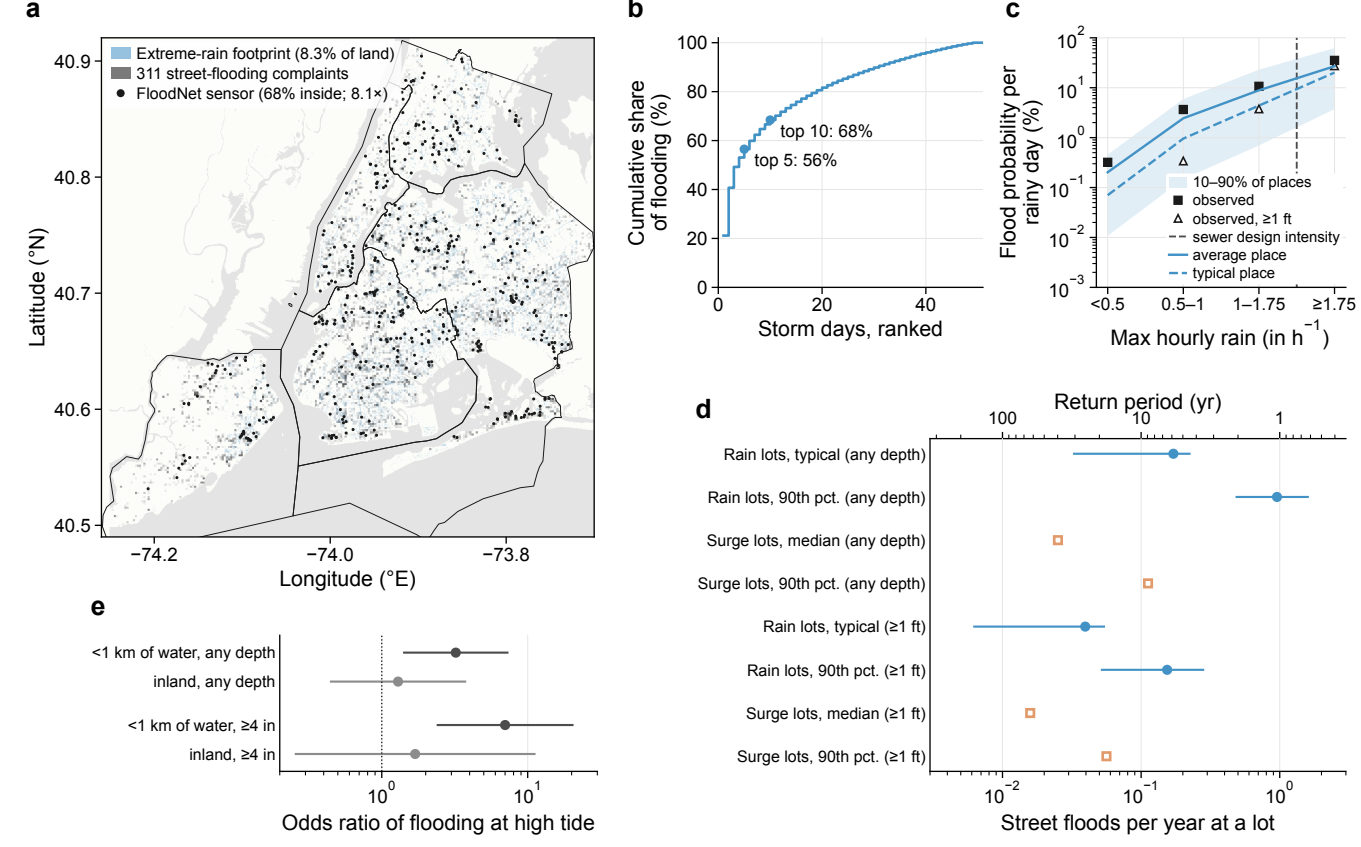

a
Extreme-rain footprint (8.3% of land)
311 street-flooding complaints
FloodNet sensor (68% inside; 8.1×)
Latitude (°N)
Longitude (°E)
40.9
40.8
40.7
40.6
40.5
−74.2
−74.0
−73.8
b
Cumulative share of flooding (%)
top 10: 68%
top 5: 56%
Storm days, ranked
c
Flood probability per rainy day (%)
10–90% of places
observed
observed, ≥1 ft
sewer design intensity
average place
typical place
<0.5
0.5–1
1–1.75
≥1.75
Max hourly rain (in h⁻¹)
d
Return period (yr)
Rain lots, typical (any depth)
Rain lots, 90th pct. (any depth)
Surge lots, median (any depth)
Surge lots, 90th pct. (any depth)
Rain lots, typical (≥1 ft)
Rain lots, 90th pct. (≥1 ft)
Surge lots, median (≥1 ft)
Surge lots, 90th pct. (≥1 ft)
Street floods per year at a lot
e
<1 km of water, any depth
inland, any depth
<1 km of water, ≥4 in
inland, ≥4 in
Odds ratio of flooding at high tide