TEXAS INSTRUMENTS
Data sheet acquired from Harris Semiconductor
SCHS052B – Revised June 2003

CD4067B, CD4097B Types

CMOS Analog Multiplexers/Demultiplexers

High-Voltage Types (20-Volt Rating)

CD4067B – Single 16-Channel Multiplexer/Demultiplexer

CD4097B – Differential 8-Channel Multiplexer/Demultiplexer

■ CD4067B and CD4097B CMOS analog multiplexers/demultiplexers* are digitally controlled analog switches having low ON impedance, low OFF leakage current, and internal address decoding. In addition, the ON resistance is relatively constant over the full input-signal range.

The CD4067B is a 16-channel multiplexer with four binary control inputs, A,B,C,D, and an inhibit input, arranged so that any combination of the inputs selects one switch.

The CD4097B is a differential 8-channel multiplexer having three binary control inputs A, B, C, and an inhibit input. The inputs permit selection of one of eight pairs of switches.

A logic "1" present at the inhibit input turns all channels off.

The CD4067B and CD4097B types are supplied in 24-lead hermetic dual-in-line ceramic packages (F3A suffix), 24-lead dual-in-line plastic packages (E suffix), 24-lead small-outline packages (M, M96, and NSR suffixes), and 24-lead thin shrink small-outline packages (P and PWR suffixes).

*When these devices are used as demultiplexers, the channel in/out terminals are the outputs and the common out/in terminals are the inputs.

Features:

- Low ON resistance: 125 Ω (typ.) over 15 V_{p-p} signal-input range for $V_{DD}-V_{SS}=15$ V
- High OFF resistance: channel leakage of ±10 pA (typ.) @ $V_{DD}-V_{SS}=10$ V
- Matched switch characteristics: $R_{ON}=5$ Ω (typ.) for $V_{DD}-V_{SS}=15$ V
- Very low quiescent power dissipation under all digital-control input and supply conditions: 0.2 μW (typ.) @ $V_{DD}-V_{SS}=10$ V
- Binary address decoding on chip
- 5-V, 10-V, and 15-V parametric ratings
- 100% tested for quiescent current at 20 V
- Standardized symmetrical output characteristics
- Maximum input current of 1 μA at 18 V over full package temperature range; 100 nA at 18 V and 25°C
- Meets all requirements of JEDEC Tentative **Standard No. 13B,** "Standard Specifications for Description of 'B' Series CMOS Devices"

Applications:

- Analog and digital multiplexing and demultiplexing
- A/D and D/A conversion
- Signal gating

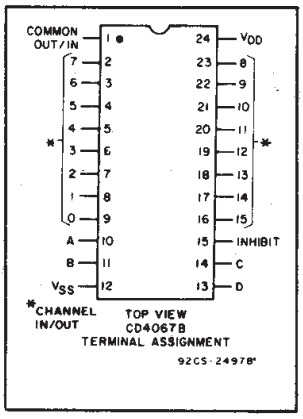

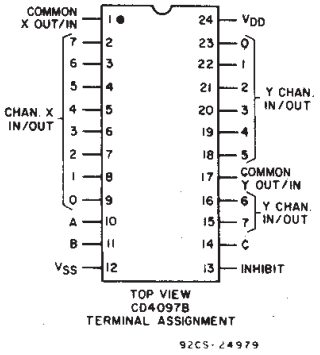

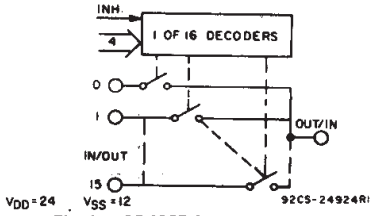

Fig. 1 – CD4067 functional diagram.

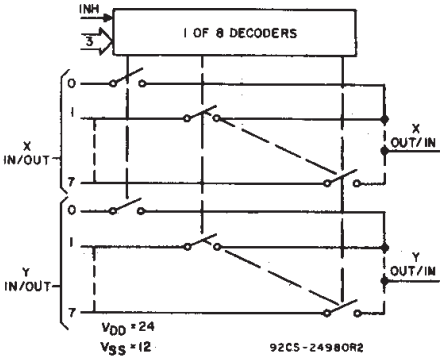

Fig. 2–CD4097 functional diagram.

Recommended Operating Conditions at $T_A = 25°C$ (Unless Otherwise Specified)

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges. Values shown apply to all types except as noted.

Characteristic	Min.	Max.	Units
Supply-Voltage Range (T_A=Full Package-Temp. Range)	3	18	V
Multiplexer Switch Input Current Capability	–	25	mA
Output Load Resistance	100	–	Ω

NOTE:
In certain applications, the external load-resistor current may include both V_{DD} and signal-line components. To avoid drawing V_{DD} current when switch current flows into the transmission gate inputs, the voltage drop across the bidirectional switch must not exceed 0.8 volt (calculated from R_{ON} values shown in ELECTRICAL CHARACTERISTICS CHART). No V_{DD} current will flow through R_L if the switch current flows into terminal 1 on the CD4067; terminals 1 and 17 on the CD4097.

CD4067 TRUTH TABLE

A	B	C	D	Inh	Selected Channel
X	X	X	X	1	None
0	0	0	0	0	0
1	0	0	0	0	1
0	1	0	0	0	2
1	1	0	0	0	3
0	0	1	0	0	4
1	0	1	0	0	5
0	1	1	0	0	6
1	1	1	0	0	7
0	0	0	1	0	8
1	0	0	1	0	9
0	1	0	1	0	10
1	1	0	1	0	11
0	0	1	1	0	12
1	0	1	1	0	13
0	1	1	1	0	14
1	1	1	1	0	15

CD4097 TRUTH TABLE

A	B	C	Inh	Selected Channel
X	X	X	1	None
0	0	0	0	0X, 0Y
1	0	0	0	1X, 1Y
0	1	0	0	2X, 2Y
1	1	0	0	3X, 3Y
0	0	1	0	4X, 4Y
1	0	1	0	5X, 5Y
0	1	1	0	6X, 6Y
1	1	1	0	7X, 7Y

3 COMMERCIAL CMOS HIGH VOLTAGE ICs

ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	CONDITIONS			LIMITS AT INDICATED TEMPERATURES (°C)							Units
	V_{is} (V)	V_{SS} (V)	V_{DD} (V)	−55	−40	+85	+125	+25 Min.	+25 Typ.	+25 Max.	
SIGNAL INPUTS (V_{is}) AND OUTPUTS (V_{OS})											
Quiescent Device Current, I_{DD} Max.			5	5	5	150	150	–	0.04	5	μA
			10	10	10	300	300	–	0.04	10	
			15	20	20	600	600	–	0.04	20	
			20	100	100	3000	3000	–	0.08	100	
ON-state Resistance $V_{SS} \leqslant V_{is} \leqslant V_{DD}$ r_{on} Max.		0	5	800	850	1200	1300	–	470	1050	Ω
		0	10	310	330	520	550	–	180	400	
		0	15	200	210	300	320	–	125	240	
Change in on-state Resistance (Between Any Two Channels) Δr_{on}		0	5	–	–	–	–	–	15	–	Ω
		0	10	–	–	–	–	–	10	–	
		0	15	–	–	–	–	–	5	–	
OFF Channel Leakage Current: Any Channel OFF Max. or All Channels OFF (Common OUT/IN) Max.		0	18	±100*		±1000*		–	±0.1	±100*	nA
Capacitance: Input, C_{is}		−5	5	–	–	–	–	–	5	–	pF
Output, C_{os} CD4067				–	–	–	–	–	55	–	
CD4097				–	–	–	–	–	35		
Feedthrough, C_{ios}				–	–	–	–	–	0.2		
Propagation Delay Time (Signal Input to Output	V_{DD}	R_L = 200 KΩ C_L=50 pF t_r, t_f=20 ns	5	–	–	–	–	–	30	60	ns
			10	–	–	–	–	–	15	30	
			15	–	–	–	–	–	10	20	
CONTROL (ADDRESS or INHIBIT) V_C											
Input Low Voltage, V_{IL} Max.	=V_{DD} thru 1 KΩ	R_L=1 KΩ to V_{SS} I_{IS}<2 μA on all OFF Channels	5	1.5				–	–	1.5	V
			10	3				–	–	3	
			15	4				–	–	4	
Input High Voltage, V_{IH} Min.			5	3.5				3.5	–	–	
			10	7				7	–	–	
			15	11				11	–	–	

* Determined by minimum feasible leakage measurement for automatic testing.

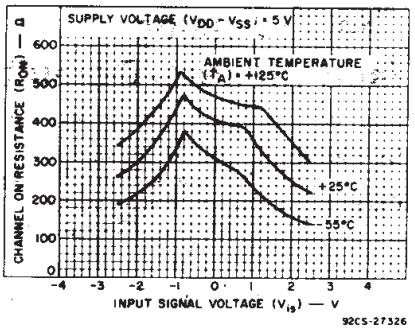

Fig. 3—Typical ON resistance vs. input signal voltage (all types).

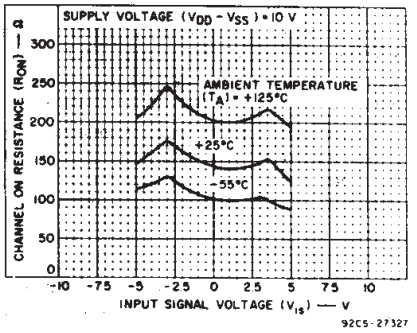

Fig. 4—Typical ON resistance vs. input signal voltage (all types).

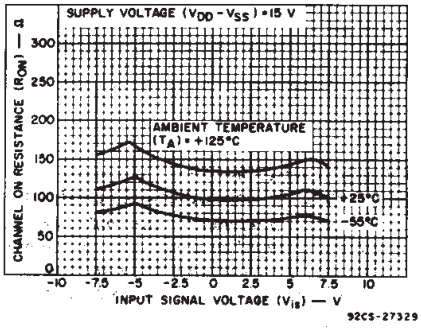

Fig. 5—Typical ON resistance vs. input signal voltage (all types).

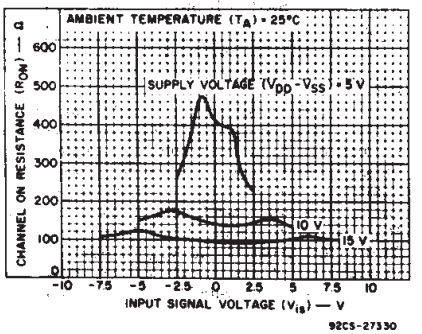

Fig. 6—Typical ON resistance vs. input signal voltage (all types).

ELECTRICAL CHARACTERISTICS (Cont'd)

CHARACTERISTIC	CONDITIONS			LIMITS AT INDICATED TEMPERATURES (°C)							Units
	V_{is} (V)	V_{SS} (V)	V_{DD} (V)	−55	−40	+85	+125	+25 Min.	+25 Typ.	+25 Max.	
Input Current, I_{IN} Max.	V_{IN} = 0, 18 V		18	±0.1	±0.1	±1	±1	–	$\pm10^{-5}$	±0.1	μA
Propagation Delay Time: Address or Inhibit-to-Signal OUT (Channel turning ON)	R_L = 10 KΩ, C_L = 50 pF, t_r, t_f = 20 ns	0	5	–	–	–	–	–	325	650	ns
		0	10	–	–	–	–	–	135	270	
		0	15	–	–	–	–	–	95	190	
Address or Inhibit-to-Signal OUT (Channel turning OFF)	R_L = 300 Ω, C_L = 50 pF, t_r, t_f = 20 ns	0	5	–	–	–	–	–	220	440	ns
		0	10	–	–	–	–	–	90	180	
		0	15	–	–	–	–	–	65	130	
Input Capacitance, C_{IN}	Any Address or Inhibit Input			–	–	–	–	–	5	7.5	pF

MAXIMUM RATINGS, *Absolute-Maximum Values:*

DC SUPPLY-VOLTAGE RANGE, (V_{DD})
(Voltages referenced to V_{SS} Terminal) ..... -0.5V to +20V
INPUT VOLTAGE RANGE, ALL INPUTS ..... -0.5V to V_{DD} +0.5V
DC INPUT CURRENT, ANY ONE INPUT ..... ±10mA
POWER DISSIPATION PER PACKAGE (P_D):
For T_A = -55°C to +100°C 500mW
For T_A = +100°C to +125°C ..... Derate Linearity at 12mW/°C to 200mW
DEVICE DISSIPATION PER OUTPUT TRANSISTOR
FOR T_A = FULL PACKAGE-TEMPERATURE RANGE (All Package Types) 100mW
OPERATING-TEMPERATURE RANGE (T_A) ..... -55°C to +125°C
STORAGE TEMPERATURE RANGE (T_{stg}) ..... -65°C to +150°C
LEAD TEMPERATURE (DURING SOLDERING):
At distance 1/16 ± 1/32 inch (1.59 ± 0.79mm) from case for 10s max ..... +265°C

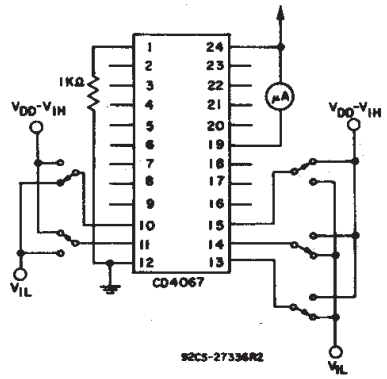

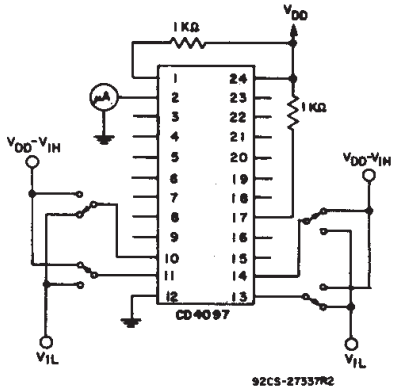

Fig. 8—Input voltage—measure <2 μA on all OFF channels (e.g., channel 12).

TEST CIRCUITS

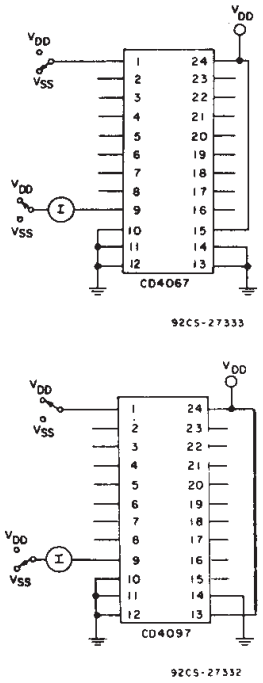

Fig. 7—OFF channel leakage current—any channel OFF.

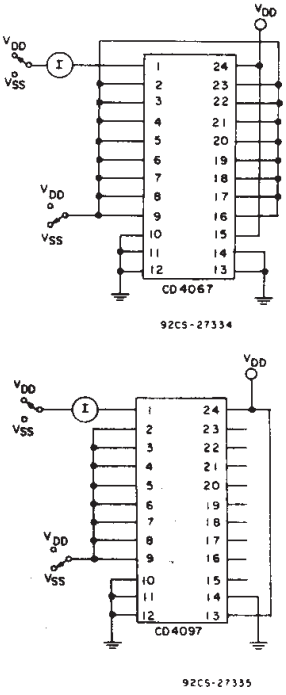

Fig. 9—OFF channel leakage current—all channels OFF.

ELECTRICAL CHARACTERISTICS (Cont'd)

CHARACTERISTIC	TEST CONDITIONS V_{is} (V)	V_{DD} (V)	R_L (KΩ)			TYPICAL VALUES	UNITS
Cutoff (−3-dB) Frequency Channel ON (Sine Wave Input)	5●	10	1	V_{os} at Common OUT/IN	CD4067	14	MHz
	$20 \log \frac{V_{os}}{V_{is}} = -3$ dB				CD4097	20	
				V_{os} at Any Channel		60	
Total Harmonic Distortion, THD	2●	5	10			0.3	%
	3●	10				0.2	
	5●	15				0.12	
	f_{is} = 1 kHz sine wave						
−40-dB Feedthrough Frequency (All Channels OFF	5●	10	1	V_{os} at Common OUT/IN	CD4067	20	MHz
	$20 \log \frac{V_{os}}{V_{is}} = -40$ dB				CD4097	12	
				V_{os} at Any Channel		8	
Signal Crosstalk (Frequency at −40 dB)	5●	10	1	Between Any 2 Channels▲		1	MHz
	$20 \log \frac{V_{os}}{V_{is}} = -40$ dB			Between Sections CD4097 Only	Measured on Common	10	
					Measured on Any Channel	18	
Address-or-Inhibit-to-Signal Crosstalk	—	10	10*			75	mV (Peak)
	V_{SS}=0, t_r,t_f=20 ns, $V_C = V_{DD} - V_{SS}$ (Square Wave)						

● Peak-to-peak voltage symmetrical about $\frac{V_{DD}-V_{SS}}{2}$.

▲ Worst case.

* Both ends of channel.

TEST CIRCUITS (Cont'd)

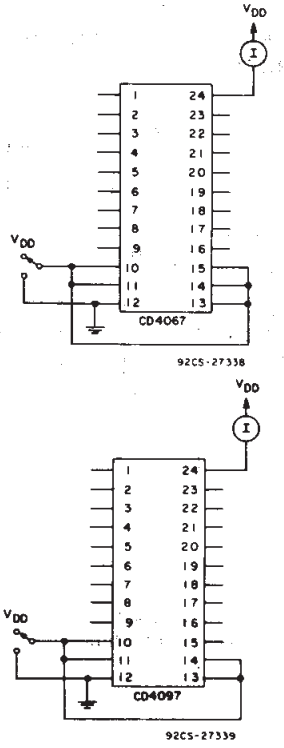

Fig. 10— Quiescent device current.

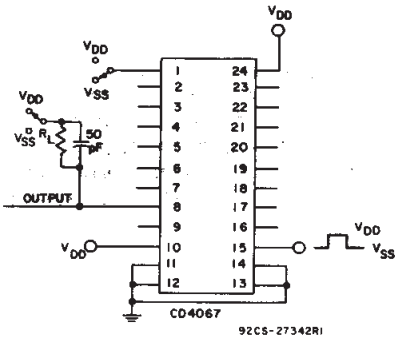

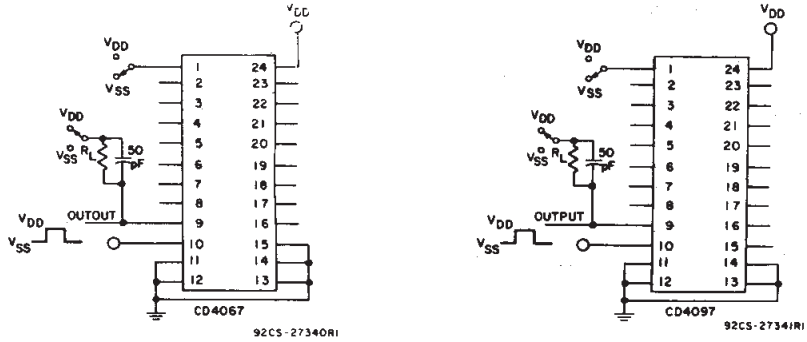

Fig. 11— Turn-on and turn-off propagation delay—address select input to signal output (e.g. measured on channel 0).

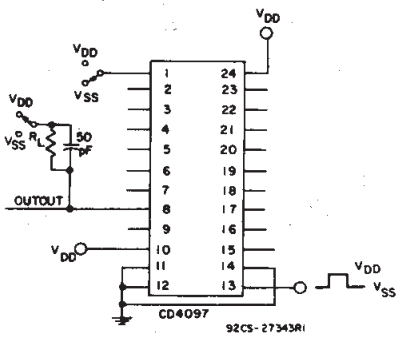

Fig. 12— Turn-on and turn-off propagation delay—inhibit input to signal output (e.g. measured on channel 1).

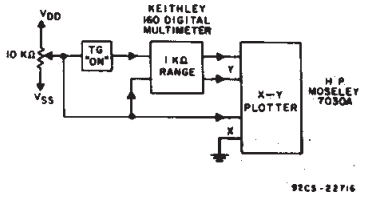

Fig. 13– Channel ON resistance measurement circuit.

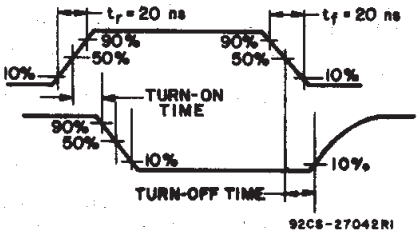

Fig. 14– Propagation delay waveform channel being turned ON (R_L = 10 K Ω, C_L = 50 pF).

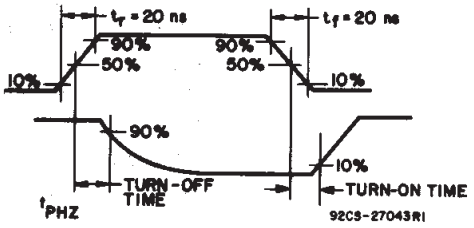

Fig. 15– Propagation delay waveform, channel being turned OFF (R_L = 300 Ω, C_L = 50 pF).

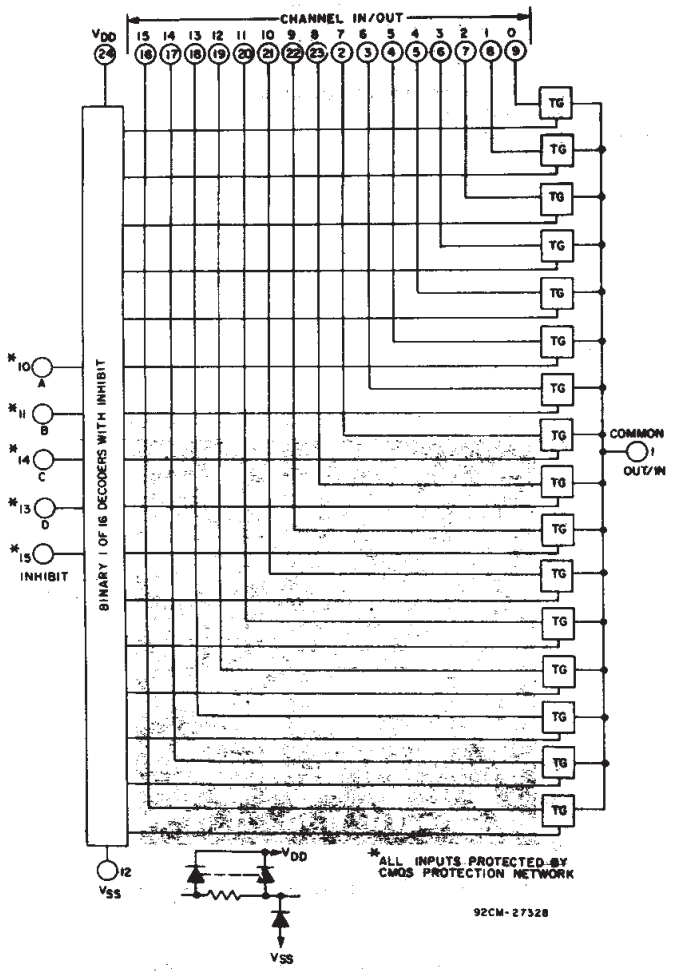

Fig. 16–CD4067 logic diagram.

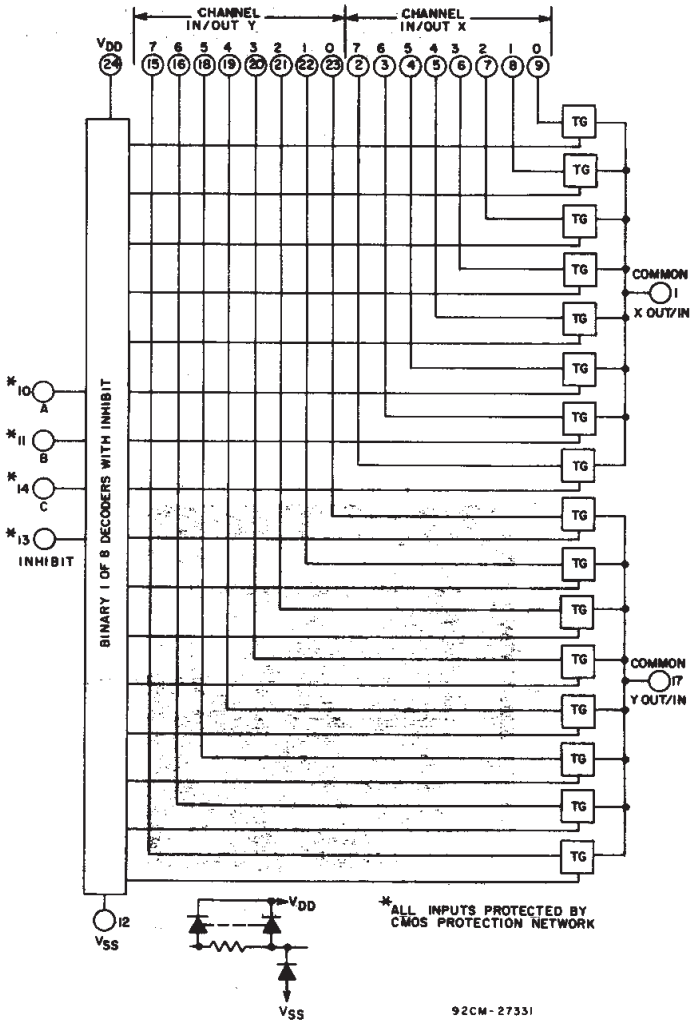

Fig. 17–CD4097 logic diagram.

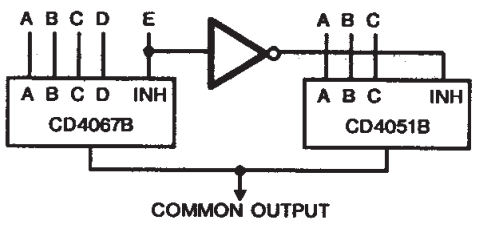

Fig. 18–24-to-1 MUX Addressing

SPECIAL CONSIDERATIONS

In applications where separate power sources are used to drive V_{DD} and the signal inputs, the V_{DD} current capability should exceed V_{DD}/R_L (R_L=effective external load). This provision avoids permanent current flow or clamp action on the V_{DD} supply when power is applied or removed from the CD4067B or CD4097B.

When switching from one address to another, some of the ON periods of the channels of the multiplexers will overlap momentarily, which may be objectionable in certain applications. Also when a channel is turned on or off by an address input, there is a momentary conductive path from the channel to V_{SS}, which will dump some charge from any capacitor connected to the input or output of the channel. The inhibit input turning on a channel will similarly dump some charge to V_{SS}.

The amount of charge dumped is mostly a function of the signal level above V_{SS}. Typically, at $V_{DD}-V_{SS}$=10 V, a 100-pF capacitor connected to the input or output of the channel will lose 3-4% of its voltage at the moment the channel turns on or off. This loss of voltage is essentially independent of the address or inhibit signal transition time, if the transition time is less than 1-2 μs. When the inhibit signal turns a channel off, there is no charge dumping to V_{SS}. Rather, there is a slight rise in the channel voltage level (65 mV typ.) due to capacitive coupling from inhibit input to channel input or output. Address inputs also couple some voltage steps onto the channel signal levels.

In certain applications, the external load-resistor current may include both V_{DD} and signal-line components. To avoid drawing V_{DD} current when switch current flows into the transmission gate inputs, the voltage drop across the bidirectional switch must not exceed 0.8 volt (calculated from R_{ON} values shown in ELECTRICAL CHARACTERISTICS CHART). No V_{DD} current will flow through R_L if the switch current flows into terminal 1 on the CD4067B, terminals 1 and 17 on the CD4097B.

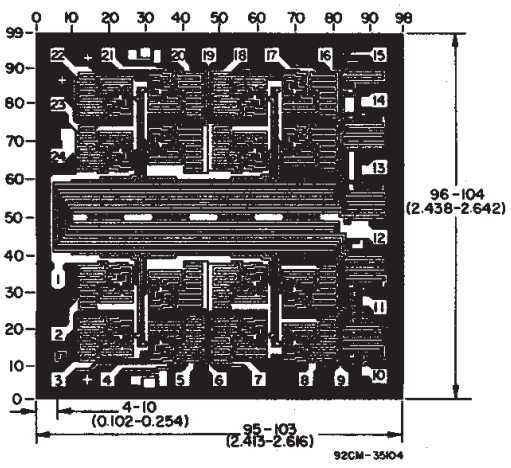

Dimensions and pad layout for CD4067BH.

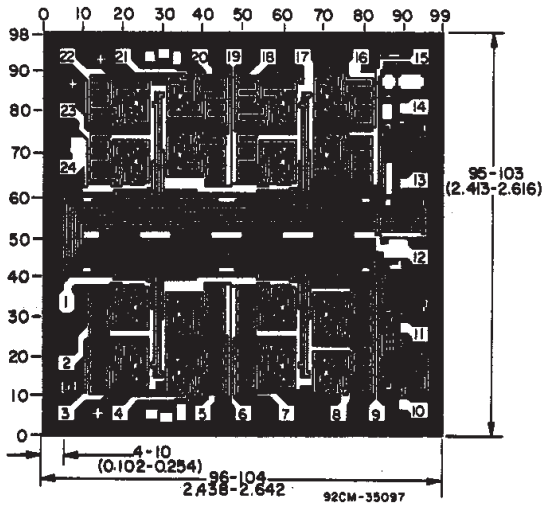

Dimensions and pad layout for CD4097BH.

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10^{-3} inch).

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)
CD4067BE	ACTIVE	PDIP	N	24	15	Pb-Free (RoHS)	CU NIPDAU	Level-NC-NC-NC
CD4067BF	ACTIVE	CDIP	J	24	1	None	Call TI	Level-NC-NC-NC
CD4067BF3A	ACTIVE	CDIP	J	24	1	None	Call TI	Level-NC-NC-NC
CD4067BM	ACTIVE	SOIC	DW	24	25	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR/ Level-1-235C-UNLIM
CD4067BM96	ACTIVE	SOIC	DW	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR/ Level-1-235C-UNLIM
CD4067BNSR	ACTIVE	SO	NS	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4067BPW	ACTIVE	TSSOP	PW	24	60	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
CD4067BPWR	ACTIVE	TSSOP	PW	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
CD4097BE	ACTIVE	PDIP	N	24	15	Pb-Free (RoHS)	CU NIPDAU	Level-NC-NC-NC
CD4097BF	ACTIVE	CDIP	J	24	1	None	Call TI	Level-NC-NC-NC
CD4097BM	ACTIVE	SOIC	DW	24	25	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR/ Level-1-235C-UNLIM
CD4097BM96	ACTIVE	SOIC	DW	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-250C-1 YEAR/ Level-1-235C-UNLIM
CD4097BNSR	ACTIVE	SO	NS	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-2-260C-1 YEAR/ Level-1-235C-UNLIM
CD4097BPW	ACTIVE	TSSOP	PW	24	60	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM
CD4097BPWR	ACTIVE	TSSOP	PW	24	2000	Pb-Free (RoHS)	CU NIPDAU	Level-1-250C-UNLIM

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - May not be currently available - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
None: Not yet available Lead (Pb-Free).
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Green (RoHS & no Sb/Br): TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDECindustry standard classifications, and peak solder temperature.

information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

MCDI004A – JANUARY 1995 – REVISED NOVEMBER 1997

J (R-GDIP-T**)

CERAMIC DUAL-IN-LINE PACKAGE

24 PINS SHOWN

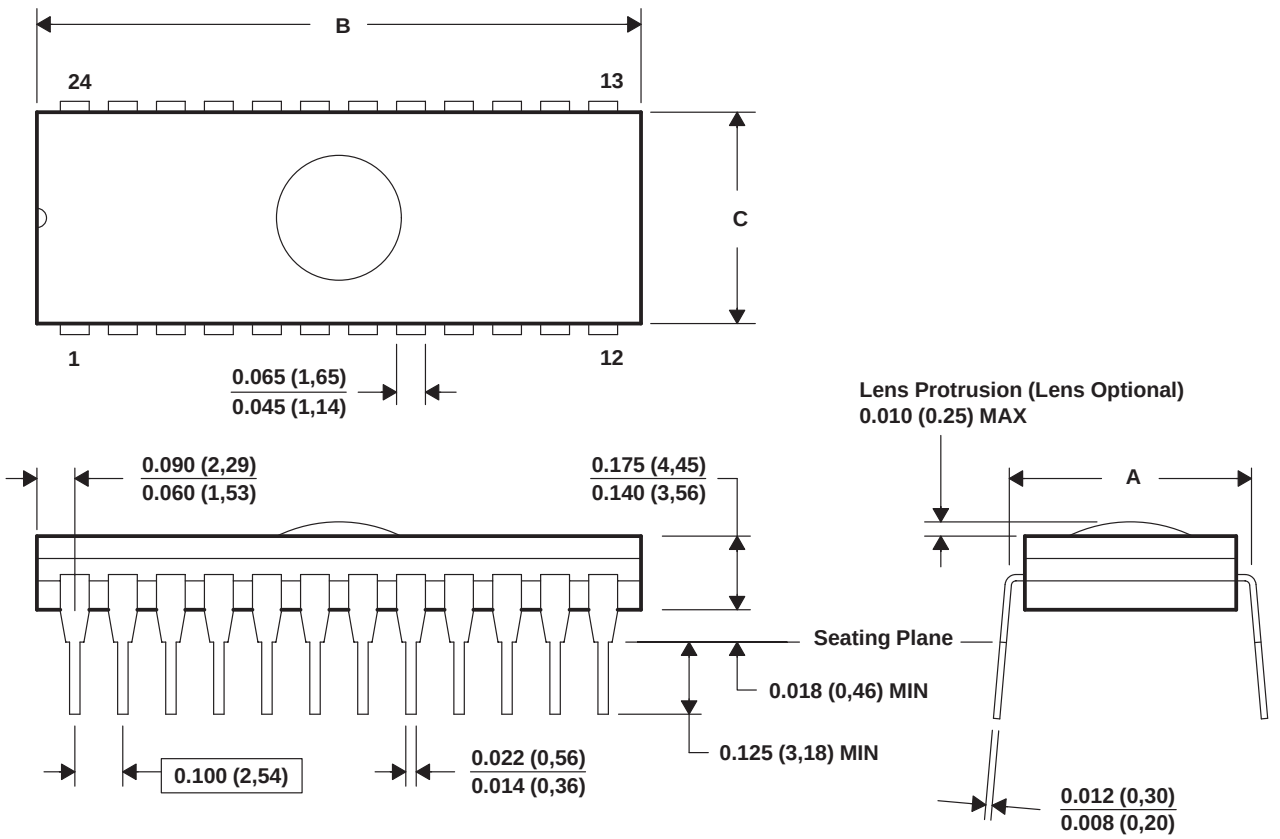

DIM \ PINS **		24		28		32		40	
		NARR	WIDE	NARR	WIDE	NARR	WIDE	NARR	WIDE
"A"	MAX	0.624(15,85)	0.624(15,85)	0.624(15,85)	0.624(15,85)	0.624(15,85)	0.624(15,85)	0.624(15,85)	0.624(15,85)
	MIN	0.590(14,99)	0.590(14,99)	0.590(14,99)	0.590(14,99)	0.590(14,99)	0.590(14,99)	0.590(14,99)	0.590(14,99)
"B"	MAX	1.265(32,13)	1.265(32,13)	1.465(37,21)	1.465(37,21)	1.668(42,37)	1.668(42,37)	2.068(52,53)	2.068(52,53)
	MIN	1.235(31,37)	1.235(31,37)	1.435(36,45)	1.435(36,45)	1.632(41,45)	1.632(41,45)	2.032(51,61)	2.032(51,61)
"C"	MAX	0.541(13,74)	0.598(15,19)	0.541(13,74)	0.598(15,19)	0.541(13,74)	0.598(15,19)	0.541(13,74)	0.598(15,19)
	MIN	0.514(13,06)	0.571(14,50)	0.514(13,06)	0.571(14,50)	0.514(13,06)	0.571(14,50)	0.514(13,06)	0.571(14,50)

4040084/C 10/97

NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Window (lens) added to this group of packages (24-, 28-, 32-, 40-pin).
D. This package can be hermetically sealed with a ceramic lid using glass frit.
E. Index point is provided on cap for terminal identification.

MPDI006B – SEPTEMBER 2001 – REVISED APRIL 2002

N (R–PDIP–T24) **PLASTIC DUAL–IN–LINE**

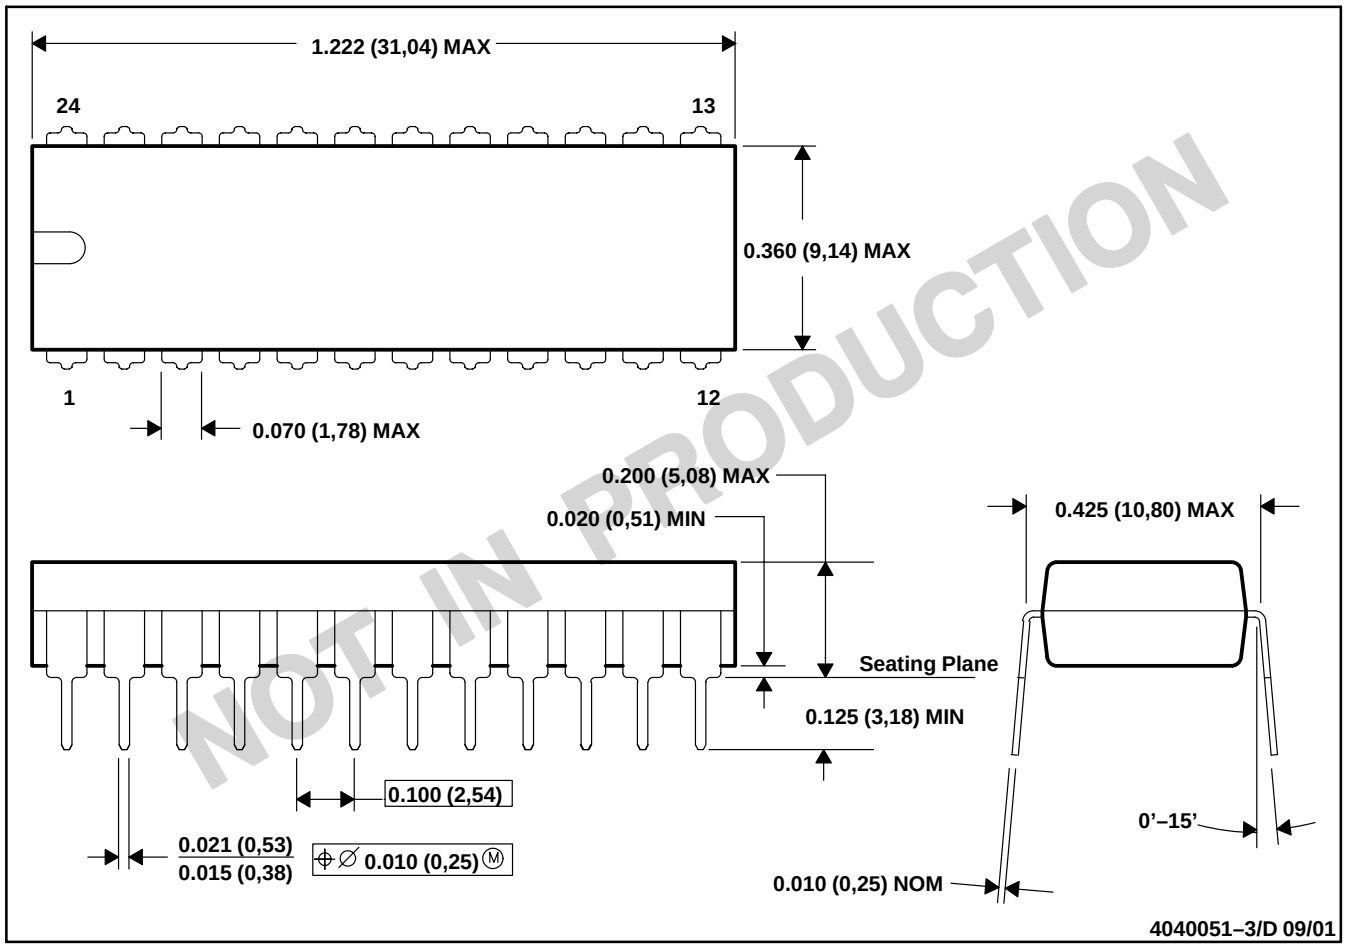

NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–010

MPDI008 – OCTOBER 1994

N (R-PDIP-T)** **PLASTIC DUAL-IN-LINE PACKAGE**

24 PIN SHOWN

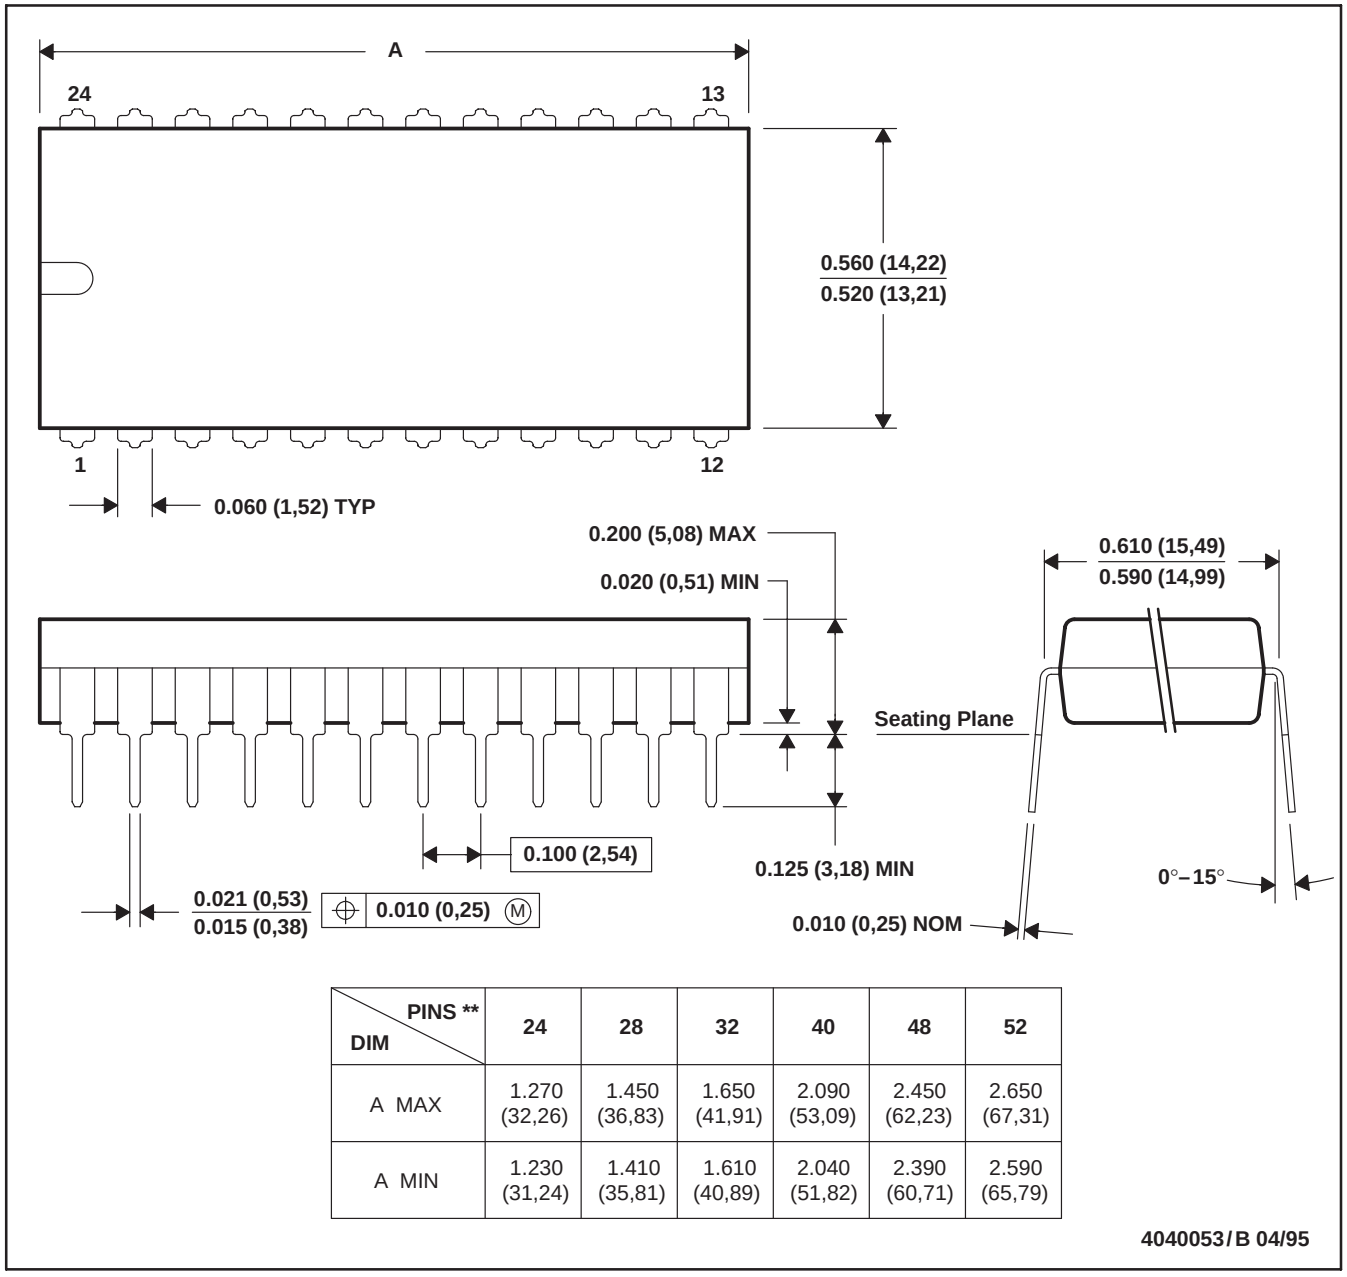

DIM \ PINS **	24	28	32	40	48	52
A MAX	1.270 (32,26)	1.450 (36,83)	1.650 (41,91)	2.090 (53,09)	2.450 (62,23)	2.650 (67,31)
A MIN	1.230 (31,24)	1.410 (35,81)	1.610 (40,89)	2.040 (51,82)	2.390 (60,71)	2.590 (65,79)

4040053/B 04/95

NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS-011
D. Falls within JEDEC MS-015 (32 pin only)

DW (R–PDSO–G24) PLASTIC SMALL–OUTLINE PACKAGE

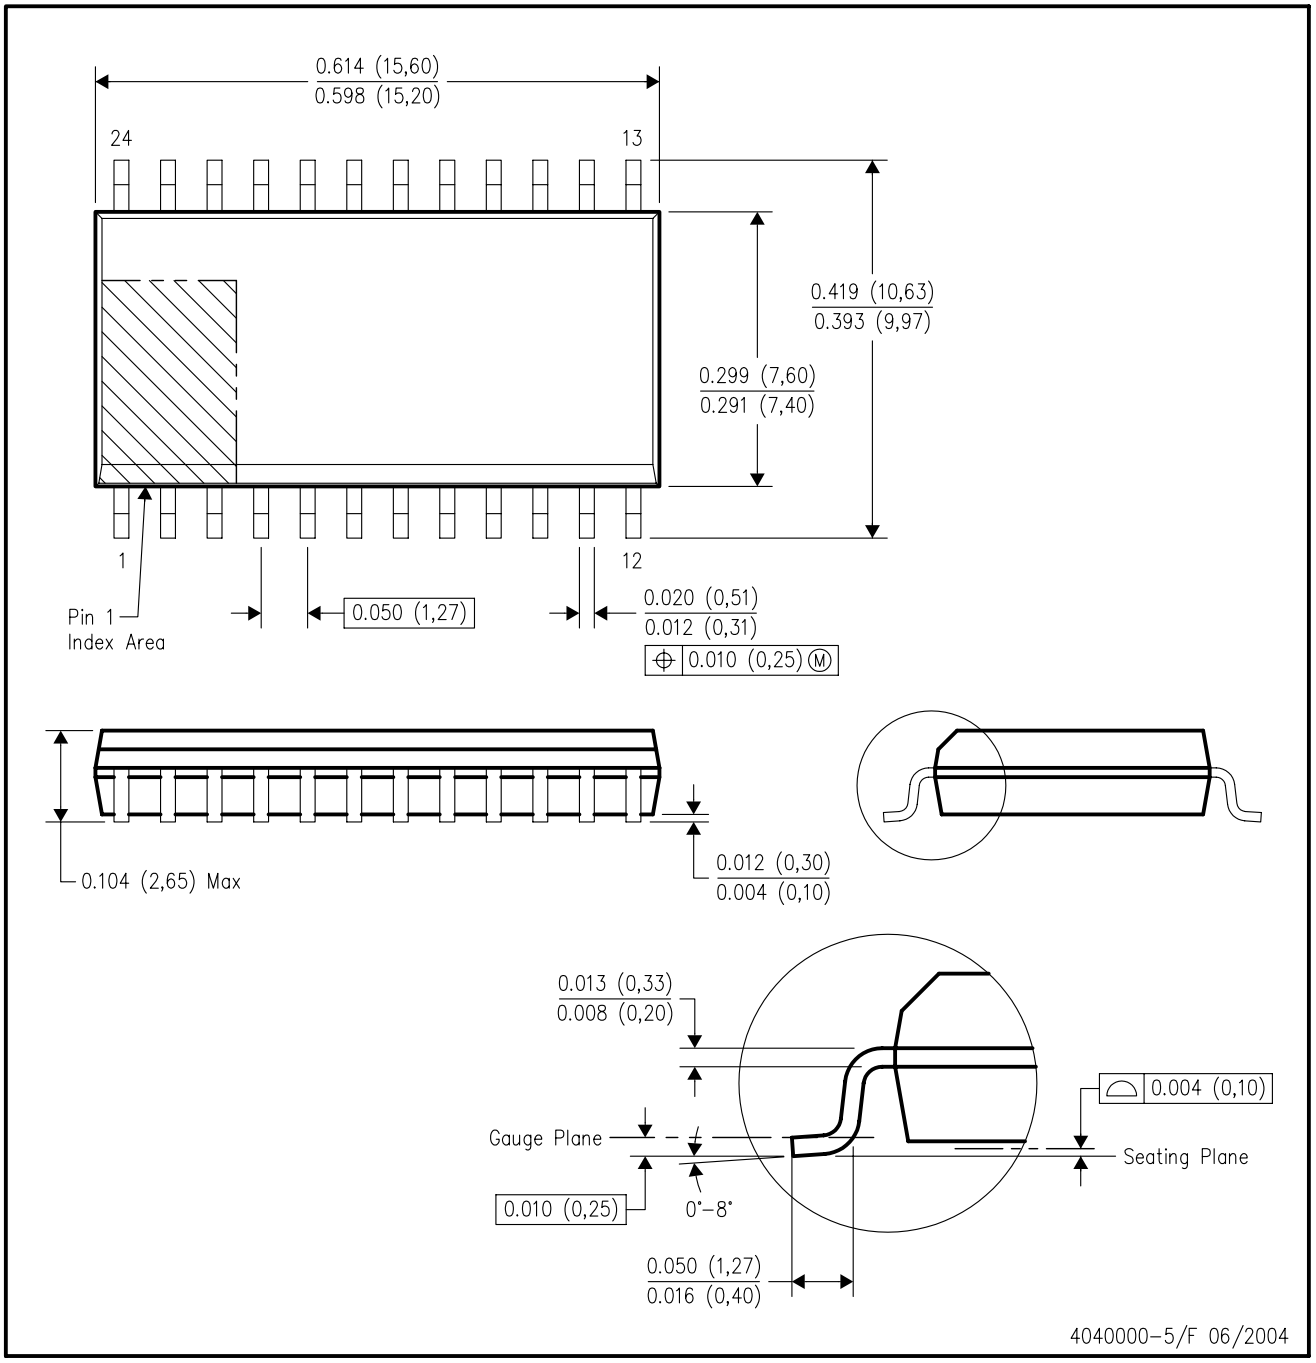

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
D. Falls within JEDEC MS–013 variation AD.

MECHANICAL DATA

NS (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

14-PINS SHOWN

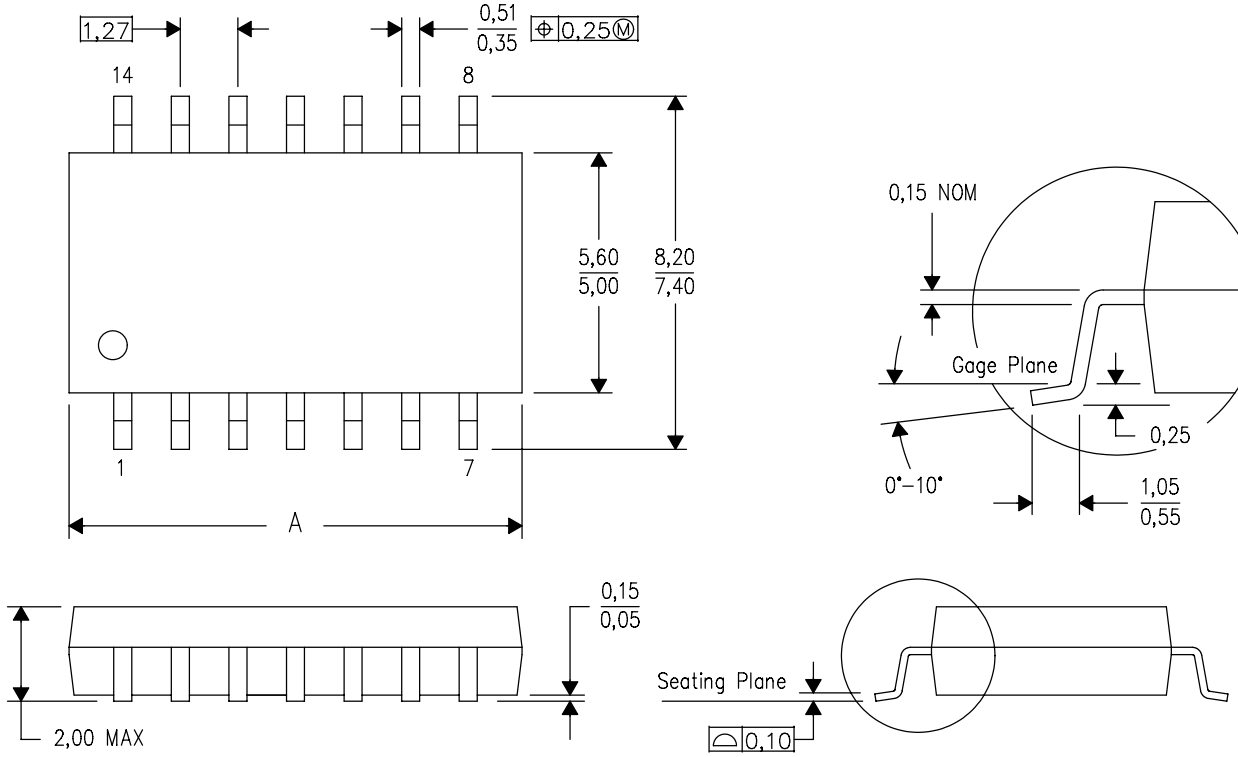

DIM \ PINS **	14	16	20	24
A MAX	10,50	10,50	12,90	15,30
A MIN	9,90	9,90	12,30	14,70

4040062/C 03/03

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

PW (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

14 PINS SHOWN

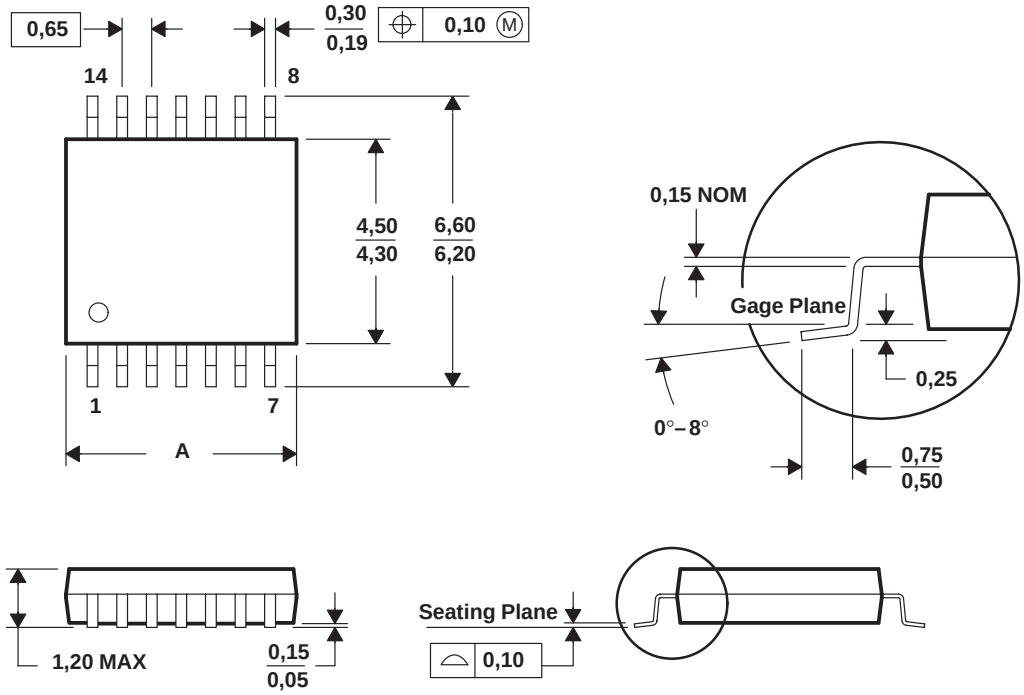

DIM \ PINS **	8	14	16	20	24	28
A MAX	3,10	5,10	5,10	6,60	7,90	9,80
A MIN	2,90	4,90	4,90	6,40	7,70	9,60

4040064/F 01/97

NOTES: A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Texas Instruments

http://www.ti.com

This file is the datasheet for the following electronic components:

CD4097BF - http://www.ti.com/product/cd4097bf?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BE - http://www.ti.com/product/cd4097be?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097B - http://www.ti.com/product/cd4097b?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BPW - http://www.ti.com/product/cd4067bpw?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BPWR - http://www.ti.com/product/cd4097bpwr?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BM - http://www.ti.com/product/cd4097bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BPWR - http://www.ti.com/product/cd4067bpwr?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BM - http://www.ti.com/product/cd4067bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BNSR - http://www.ti.com/product/cd4067bnsr?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BM96 - http://www.ti.com/product/cd4097bm96?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BNSR - http://www.ti.com/product/cd4097bnsr?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067B - http://www.ti.com/product/cd4067b?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4097BPW - http://www.ti.com/product/cd4097bpw?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BE - http://www.ti.com/product/cd4067be?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BF - http://www.ti.com/product/cd4067bf?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BM96 - http://www.ti.com/product/cd4067bm96?HQS=TI-null-null-dscatalog-df-pf-null-wwe

CD4067BF3A - http://www.ti.com/product/cd4067bf3a?HQS=TI-null-null-dscatalog-df-pf-null-wwe