

CONNECTING YOUR WIRED NETWORK

Connect to your wired network by plugging one end of an Ethernet cable into your router, switch, or jack designated by your network administrator. Plug the other end of the Ethernet cable into the Ethernet port **(B)** on the back of your Vector One.

CONNECTING YOUR KEYBOARD & MOUSE

Connect your keyboard & mouse to any available USB ports **(A)** on your Vector One, including the USB ports on the top.

CONNECTING YOUR WI-FI ANTENNA

Connect the included antenna to the connectors **(C)** on the rear of your Vector One.

CONNECTING YOUR POWER CABLE

Connect your Vector One's power supply unit (PSU) **(E)** directly to a power outlet using the included cord. Ideally, the power outlet will be on a dedicated circuit. Make sure your PSU is switched to the **I** (on) position.

Note: Do not use a power strip, surge suppressor, or uninterruptible power supply (UPS or battery backup).



QUESTIONS?

Visit us at
<https://lambdalabs.com/support>



NEED QUICK ACCESS TO MORE GPUS?

Visit us at
<https://lambdalabs.com/service/gpu-cloud>

Lambda Vector One QUICKSTART GUIDE



Questions? Visit <https://lambdalabs.com/support>

©2023 Lambda. Updated December 8, 2023.

 Lambda

WHAT'S INCLUDED?

1. Lambda Vector One workstation
2. Power cable
3. Wi-Fi antenna
4. Lambda swag
5. Quickstart guide


GETTING STARTED

To set up your Vector One, you need to connect your monitor, keyboard & mouse, wired network, Wi-Fi antenna, and power cable. You also need to remove the glass panel films and Instapak foam used to protect your Vector One during shipment.

Note: The ports on your Vector One might be arranged differently than pictured, depending on your Vector One's configuration.

LEGEND

- A. USB ports
- B. Ethernet port
- C. Wi-Fi antenna connectors
- D. GPU
- E. Power connector

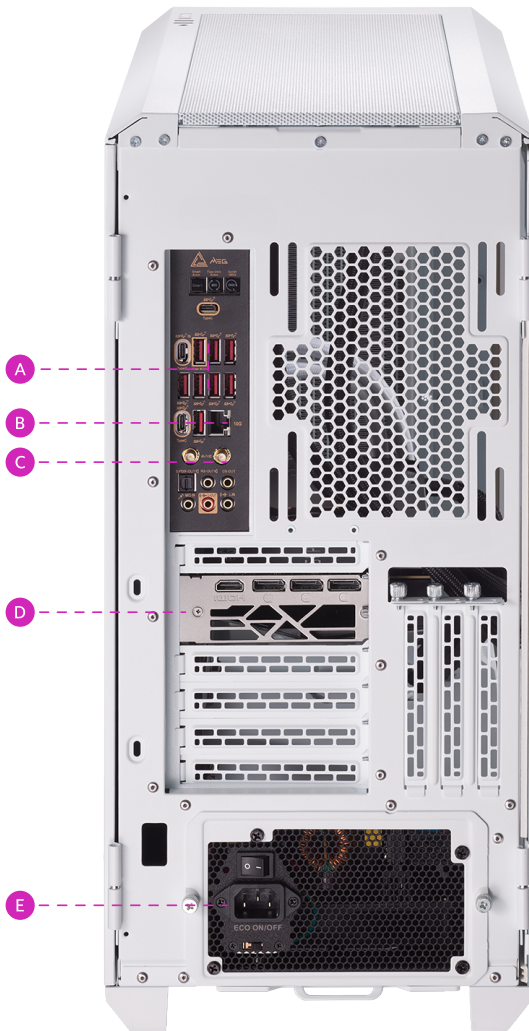

REMOVING THE INSTAPAK FOAM & GLASS PANEL FILMS

To remove the Instapak foam from inside your Vector One and the films that protect your Vector One's glass panel, you need to first remove the glass panel. **Warning: Use care when handling!**

1. Open the magnetic glass side panel by grabbing onto the handle near the front of the Vector One and swinging the panel open.
2. With your Vector One's glass panel removed, remove the Instapak foam from inside your Vector One.
3. Peel the protective films from both sides of your Vector One's glass panel.

Once you've removed the Instapak foam from inside your Vector One and have peeled the protective films from your Vector One's glass panel, replace the glass panel by following the above instructions in reverse.

CONNECTING YOUR MONITOR

Connect your monitor to your Vector One's GPU (D).

- If your GPU and monitor both have HDMI ports, use an HDMI cable to connect your monitor to the GPU.
- If your GPU and monitor both have DisplayPorts, use a DisplayPort cable to connect your monitor to the GPU.
- If your GPU has DisplayPorts and your monitor has only HDMI ports, use a DisplayPort-to-HDMI adapter and an HDMI cable to connect your monitor to the GPU.
- If your GPU has HDMI ports and your monitor has only DisplayPorts, use an HDMI-to-DisplayPort adapter and a DisplayPort cable to connect your monitor to the GPU.

Note: DisplayPort-to-HDMI and HDMI-to DisplayPort adapters are unidirectional. This means a DisplayPort-to-HDMI adapter can only be used with the DisplayPorts on GPUs. Similarly, HDMI-to-DisplayPort adapters can only be used with the HDMI ports on GPUs. Lambda doesn't support or recommend any particular adapters.