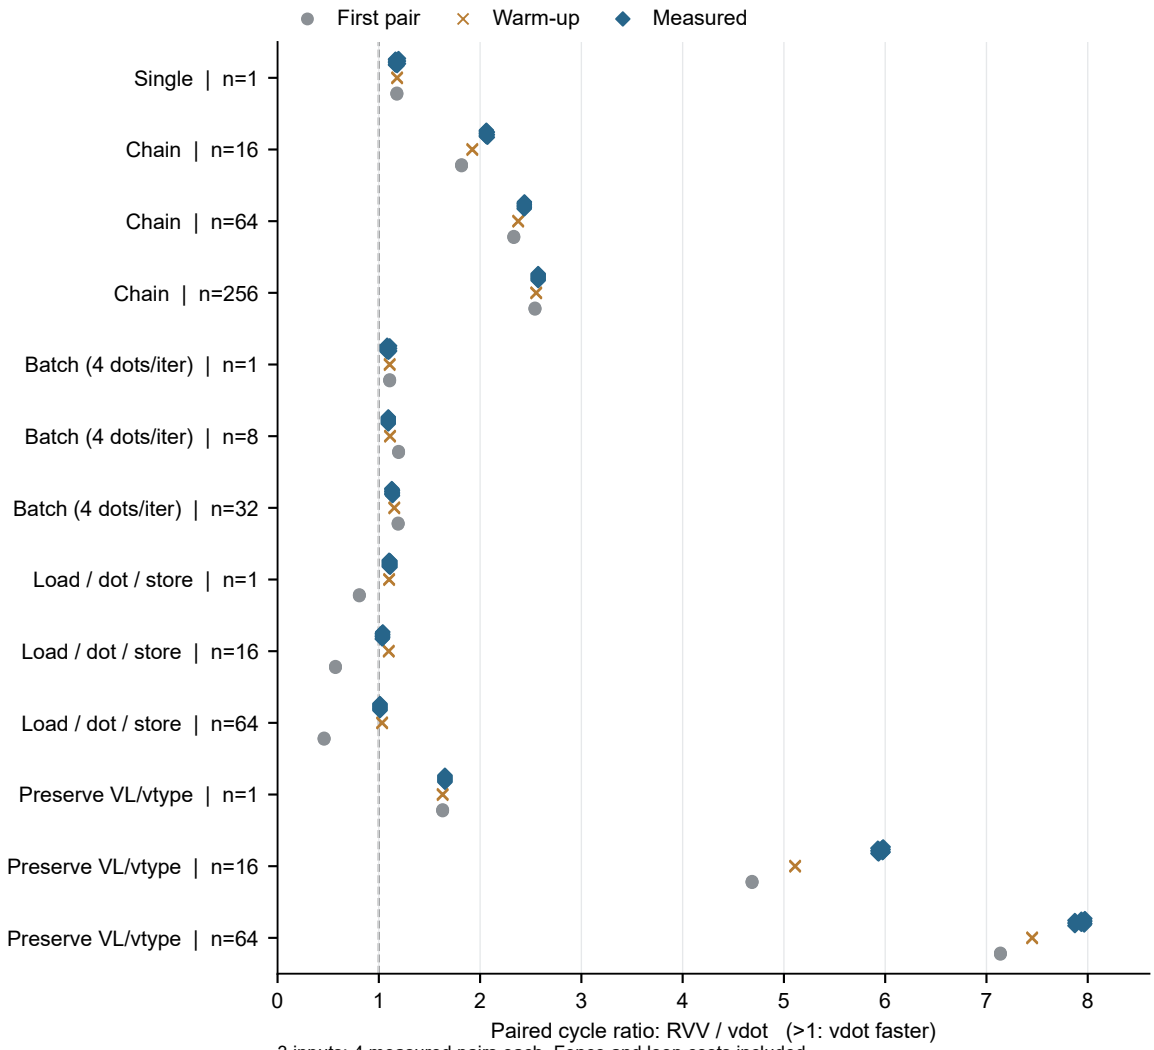
Cycle benefit depends on workload and warm-up
First pair
Warm-up
Measured
Single | n=1
Chain | n=16
Chain | n=64
Chain | n=256
Batch (4 dots/iter) | n=1
Batch (4 dots/iter) | n=8
Batch (4 dots/iter) | n=32
Load / dot / store | n=1
Load / dot / store | n=16
Load / dot / store | n=64
Preserve VL/vtype | n=1
Preserve VL/vtype | n=16
Preserve VL/vtype | n=64
0
1
2
3
4
5
6
7
8
Paired cycle ratio: RVV / vdot (>1: vdot faster)
3 inputs; 4 measured pairs each. Fence and loop costs included.
All 3 fresh replays agree; only replay 0 is drawn.