


Assemble plan for the outrigger system

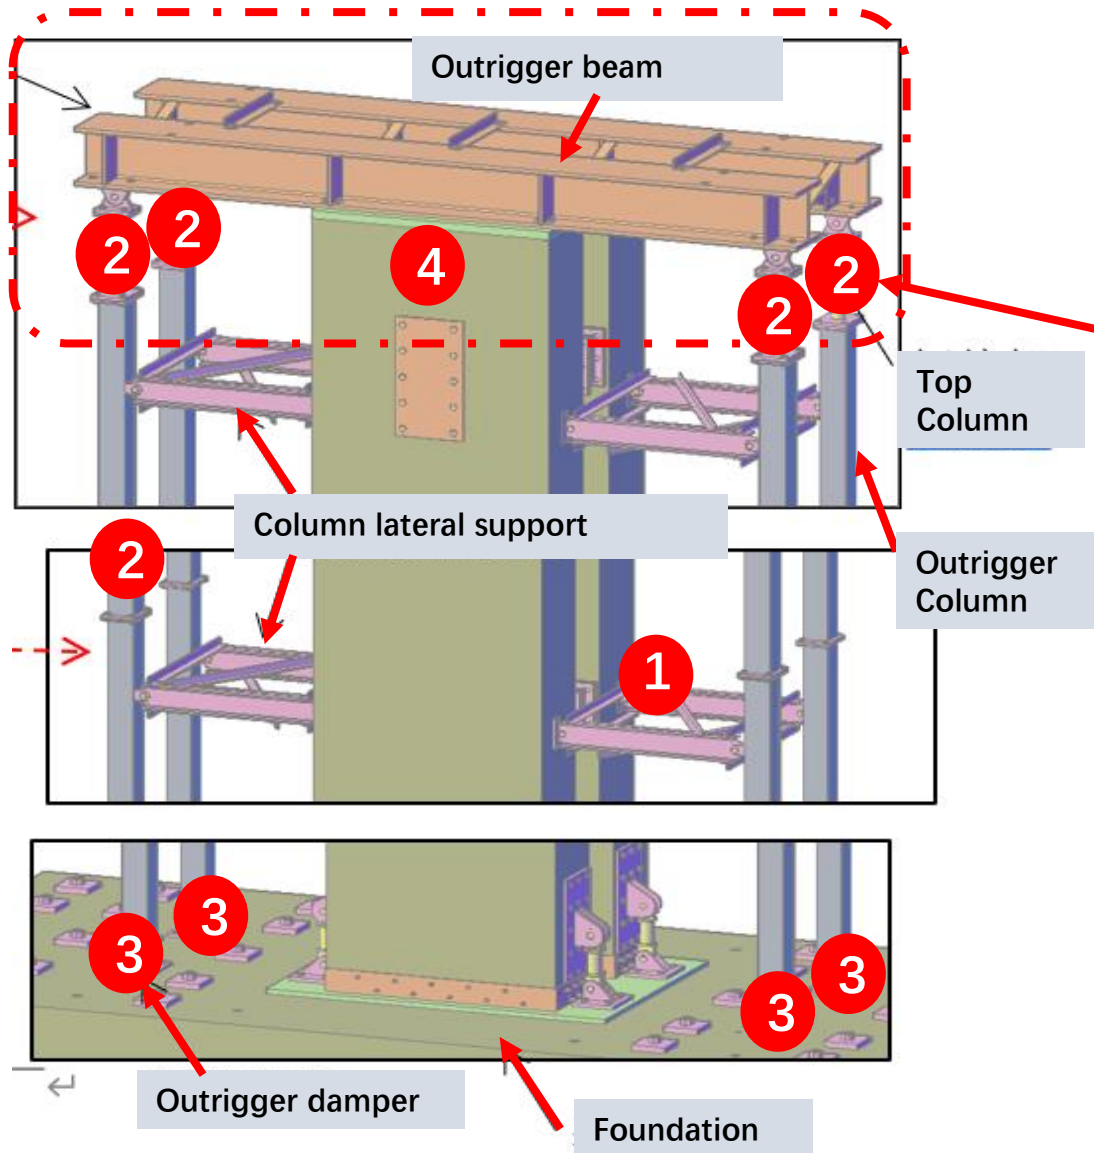

Step 1:

Assemble 4 column lateral supports (Pin connect)

Step 2:

Pin connected 4 top outrigger column on the outrigger beam; And bolts connected 4 bottom outrigger column


Step 3:

Assemble 4 base outrigger damper (one side pin and other side bolts connect)


Step 4:

Grouting


Assemble plan for the outrigger system

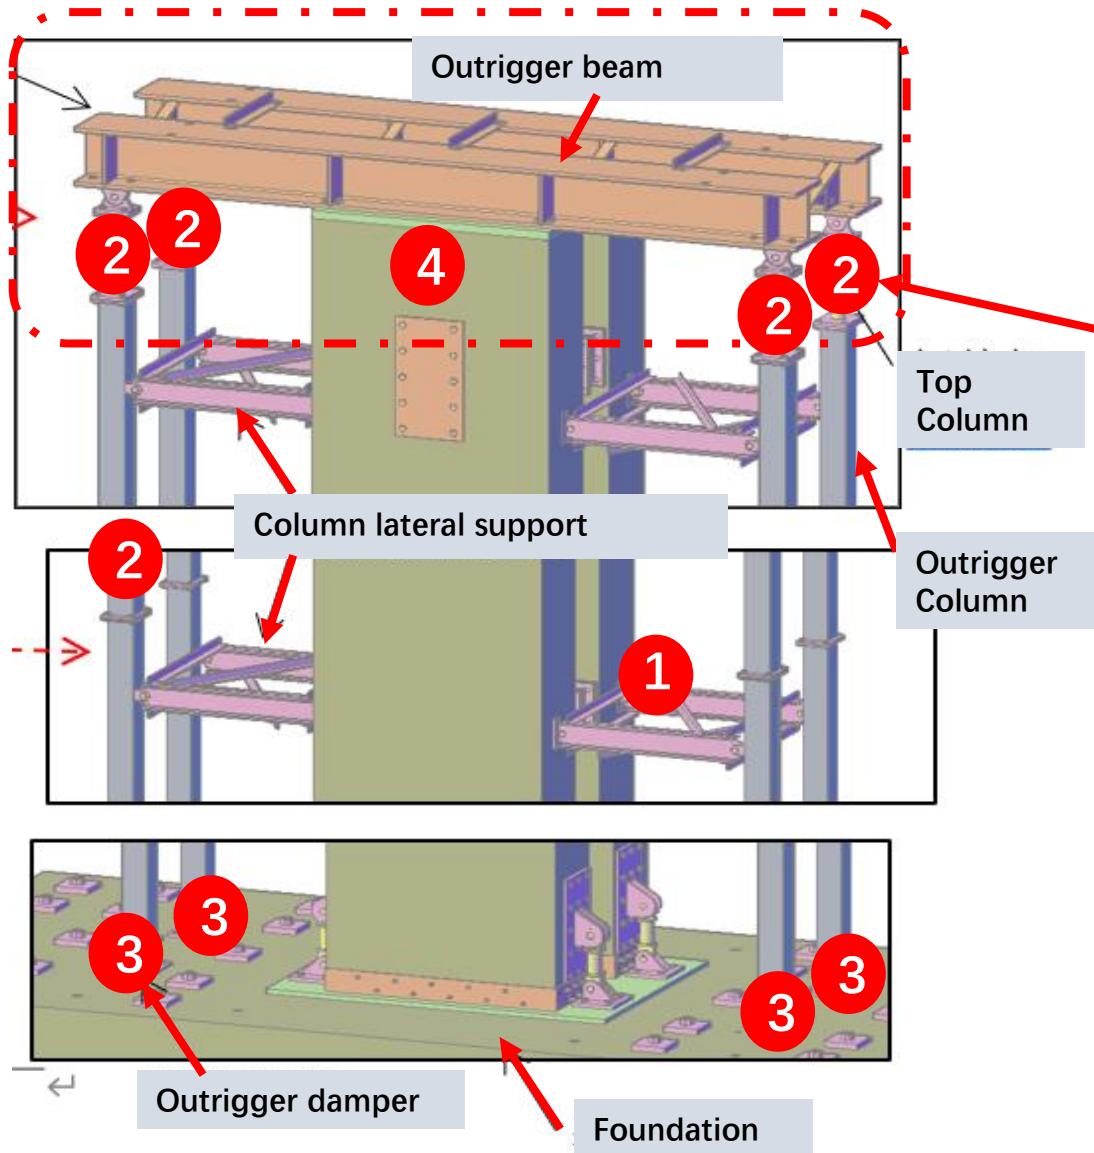


Assemble plan for the outrigger system

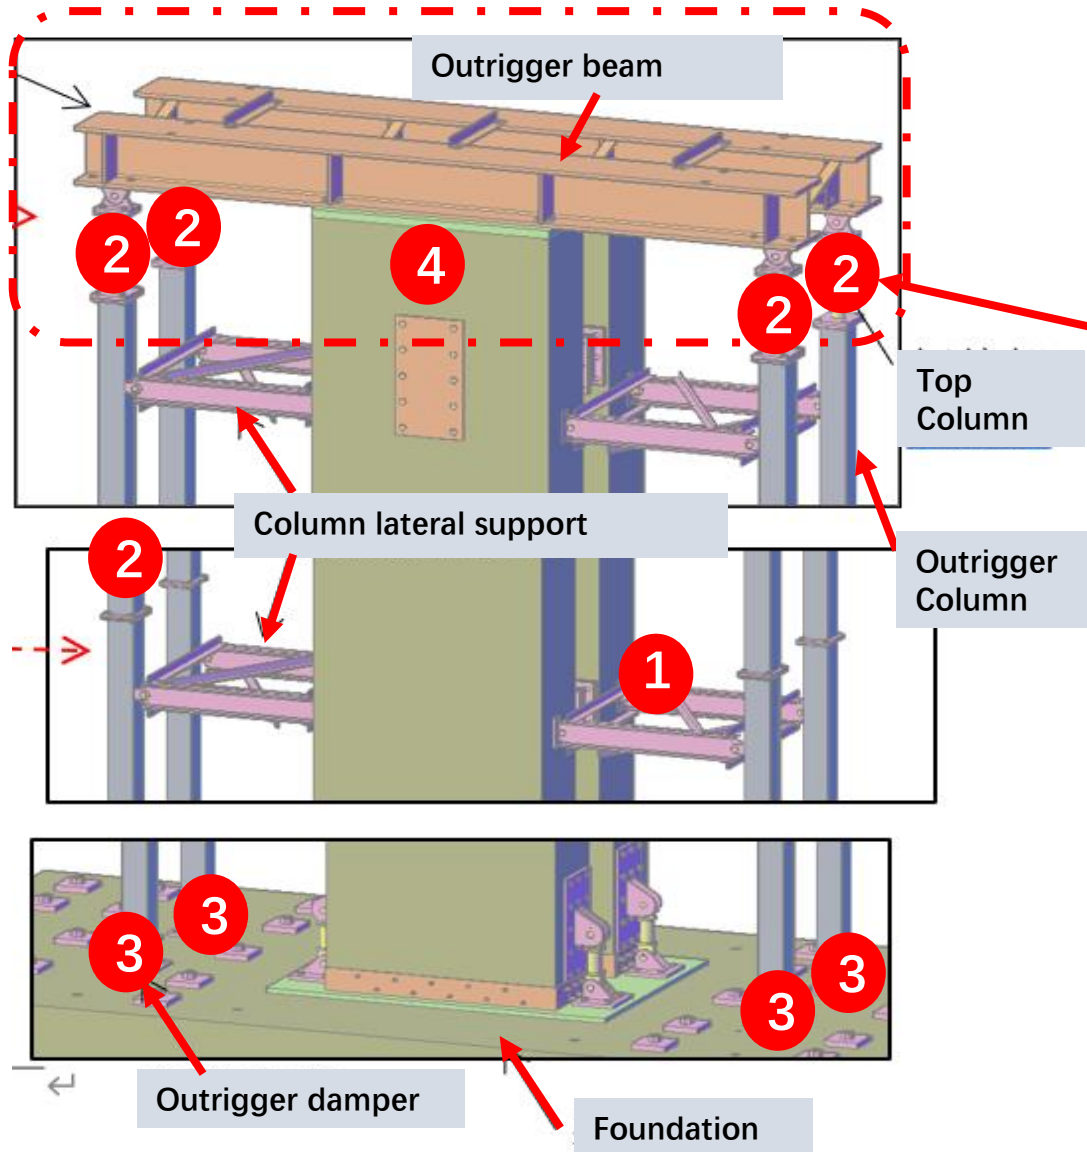

3 Base outrigger damper
(Pin/bolts connected)
RSFJ (Pin dia: 38mm)

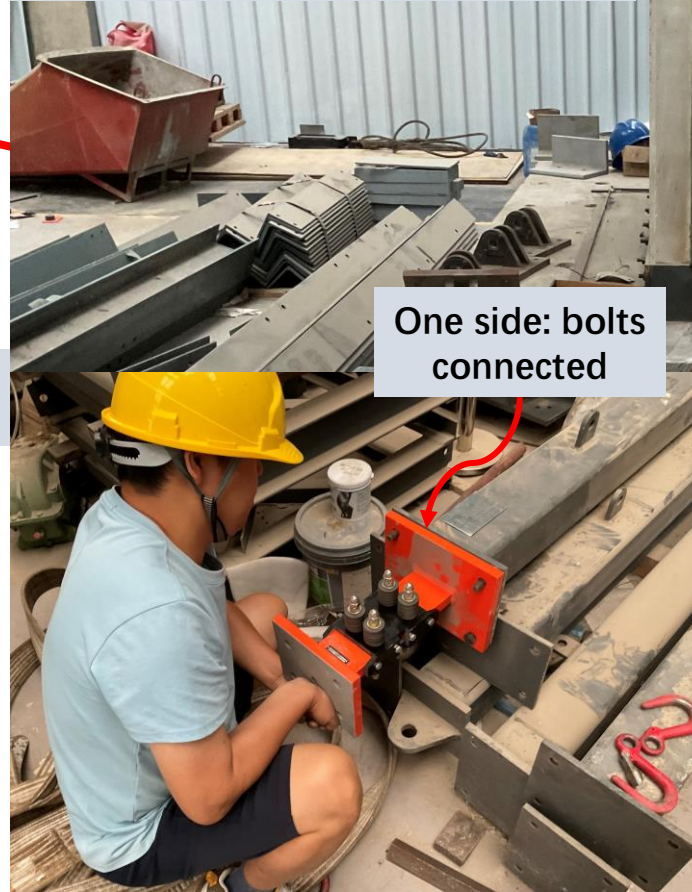

One side: bolts
connected

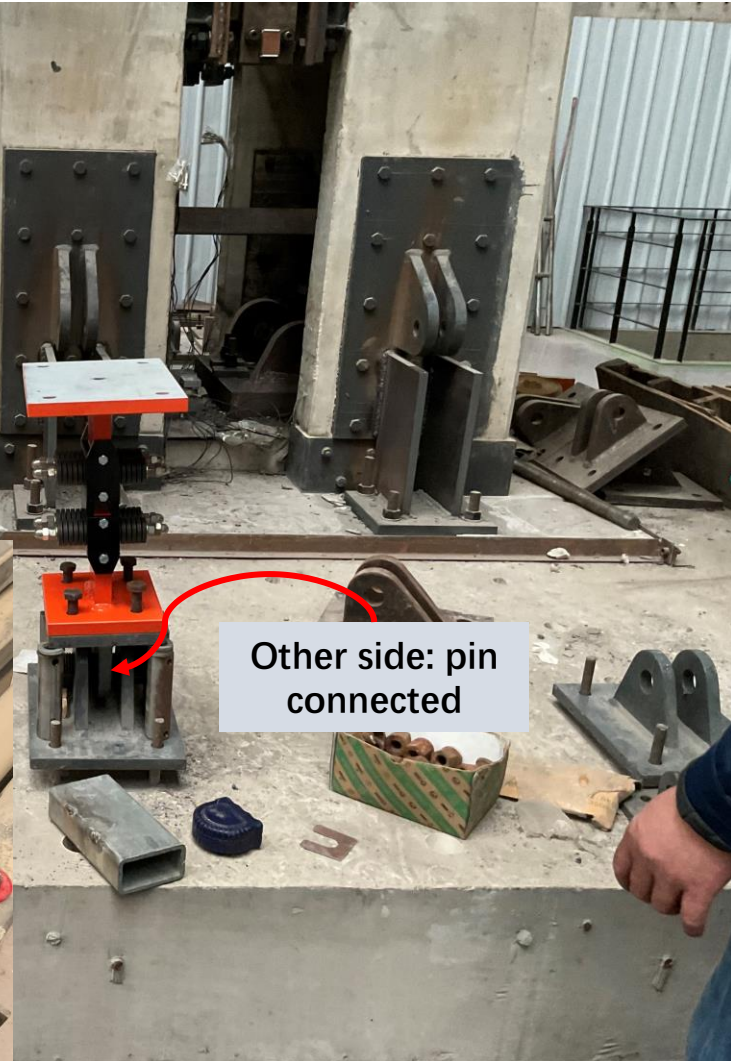

Other side: pin
connected

Assemble plan for the outrigger system

