


Appendix I

Old version

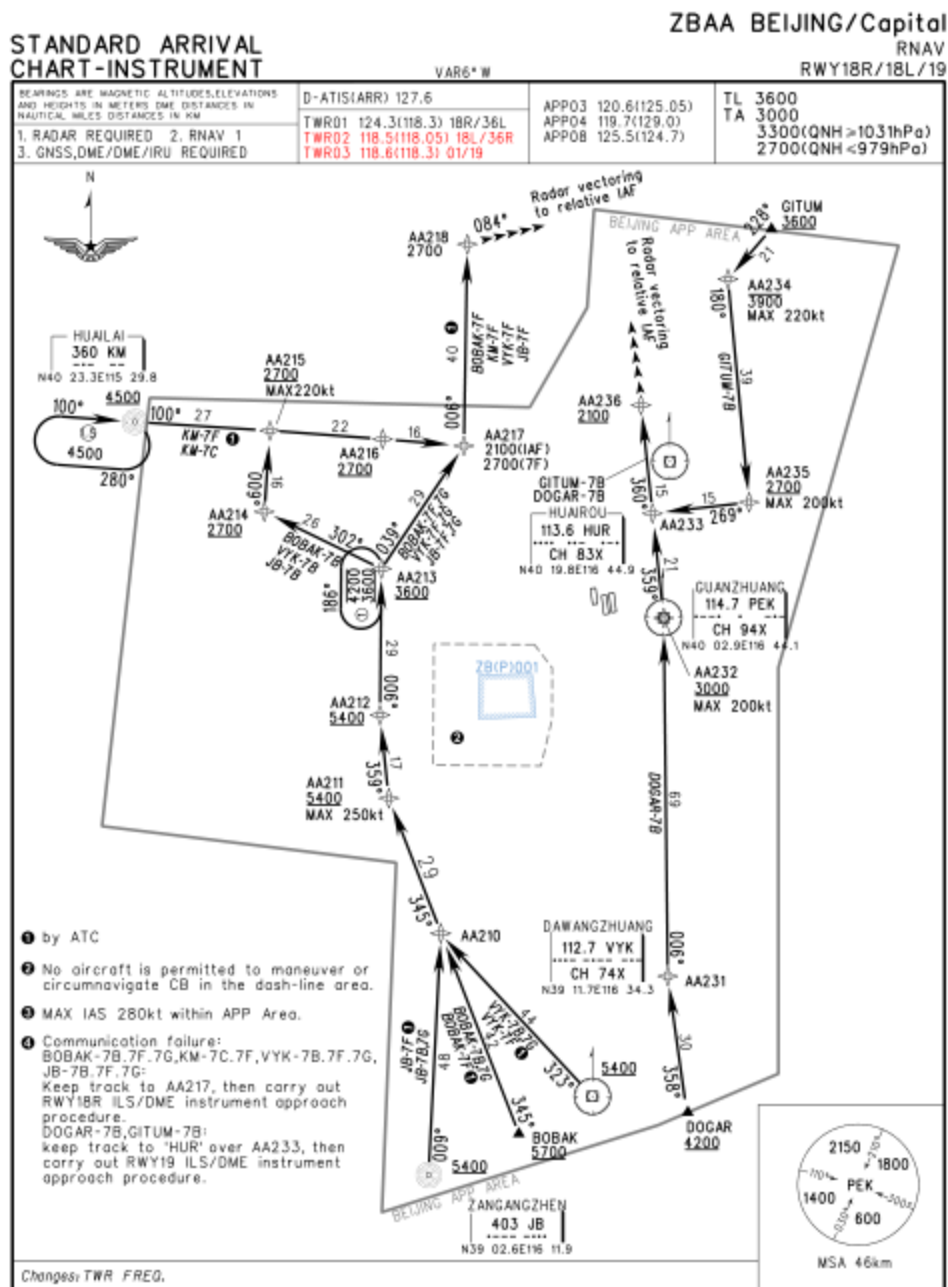

STANDARD DEPARTURE CHART-INSTRUMENT

ZBAA BEIJING/Capital

RNAV (TONIL)
(by ATC)

VAR6°W

BEARINGS ARE MAGNETIC. ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS. DME DISTANCES IN
NAUTICAL MILES. DISTANCES IN KM

D-ATIS(DEP) 128.65

1. RADAR REQUIRED
2. RNAV 1
3. GNSS/DME/DME/IRU REQUIRED


TWR01 124.3(118.3) 18R/36L
TWR02 118.5(118.05) 18L/36R
TWR03 118.6(118.3) 01/19

APP05 127.75(126.5)
APP06 121.1(126.5)
APP07 124.4(124.7)

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



NOT TO SCALE

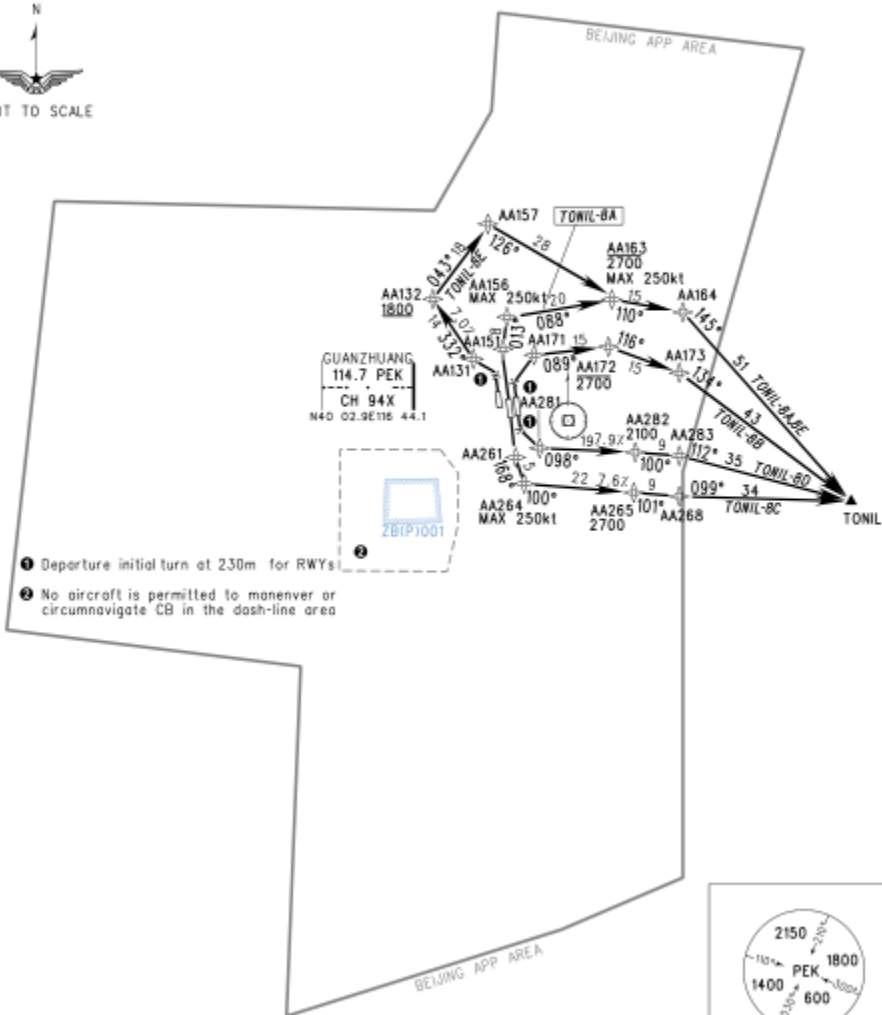

① Departure initial turn at 230m for RWYs

② No aircraft is permitted to maneuver or
circumnavigate CB in the dash-line area

Changes: TWR FREQ.



STANDARD DEPARTURE CHART-INSTRUMENT

VAR 6° W

ZBAA BEIJING/Capital
RNAV (JB)

BEARINGS ARE MAGNETIC. ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS. DME DISTANCES IN
NAUTICAL MILES. DISTANCES IN KM


D-ATIS (DEP) 128.65

1. RADAR REQUIRED
2. RNAV 1
3. GNSS, DME/DME/IRU REQUIRED

TWR01 124.3(118.3) 18R/36L
TWR02 118.5(118.05) 18L/36R
TWR03 118.6(118.3) 01/19

APP05 127.75(126.5)
APP06 121.1(126.5)
APP07 124.4(124.7)

TL 3600
TA 3000
3300(QNH > 1031hPa)
2700(QNH < 979hPa)

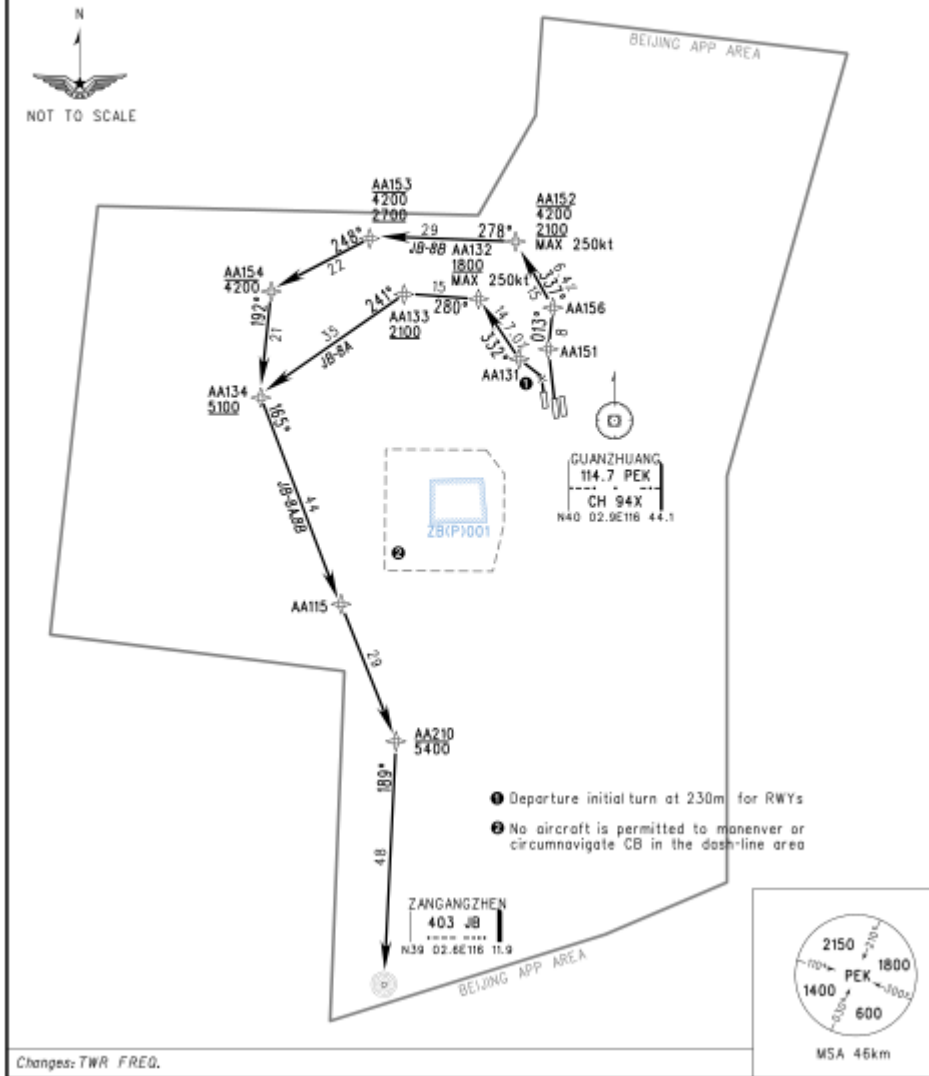


New version

D-ATIS(DEP) 128.65

RNAV RWY36L/36R/01

APP01	126.1(125.05)	APP06	119.7(129.0)
APP02	119.0(125.05)	APP07	124.7(125.8)
APP03	126.5(125.8)	APP08	127.75(124.4)
APP05	121.1(124.4)	APP09	120.6(129.0)
		APP10	125.5(125.8)

1. RADAR REQUIRED
2. GNSS, IRU REQUIRED
3. RNAV 1

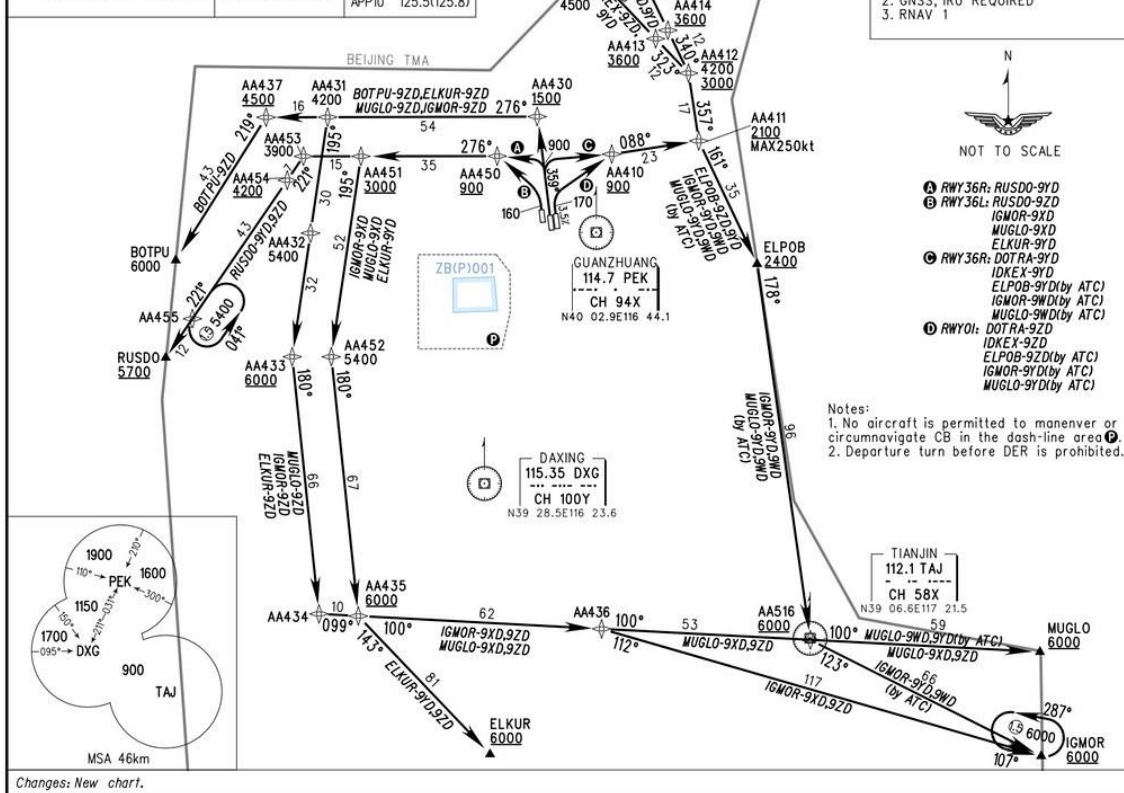

Changes: New chart.

D-ATIS(DEP) 128.65

TWR01	124.3(118.3)	18R/36L
TWR02	118.5(118.05)	18L/36R
TWR03	118.6(118.3)	01/19

RNAV RWY36L/36R/01

APP01	126.1(125.05)	APP06	119.7(129.0)
APP02	119.0(125.05)	APP07	124.7(125.8)
APP03	126.5(125.8)	APP08	127.75(124.4)
APP05	121.1(124.4)	APP09	120.6(129.0)
		APP10	125.5(125.8)

1. RADAR REQUIRED
2. GNSS, IRU REQUIRED
3. RNAV 1

