Advanced Computer Architecture

COMP 5123

Fall 2016

Computer Science Department

Prairie View A&M University

Mary Heejin Kim (aka Heejin Lim), Ph.D.

© 2016 Pearson Education, Inc. Hoboken, NJ, All rights reserved

Chapter 1. Basic Concept and Computer Evolution

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

Why learn computer organization?

"The computer lies at the heart of computing. Without it most of the computing disciplines today would be a branch of theoretical mathematics.

To be a professional in any field of computing today, one should not regard the computer as just a black box that executes programs by magic.....

Students need to understand computer architecture in order to structure a program so that it runs more efficiently

In selecting a system to use, they should be able to understand the tradeoff among various components such as CPU clock speed vs. memory size."

IEEE/ACM Computer Curricula 2001


© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved


3

Why learn computer organization?

- "Computer science is no more about computers than astronomy is about telescopes." Dijkstra
- Both Hardware and Software affect performance
 - Algorithm determines # of source-level statements
 - Language/Compiler/Architecture determine # of machine instructions
 - Processor/Memory determine how fast instructions are executed
 - I/O system determines I/O speed

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

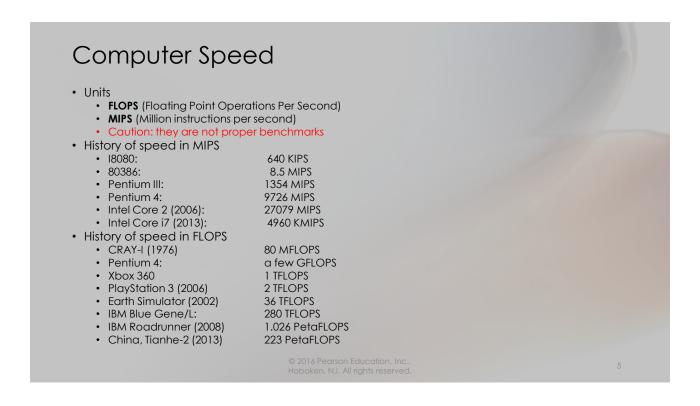

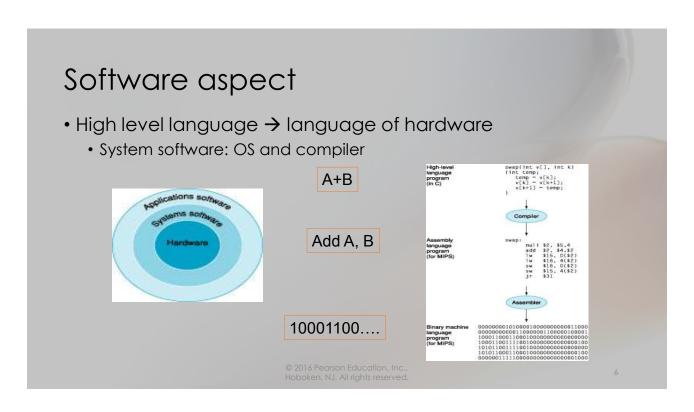


Hardware aspect

- Components:
 - input (mouse, keyboard)
 - output (display, printer)
 - memory

(Disk drives, DRAM, SRAM, CD)

- Motherboard
- Central Processing Unit (CPU) = Processor
 - · Contains datapath and control
 - Datapath: performs arithmetic operation
 - Control: commands the datapath, memory, and I/O devices





© 2016 Pearson Education, Inc Hoboken, NJ. All rights reserved 7

Structure and Function

- Structure
 - The way in which components relate to each other
- Function
 - The operation of individual components as part of the structure
- Computer is a hierarchical system
 - Set of interrelated subsystems
 - Essential to both their design and their description




© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

Function

- Four basic functions
 - Data processing
 - Data may take a wide variety of forms and the range of processing requirements is broad
 - Data storage
 - Short-term
 - · Long-term
 - Data movement
 - Input-output (I/O)
 - · Data communications
 - Control
 - Manages the computer's resources and orchestrates the performance of its functional parts in response to instructions

© 2016 Pearson Education, Inc., Hoboken, NJ, All rights reserved

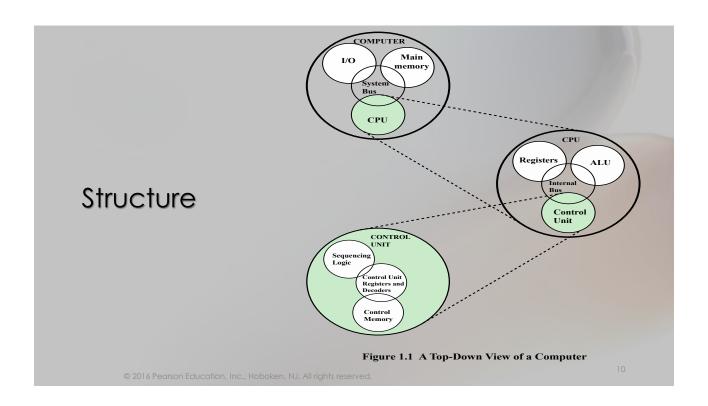

There are four main structural components of the computer:





- CPU controls the operation of the computer and performs its data processing functions
- Main Memory stores data
- → I/O moves data between the computer and its external environment
- System Interconnection some mechanism that provides for communication among CPU, main memory, and I/O

11 2016 Pearson Education, Inc., Hoboken, NJ, All rights reserved

CPU

Major structural components:





- Control Unit
 - Controls the operation of the CPU and hence the computer
- Arithmetic and Logic Unit (ALU)
 - Performs the computer's data processing function
- Registers
 - Provide storage internal to the CPU
- CPU Interconnection
 - Some mechanism that provides for communication among the control unit, ALU, and registers

© 2016 Pearson Education Inc. Hoboken N.I. All rights reserved

Multicore Computer Structure

- Central processing unit (CPU)
 - Portion of the computer that fetches and executes instructions
 - Consists of an ALU, a control unit, and registers
 - Referred to as a processor in a system with a single processing unit
- Core
 - An individual processing unit on a processor chip
 - May be equivalent in functionality to a CPU on a single-CPU system
 - Specialized processing units are also referred to as cores
- Processor
 - A physical piece of silicon containing one or more cores
 - Is the computer component that interprets and executes instructions
 - Referred to as a multicore processor if it contains multiple cores


© 2016 Pearson Education, Inc., Hoboken, NJ, All rights reserved


10


Cache Memory


- Multiple layers of memory between the processor and main memory
- Is smaller and faster than main memory
- Used to speed up memory access by placing in the cache data from main memory that is likely to be used in the near future
- A greater performance improvement may be obtained by using multiple levels of cache, with level 1 (L1) closest to the core and additional levels (L2, L3, etc.) progressively farther from the core

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

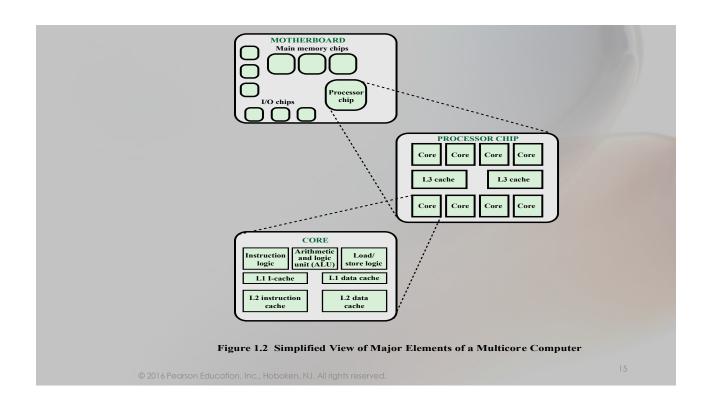

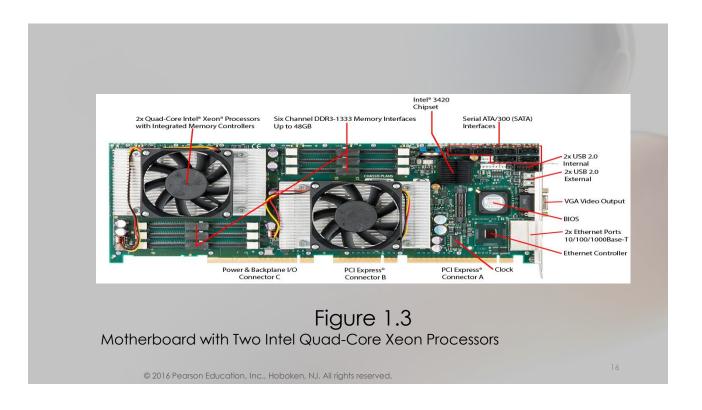

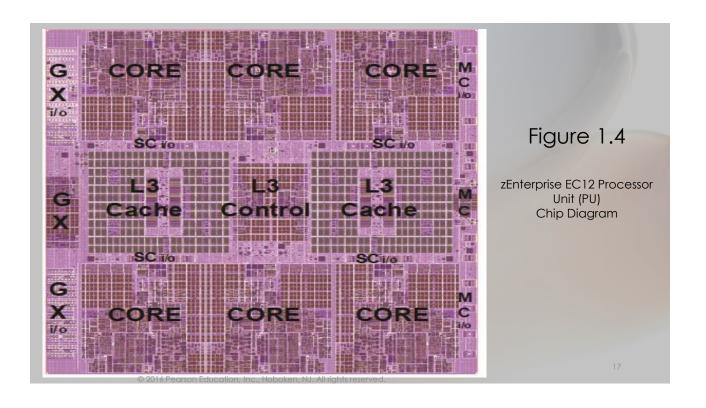

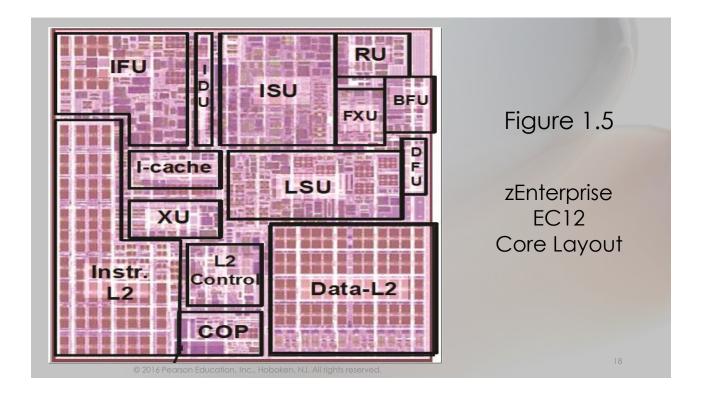


Brief History of Computer © 2016 Pearson Education, Inc., Hoboken, N.J. All rights reserved.


History of Computers

First Generation: Vacuum Tubes

- Vacuum tubes were used for digital logic elements and memory
- IAS computer
 - Fundamental design approach was the stored program concept
 - Attributed to the mathematician John von Neumann
 - First publication of the idea was in 1945 for the EDVAC
 - Design began at the Princeton Institute for Advanced Studies
 - Completed in 1952
 - Prototype of all subsequent general-purpose computers

Hoboken, NJ. All rights reserved

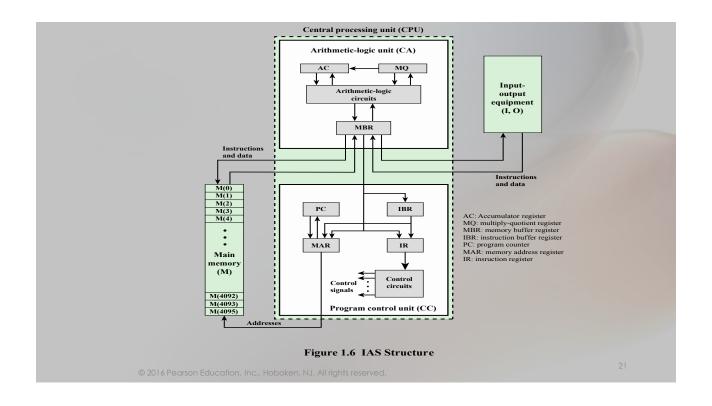

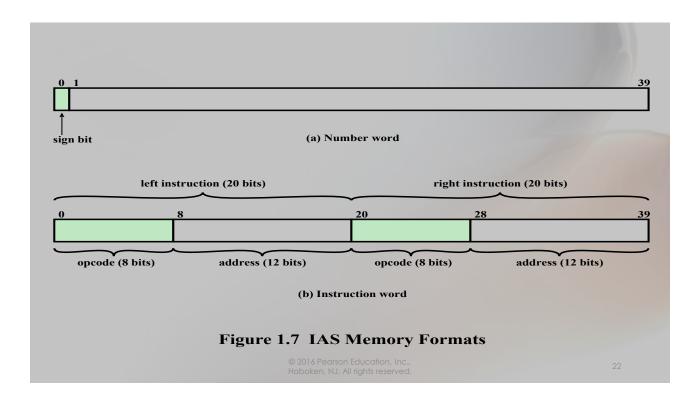

Registers Memory buffer register •Contains a word to be stored in memory or sent to the I/O unit •Or is used to receive a word from memory or from the I/O unit (MBR) Memory address •Specifies the address in memory of the word to be written from or read into the MBR register (MAR) Instruction register (IR) Contains the 8-bit opcode instruction being executed Instruction buffer register • Employed to temporarily hold the right-hand instruction from a word in memory (IBR) • Contains the address of the next instruction pair to be fetched Program counter (PC) from memory Accumulator (AC) and • Employed to temporarily hold operands and results of ALU multiplier quotient (MQ) operations

Instruction Type	Opcode	Symbolic Representation	Description	
Data transfer	00001010	LOAD MQ	Transfer contents of register MQ to the accumulator AC	
	00001001	LOAD $MQ,M(X)$	Transfer contents of memory location X to MQ	
	00100001	STOR M(X)	Transfer contents of accumulator to memory location X	
	00000001	LOAD M(X)	Transfer M(X) to the accumulator	
	00000010	LOAD -M(X)	Transfer –M(X) to the accumulator	
	00000011	LOAD M(X)	Transfer absolute value of M(X) to the accumulator	
	00000100	LOAD - M(X)	Transfer - M(X) to the accumulator	
Unconditional	00001101	JUMP M(X,0:19)	Take next instruction from left half of M(X)	
branch	00001110	JUMP M(X,20:39)	Take next instruction from right half of M(X)	Talble 1 1
	00001111	JUMP+ M(X,0:19)	If number in the accumulator is nonnegative, take next instruction from left half of $M(X)$	Table 1.1
		JU MP	If number in the accumulator is nonnegative,	
Conditional branch		+	take next instruction from	
		M(X	right half of M(X)	The IAS
		,20: 39)		IIIE IA3
		37)		
				Instruction Set
	00000101	ADD M(X)	Add M(X) to AC; put the result in AC	1113110011001
	00000111	ADD M(X)	Add M(X) to AC; put the result in AC	
	00000110	SUB M(X)	Subtract M(X) from AC; put the result in AC	
	00001000	SUB M(X)	Subtract M(X) from AC; put the remainder in AC	
Arithmetic	00001011	MUL M(X)	Multiply M(X) by MQ; put most significant bits of result in AC, put least significant bits in MQ	
	00001100	DIV M(X)	Divide AC by M(X); put the quotient in MQ and the remainder in AC	
	00010100	LSH	Multiply accumulator by 2; i.e., shift left one bit position	
	00010101	RSH	Divide accumulator by 2; i.e., shift right one position	
Address modify	00010010	STOR M(X,8:19)	Replace left address field at M(X) by 12	
			rightmost bits of AC	
	00010011	STOR M(X,28:39)	Replace right address field at M(X) by 12 rightmost bits of AC	(Table can be found on page 17 in the textbook
			© 2016 Pearson Education, Inc.,	24
			Hoboken, NJ. All rights reserved.	24

History of Computers

Second Generation: Transistors

- Smaller
- Cheaper
- Dissipates less heat than a vacuum tube
- Is a solid state device made from silicon
- Was invented at Bell Labs in 1947
- It was not until the late 1950's that fully transistorized computers were commercially available



© 2016 Pearson Education, Inc., Hoboken, NJ. All rights reserved.

2

Table 1.2 Computer Generations

Generation	Approximate Dates	Technology	Typical Speed (operations per second)
1	1946–1957	Vacuum tube	40,000
2	1957-1964	Transistor	200,000
3	1965–1971	Small and medium scale integration	1,000,000
4	1972-1977	Large scale integration	10,000,000
5	1978-1991	Very large scale integration	100,000,000
6	1991-	Ultra large scale integration	>1,000,000,000


Hoboken, NJ. All rights reserved

Second Generation Computers

- Introduced:
 - More complex arithmetic and logic units and control units
 - The use of high-level programming languages
 - Provision of system software which provided the ability to:
 - Load programs
 - Move data to peripherals
 - Libraries perform common computations



© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

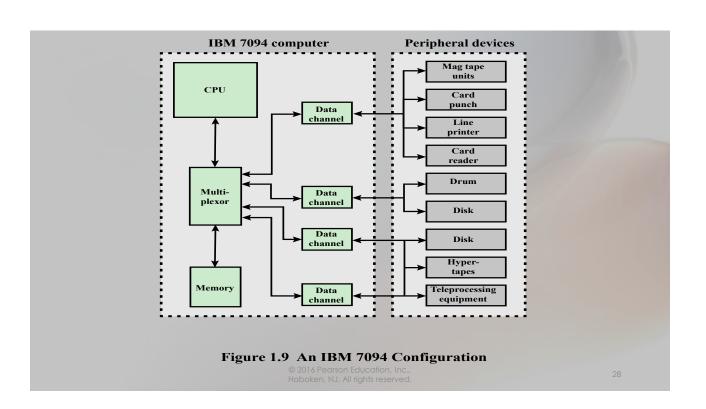


History of Computers

Third Generation: Integrated Circuits

- 1958 the invention of the integrated circuit
- Discrete component
 - Single, self-contained transistor
 - Manufactured separately, packaged in their own containers, and soldered or wired together onto masonite-like circuit boards
 - Manufacturing process was expensive and cumbersome
- The two most important members of the third generation were the IBM System/360 and the DEC PDP-8

© 2016 Pearson Education, Inc., Hoboken, NJ. All rights reserved

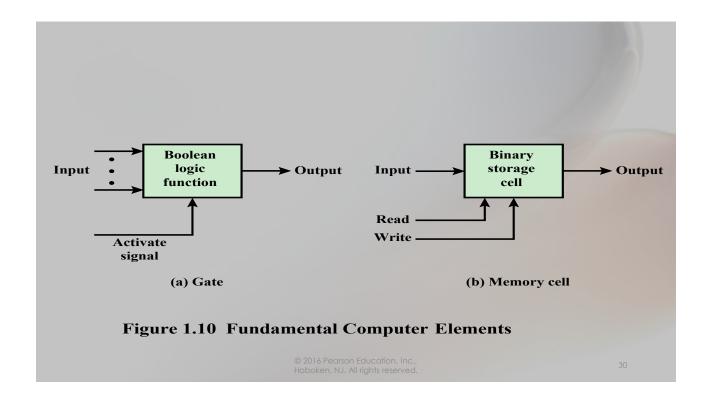



Integrated Circuits


- A computer consists of gates, memory cells, and interconnections among these elements
- The gates and memory cells are constructed of simple digital electronic components
- Exploits the fact that such components as transistors, resistors, and conductors can be fabricated from a semiconductor such as silicon
- Many transistors can be produced at the same time on a single wafer of silicon
- Transistors can be connected with a processor metallization to form circuits

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

,

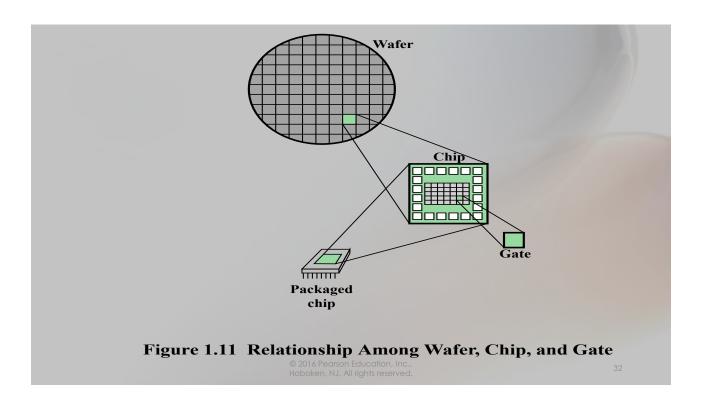

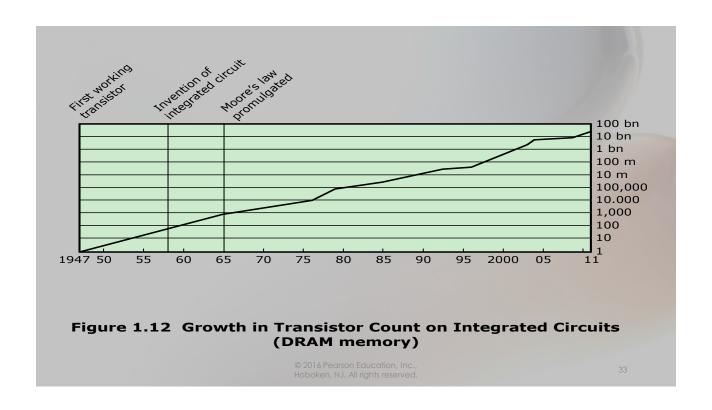

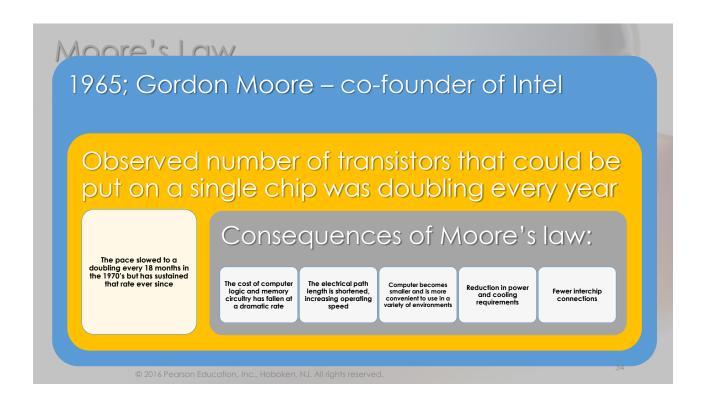


IBM System/360


- Announced in 1964
- Product line was incompatible with older IBM machines
- Was the success of the decade and cemented IBM as the overwhelmingly dominant computer vendor
- The architecture remains to this day the architecture of IBM's mainframe computers
- Was the industry's first planned family of computers
 - Models were compatible in the sense that a program written for one model should be capable of being executed by another model in the series


© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

35

Family Characteristics Similar or identical operating system Increasing number of I/O ports Similar or identical operating speed Increasing memory size Increasing cost Increasing cost O 2014 Pearson Education, Inc., Hoboken, NJ. All rights reserved.

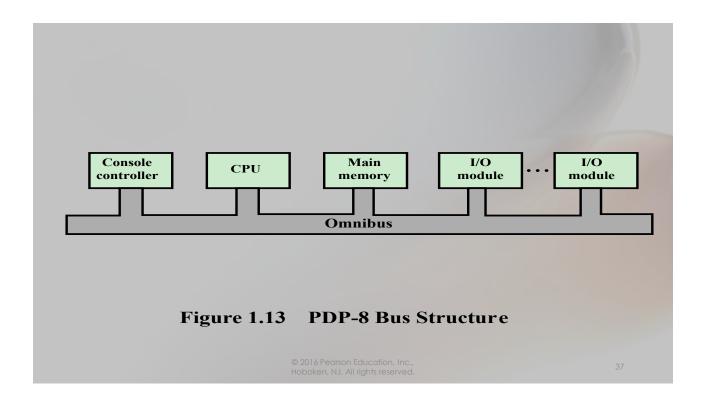

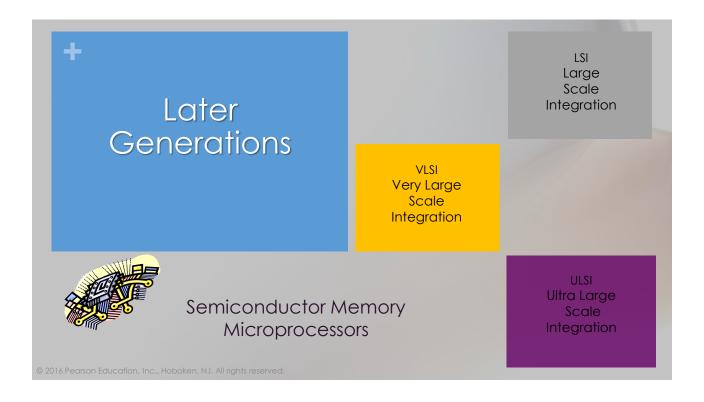

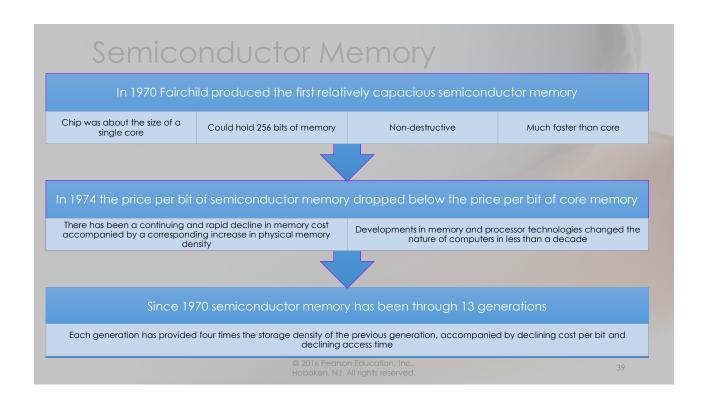

Microprocessors

- The density of elements on processor chips continued to rise
 - More and more elements were placed on each chip so that fewer and fewer chips were needed to construct a single computer processor
- 1971 Intel developed 4004
 - First chip to contain all of the components of a CPU on a single chip
 - Birth of microprocessor
- 1972 Intel developed 8008
 - First 8-bit microprocessor
- 1974 Intel developed 8080
 - First general purpose microprocessor
 - Faster, has a richer instruction set, has a large addressing capability



© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

Evolution of Intel Microprocessors

	4004	8008	8080	8086	8088
Introduced	1971	1972	1974	1978	1979
Clock speeds	108 kHz	108 kHz	2 MHz	5 MHz, 8 MHz, 10 MHz	5 MHz, 8 MHz
Bus width	4 bits	8 bits	8 bits	16 bits	8 bits
Number of transistors	2,300	3,500	6,000	29,000	29,000
Feature size (µm)	10	8	6	3	6
Addressable memory	640 Bytes	16 KB	64 KB	1 MB	1 MB

(a) 1970s Processors

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

41

Evolution of Intel Microprocessors

	80286	386TM DX	386TM SX	486TM DX CPU
Introduced	1982	1985	1988	1989
Clock speeds	6 MHz - 12.5 MHz	16 MHz - 33 MHz	16 MHz - 33 MHz	25 MHz - 50 MHz
Bus width	16 bits	32 bits	16 bits	32 bits
Number of transistors	134,000	275,000	275,000	1.2 million
Feature size (µm)	1.5	1	1	0.8 - 1
Addressable memory	16 MB	4 GB	16 MB	4 GB
Virtual memory	1 GB	64 TB	64 TB	64 TB
Cache	_	_	_	8 kB

(b) 1980s Processors

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

Evolution of Intel Microprocessors

	486TM SX	Pentium	Pentium Pro	Pentium II
Introduced	1991	1993	1995	1997
Clock speeds	16 MHz - 33 MHz	60 MHz - 166 MHz,	150 MHz - 200 MHz	200 MHz - 300 MHz
Bus width	32 bits	32 bits	64 bits	64 bits
Number of transistors	1.185 million	3.1 million	5.5 million	7.5 million
Feature size (μm)	1	0.8	0.6	0.35
Addressable memory	4 GB	4 GB	64 GB	64 GB
Virtual memory	64 TB	64 TB	64 TB	64 TB
Cache	8 kB	8 kB	512 kB L1 and 1 MB L2	512 kB L2

(c) 1990s Processors

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

43

Evolution of Intel Microprocessors

	Pentium III	Pentium 4	Core 2 Duo	Core i7 EE 4960X
Introduced	1999	2000	2006	2013
Clock speeds	450 - 660 MHz	1.3 - 1.8 GHz	1.06 - 1.2 GHz	4 GHz
Bus wid th	64 bits	64 bits	64 bits	64 bits
Number of transistors	9.5 million	42 million	167 million	1.86 billion
Feature size (nm)	250	180	65	22
Addressable memory	64 GB	64 GB	64 GB	64 GB
Virtual memory	64 TB	64 TB	64 TB	64 TB
Cache	512 kB L2	256 kB L2	2 MB L2	1.5 MB L2/15 MB L3
Number of cores	1	1	2	6

(d) Recent Processors

© 2016 Pearson Education, Inc Hoboken, NJ, All rights reserved

The Evolution of the Intel x86 Architecture

- Two processor families are the Intel x86 and the ARM architectures
- Current x86 offerings represent the results of decades of design effort on complex instruction set computers (CISCs)
- An alternative approach to processor design is the reduced instruction set computer (RISC)
- ARM architecture is used in a wide variety of embedded systems and is one of the most powerful and bestdesigned RISC-based systems on the market

© 2016 Pearson Education, Inc., Hoboken, NJ. All rights reserved

45

Highlights of the Evolution of the Intel Product Line:

World's first general-purpose microprocessor 8-bit machine, 8-bit data path to memory Was used in the first personal computer (Altair)

A more powerful 16-bit machine Has an instruction cache, or queue, that prefetches a few instructions before they are executed The first appearance of the x86 architecture •The 8088 was a variant of this processor and used in IBM's first personal computer (securing the success of Intel

8086

80286 • Extension of the 8086 enabling addressing a 16-MB memory instead of just 1MB

80386 • Intel's first 32-bit machine • First Intel processor to support multitasking

• Introduced the use of much more sophisticated and powerful cache technology and sophisticated instruction pipelining • Also offered a builtin math coprocessor

© 2016 Pearson Education, Inc., Hoboken, NJ. All rights reserved

Highlights of the Evolution of the Intel Product Line: Pentium Intel introduced the use of superscalar techniques, which allow multiple instructions to execute in parallel Pentium Pro Continued the move into superscalar organization with aggressive use of register renaming, branch prediction, data flow analysis, and speculative execution Pentium II Incorporated Intel MMX technology, which is designed specifically to process video, audio, and graphics data efficiently Pentium III Incorporated additional floating-point instructions Streaming SIMD Extensions (SSE) Pentium 4 Includes additional floating-point and other enhancements for multimedia Core First Intel x86 micro-core Core 2 Extends the Core architecture to 64 bits Core 2 Quad provides four cores on a single chip More recent Core offerinas have up to 10 cores per chip

Embedded Systems




The use of electronics and software within a product

An important addition to the architecture was the Advanced Vector Extensions instruction set

- Billions of computer systems are produced each year that are embedded within larger devices
- Today many devices that use electric power have an embedded computing system
- Often embedded systems are tightly coupled to their environment
 - This can give rise to real-time constraints imposed by the need to interact with the environment
 - Constraints such as required speeds of motion, required precision of measurement, and required time durations, dictate the timing of software operations
 - If multiple activities must be managed simultaneously this imposes more complex real-time constraints

Hoboken, NJ. All rights reserved



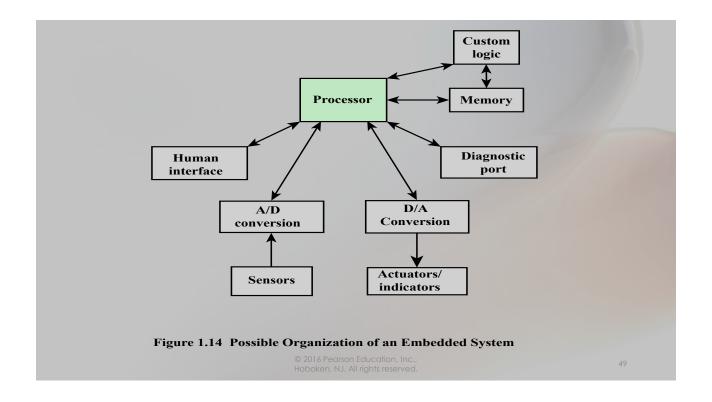

The Internet of Things (IoT)

- Term that refers to the expanding interconnection of smart devices, ranging from appliances to tiny sensors
- Is primarily driven by deeply embedded devices
- Generations of deployment culminating in the IoT:
 - Information technology (IT)
 - PCs, servers, routers, firewalls, and so on, bought as IT devices by enterprise IT people and primarily using wired connectivity
 - Operational technology (OT)
 - Machines/appliances with embedded IT built by non-IT companies, such as medical machinery, SCADA, process control, and kiosks, bought as appliances by enterprise OT people and primarily using wired connectivity
 - Personal technology
 - Smartphones, tablets, and eBook readers bought as IT devices by consumers exclusively
 using wireless connectivity and often multiple forms of wireless connectivity
 - Sensor/actuator technology
 - Single-purpose devices bought by consumers, IT, and OT people exclusively using wireless connectivity, generally of a single form, as part of larger systems
- It is the fourth generation that is usually thought of as the IoT and it is marked by the use of billions of embedded devices

Hoboken, NJ. All rights reserved


Embedded Operating Systems

- There are two general approaches to developing an embedded operating system (OS):
 - Take an existing OS and adapt it for the embedded application
 - Design and implement an OS intended solely for embedded use

Application Processors versus Dedicated Processors

- Application processors
 - Defined by the processor's ability to execute complex operating systems
 - General-purpose in nature
 - An example is the smartphone the embedded system is designed to support numerous apps and perform a wide variety of functions
- Dedicated processor
 - Is dedicated to one or a small number of specific tasks required by the host device
 - Because such an embedded system is dedicated to a specific task or tasks, the processor and associated components can be engineered to reduce size and cost


© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

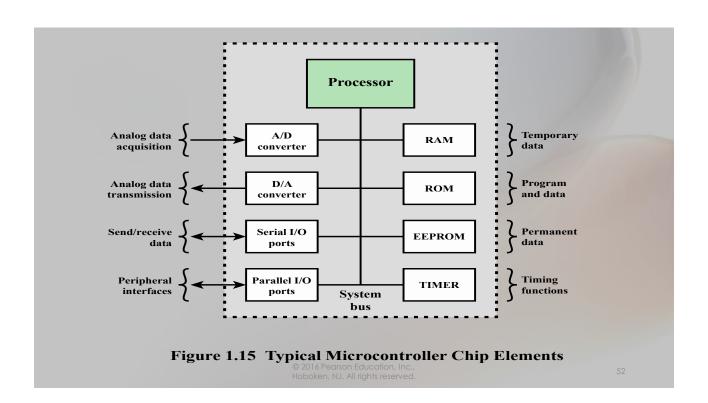



Deeply Embedded Systems

- Subset of embedded systems
- Has a processor whose behavior is difficult to observe both by the programmer and the user
- Uses a microcontroller rather than a microprocessor
- Is not programmable once the program logic for the device has been burned into ROM
- Has no interaction with a user
- Dedicated, single-purpose devices that detect something in the environment, perform a basic level of processing, and then do something with the results
- Often have wireless capability and appear in networked configurations, such as networks of sensors deployed over a large area
- Typically have extreme resource constraints in terms of memory, processor size, time, and power consumption

© 2016 Pearson Education, Inc., Hoboken, NJ, All rights reserved

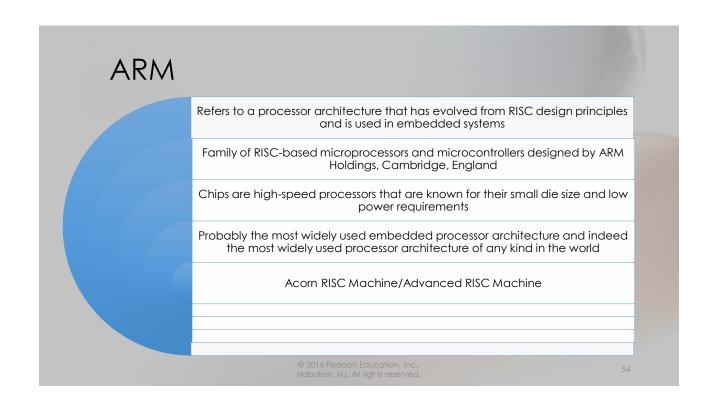

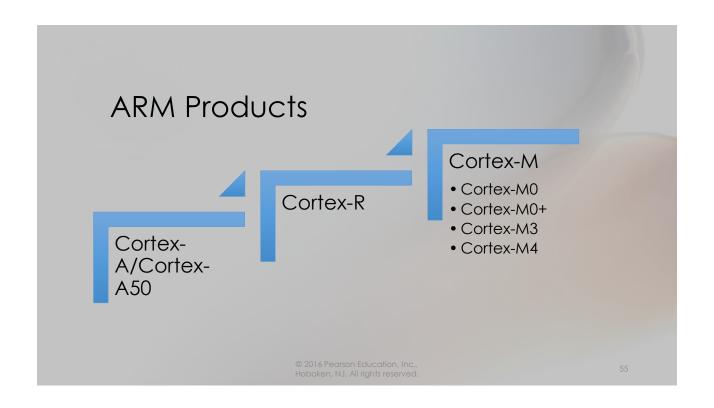

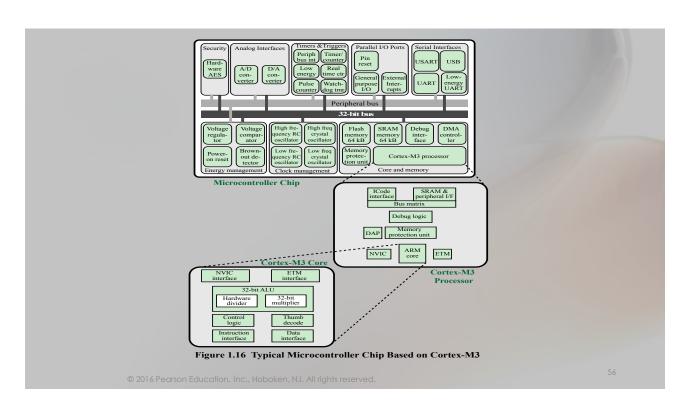

Cloud Computing



NIST defines cloud computing as:

"A model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources that can be rapidly provisioned and released with minimal management effort or service provider interaction."

- You get economies of scale, professional network management, and professional security management
- The individual or company only needs to pay for the storage capacity and services they need
- Cloud provider takes care of security

© 2016 Pearson Education, Inc. Hoboken, NJ, All rights reserved

57


Cloud Networking

- Refers to the networks and network management functionality that must be in place to enable cloud computing
- One example is the provisioning of high-performance and/or highreliability networking between the provider and subscriber
- The collection of network capabilities required to access a cloud, including making use of specialized services over the Internet, linking enterprise data center to a cloud, and using firewalls and other network security devices at critical points to enforce access security policies

Cloud Storage

- Subset of cloud computing
- Consists of database storage and database applications hosted remotely on cloud servers
- Enables small businesses and individual users to take advantage of data storage that scales with their needs and to take advantage of a variety of database applications without having to buy, maintain, and manage the storage assets

© 2016 Pearson Education, Inc. Hoboken, NJ. All rights reserved

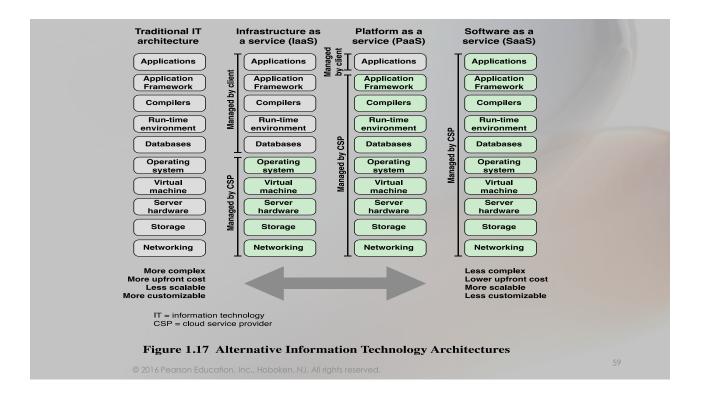

Summary Chapter 1

Basic Concepts and Computer Evolution

- Organization and architecture
- Structure and function
- Brief history of computers
 - The First Generation: Vacuum tubes
 - The Second Generation: Transistors
 - The Third Generation: Integrated Circuits
 - Later generations
- The evolution of the Intel x86 architecture
- Cloud computing
 - · Basic concepts
 - · Cloud services

- Embedded systems
 - The Internet of things
 - · Embedded operating systems
 - Application processors versus dedicated processors
 - Microprocessors versus microcontrollers
 - Embedded versus deeply embedded systems
- ARM architecture
 - · ARM evolution
 - Instruction set architecture
 - ARM products

6

2016 Pearson Education, Inc., Hoboken, NJ. All rights reserved