



公司地址:江苏省江阴市华士镇龙山路
电话: 13961617343
网址: www.reizemachinery.com
E-mail: info@reizemachinery.com

Company Address: Longshan Road,
Huashi Town, Jiangyin City, Jiangsu
Province, China
Tel: +86 139 6161 7343
Website: www.reizemachinery.com
E-mail: info@reizemachinery.com



吹膜机
blown film lines



制袋机
bag making machines

CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂

**MULTI-LAYER
BLOWN FILM MACHINE**

多层共挤高效吹膜机

www.reizemachinery.com





REIZE
MACHINERY

客户的需求和满意，
是我们不懈的创造和追求！

*Customer's need and satisfaction is what
we are constantly creating and pursuing.*

WELCOME TO REIZE !

**From pellet to packed bag.
One factory, one complete line.**

**从一粒料，到一只成品袋。
一个工厂，为你提供一整条生产线。**

- ① 方便的操作
- ② 耐用性
- ③ 出色的性价比
- ④ 及时的售后服务

- Convenient operation
- Durability
- Excellent value for money
- Timely service

欧盟认证企业 / 国家高新技术企业
CE Certified Enterprise
National High Technology Enterprise

Founded in 1997, Reize started out as a specialist manufacturer combining automation and electrical engineering with flexible packaging machinery. Its products include a full range of side-seal and bottom-seal bag making machines, along with matching servo control systems. In 2010 the company began developing and manufacturing blown film machines. It now builds 3- to 11-layer co-extrusion blown film lines for food, personal care, household product and barrier packaging, as well as other printed and laminated flexible packaging. After years of development, its products have reached a consistently high standard of quality. They sell well in China and abroad, and the company is well known among customers and across the industry.



www.reizemachinery.com

CHINESE BRAND
SGLOBAL STAGE

中国智造，布局全球

锐泽市场辐射全球20+个国家及地区，国内34省市场全面覆盖。目前仍在持续开拓中。

REIZE market radiates to over 20 countries and regions worldwide, with full coverage of the 34 provincial markets in China. Still continuously expanding.



REIZE'S FIVE CORE COMPETITIVENESS



1. 强大的研发实力

公司拥有多项专利证书，研发能力突出，持续推动技术创新与产品升级。



2. 稳定的海内外供应链保障

与海内外高端核心部件供应商建立长期紧密的深度合作关系，从源头确保产品品质达到国际领先水平。



3. 深厚的行业积淀

30年行业发展历程，服务全球多家大型软包装企业，以卓越口碑与专业服务赢得客户信赖。



4. 高效的生产能力

配备7000平方米标准化装配车间，严格把控品质，保障产品准时交付，满足客户多样化需求。



5. 全球化售后网络

我们在马来西亚、斯里兰卡、菲律宾均设有本地工程师团队，可快速响应全球服务需求，快速抵达现场提供安装、维修服务，保障设备持续运行。



1. Strong R&D capability

With multiple patent certifications, our company demonstrates outstanding research and development capabilities, continuously driving technological innovation and product upgrading.

2. Stable high-end supply chain assurance

Long-term, close and in-depth partnerships with overseas and domestic suppliers of high-end core components ensure that product quality meets international leading standards from the source.

3. Profound industry expertise

With 30 years of industry experience and serving many large global flexible packaging enterprises, we have earned customer trust through excellent reputation and professional services.

4. Efficient production capacity

Equipped with a 7,000-square-meter standardized assembly workshop, we strictly control quality and ensure on-time delivery of products to meet diverse customer needs.

5. Global After-sales Network

With local engineer teams based in Malaysia, Sri Lanka, and the Philippines, we offer rapid response services worldwide. Our technicians can arrive on-site within 72 hours for installation and maintenance, ensuring continuous operation of your equipment.

PRODUCT ADVANTAGES
-CORE COMPONENTS

产品优势-核心部件

① 进口全自动风环

吹膜机配备进口自动风环，且与海外供应商建立了超十年深度合作关系，双方作为长期稳定的战略合作伙伴，持续以高品质部件赋能产品性能。



① Imported Full-automatic Air Ring

Our blown film lines use imported automatic air rings from an overseas supplier we have partnered with for more than ten years.

② Taiwan Die


Taiwan-made die heads, forged from high-grade alloy steel and fully machined on five-axis machining centers. Each core part is cut from a single piece, so every spiral channel splits the melt evenly. The film has no weld lines, and the melt flows smoothly with no dead zones.

② 台湾模头

精选台湾模头，采用优质合金钢锻造，并依托精密五轴加工中心完成全流程加工。模具核心部件均在加工中心一体成型，不仅确保了模具的超高精度，更实现各层螺旋流道的精准分料，让制品彻底告别分料线与死角，保障熔融物料流动全程平滑无阻，从源头奠定卓越品质基础。

③ 自主研发, 双工位快速换滤网装置

1. 密封可靠：自涨式密封，防漏料。
2. 品质精良：合金钢材，数控精加。
3. 加热高效：双区陶瓷加热。
4. 智能监控：熔体压力、温度实时显示，便于工艺调整。
5. 操作便捷：气动控制，换网安全快速。

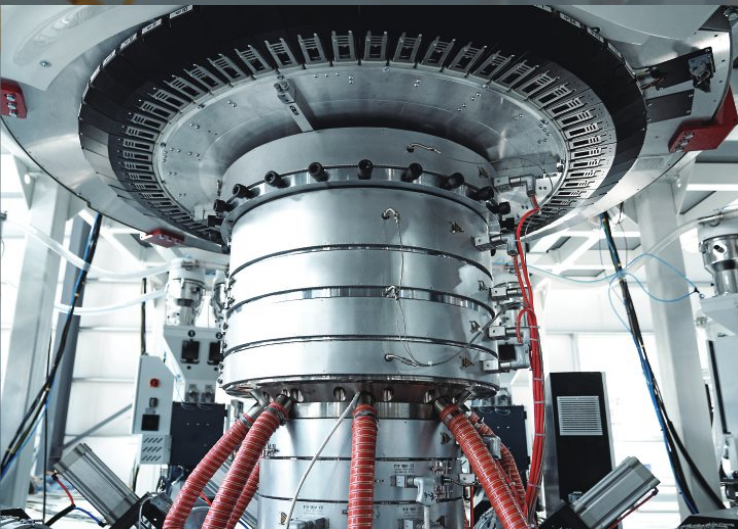

③ Self-developed, Double-station Quick Filter Change Device

1. Reliable sealing: Self-energizing seal, no melt leakage.
2. Precision build: Alloy steel, CNC machined.
3. Efficient heating: Dual-zone ceramic heaters.
4. Smart monitoring: Real-time melt pressure and temperature display for easy process adjustment.
5. Easy operation: Pneumatic control for fast, safe screen changes.

④ 自主研发IBC膜泡内冷控制系统

自主研发的IBC膜泡内冷控制系统，通过精准调控膜泡内部冷却过程，实现三大核心优势：

1. 尺寸稳定性提升：确保薄膜厚度公差控制在极小范围，产品一致性更优；
2. 高精度实时响应：毫秒级反馈调节，适应复杂生产环境；
3. 快速规格切换：缩短换型时间，降低废料率，显著提升生产效率与材料利用率。



④ Independently Developed IBC System

In-house IBC (Internal Bubble Cooling) control system, precisely regulating cooling inside the bubble:

1. Stable dimensions: Tight thickness tolerance for consistent film.
2. Fast, precise response: Millisecond-level feedback for demanding production conditions.
3. Quick changeovers: Less downtime and scrap, higher output and material yield.

⑤ 自主研发, 全自动中心表面双收卷

自主研发的全自动双收卷系统，技术国内领先。支持三种收卷模式，配备全自动张力控制系统，实现切膜、换卷、卸卷等全流程自动化。卸卷液压控制，张力可调，适配多种膜工艺；自动追踪薄膜张力，保障收卷平整。设备达国际先进水平，显著提升效率、降低废品率与节省劳动力。



⑤ In-house automatic center/surface twin winder

In-house automatic twin winder with three winding modes and automatic tension control. Film cutting, roll change and roll unloading are fully automatic, with hydraulic unloading. Adjustable, self-tracking tension suits a wide range of films and keeps rolls flat. Higher efficiency, less scrap, lower labor costs.

UPWARD BLOWING

多层共挤上吹机组
系列

旋转牵引
Rotary nip system

测厚系统
Film thickness control

稳泡系统
Bubble stabilization unit

自动风环
Automatic air ring

称重喂料系统
Automatic hopper loading units

模头
Extrusion die

螺杆挤出系统
Extruder

中间牵引机构
Middle nip system

自动纠偏系统
Web guiding system

下牵引机构
Winder nip roll system

收卷机构
Film winder




CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂




模头材质：优质合金钢锻造，精密五轴加工中心加工(模具主要零件全部在加工中心上加工而成，保证了模具的精度和各层螺旋流道分料的均匀性，使制品无分料线，无死角，确保熔融物料流动顺畅)；模头陶瓷电加热器加热(插口式)，模头流道、口模抛光，镀硬铬(采用新型抛光技术使模具表面达到镜面要求，模头全流道经精心研磨抛光后镀硬铬，增强了模具的耐磨性和抗腐蚀性)。

Extrusion Die material：Forged high-grade alloy steel, precision machined on five-axis machining centers. All main die parts are made on these centers, so the die is highly accurate and every spiral channel splits the melt evenly: no weld lines, no dead zones, smooth melt flow. Plug-in ceramic heaters. Flow channels and die lips are mirror polished and hard-chrome plated for wear and corrosion resistance.

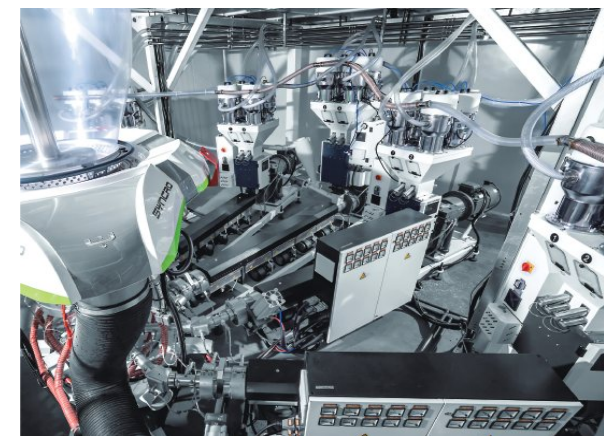

挤出机：1.机筒螺杆(螺杆设计有分离、屏障、混炼功能，并经过特殊硬化处理，不仅有良好的耐腐蚀性和耐磨性，而且具有高产出、低能耗、塑化好等特点)；
2.结构：高混炼型，双螺纹式螺杆(复牙式)；
3.材料：38CrMoAlA;螺杆双合金；
4.螺杆加工工艺：素材锻打调质处理→精细加工→外圆真圆度精密研磨→长时间渗氮热处理(100小时)→加工后低温回火应力消除→表面镀硬铬处理→表面精致抛光处理；
5.机筒加料口强制水冷(通循环水冷却，进一步提高效率同时延长使用寿命)；6.机筒采用陶瓷加热器(分区式)及冷却风机；
7.挤出机主电机采用一级能效永磁同步电机，能效节约15%左右。

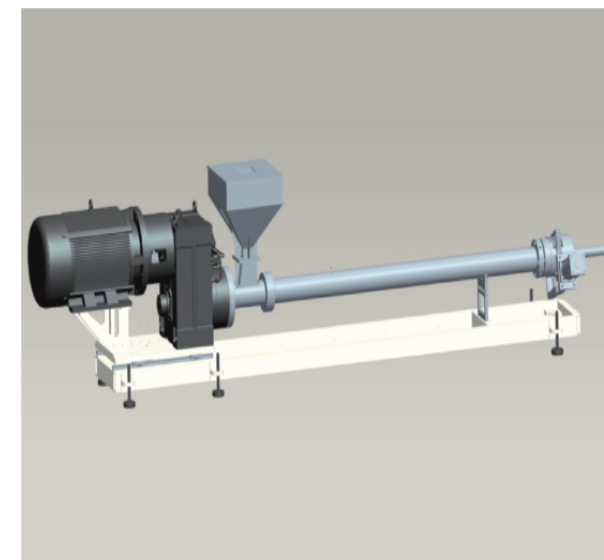

1. Barrel and screw: Barrier screw with separation and mixing sections, specially hardened for wear and corrosion resistance. High output, low energy use, good plasticizing.
2. Design: High-mixing, double-flight screw.
3. Material: 38CrMoAlA; bimetallic screw.
4. Screw process: Forged, quenched and tempered → precision machined → OD precision ground for roundness → 100-hour nitriding → low-temperature stress relief → hard-chrome plated → polished.
5. Feed throat: Forced circulating water cooling for higher efficiency and longer service life.
6. Barrel: Zoned ceramic heaters with cooling fans.
7. Main motor: Grade 1 energy-efficient permanent magnet synchronous motor, saving about 15% energy

MULTI-LAYER
BLOWN FILM
MACHINE

多层共挤高效吹膜机

www.reizemachinery.com



CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂




风环：安装在机器上的风环将提供对气压和温度的控制，以确保薄膜能够达到恒定的厚度。

Air ring： The air ring controls air pressure and temperature to keep film thickness consistent.

双工位快速换滤网装置：

- 1.自涨式密封结构，确保不漏料；
- 2.采用优质合金钢材，数控加工中心精密加工；
- 3.加热方式：采用陶瓷加热器，共二区加热；
- 4.换网前加熔体压力、温度传感器装置(熔体压力显示能随时显示压力变化，让操作人员能即时调整加工工艺)
- 5.气动控制换网装置，使换网更安全、方便、快捷。

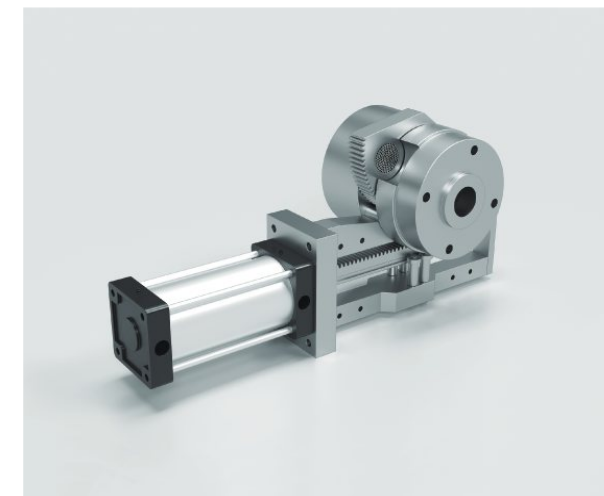

Dual station quick-change filter device：

1. Self-energizing seal, no melt leakage.
2. High-grade alloy steel, precision machined on CNC machining centers.
3. Heating: Ceramic heaters, two zones.
4. Melt pressure and temperature sensors before the screen changer. The pressure display shows changes in real time, so operators can adjust the process right away.
5. Pneumatic screen changer for safe, easy and fast screen changes.



稳泡器和辅助稳泡器：

- 1.结构型式：外框铝合金型材组装，结构合理，外形美观大方；
- 2.电动调节鼠笼式稳泡器；稳定泡开合、高度可电动遥控调节；
- 3.导辊采用碳纤维辊，优点重量轻、强度高、摩擦系数和热系数低从而不会因高温和高阻力而影响薄膜的性能。

Primar bubble cage and secondar bubble cage

1. Frame: Assembled aluminum alloy profiles, well designed and clean-looking.
2. Motorized bubble cage: Opening and height adjustable by remote control.
3. Carbon fiber guide rollers: Light and strong, with low friction and low thermal expansion, so heat and drag do not affect the film.

MULTI-LAYER
BLOWN FILM
MACHINE

多层共挤高效吹膜机

www.reizemachinery.com



CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂

旋转牵引系统

水平式薄膜旋转牵引装置具有国际先进水平，牵引机构采用 $\pm 352^\circ$ 水平摆动式旋转，伺服控制薄膜线速度恒定可调，结构科学合理。它取代了旋转模头，解决了旋转模头存在的流道长、熔体密封难、易漏料、维护难等系列难题，从而避免了旋转模头引起的制品“大小头”、荷叶边”等缺陷。

Rotar nip driving system

Horizontal oscillating haul-off:
Rotates $\pm 352^\circ$ horizontally, with servo control keeping line speed constant and adjustable. It replaces a rotating die and avoids that die's long flow channels, sealing problems, leakage and difficult maintenance, along with the film defects they cause, such as tapered rolls and wavy edges.



1. 薄膜第一牵引装置采用多辊冷却形式；
2. 牵引电机功率2kw伺服电机；
3. 最大牵引速度128m/min；
4. 牵引辊采用镜面抛光辊，表面镀硬铬处理；
5. 牵引辊筒开合形式：气缸驱动；
6. 352° 水平摆动式旋转装置1套，两根低摩擦的气垫式换向辊：两根特殊的橡胶展平辊等组成；
7. 旋转驱动由0.75kw变频驱动；
8. 控制部分：在主控制台和旋转牵引安装平台上均设有控制按钮，包括开机/关机按钮和复位开关等。

1. Primary haul-off: Multi-roller cooling.
2. Haul-off motor: 2 kW servo motor.
3. Max. haul-off speed: 128 m/min.
4. Nip rollers: Mirror polished, hard-chrome plated.
5. Nip roller opening: Pneumatic cylinders.
6. One 352° horizontal oscillating unit, with two low-friction air turning bars and two special rubber spreader rollers.
7. Oscillation drive: 0.75 kW, inverter controlled.
8. Controls: Buttons on both the main console and the haul-off platform, including start/stop and reset.


MULTI-LAYER BLOWN FILM MACHINE

多层共挤高效吹膜机

www.reizemachinery.com



DOWNWARD BLOWING
多层共挤下吹机组系列

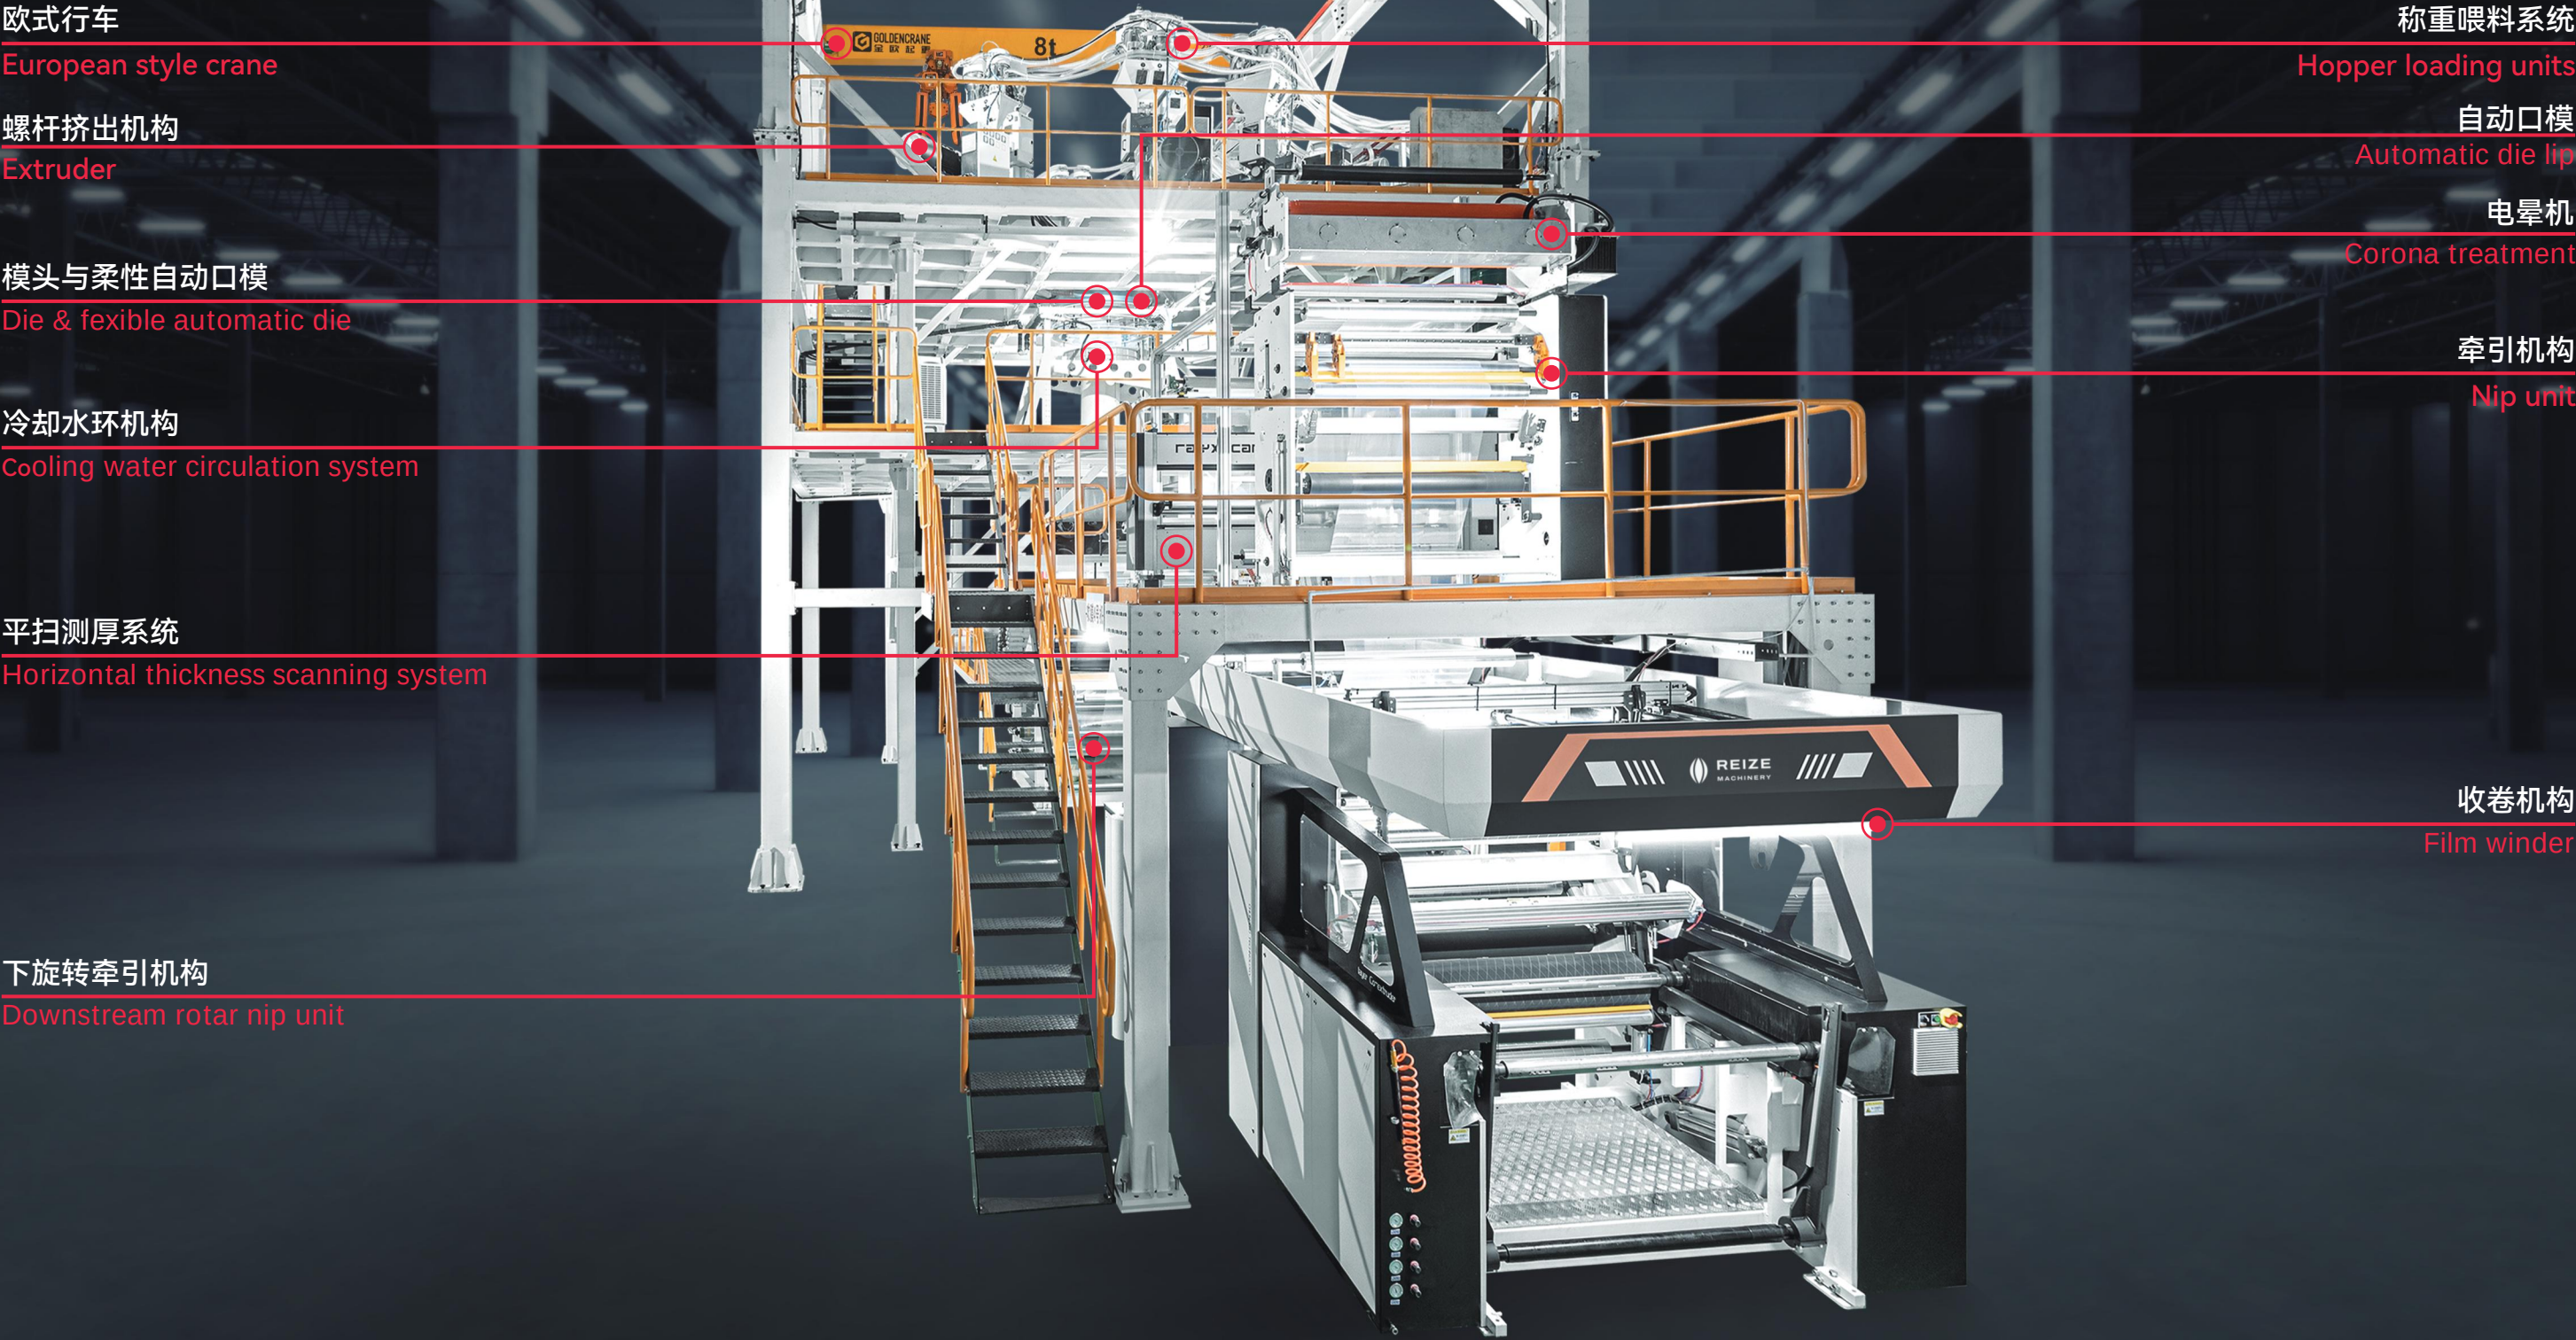

欧式行车
European style crane

螺杆挤出机构
Extruder

模头与柔性自动口模
Die & flexible automatic die

冷却水环机构
Cooling water circulation system

平扫测厚系统
Horizontal thickness scanning system

下旋转牵引机构
Downstream rotar nip unit

称重喂料系统
Hopper loading units

自动口模
Automatic die lip

电晕机
Corona treatment

牵引机构
Nip unit

收卷机构
Film winder

CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂



模头与柔性自动口模

- 1.基本结构型式：特殊设计多层共挤叠加模头，侧向进料，流线性流道设计、适应内层PA的阻隔膜生产；
- 2.模头材质：优质合金钢锻造，精密五轴加工中心加工(模具主要零件全部在加工中心上加工而成，保证了模具的精度和各层螺旋流道分料的均匀性使制品无分料线，无死角，确保熔融物料流动顺畅)；
- 3.口模直径：Φ450 1套，口模间隙：1.5mm，另配一个口模间隙2.0mm；(意大利信可柔性口膜)
- 4.模头陶瓷电加热器加热(插口式)，共12区，自动控温，加热功率约200kW；
- 5.模头有四个可调节水平的支撑丝杆；
- 6.模头流道、口模抛光，镀镍磷合金；(采用新型抛光技术使模具表面达到镜面要求，模头全流道经精心研磨抛光后镀镍磷合金，增强了模具的耐磨性和抗腐蚀性)
- 7.流道(连接换网和模头)：采用法兰连接，便于安装，流道内孔镀硬铬并经特殊硬化处理。

Die & flexible automatic die

1. Design: Multi-layer co-extrusion stack die, side feed, streamlined flow channels, for barrier film with an inner PA layer.
2. Material: Forged high-grade alloy steel, five-axis machined. All main parts made on the machining centers: high accuracy, even melt split in every spiral channel, no weld lines, no dead zones.
3. Die diameter: Ø450 mm, one set. Die gap 1.5 mm, plus a second die lip at 2.0 mm. (Italian flexible die lip)
4. Heating: Plug-in ceramic heaters, 12 zones, automatic control, approx. 200 kW.
5. Four adjustable support screws for levelling.
6. Flow channels and die lips: Mirror polished, nickel-phosphorus plated.
7. Melt pipe (screen changer to die): Flanged for easy installation, bore hard-chrome plated and hardened.

X射线光束测厚系统

机器上使用电容式或非放射性(低于 5 KeV)X射线传感器来检测薄膜的厚度。该传感器的实时厚度反馈使PLC能够及时控制风环的调整。

X-ray beam thickness measurement system

Either capacitive or non-radioactive (below 5 KeV) X ray sensors is used on the machine to determine the web thickness while a homogeneous layer of film is passing through. This sensor real time web thickness feedback will enable the PLC to enhance the air ring control.

MULTI-LAYER BLOWN FILM MACHINE

多层共挤高效吹膜机

www.reizemachinery.com



CUSTOMER-ORIENTED AND
IMPLEMENT WITH PASSION

客户至上 / 执行激昂

核心优势：

性能出色：0.004mm精密纠偏+0.02ms快速响应，满足高精度产线需求；可靠耐用：金属外壳抗干扰、抵御3万伏静电，免维护结构保障长期稳定；安全适配：杜绝火花；兼容多类传感器与边缘 / 线迹 / 对比度等跟踪模式；节能高效电机自动调速降低能耗适配多元生产需求。

Core Advantages：

Performance: 0.004 mm guiding accuracy and 0.02 ms response, for high-precision lines.
Durable: Metal housing blocks interference and withstands 30,000 V static. Maintenance-free.
Safe and flexible: No sparking. Works with many sensor types and with edge, line or contrast tracking.
Efficient: The motor adjusts its speed automatically to save energy.

纠偏装置EPC (Edge position controller)

产品定位：

高性能全触屏伺服纠偏控制器，专注材料边缘、线、对比度跟踪，适配材料收放卷等自动化流程。

Product positioning:

High-performance servo web guiding controller with full touchscreen. Tracks material edge, line or contrast. Suitable for unwinding, rewinding and other automated processes.

核心配置与工作逻辑：

32位双核CPU、1000线编码器与闭环伺服电机，兼容多传感器，实现±0.004mm精度、以及0.02ms响应。传感器实时捕偏，CPU驱动电机调整，编码器闭环控制，支持单边巡边与无火花换向。

Core configuration & logic:

32-bit dual-core CPU, 1000-line encoder, closed-loop servo motor and a wide sensor choice: ±0.004 mm accuracy, 0.02 ms response. Sensor detects, CPU corrects, encoder closes the loop. Single-edge tracking and spark-free reversing.



www.reizemachinery.com



收卷系统

自动切膜、自动换卷、自动卸卷、自动计长和全自动张力控制，卸卷采用了液压控制系统，张力控制可实现恒张力控制或张力锥度控制，可满足不同膜工艺要求。可根据所测薄膜的表面张力反馈并实现自动跟踪，提高薄膜收卷平整度。全自动收卷机已达到国际先进水平，降低了工人的劳动强度，减少人工换卷时出现的废品量，提高工作效率，也增强了安全性能。

1. 收卷方式：三种可选，适应不同薄膜的工艺要求。

- ① 全自动双工位表面摩擦收卷
- ② 全自动双工位间隙收卷
- ③ 全自动双工位主动+摩擦收卷

三种均为自动切膜、自动换卷、自动卸卷。

2. 最大卷径：Φ1000mm

3. 收卷厚度：0.02~0.2mm

4. 张力控制：全自动张力控制系统，由低摩擦气缸和电气比例阀组成，可实现全自动张力锥度控制，提高张力控制精度。

5. 气胀轴：一键装卸，无需人工操作，降低劳动强度，提高生产效率。

6. 自动计长装置：1套。

Finish roll winding system

Automatic film cutting, roll change, roll unloading, length counting and tension control, with hydraulic unloading. Tension can be held constant or tapered to suit different films, and is tracked automatically from the measured film tension to keep rolls flat. The winder cuts labour, reduces the scrap of manual roll changes, and improves output and safety.

1. Winding: Three modes for different films.

- ① Fully automatic twin-station surface winding
- ② Fully automatic twin-station gap winding
- ③ Fully automatic twin-station centre + surface winding All three: automatic film cutting, roll change and roll unloading.


2. Max. roll diameter: Ø1000 mm

3. Film thickness: 0.02 – 0.2 mm

4. Tension control: Fully automatic, with low-friction cylinders and an electro-pneumatic proportional valve; automatic taper tension, higher accuracy.

5. Air shaft: One-button loading and unloading, no manual work.

6. Automatic length counter: 1 set.

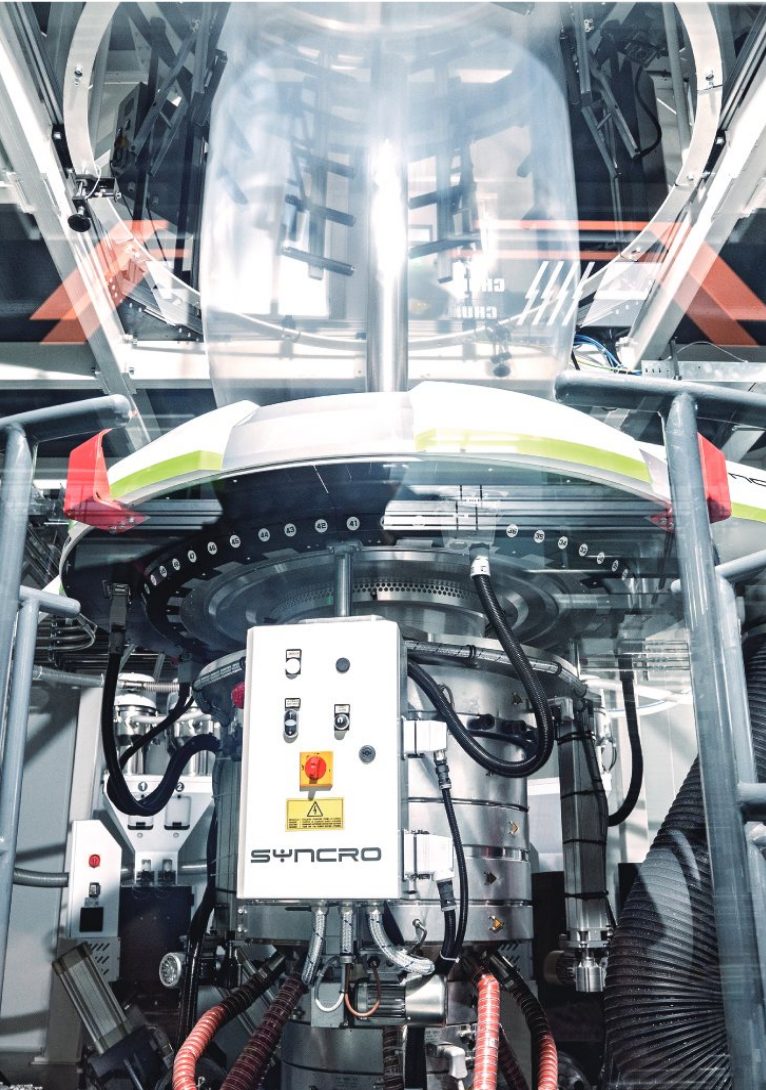

计算机集中控制系统

整机采用带触摸屏面板计算机集中控制，为本公司自主研发的程序(采用施耐德自动化公司产品配套)；设备连线采用施耐德Canopen总线连接控制设备(变频器和伺服驱动器等)，其优点在于控制可靠、响应及时；牵引和收卷电机采用伺服电机，稳定可靠，可实现高精度控制；集中对整机的加工温度、螺杆转速、熔体压力、熔体温度、IBC膜泡内冷系统、外冷却风环、电动稳泡装置、薄膜旋转牵引系统、薄膜线速度、张力、收卷机等系统进行控制。同时，显示和监控各温度、压力、电流、电压、张力、速度、长度等参数，并具有自动报警和自诊断等功能；实现现场智能化的精确控制、监测以及远程参数化；可存取制品加工工艺参数和生产进度工艺参数，大大方便了设备的操作，实现数字化的生产与管理，确保项目的技术先进性；主机、温控、膜泡内冷(IBC)及旋转牵引装置由一15寸触摸屏控制，两背靠背收卷由两个10寸触摸屏单独控制。整机采用3个PLC控制，主机/牵引部分和两收卷系统分别可单独控制，增强了操作的灵活性，如任意一收卷的控制部分有问题都不会影响主机和牵引正常工作而导致整机停止；

主操作屏(15寸触摸屏)配套新型支托臂系统，可多角度旋转，操作上大大增强了灵活性和方便性；

外部辅机安装接口丰富，可连接德国塑控或意大利信可等多品牌的自动风环和料斗系统。

Centralized Computer Control System

Central control from a touchscreen panel PC running software developed in-house on Schneider automation hardware. Devices (inverters, servo drives) are linked by Schneider CANopen bus for reliable control and fast response. Haul-off and winder motors are servo motors for precise, stable control.

One system controls processing temperatures, screw speeds, melt pressure and temperature, IBC, external air ring, motorised bubble cage, oscillating haul-off, line speed, tension and winders. It displays and monitors temperature, pressure, current, voltage, tension, speed and length, with automatic alarms and self-diagnosis, and allows remote parameter setting. Process and production data can be stored and recalled.

A 15" touchscreen controls the extruders, temperature, IBC and oscillating haul-off; the two back-to-back winders each have their own 10" touchscreen. Three PLCs run the line, with the extruder/haul-off section and the two winders controlled separately, so a fault on either winder does not stop the extruder and haul-off.

The 15" main screen is mounted on a swing arm, adjustable to many angles.

Interfaces for external equipment: compatible with automatic air rings and hopper systems from Plast-Control (Germany), Syncro (Italy) and other brands.

型号 series	层数 layers	最大产量 max.output (kg)	薄膜宽度 film width (mm)	薄膜厚度 film thickness (mm)	厚薄偏差 thickness tolerance (2sigma)	模头直径 die (mm)	螺杆 screw (mm)
三层1600型	3LAYER	300-360	1460	0.02-0.20	±3%	300	60*2+70*1
三层1800型	3LAYER	300-420	1660	0.02-0.20	±3%	350	60*2+80*1
三层2000型	3LAYER	400-480	1860	0.02-0.20	±3%	400	70*2+80*1
三层2300型	3LAYER	360-540	2160	0.02-0.20	±3%	450	70*2+90*1
三层2600型	3LAYER	400-650	2460	0.02-0.20	±3%	550	80*2+90*1
三层2800型	3LAYER	720	2660	0.02-0.20	±3%	600	90*2+100*1
五层2000型	5LAYER	480-540	1860	0.02-0.20	±3%	450	60*4+80*1
五层2300型	5LAYER	500-600	2160	0.02-0.20	±3%	500	70*4+90*1
五层2600型	5LAYER	600-650	2460	0.02-0.20	±3%	550	70*4+90*1
七层2000型	7LAYER	540	1860	0.02-0.20	±3%	450	50*6+60*1
七层2300型	7LAYER	650	2160	0.02-0.20	±3%	550	60*6+70*1
九层2000型	9LAYER	540	1860	0.02-0.20	±3%	450	50*8+60*1
九层2300型	9LAYER	650	2160	0.02-0.20	±3%	550	60*8+70*1
十一层2300型	11LAYER	650	2160	0.02-0.20	±3%	550	60*10+70*1
七层1400型下吹	7LAYER	480	1200	0.04-0.25	±3%	450	50*6+70*1
九层1400型下吹	9LAYER	480	1200	0.04-0.25	±3%	450	50*8+70*1

型号 series	层数 layers	螺杆转速 screw rotating speed	总装机功率 total power	主电机 main drive	外冷却风机 outer cooling blower	牵引速度 drawing speed (m/min)
三层1600型	3LAYER	120r/min	240KW	45KW*2+55KW*1	15KW	128
三层1800型	3LAYER	120r/min	300KW	45KW*2+75KW*1	15KW	128
三层2000型	3LAYER	120r/min	350KW	55KW*2+75KW*1	15KW	128
三层2300型	3LAYER	120r/min	400KW	55KW*2+90KW*1	15KW	128
三层2600型	3LAYER	120r/min	500KW	75KW*2+90KW*1	18KW	128
三层2800型	3LAYER	120r/min	550KW	90KW*2+132KW*1	18KW	128
五层2000型	5LAYER	120r/min	500KW	45KW*4+75KW*1	15KW	128
五层2300型	5LAYER	120r/min	550KW	55KW*4+90KW*1	15KW	128
五层2600型	5LAYER	120r/min	580KW	55KW*4+90KW*1	18KW	128
七层2000型	7LAYER	120r/min	530KW	37KW*6+45KW*1	15KW	128
七层2300型	7LAYER	120r/min	580KW	45KW*6+55KW*1	15KW	128
九层2000型	9LAYER	120r/min	520KW	37KW*8+45KW*1	15KW	128
九层2300型	9LAYER	120r/min	580KW	45KW*8+55KW*1	15KW	128
十一层2300型	11LAYER	120r/min	630KW	45KW*10+55KW*1	15KW	128
七层1400型下吹	7LAYER	120r/min	500KW	37KW*6+55KW*1	7.5KW	128
九层1400型下吹	9LAYER	120r/min	560KW	37KW*8+55KW*1	7.5KW	128