

ELECTRIC DRIVE OPTIMISATION

CHONG CHEE KANG

UNIVERSITI SAINS MALAYSIA
2012

ELECTRIC DRIVE OPTIMISATION

By:

CHONG CHEE KANG

(Matrix no: 102449)

Supervisor:

Prof. Horizon Walker Gitano-Briggs

June 2012

This dissertation is submitted to
Universiti Sains Malaysia
As partial fulfillment of the requirement to graduate with honors degree in
BACHELOR OF ENGINEERING (MECHANICAL ENGINEERING)



School of Mechanical Engineering
Engineering Campus
Universiti Sains Malaysia

ACKNOWLEDGEMENTS

CONTENTS

Acknowledgements	ii
Contents	iii
List of Tables	v
List of Figures	vi
List of Equations	vii
List of Abbreviations	viii
List of Symbols	ix
Abstrak	x
Abstract	xi

CHAPTER 1 – INTRODUCTION

1.1 Background	1
1.2 Problem Statement	3
1.3 Objectives	7
1.4 Scope of Research	7
1.5 Research Approach	8

CHAPTER 2 – LITERATURE REVIEW

2.1 Introduction	9
2.2 Torque Ripple	9
2.3 Driving Strategy	12
2.4 Summary	15

CHAPTER 3 – METHODOLOGY

CHAPTER 4 – RESULT AND DISCUSSION

CHAPTER 5 – CONCLUSION

References	19
APPENDICES	21
APPENDIX A – SCHEMATIC	22

LIST OF TABLES

Page

LIST OF FIGURES

		Page
Figure 1.1	Hall effect sensors signal, back emf, output torque and phase current (Yedamale, 2003)	4
Figure 1.2	The phase current and torque during an alternating comutation event (Salah et al., 2011)	6
Figure 2.1	Supervision Support System hardware configuration schematic (Shimizu et al., 1998)	13
Figure 2.2	Flowchart of the Cruising Simulation (Shimizu et al., 1998)	14

LIST OF EQUATIONS

Page

LIST OF ABBREVIATIONS

AC Alternating Current

BLDC Brushless DC

DC Direct Current

PMBLDC Permanent Magnet Brushless DC

PWM Pulse Width Modulation

LIST OF SYMBOLS

\lim limit

ABSTRAK

Abstrak versi bahasa melayu

ELECTRIC DRIVE OPTIMISATION

ABSTRACT

English version of the abstract

CHAPTER 1

INTRODUCTION

1.1 Background

Electric motor can be classified into two major categories which are the DC electric motor and AC electric motor. An AC motor is an electric motor driven by alternating current whereas a DC motor is driven by direct current. There are various types of AC motor which includes induction motor, synchronous motor, eddy current motor and etc. The DC electric motor includes permanent magnet brushed motor, permanent magnet brushless motor, switched reluctance motor and etc.

Electric motor is used in many application which includes in machine for driving the pulley and belts, the conveyor belt, in drilling and lathe machine. Apart from the heavy industry, electric motor is used in home appliances for powering the washing machine, fan, blower of air-conditioner and blender machine. Moreover, electric motor is also used in automobile industry as the starter motor for firing up the internal combustion engine of cars and trucks and last but not least, as the drive train for electric vehicle.

The PMBLDC is a synchronous motor. In other words, the frequency of the magnetic field generated at the stator and the rotor is the same. PMBLDC comes in single-phase, 2-phase and 3-phase configuration which the 3-phase configuration is the most popular among the three. There are basically two major components inside a PMBLDC

motor which is the stator and the rotor. The stator of a PMBLDC motor is made up of a series of laminated steel with wire windings around it. The rotor is build up of permanent magnet that has at least 2 poles.

Unlike brushed motor, PMBLDC does not have brushes for comutation, instead a controller is needed for controlling the rotation of the PMBLDC by sending out AC signal to the PMBLDC. There are two types of AC signal sent to the PMBLDC for controlling the motor which are the Trapezoidal type and the Sinusoidal type which depends on the winding of the stator.

In order for the controller to send out the correct signal, the position of the rotor must be sent to the controller so that a sequence of AC signal can be generated which energized the winding of the stator for rotating the motor. Hall effect sensors is used as the rotor position detection sensor which has an analog signal output. When the magnetic field is detected by the hall effect sensor, the voltage output will be changes from low-est to the highest or vice versa depending on the circuit configuration. Normally there are three hall effect sensor mounted on the stator of PMBLDC motor which are 60° or 120° apart depending on the number of poles and the comutation sequence required.

Figure 1.1 shows the hall effect sensors signal for a 2 pole PMBLDC motor, the back emf, the phase current and the output torque. As shown in the figure, there are 3 hall effect sensors with labels A, B and C respectively, sensor A is leading sensor B by 60° and sensor B is leading sensor C by 60° .

Ideally, the phase current should behave as a digital square wave signal where the current rises and drops immediately. But in real world, the current would take some time

to rises from zero to maximum/minimum. Hence, the torque produced would behave as a series of ripple instead of a constant output torque.

In this project, a PMBLDC hub motor is used as the sole powertrain of a electric vehicle. The electric vehicle will be used for participating the Shell Eco-Marathon which is a competition which teams compete to build a higher mileage vehicle. The competition requires the participating teams to build their own car for the categories they are participating(for example, the urban concept category or the prototype category). For our case, a four-wheel electric vehicle is built for participation in urban concept category. The vehicle will be driven around a race track, which is the Sepang Internation Track, North Track for year 2012 for four laps with 10 seconds of stop between each lap. The energy consumption will be collected and the mileage will be calculated for each attempt and every team will have 3 attempts for mileage improvement.

1.2 Problem Statement

PMBLDC motor is better compare to brushed DC motor because brushless motor increases the efficiency by dropping the friction between the brush and the comutator which happens in brushed DC motor. However, the inefficient PWM in controlling the speed of the motor and the torque ripple cause by the phase current limits the efficiency of a PMBLDC motor.

There are three types of torque produced by a permanent magnet electric motor which are:

- cogging torque

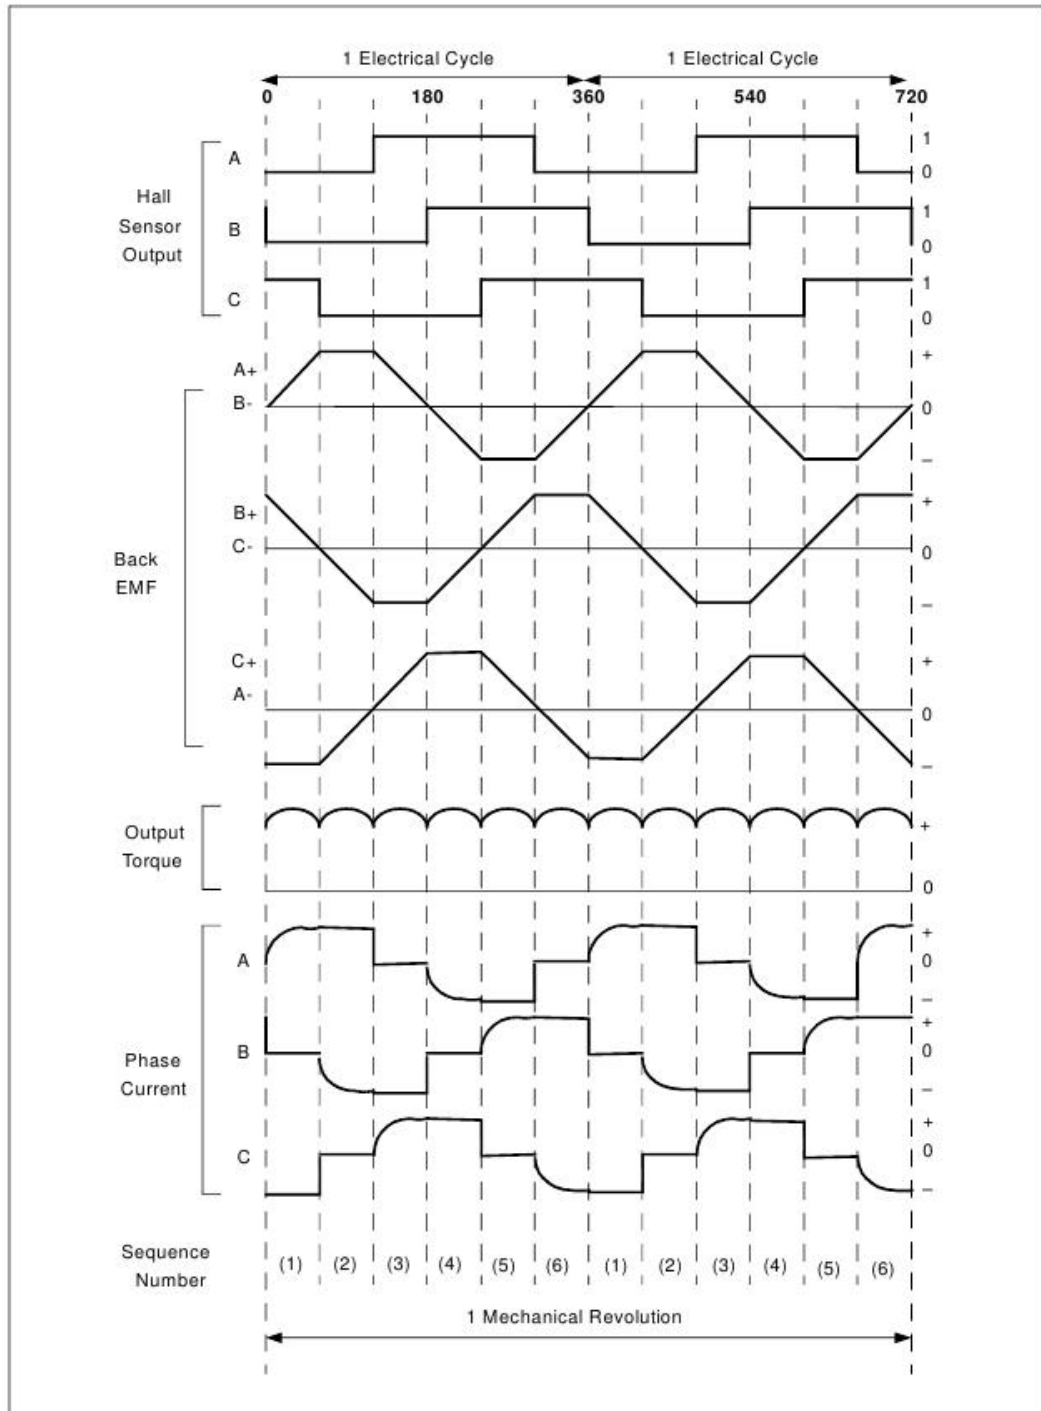


Figure 1.1: Hall effect sensors signal, back emf, output torque and phase current (Yedamale, 2003)

- reluctance torque
- mutual torque

The cogging torque is produced by the interaction between the permanent magnet at the rotor and the stator slots. Cogging torque is an undesirable torque generated by the electric motor which dominates at low speed and results in speed ripple. Cogging torque can only be minimized by means of hardware tuning which includes altering the number of poles, teeth at the stator or editing the controller setting which changes the drive current waveform.

The reluctance torque is generated by the difference in position of the rotor and the phase induction at the rotor. The ripple produced by the reluctance torque could be negligible with a good number of poles and slots of the windings at the stator.

The third type of torque produced by PMBLDC motor is the mutual torque which is caused by the non-sinusoidal signal reaching the stator windings or the magnet at the rotor. Since the torque is generated by the current, ripple reduction for mutual torque could be achieved by fine-tuning the current signal.

The torque ripple occurs in PMBLDC is mainly contributed by the different rise and decay time of the phase current as shown in figure 1.1. The cogging torque does contribute to torque ripple in low speed but it's negligible at high speed. Torque ripple contributed by reluctance torque could also be ignored since the high number of poles and stator slot minimize the ripple. Mutual torque would be the major contributor to torque ripple due to the direct dependency on the current.

Based on figure 1.2 (a), the rate of decay of i_a is faster than the rate of increase of i_b . Therefore, at certain point where i_a reaches 0 but i_b still rising, there will be a surge in current at phase C, i_c . As the result, there will be a sudden drop in torque output. The same case happens as shown in figure 1.2 (c) where i_a drops slower than i_b causing an sudden drop in i_c and sudden increase in torque output. The same circumstances apply for i_a-i_c and i_b-i_c hence creating a ripple torque output.

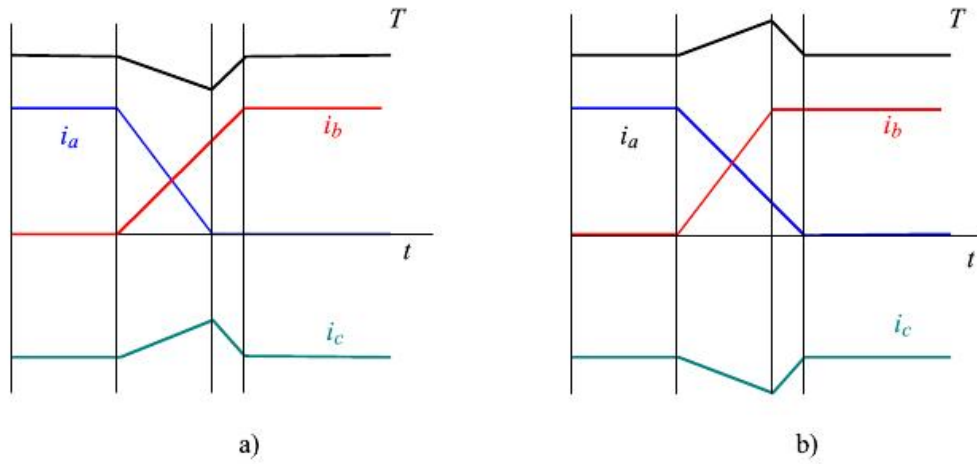


Figure 1.2: The phase current and torque during an alternating comutation event (Salah et al., 2011)

Apart from torque ripple in PMBLDC that reduce the efficiency of the electric motor and cut down the mileage of the electric vehicle, poor driving strategy will also contributes to poor mileage. The Sepang North Track is a racing track that contains 3 uphill section and 3 uphill section and an approximately 800m long straight for the starting and ending line. This track is especially challenging for electric vehicle because the factor of torque generated by the electric motor, cruise speed when uphill and downhill, rolling resistance and drag factor need to be taken into consideration for minimum energy consumption.

1.3 Objectives

The objectives for this project are:

1. To identify the output signal of the controller circuit and the hall effect sensor of the PMBLDC and develop a set of instrument for measuring the mileage of the electric vehicle.
2. To study the track profile of Sepang North Track and compose a set of strategy to increase the mileage of the electric vehicle.
3. To suggest methods for improving the efficiency of the electric vehicle through altering the drive current waveform and reducing coefficient of drag.

1.4 Scope of Research

In this project, the proprietary controller and PMBLDC motor signal output port will be identified. After that, by utilizing the signal output of the hall effect sensor and the controller speed output signal port, a set of instrument will be build for measuring the speed, input current and input voltage. The power input will then be calculated based on the voltage and current input.

After the instrumentation for measuring the performance of the electric vehicle is established, methods for improving the overall electric vehicle efficiency will be suggested which includes reducing the frontal area and improving the coefficient of drag of the electric vehicle and hence reducing the drag force. Modification on the phase current signal using indirect method also will be suggested for reducing the torque ripple

and hence improving the overall efficiency of the electric vehicle.

Next up, the behaviour of the electric vehicle on the Sepang North Track will be simulated with taking the drag force, rolling resistance and track gradient into consideration. With the frontal area, coefficient of drag, coefficient of rolling resistance and the mass of the vehicle as manipulating variables, a set of strategies could be created for electric vehicle at different mass, tyre pressure at the same track with using the same electric motor as drive train.

1.5 Research Approach

For tapping the signal from the PMBLDC motor's hall effect sensors as well as the analog/digital output from the controller circuit board for the speed signal, multimeter will be used. For building the measurement tools for measuring and logging the input voltage, input current and the speed of the vehicle, Arduino boards will be used in conjunction with the self-made transducing circuit.

For simulating the vehicle's behaviour on track, self-made codes using C++ language will be used for iteration. Data's for each set of simulation and strategies will be saved and the graph will be plot for analysing the effectiveness of the strategy.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

In this chapter, the research paper of different researchers around the world will be reviewed. The research on tuning the PWM controller signal, modification of phase current signal for minimizing the torque ripple as well as driving strategy for cars and trains will be reviewed.

2.2 Torque Ripple

Park, Sung Jun *et al.* (Park et al., 2000) found that the back EMF generated by each of the three windings are slightly different in shape and magnitude from each other. Since the back EMF for each winding is different, therefore different phase current should be apply to each of the three windings. By assuming the three stator windings are in Y-shape connection, the cogging torque and the reluctance torque component is negligible and the mutual torque is directly proportional to the phase current, phase current for each of the three stator windings should be seperately excited in phase with the back EMF to minimize the losses and maximizing the torque-per-ampere generation.

Kim, Tae-Sung *et al.* (Kim et al., 2001) shows that by using the rectangular shape phase current that changes to high at the flat part of the back-emf wave can minimize

the torque ripple, but this method is too ideal to be used in practical condition. In this paper, another method which is the unipolar PWM is introduced but it has a slow dynamic response, making this method not feasible at reducing the torque for current control commutation. The proposed current control algorithm is to separate the phase current that contains all harmonic components to each harmonical components and then transformed into stationary frame. Then, each stationary frame is added together and the output is the current command. After this process, the rectangular wave will appear more rectangular and hence reducing the torque ripple.

Nam, Ki-Yong *et al.* (Nam et al., 2006) suggested reducing the torque ripple by varying the input voltage to the PMBLDC. The idea of this paper is that by maintaining the current at a constant value, the torque ripple could be minimized. The method for reducing the torque ripple used in this paper is to supply varied input voltage during the freewheeling region.

Wael A. Salah *et al.* (Salah et al., 2011) proposed a method which apply a modified PWM signal to the PMBLDC. The modified PWM signal used will delay the build up of current in the in-coming phase gradually at low speed region. At high speed region, it will speed up the build up of current which results in overcoming the tips and dips of current during phase current commutation which contributes to reduce in torque ripple.

Mohamed. A. Enany *et al.* (Enany et al., 2010) presented a method for improving the performance of BLDC with varying the switch-on and switch-off angle of the phase current. By advancing the switch-on and switch-off phase current, it enables current at each windings to reach to the maximum value earlier hence reducing the tips and dips

of the current at the other winding which results in reducing torque ripple.

G. H. Jang and C. J. Lee (Jang and Lee, 2006) proposed a method to reduce the torque ripple through eliminating cogging torque by implementing a modified current wave form. The modified current wave form consists of main and auxiliary wave which the main wave is the conventional wave whereas the auxiliary wave generates a torque which has the same magnitude but opposite direction to the cogging torque.

Vanisri A. and Devarajan N. (A. and N., 2011) describe the design of a controller with minimize torque ripple which different than the conventional controller for PM-BLDC motor by filter components. The methodology of the method used in this research is passing through the signal through an inductor-capacitor filter which filters out the high frequency waveform. The capacitor is selected in a way that it can charge and discharge effectively and the inductor is responsible for reduce the current pulsation hence reducing the torque ripple.

Leila Parsa and Lei Hao (Parsa and Hao, 2008) studied the effect of magnetization, winding distribution, skew angle and current angle on torque pulsation minimization. The switching instance has been calculated in a way that the reluctance torque is utilized in reducing the torque pulsation. It is also shown in the paper that by using the proper switching interval and applying suitable current waveform, the torque pulsation is reduced.

2.3 Driving Strategy

Michiel Koot *et al.* (Koot et al., 2005) showed the work of analysing the engine, battery and alternator of an Hybrid Electric Vehicle (HEV). After the value of the parameters of an HEV is discretized, Dynamic Programming (DP) and Quadratic Programming (QP) techniques are used for the control strategy of the HEV.

Phil Howlett *et al.* (Howlett et al., 1997) discussed the making of an optimal strategy for a solar powered vehicle on a level road for participation in the World Solar Challenge. The draft strategy pointed out in the paper is:

- Accelerate using maximum available power.
- Hold speed at a lower critical speed, V , until mid-morning.
- Follow solar power up to an upper critical speed, W .
- Hold speed W until mid-afternoon.
- Follow solar power back down to the lower critical speed, V .
- Hold speed V until late in the afternoon.
- Follow solar power.
- Apply full regenerative braking, if available, or coast.
- Apply full regenerative braking and mechanical braking.

The mathematical model for the vehicle is built from the power flow from the solar panel to the traction system, from the battery to the traction system, from the solar panel

to the battery and from the traction system to the battery. Vehicle dynamics, for instance, the rolling resistance and drag force were also modelled. Finally, the control strategy is made based on the mathematical model.

The paper written by Yasuo Shimizu *et al.* (Shimizu et al., 1998) introduced 2 system which is the Supervision Support System as shown in figure 2.1 and the Cruising Simulation as shown in figure 2.2. The Supervision Support System is a system where a control centre vehicle is followed behind the solar vehicle and collect all the data from the solar vehicle, the data is logged and calculated and the instruction is sent via transmitter back to the solar vehicle and displayed on the panel meters

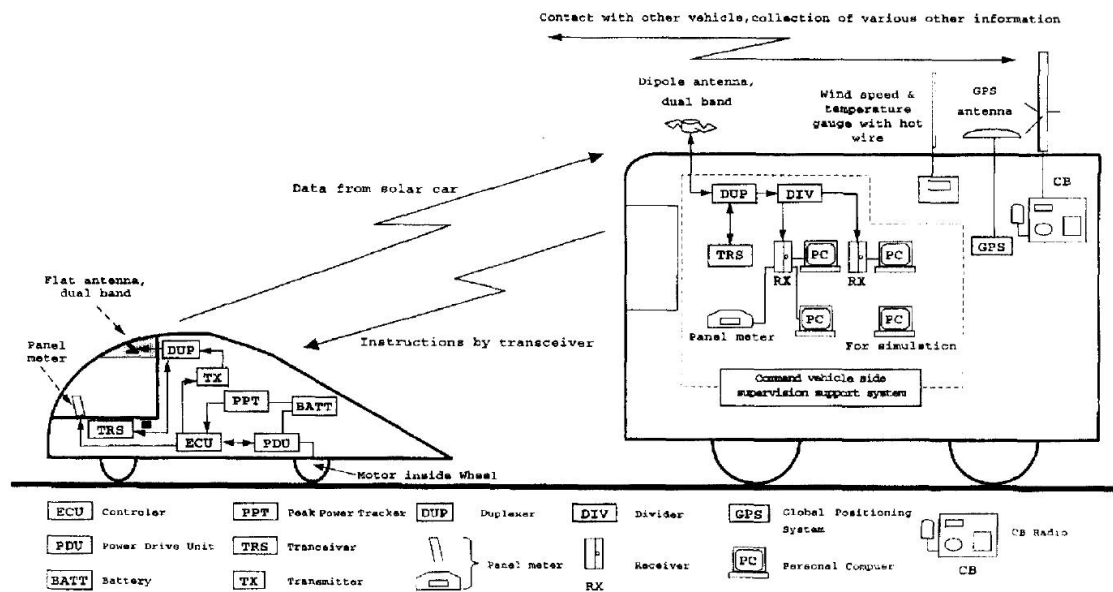


Figure 2.1: Supervision Support System hardware configuration schematic (Shimizu et al., 1998)

The Cruising Simulation on the other hand is a simulation process where the condition component is set, for example, the environment condition settings, the vehicle specification settings and etc. Next, the result is calculated through calculation of every single condition, for instance, the reading of geographical data, the calculation of motor

power and etc. By utilising the Supervision Support System and the Cruising Simulation, the on-road calculation could be done so that the power or speed control strategy can be set and implemented when the solar vehicle is running.

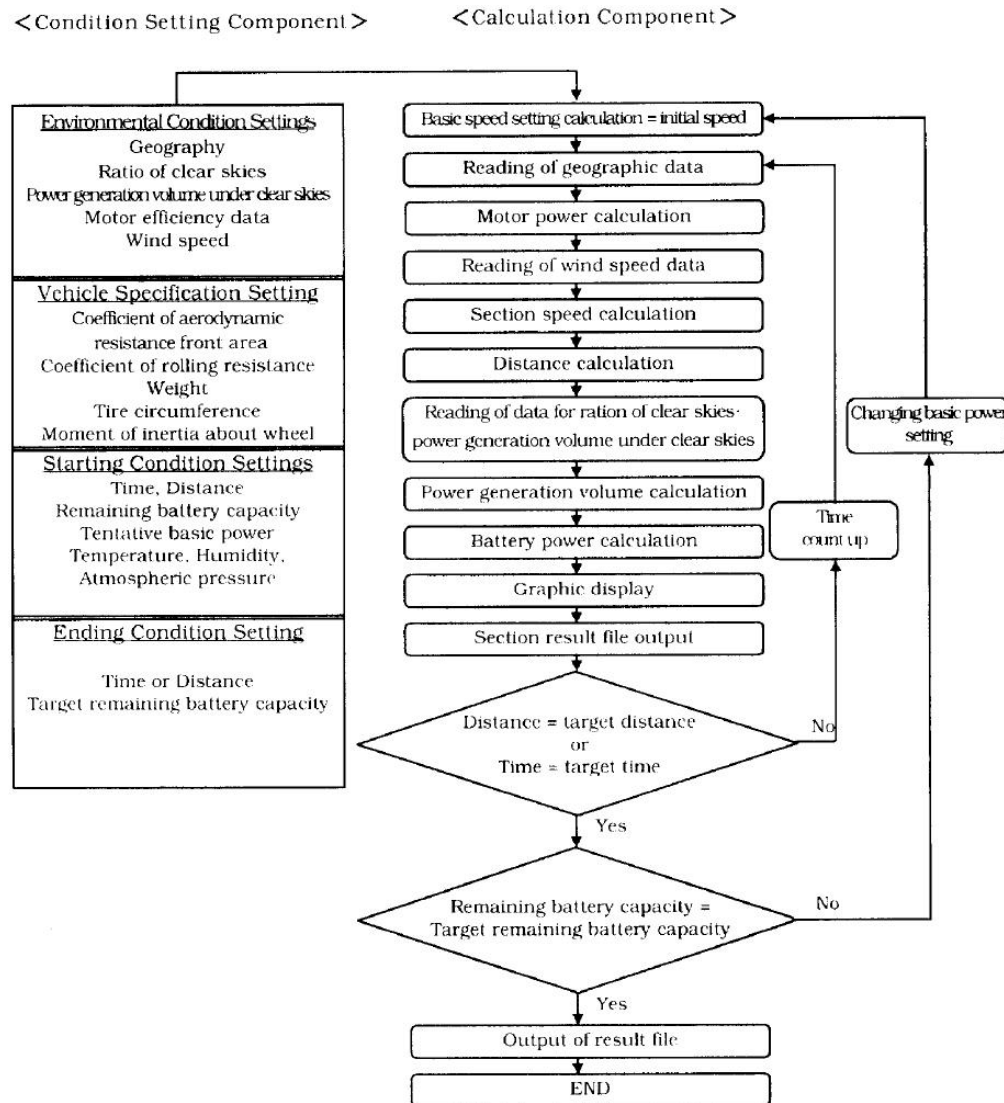


Figure 2.2: Flowchart of the Cruising Simulation (Shimizu et al., 1998)

Y.V. Bocharnikov *et al.* (Bocharnikov et al., 2007) researched on the optimal driving strategy for suburban railways. The strategy is constrained by two conditions which are energy saving and running fast so that it would not miss the schedule. There are 3 components for suburban railways which are the Motoring(M), Coasting(C) and Braking(B). By building mathematical model based on these 3 components and using fuzzy logic for optimization of energy function, a strategy with balance between the energy saving and running fast is achieved.

Peter Pudney and Phil Howlett (1994) described building of strategies for a train journey which have speed limits at certain part of the journey. The method used in this paper is to build mathematical model for both the vehicle model and the journey model. Then, the speed profile was built and the optimal driving strategies were derived using mathematical models.

2.4 Summary

CHAPTER 3

METHODOLOGY

CHAPTER 4

RESULT AND DISCUSSION

CHAPTER 5

CONCLUSION

REFERENCES

- A., V. and N., D. (2011). Torque Ripple Minimization in Indirect Position Detection of Permanent Magnet Brushless DC Motor. *European Journal of Scientific Research*, 65(4):481–489.
- Bocharnikov, Y., Tobias, A., Roberts, C., Hillmanssen, S., and Goodman, C. (2007). Optimal Driving Strategy for Traction Energy Saving on DC Suburban Railways. *IET Electr. Power Appl.*, 19(5):675–682.
- Enany, M. A., Elshewy, H. M., and Abdel-kader, F. E. (2010). Brushless DC Motor Performance Improvement through Switch-on and Switch-off Angles Control. *Proceedings of the 14th International Middle East Power System Conference (MEPCON'10)*, pages 786–790.
- Howlett, P., Pudney, P., Tarnopolskaya, T., and Gates, D. (1997). Optimal Driving Strategy for a Solar Car on a Level Road. *IMA Journal of Mathematics Applied in Business & Industry*, pages 59–81.
- Jang, G. H. and Lee, C. J. (2006). Design and Control of the Phase Current of a Brushless DC Motor to Eliminate Cogging Torque. *Journal of Applied Physics*, page 3.
- Kim, T.-S., Ahn, S.-C., and Hyun, D.-S. (2001). A New Current Control Algorithm for Torque Ripple Reduction of BLDC Motors. *IECON'01: The 27th Annual Conference of the IEEE Industrial Electronics Society*, pages 521–526.
- Koot, M., Kessels, J. T. B. A., de Jager, B., Heemels, W. P. M. H., van den Bosch, P. P. J., and Steinbuch, M. (2005). Energy Management Strategies for Vehicular Electric Power Systems. *IEEE Transactions on Vehicular Technology*, 54(3):771–782.
- Nam, K.-Y., Lee, W.-T., Lee, C.-M., and Hong, J.-P. (2006). Reducing Torque Ripple of Brushless DC Motor by Varying Input Voltage. *IEEE Transactions on Magnetics*, 42(4):1307–1310.
- Park, S. J., Park, H. W., et al. (2000). A New Approach for Minimum-Torque-Ripple Maximum-Efficiency Control of BLDC Motor. *IEEE Transactions on Industrial Electronics*, 47(1):109–114.
- Parsa, L. and Hao, L. (2008). Interior Permanent Magnet Motors With Reduced Torque Pulsation. *IEEE Transactions on Industrial Electronics*, 55(2):602–609.
- Pudney, P. and Howlett, P. (1994). Optimal Driving Strategies for a Train Journey with Speed Limits. *J. Austral. Math. Soc. Ser. B*, 36:38–49.
- Salah, W. A., Ishak, D., and Hammadi, K. J. (2011). PWM Switching Strategy For Torque Ripple Minimization in BLDC Motor. *Journal of Electrical Engineering*, 62(3):141–146.

- Shimizu, Y., Komatsu, Y., Torii, M., and Takamuro, M. (1998). Solar Car Cruising Strategy and Its Supporting System. *JSAE Review*, 19:143–149.
- Yedamale, P. (2003). *Brushless DC (BLDC) Motor Fundamentals*. Microchip Technology Inc.

APPENDICES

APPENDIX A

SCHEMATIC