

ELECTRIC DRIVE OPTIMISATION

CHONG CHEE KANG

UNIVERSITI SAINS MALAYSIA
2012

ELECTRIC DRIVE OPTIMISATION

By:

CHONG CHEE KANG

(Matrix no: 102449)

Supervisor:

Prof. Horizon Walker Gitano-Briggs

June 2012

This dissertation is submitted to
Universiti Sains Malaysia
As partial fulfillment of the requirement to graduate with honors degree in
BACHELOR OF ENGINEERING (MECHANICAL ENGINEERING)



School of Mechanical Engineering
Engineering Campus
Universiti Sains Malaysia

ACKNOWLEDGEMENTS

TABLE OF CONTENTS

Acknowledgements	ii
Table of Contents	iii
List of Tables	v
List of Figures	vi
List of Abbreviations	viii
List of Symbols	ix
List of Equations	viii
Abstrak	x
Abstract	xi

CHAPTER 1 – INTRODUCTION

1.1 Background	1
1.2 Problem Statement	3
1.3 Objectives	7
1.4 Scope of Research	7
1.5 Research Approach	8

CHAPTER 2 – LITERATURE REVIEW

2.1 Introduction	9
2.2 Torque Ripple	9
2.3 Driving Strategy	11

CHAPTER 3 – METHODOLOGY

CHAPTER 4 – RESULT AND DISCUSSION

CHAPTER 5 – CONCLUSION

References	16
APPENDICES	17
APPENDIX A – SCHEMATIC	18

LIST OF TABLES

Page

LIST OF FIGURES

		Page
Figure 1.1	Hall effect sensors signal, back emf, output torque and phase current [1]	4
Figure 1.2	The phase current and torque during an alternating comutation event [2]	6

LIST OF EQUATIONS

LIST OF ABBREVIATIONS

AC Alternating Current

BLDC Brushless DC

DC Direct Current

PMBLDC Permanent Magnet Brushless DC

PWM Pulse Width Modulation

LIST OF SYMBOLS

\lim limit

ABSTRAK

Abstrak versi bahasa melayu

ELECTRIC DRIVE OPTIMISATION

ABSTRACT

English version of the abstract

CHAPTER 1

INTRODUCTION

1.1 Background

Electric motor can be classified into two major categories which are the DC electric motor and AC electric motor. An AC motor is an electric motor driven by alternating current whereas a DC motor is driven by direct current. There are various types of AC motor which includes induction motor, synchronous motor, eddy current motor and etc. The DC electric motor includes permanent magnet brushed motor, permanent magnet brushless motor, switched reluctance motor and etc.

Electric motor is used in many application which includes in machine for driving the pulley and belts, the conveyor belt, in drilling and lathe machine. Apart from the heavy industry, electric motor is used in home appliances for powering the washing machine, fan, blower of air-conditioner and blender machine. Moreover, electric motor is also used in automobile industry as the starter motor for firing up the internal combustion engine of cars and trucks and last but not least, as the drive train for electric vehicle.

The PMBLDC is a synchronous motor. In other words, the frequency of the magnetic field generated at the stator and the rotor is the same. PMBLDC comes in single-phase, 2-phase and 3-phase configuration which the 3-phase configuration is the most popular among the three. There are basically two major components inside a PMBLDC

motor which is the stator and the rotor. The stator of a PMBLDC motor is made up of a series of laminated steel with wire windings around it. The rotor is build up of permanent magnet that has at least 2 poles.

Unlike brushed motor, PMBLDC does not have brushes for comutation, instead a controller is needed for controlling the rotation of the PMBLDC by sending out AC signal to the PMBLDC. There are two types of AC signal sent to the PMBLDC for controlling the motor which are the Trapezoidal type and the Sinusoidal type which depends on the winding of the stator.

In order for the controller to send out the correct signal, the position of the rotor must be sent to the controller so that a sequence of AC signal can be generated which energized the winding of the stator for rotating the motor. Hall effect sensors is used as the rotor position detection sensor which has an analog signal output. When the magnetic field is detected by the hall effect sensor, the voltage output will be changes from low-est to the highest or vice versa depending on the circuit configuration. Normally there are three hall effect sensor mounted on the stator of PMBLDC motor which are 60° or 120° apart depending on the number of poles and the comutation sequence required.

Figure 1.1 shows the hall effect sensors signal for a 2 pole PMBLDC motor, the back emf, the phase current and the output torque. As shown in the figure, there are 3 hall effect sensors with labels A, B and C respectively, sensor A is leading sensor B by 60° and sensor B is leading sensor C by 60° .

Ideally, the phase current should behave as a digital square wave signal where the current rises and drops immediately. But in real world, the current would take some time

to rises from zero to maximum/minimum. Hence, the torque produced would behave as a series of ripple instead of a constant output torque.

In this project, a PMBLDC hub motor is used as the sole powertrain of a electric vehicle. The electric vehicle will be used for participating the Shell Eco-Marathon which is a competition which teams compete to build a higher mileage vehicle. The competition requires the participating teams to build their own car for the categories they are participating(for example, the urban concept category or the prototype category). For our case, a four-wheel electric vehicle is built for participation in urban concept category. The vehicle will be driven around a race track, which is the Sepang Internation Track, North Track for year 2012 for four laps with 10 seconds of stop between each lap. The energy consumption will be collected and the mileage will be calculated for each attempt and every team will have 3 attempts for mileage improvement.

1.2 Problem Statement

PMBLDC motor is better compare to brushed DC motor because brushless motor increases the efficiency by dropping the friction between the brush and the comutator which happens in brushed DC motor. However, the inefficient PWM in controlling the speed of the motor and the torque ripple cause by the phase current limits the efficiency of a PMBLDC motor.

There are three types of torque produced by a permanent magnet electric motor which are:

- cogging torque

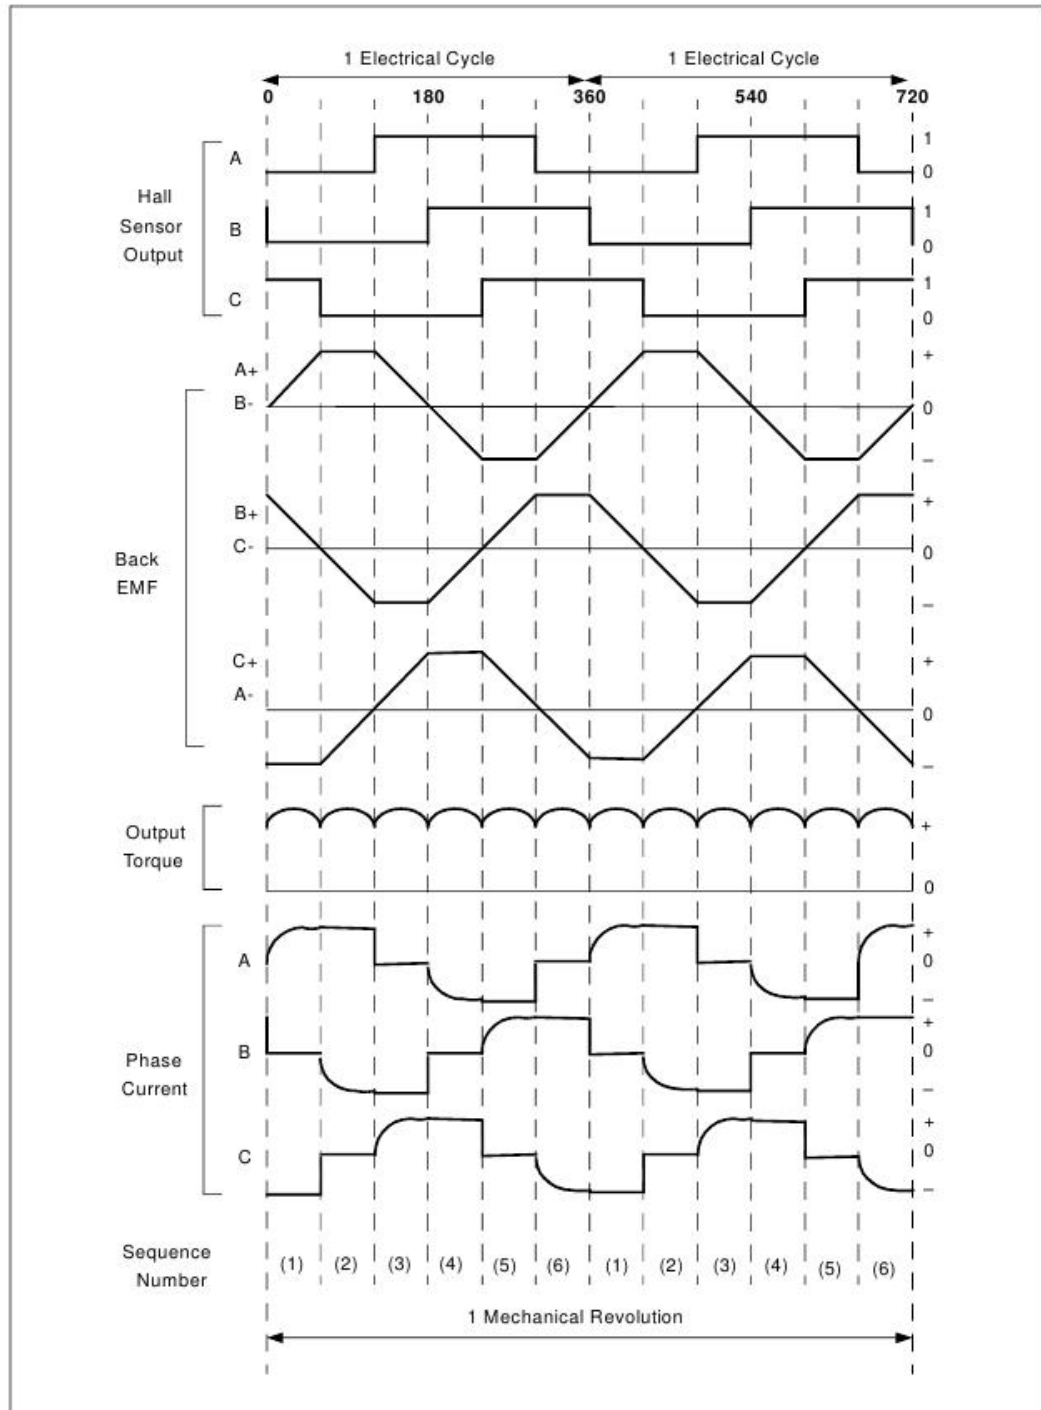


Figure 1.1: Hall effect sensors signal, back emf, output torque and phase current [1]

- reluctance torque
- mutual torque

The cogging torque is produced by the interaction between the permanent magnet at the rotor and the stator slots. Cogging torque is an undesirable torque generated by the electric motor which dominates at low speed and results in speed ripple. Cogging torque can only be minimized by means of hardware tuning which includes altering the number of poles, teeth at the stator or editing the controller setting which changes the drive current waveform.

The reluctance torque is generated by the difference in position of the rotor and the phase induction at the rotor. The ripple produced by the reluctance torque could be negligible with a good number of poles and slots of the windings at the stator.

The third type of torque produced by PMBLDC motor is the mutual torque which is caused by the non-sinusoidal signal reaching the stator windings or the magnet at the rotor. Since the torque is generated by the current, ripple reduction for mutual torque could be achieved by fine-tuning the current signal.

The torque ripple occurs in PMBLDC is mainly contributed by the different rise and decay time of the phase current as shown in figure 1.1. The cogging torque does contribute to torque ripple in low speed but it's negligible at high speed. Torque ripple contributed by reluctance torque could also be ignored since the high number of poles and stator slot minimize the ripple. Mutual torque would be the major contributor to torque ripple due to the direct dependency on the current.

Based on figure 1.2 (a), the rate of decay of i_a is faster than the rate of increase of i_b . Therefore, at certain point where i_a reaches 0 but i_b still rising, there will be a surge in current at phase C, i_c . As the result, there will be a sudden drop in torque output. The same case happens as shown in figure 1.2 (c) where i_a drops slower than i_b causing an sudden drop in i_c and sudden increase in torque output. The same circumstances apply for i_a-i_c and i_b-i_c hence creating a ripple torque output.

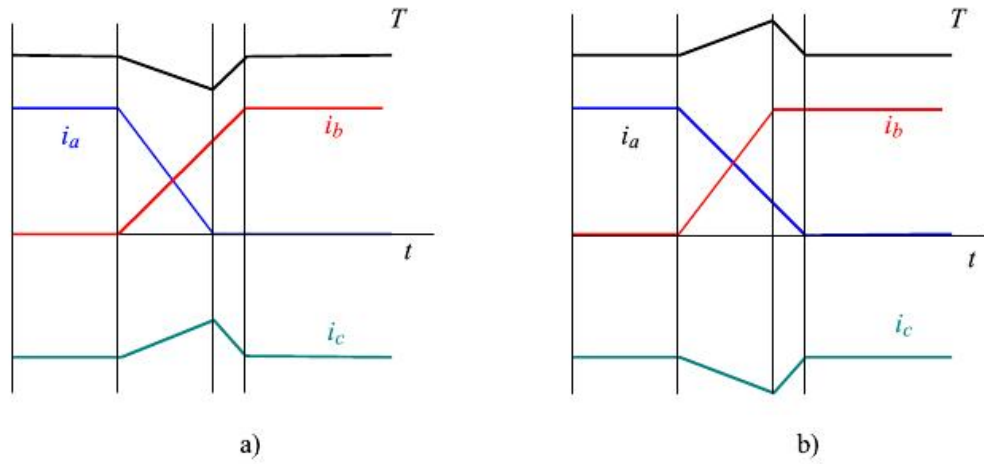


Figure 1.2: The phase current and torque during an alternating comutation event [2]

Apart from torque ripple in PMSBLDC that reduce the efficiency of the electric motor and cut down the mileage of the electric vehicle, poor driving strategy will also contributes to poor mileage. The Sepang North Track is a racing track that contains 3 uphill section and 3 downhill section and an approximately 800m long straight for the starting and ending line. This track is especially challenging for electric vehicle because the factor of torque generated by the electric motor, cruise speed when uphill and downhill, rolling resistance and drag factor need to be taken into consideration for minimum energy consumption.

1.3 Objectives

The objectives for this project are:

1. To identify the output signal of the controller circuit and the hall effect sensor of the PMSLDC and develop a set of instrument for measuring the mileage of the electric vehicle.
2. To study the track profile of Sepang North Track and compose a set of strategy to increase the mileage of the electric vehicle.
3. To suggest methods for improving the efficiency of the electric vehicle through altering the drive current waveform and reducing coefficient of drag.

1.4 Scope of Research

In this project, the proprietary controller and PMSLDC motor signal output port will be identified. After that, by utilizing the signal output of the hall effect sensor and the controller speed output signal port, a set of instrument will be build for measuring the speed, input current and input voltage. The power input will then be calculated based on the voltage and current input.

After the instrumentation for measuring the performance of the electric vehicle is established, methods for improving the overall electric vehicle efficiency will be suggested which includes reducing the frontal area and improving the coefficient of drag of the electric vehicle and hence reducing the drag force. Modification on the phase current signal using indirect method also will be suggested for reducing the torque ripple

and hence improving the overall efficiency of the electric vehicle.

Next up, the behaviour of the electric vehicle on the Sepang North Track will be simulated with taking the drag force, rolling resistance and track gradient into consideration. With the frontal area, coefficient of drag, coefficient of rolling resistance and the mass of the vehicle as manipulating variables, a set of strategies could be created for electric vehicle at different mass, tyre pressure at the same track with using the same electric motor as drive train.

1.5 Research Approach

For tapping the signal from the PMBLDC motor's hall effect sensors as well as the analog/digital output from the controller circuit board for the speed signal, multimeter will be used. For building the measurement tools for measuring and logging the input voltage, input current and the speed of the vehicle, Arduino boards will be used in conjunction with the self-made transducing circuit.

For simulating the vehicle's behaviour on track, self-made codes using C++ language will be used for iteration. Data's for each set of simulation and strategies will be saved and the graph will be plot for analysing the effectiveness of the strategy.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

In this chapter, the research paper of different researchers around the world will be reviewed. The research on tuning the PWM controller signal, modification of phase current signal for minimizing the torque ripple as well as driving strategy for cars and trains will be reviewed.

2.2 Torque Ripple

Park, Sung Jun *et al.* [3] found that the back EMF generated by each of the three windings are slightly different in shape and magnitude from each other. Since the back EMF for each winding is different, therefore different phase current should be apply to each of the three windings. By assuming the three stator windings are in Y-shape connection, the cogging torque and the reluctance torque component is negligible and the mutual torque is directly proportional to the phase current, phase current for each of the three stator windings should be separately excited in phase with the back EMF to minimize the losses and maximizing the torque-per-ampere generation.

Kim, Tae-Sung *et al.* [4] shows that by using the rectangular shape phase current that changes to high at the flat part of the back-emf wave can minimize the torque ripple,

but this method is too ideal to be used in practical condition. In this paper, another method which is the unipolar PWM is introduced but it has a slow dynamic response, making this method not feasible at reducing the torque for current control commutation. The proposed current control algorithm is to separate the phase current that contains all harmonic components to each harmonical components and then transformed into stationary frame. Then, each stationary frame is added together and the output is the current command. After this process, the rectangular wave will appear more rectangular and hence reducing the torque ripple.

Nam, Ki-Yong *et al.* [5] suggested reducing the torque ripple by varying the input voltage to the PMBLDC. The idea of this paper is that by maintaining the current at a constant value, the torque ripple could be minimized. The method for reducing the torque ripple used in this paper is to supply varied input voltage during the freewheeling region.

Wael A. Salah *et al.* [2] proposed a method which apply a modified PWM signal to the PMBLDC. The modified PWM signal used will delay the build up of current in the in-coming phase gradually at low speed region. At high speed region, it will speed up the build up of current which results in overcoming the tips and dips of current during phase current commutation which contributes to reduce in torque ripple.

Mohamed. A. Enany *et al.* [6] presented a method for improving the performance of BLDC with varying the switch-on and switch-off angle of the phase current. By advancing the switch-on and switch-off phase current, it enables current at each windings to reach to the maximum value earlier hence reducing the tips and dips of the current at

the other winding which results in reducing torque ripple.

G. H. Jang and C. J. Lee [7] proposed a method to reduce the torque ripple through eliminating cogging torque by implementing a modified current wave form. The modified current wave form consists of main and auxiliary wave which the main wave is the conventional wave whereas the auxiliary wave generates a torque which has the same magnitude but opposite direction to the cogging torque.

Vanisri A. and Devarajan N. [8] describe the design of a controller with minimize torque ripple which different than the conventional controller for PMBLDC motor by filter components. The methodology of the method used in this research is passing through the signal through an inductor-capacitor filter which filters out the high frequency waveform. The capacitor is selected in a way that it can charge and discharge effectively and the inductor is responsible for reduce the current pulsation hence reducing the torque ripple.

Leila Parsa and Lei Hao [9] studied the effect of magnetization, winding distribution, skew angle and current angle on torque pulsation minimization. The switching instance has been calculated in a way that the reluctance torque is utilized in reducing the torque pulsation. It is also shown in the paper that by using the proper switching interval and applying suitable current waveform, the torque pulsation is reduced.

2.3 Driving Strategy

Michiel Koot *et al.* [10] showed the work of analysing the engine, battery and alternator of an Hybrid Electric Vehicle (HEV). After the value of the parameters of an HEV is

discretized, Dynamic Programming (DP) and Quadratic Programming (QP) techniques are used for the control strategy of the HEV.

CHAPTER 3

METHODOLOGY

CHAPTER 4

RESULT AND DISCUSSION

CHAPTER 5

CONCLUSION

REFERENCES

- [1] P. Yedamale, *Brushless DC (BLDC) Motor Fundamentals*. Microchip Technology Inc., 2003.
- [2] W. A. Salah, D. Ishak, and K. J. Hammadi, "PWM Switching Strategy For Torque Ripple Minimization in BLDC Motor," *Journal of Electrical Engineering*, vol. 62, no. 3, pp. 141–146, 2011.
- [3] S. J. Park, H. W. Park, *et al.*, "A New Approach for Minimum-Torque-Ripple Maximum-Efficiency Control of BLDC Motor," *IEEE Transactions on Industrial Electronics*, vol. 47, pp. 109–114, Feb. 2000.
- [4] T.-S. Kim, S.-C. Ahn, and D.-S. Hyun, "A New Current Control Algorithm for Torque Ripple Reduction of BLDC Motors," *IECON'01: The 27th Annual Conference of the IEEE Industrial Electronics Society*, pp. 521–526, 2001.
- [5] K.-Y. Nam, W.-T. Lee, C.-M. Lee, and J.-P. Hong, "Reducing Torque Ripple of Brushless DC Motor by Varying Input Voltage," *IEEE Transactions on Magnetics*, vol. 42, pp. 1307–1310, Apr. 2006.
- [6] M. A. Enany, H. M. Elshewy, and F. E. Abdel-kader, "Brushless DC Motor Performance Improvement through Switch-on and Switch-off Angles Control," *Proceedings of the 14th International Middle East Power System Conference (MEP-CON'10)*, pp. 786–790, Dec. 2010.
- [7] G. H. Jang and C. J. Lee, "Design and Control of the Phase Current of a Brushless DC Motor to Eliminate Cogging Torque," *Journal of Applied Physics*, p. 3, 2006.
- [8] V. A. and D. N., "Torque Ripple Minimization in Indirect Position Detection of Permanent Magnet Brushless DC Motor," *European Journal of Scientific Research*, vol. 65, no. 4, pp. 481–489, 2011.
- [9] L. Parsa and L. Hao, "Interior Permanent Magnet Motors With Reduced Torque Pulsation," *IEEE Transactions on Industrial Electronics*, vol. 55, pp. 602–609, Feb. 2008.
- [10] M. Koot, J. T. B. A. Kessels, B. de Jager, W. P. M. H. Heemels, P. P. J. van den Bosch, and M. Steinbuch, "Energy Management Strategies for Vehicular Electric Power Systems," *IEEE Transactions on Vehicular Technology*, vol. 54, pp. 771–782, May 2005.

APPENDICES

APPENDIX A

SCHEMATIC