





5v or 3.3V output to device

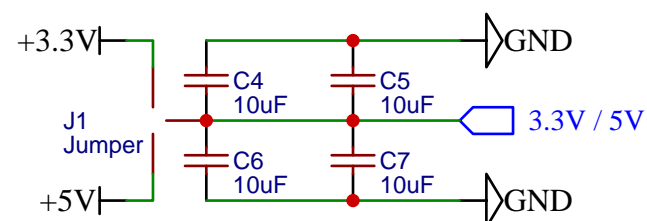

DTR (Arduino) or RESET (ESP)  
output to device

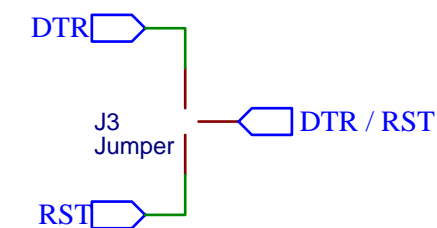

CTS (Arduino) or GPIO 0 (ESP)  
output to device

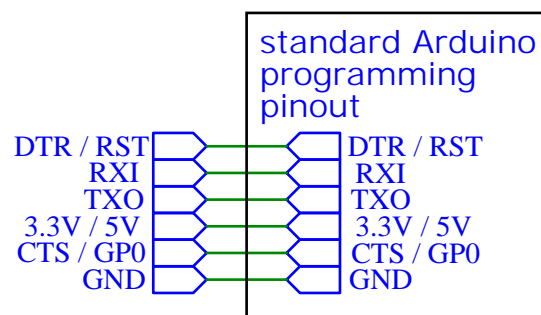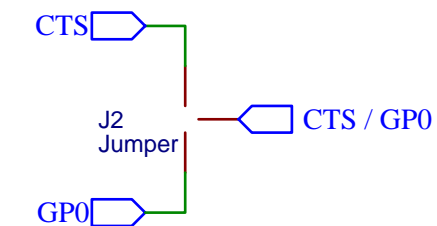

Can be used for 5V and 3.3V Arduino boards but also for ESP8266/ESP32 boards  
Data lines are always 3.3V, works for all 5V devices.  
Use NodeMCU type reset for ESP devices.

TITLE: 3DStar PGM		REV: 1.2
	Company: 3DStar.ro	Sheet: 1/1
	Date: 2023-12-26	Drawn By: cctweaker