

The Pennsylvania State University  
The Graduate School  
College of Engineering

**THESIS TITLE**

A Dissertation in  
Your Department Name  
by  
Your Name

© 2013 Your Name

Submitted in Partial Fulfillment  
of the Requirements  
for the Degree of

Master of Science

May 2013

I grant The Pennsylvania State University the non-exclusive right to use this work for the University's own purposes and to make single copies of the work available to the public on a not-for-profit basis if copies are not otherwise available.

---

Your Name

The dissertation of Your Name was reviewed and approved\* by the following:

Joseph H. Blow  
Professor of SomeThing  
Thesis Advisor, Chair of Committee

Reader Name  
Professor of SomeThing  
Optional Title Here

Reader Name  
Professor of SomeThing  
Optional Title Here

Reader Name  
Professor of SomeThing  
Optional Title Here

Reader Name  
Professor of SomeThing  
Optional Title Here

\*Signatures are on file in the Graduate School.

# Abstract

# Table of Contents

List of Figures	v
List of Tables	vi
List of Symbols	vii
Acknowledgments	viii
Chapter 1	
Introduction	2
1.1 Background . . . . .	2
Bibliography	4

# List of Figures

1.1	The finite volume structure for COBRA-TF . . . . .	3
-----	--	---

# List of Tables

# List of Symbols

$\alpha$



# Acknowledgments

# Dedication




# Chapter 1 |

## Introduction

For the past several decades, the primary focus in nuclear engineering within the United States has been focused on light water reactors (LWR). Commercially, all nuclear reactors are either boiling water reactors (BWR) or pressurized water reactors (PWR). Correct computation of the thermal hydraulics within the reactor core leads to efficient design and accuracy in the safety analysis. A popular subchannel code for modelling the hydrodynamics within the reactor core is COBRA-TF. This FORTRAN based code solves 8 conservation equations for liquid, entrained droplet, and vapor phases in 3-D dimensions [1]. The conservation equations analytically reduce into a pressure matrix in a semi-implicit method with rod temperatures solved for explicitly. Because the physics are integrated into the numerical solution, the equations must be linear and the solution method semi-implicit. With a residual formulation, greater flexibility and control over the numerical solution is possible. COBRA-TF was originally written in FORTRAN 77, but over the years has been partially updated to newer versions of Fortran.

The finite volume structure in COBRA-TF in figure 1.1 is for a one-dimensional channel in the axial direction with  $n$  number of cells. The first and last cells at 0 and  $n + 1$  are ghost cells and act as the boundary conditions for the problem. Pressure, enthalpy, and density are averaged over the cell volume and are located at the center of the cell. Mass flow rate and velocity are located at the faces in between cells. The cells are represented with an index  $i$ , and the faces with indexes of  $i + \frac{1}{2}$  or  $i - \frac{1}{2}$ . This project will initially focus on this 1-D configuration. Usually the code is three dimensional, with channels connecting to each other in two more dimensions. Fully 3-D equations will be considered in future work.

### 1.1 Background

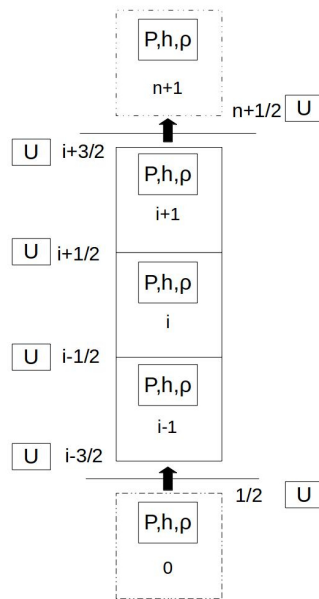

**Figure 1.1.** The finite volume structure for COBRA-TF

# Bibliography

- [1] SALKO, R. K. (2014) *CTF Theory Manual, Tech. rep.*, The Pennsylvania State University.