

deli

Contents

Contents	i
1 Introduction	1
1.1 Analysis of forested areas	2
1.2 Remote sensing for forested areas	5
1.3 Context of the thesis	7
1.4 Objectives	7
1.5 Strategy	9
1.6 Structure of the thesis	13
2 State of the art	15
2.1 Stand segmentation	16
2.1.1 Stand segmentation using VHR optical images	17
2.1.2 Stand segmentation using lidar	18
2.1.3 Stand segmentation using VHR optical images and lidar	19
2.1.4 Challenges of stand segmentation	20
2.2 Segmentation	22
2.2.1 "Traditional" segmentation methods	23
2.2.2 Superpixels methods	24
2.2.3 Segmentation of point cloud	26
2.3 Classification	26
2.3.1 Supervised classification	26
2.3.2 Random Forest	27
2.4 Dimension reduction and feature selection	29
2.4.1 Dimension reduction: feature extraction	29
2.4.2 Feature selection	30
Existing methods	30
Optimize the selection	32
2.5 Smoothing methods	33

2.5.1	Local methods	33
2.5.2	Global methods	33
3	Method	37
3.1	General flowchart	38
3.2	Over-segmentation	38
3.2.1	Segmentation of lidar data	38
3.2.2	Segmentation of optical images	40
3.3	Feature extraction	41
3.3.1	Point-based lidar features.	41
3.3.2	Pixel-based multispectral features.	42
3.3.3	Pixel-based lidar features.	43
3.3.4	Object-based feature map.	43
3.4	Classification	44
3.4.1	Training set design	44
3.4.2	Feature selection	45
3.5	Smoothing	46
3.5.1	Local methods	46
Filtering	46	
Probabilistic relaxation	47	
3.5.2	Global smoothing	48
Unary term	49	
Prior	50	
Energy minimization	52	
4	Results	55
4.1	Data	56
4.2	Segmentation methods	58
4.2.1	Retrieve stands borders	59
4.2.2	Add semantic information	63
4.3	Results of the method	64
4.3.1	Over-segmentation	64
4.3.2	Feature selection	64
4.3.3	Classification	64
4.3.4	Regularization	64
4.4	Co-products of the method	64

4.5	Semi-automatic update	64
4.6	Inventory	64
5	Conclusions and perspectives	67
A	Color code	69
B	Publication	73
B.1	Journal articles	74
B.2	Peer-reviewed conference papers	74
C	Results - Confusion matrices and accuracy metrics	77
C.1	Accuracy metrics	78
C.2	Segmentation methods	80
C.3	Results of the method	80
C.3.1	Classification	80
C.3.2	Regularization	80
	Bibliography	85



1

Introduction

1.1	Analysis of forested areas	2
1.2	Remote sensing for forested areas	5
1.3	Context of the thesis	7
1.4	Objectives	7
1.5	Strategy	9
1.6	Structure of the thesis	13

1.1 Analysis of forested areas

Forests are a core component of planet's life. They are defined as large area dominated by trees. Hundreds of other definitions of forest may be used all over the world, incorporating factors such as tree density, tree height, land use, legal standing and ecological function [131, 2].

Forest are commonly defined as land with tree crown cover (or equivalent stocking level) of more than 10 percent and area of more than 0.5 hectares (ha). The trees should be able to reach a minimum height of 5 meters at maturity in situ. They may consist either of closed forest formations where trees of various storeys and undergrowth cover a high proportion of the ground; or open forest formations with a continuous vegetation cover in which tree crown cover exceeds 10 percent. Young natural stands and all plantations established for forestry purposes which have yet to reach a crown density of 10 percent or tree height of 5 m are included under forest, as are areas normally forming part of the forest area which are temporarily unstocked as a result of human intervention or natural causes but which are expected to revert to forest.

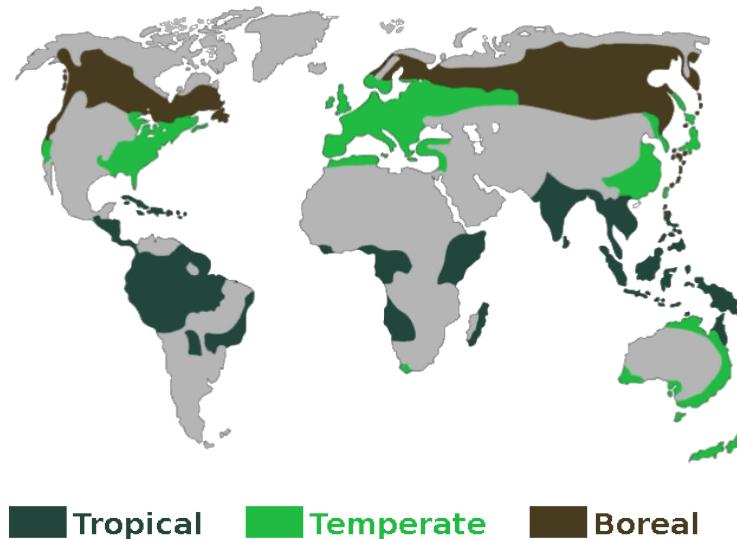


FIGURE 1.1: Forest repartition and categorization in the world.

Forests are the dominant terrestrial ecosystem of Earth, and are distributed across the globe [118]. They cover about four billion hectares, or

approximately 30% of the world's land area (see Figure 1.1). Forests at different latitudes and elevations form distinctly different ecozones: boreal forests near the poles, tropical forests near the Equator and temperate forests at mid-latitudes (see Figure 1.1). Higher elevation areas tend to support forests similar to those at higher latitudes, and the amount of precipitation also affects forest composition. Since these ecozones are very different, the study at a fine level (e.g. species composition) of forested areas must be restricted to a single ecozone at a time.

Human society and forests influence each other in both positive and negative ways [162]. Human activities, including harvesting forest resources, can negatively affect forest ecosystems. Forests have 3 main contributions to human: ecosystem services, tourist attraction and harvesting.

Ecosystem services.

Forests provide ecosystem services. Indeed, Forests account for 75% of the gross primary productivity of the Earth's biosphere, and contain 80% of the Earth's plant biomass [118]. They also hold about 90% of terrestrial biodiversity [18, 166]. Forests are also beneficial for the environment; they capt and store the CO₂ [39] (see Figure 1.2). About 45% of the total global carbon is held by forests. They also filter dust and microbial pollution of the air [136]. Finally, they also play an important role in hydrological regulation and water purification [94] (see Figure 1.2).

Tourist attraction.

Forests serve as tourist attractions. In France, there are hundred of long distance footpaths (~ 60000km) through forests. Other activities such as rock climbing, mountain bike or adventure parks are mostly practiced in forests.

Harvesting.

Wood from trees displays many uses. It has been widely used for fuel [139]. In this case, hardwood is preferred over softwood because it creates less smoke and burns longer. Wood is still an important construction material [128]: Elm was used for the construction of wood boats. In Europe, oak is still the preferred variety for all wood constructions, including beams, walls, doors, and floors. A wider variety of woods is also used such as poplar, small-knotted pine, and Douglas fir. Wood is also needed in the paper industry since wood fibers are an important component of most papers.

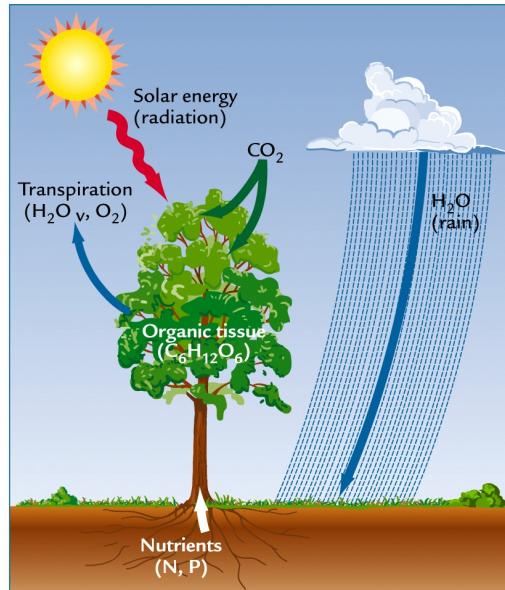


FIGURE 1.2: Carbon cycle: a process of CO₂ storage, water and air purification.

Eventually, wood is also extensively used for furniture or for making tools or music instruments.

The evolution of forests need to be monitored in order to exploit efficiently the forest resources in a sustainable way (Paris Agreement). For example, France is a great wood importer (~ 25 millions of m³ per year), while the french forest is the third in Europe in term of volume. It is therefore needed to better manage and exploit the french wood stocks.

In order to evaluate the forest resources, a precise mapping of forests is needed. Forests are complex structures [124], for which information is needed for management, exploitation and more generally for public and private policies. Such information can be the tree species or the tree maturity of the forest. There are two ways to extract such information from forest; **field inventory** or **remote sensing**. The field inventories are very expensive to set up and are also not adapted for a national mapping, but is more adapted for statistics. Remote sensing is a more relevant way in order to obtain such information since it allows to extract them at a large scale.

In order to meet these needs, two synergistic products could be produced: a statistical inventory or a forest mapping.

1.2 Remote sensing for forested areas

The analysis of forested areas from a remote sensing point of view can be performed at three different levels: pixel, object (mainly trees) or stand. In statistical national forest inventory (NFI), an automated and accurate tree segmentation is needed in order to extract tree level features (basal area, dominant tree height, etc., [109, 73]). However, the tree level is not the only reliable level of analysis for forest studies at a national scale but could be employed for a local study. When a joint mapping and statistical reasoning is required (e.g., land-cover (LC) mapping and forest inventory [148]), forest stands remain the prevailing scale of analysis [109, 169]. A stand can be defined in many different ways in terms of homogeneity: tree specie, age, height, maturity, and its definition varies according to the countries.

From a remote sensing point of view, the delineation of the stands is a segmentation problem. Forest stands are preferred, since they allow to extract reliable and statistically meaningful features and to provide an input for multi-source statistical inventory. For land-cover mapping, this is highly helpful for forest database updating [75], whether the labels of interest are *vegetated areas* (e.g., *deciduous/evergreen/mixed/non-forested*), or, even more precisely, the tree species. To obtain such information, most of the time in national forestry inventory institutes, for reliability purposes, each area is manually interpreted by human operators with very high resolution (VHR) geospatial images focusing on the infra-red channel [73]. This work is extremely time consuming and subjective [174]. Furthermore, in many countries, the wide variety of tree species (e.g., >20) significantly complicates the problem. This is all the more true than photo-interpretation may not always be sufficient and even in case of few species (3-5), automatic classification techniques are not effective enough. The design of an automatic procedure based on remote sensing data would fasten and ease such process. Additionally, the standard manual delineation procedure only takes into account the species, and few characteristics (alternatively height, age,

stem density or crown closure). Instead, an automatic method could offer more flexibility being not limited to a visual analysis and using characteristics extracted from complementary data sources and not only CIR ortho-images.

The use of remote sensing data for the automatic analysis of forests has been growing in the last 15 years, especially with the synergistic use of airborne laser scanning (ALS) and optical VHR imagery (multispectral imagery and hyperspectral imagery) [150, 169]. Several countries have already integrated such sources in their operational pipeline for forest management and characterization. They appear to be both well adapted and complementary inputs for stand segmentation [29, 27, 93]. Furthermore, they can be employed for forest management [147, 173, 122]. ALS provides a joint direct access to the vertical distribution of the trees and to the ground underneath [63]. Hyperspectral and multispectral optical images are particularly relevant for tree species classification: spectral and textural information from VHR images can allow a fine discrimination of many species. Multispectral images are often preferred due to their higher availability, and higher spatial resolution. Multispectral images can be acquired from airplanes or satellites. Spaceborne sensors allow to capture large areas with a high temporal rate but suffer from a lower spatial resolution, even if the gap decreases every year (see Table 1.1). For a better spatial resolution, airborne multispectral images are preferred since they allow to extract texture features that are very relevant for tree species classification [47]. The airborne linear lidar has been widely used for remote sensing tasks [99, 133, 164]. Lidar has been successfully employed for many forest applications [44]. The new Geiger mode lidar [155] and single photon lidar [161] is also very promising, allowing a significantly higher point density with different angles at a higher altitude and could have an important impact of especially on the studies of forested areas [67, 142].

Synthetic Aperture Radar (SAR) is widely employed the the evaluation of biomass, especially in forested environment [90, 9]. With its ability to penetrate the vegetation, SAR in P-band (0.3-1 GHz) allows to estimate efficiently the aboveground biomass. Thus, SAR can be employed in order to

extract relevant information of forests but not for their mapping.

1.3 Context of the thesis

In France, the study of forests is two fold. They need to be mapped and inventoried. The forest inventory allows to obtain an estimation of the wood stock and the forestation rate at a national scale (see Figures 1.3 & 1.4). Statistics such as volume per hectare, deciduous volume or conifer volume can then be derived. The inventory is performed through field inventory and extrapolated using the forest mapping. Thus, the mapping of forest is very important in order to derive accurate statistics.

Forest mapping is traditionally provided through a national forest LC database (see Figure 1.5). It is manually interpreted by human operators using VHR colored infra-red (CIR) ortho-images. It assigns a vegetation type to each mapped beach of more than 5000 m². The nomenclature is composed of 32 classes based on hierarchical criteria such as pure stands of the main tree species of the French forest. The forest LC should be updated in a 10 years cycle.

1.4 Objectives

Currently, the forest land cover (LC) is obtained through remote sensing (namely photo-interpretation). A method should be developed to update it automatically using remote sensing data processing. Since the forest LC is available, it can be used as an input for subsequent classification [54]. However, the learning process should be carried out carefully [55]. Indeed, some areas might have changed (e.g. forest cuts). Furthermore, the database is designed generalized [135]. Indeed, forests are not perfectly homogeneous in term of species and there can be many gaps in the canopy, leading to a noisy classification. Thus, such classification would then not be sufficient in order to retrieve homogeneous patches similar to the forest LC. In order to retrieve homogeneous patches, the classification could be regularized using smoothing methods [129]. Furthermore, an automatic method considering more data sources than only CIR ortho-images would allow to enrich

	SPOT 6,7	Ikonos	Quickbird	Pléiades	RapidEye	Sentinel 2	Landsat 7	Worldview 3
Swath	60 km	11 km	16.5 km	20 km	77 km	290 km	185 km	13.1
Revisit time	2 d	2 d	1-3.5 d	1 d	5.5 d	5 d	16 d	<1 d
Resolution	6 m	4 m	2.44-2.88 m	2.8 m	6.5 m	10 m	30 m	1.24 m
Number of bands	4	4	4	4	5	13	8	28
Main spectral bands (nm)								
Blue	455-520	450-530	450-520	430-550	440-510	460-520	450-520	450-510
Green	530-600	520-610	520-600	500-620	520-590	545-575	520-600	510-580
Red	620-690	640-720	630-690	590-710	630-685	650-680	630-690	630-690
NIR	760-890	760-880	760-900	740-940	760-850	785-900	760-900	770-895

TABLE 1.1: Principal multispectral spatial optical sensors.

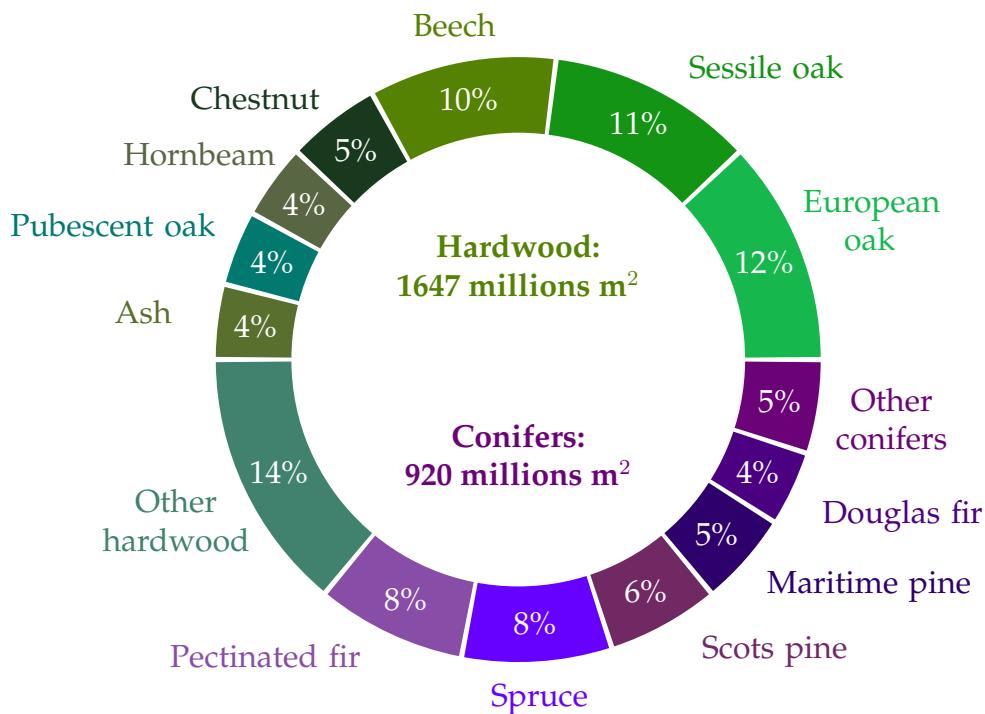


FIGURE 1.3: Distribution wood volume per species.

the LC, i.e. retrieve homogeneous tree species stands also homogeneous in terms of height [53].

1.5 Strategy

Two remote sensing modalities are available for the mapping of forested areas at IGN; VHR optical images and lidar cloud points. Both are acquired at the national level for various needs of IGN public policies.

VHR optical images

The VHR images are a part of a national database. In this thesis, the images used have a spatial resolution of 50 cm. The ortho-images employed have 4 bands (red, green, blue near infra-red) captured by the IGN digital cameras [138]. Such VHR optical multispectral images are available over full France every 3 years and are one of the component of RGE (a public

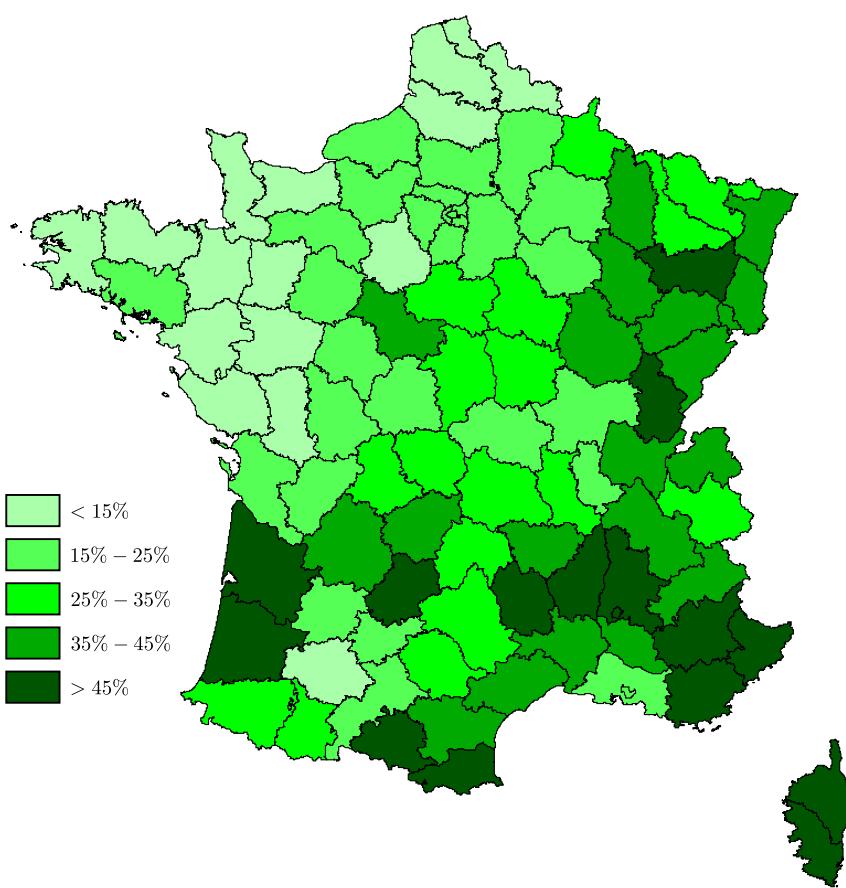


FIGURE 1.4: Forestation rate in France.

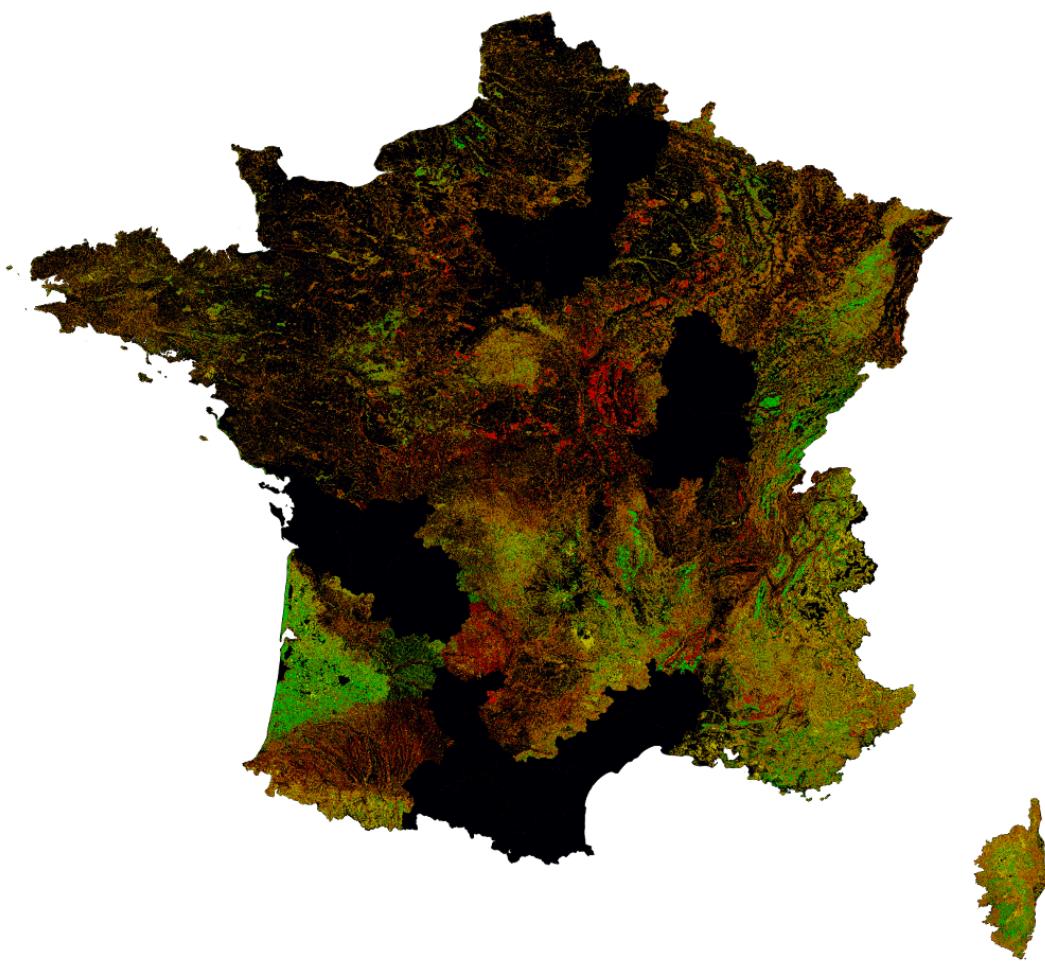


FIGURE 1.5: The French forest LC. Each color is associated to a single species (~20 species in total), black corresponds to non-labeled zones (not operated or non forested).

service mission of the IGN, that aims at describing the national land cover in a precise, complete and homogeneous way).

Airborne Laser Scanning

IGN also process lots of flights over forested areas with a laser scanning device. The point density for all echoes ranges from 2 to 4 points/m². Forested areas and areas subject to flooding are mainly flown. About 40000km² are acquired each year for Digital Terrain Model generation as main purpose.

The registration between airborne lidar point clouds and VHR multispectral images was performed by IGN itself using ground control points. This is a standard procedure in the French mapping agency since IGN operates both sensors and has also a strong expertise in data georeferencing (this is in fact the national institute responsible for that in France for both airborne and spaceborne sensors).

The combination of these two data is very relevant for the study of forest, indeed, optical images provide the major information about the tree species, while lidar give information about the vertical structure of the forest. Furthermore, the lidar allows to extract consistent object such as trees, that could be used in the stand segmentation process, even if delineated coarsely.

In order to extract more information from these two modalities, the fusion could be performed at different levels. 3 levels could be defined:

- Low level: It corresponds to the fusion of the observations, in this case, only the reflectance from the optical images and the height of the lidar points.
- Medium level: It corresponds to the fusion of features, derived from both sources, and merged together. It also corresponds to the cooperative understanding of the data; a feature is derived on a modality and applied on the other (e.g. segmentation of the point cloud applied to images).

- High level: It corresponds to decision fusion. One or many classifications have been performed and the final decision is an optimal combination of the classifications and the input data.

1.6 Structure of the thesis

- State of the art: Chapter 2
- Method: Chapter 3
- Results: Chapter 4
- Conclusion and perspectives: Chapter 5

**2**

State of the art

2.1	Stand segmentation	16
2.1.1	Stand segmentation using VHR optical images	17
2.1.2	Stand segmentation using lidar	18
2.1.3	Stand segmentation using VHR optical images and lidar	19
2.1.4	Challenges of stand segmentation	20
2.2	Segmentation	22
2.2.1	"Traditional" segmentation methods	23
2.2.2	Superpixels methods	24
2.2.3	Segmentation of point cloud	26
2.3	Classification	26
2.3.1	Supervised classification	26
2.3.2	Random Forest	27
2.4	Dimension reduction and feature selection	29
2.4.1	Dimension reduction: feature extraction	29
2.4.2	Feature selection	30
	Existing methods	30
	Optimize the selection	32
2.5	Smoothing methods	33
2.5.1	Local methods	33
2.5.2	Global methods	33

Forest are complex areas, the mapping of such environment needs the use of different image processing methods. The extraction of "homogeneous" forest stands is at the interplay between different kinds of image processing methods.

Several methods have been proposed for the forest stand segmentation (section 2.1). They employ different image processing algorithms. Segmentation (section 2.2) algorithms can be employed for a fine or coarse delineation of the principal components of the forests. Classification is also very useful to discriminate the different elements of the forest and detect tree species (section 2.3). Furthermore, with the growing number of feature that could be derived, feature selection algorithms are mandatory in order to improve the results while decreasing the computational load and times (section 2.4). Eventually, smoothing methods could be employed in order to obtain a minimum of an energy. Such energy minimization processes are used for a refinement of raw results (section 2.5).

2.1 Stand segmentation

A forest stand is defined as a contiguous group of trees that are uniform in specie composition, structure, age and/or height, spatial arrangement, site quality or condition to distinguish it from adjacent other groups of trees.

One should note that the literature remains heavily focused on individual tree extraction and tree species classification [28, 158, 72], developing site-specific workflows with similar advantages, drawbacks and classification performance. More authors have focused on forest delineation [38, 165, 126], that most of the time do not convey information about the tree species and their spatial distribution. Even if some methods have proposed forest stand delineation, they remain very specific to the study area and provide a binary mask as final output. Consequently, no operational framework embedding the automatic analysis of remote sensing data has been yet proposed in the literature for forest stand segmentation at large scale [33].

Hence, in the large amount of literature in the field, only few papers focus on the issue of stand segmentation or delineation. They can be categorized with regard to the type of data processed.

2.1.1 Stand segmentation using VHR optical images

A stand delineation technique using VHR airborne hyperspectral imagery is proposed in [92]. The trees are extracted using a valley following approach and classified into 7 tree species (5 coniferous, 1 deciduous, and 1 non-specified) with a maximum likelihood classifier. A semi-automatic iterative clustering procedure is then introduced to generate the forest polygons.

A hierarchical and multi-scale approach for the identification of stands is adopted in [61]. The data inputs were the 4 bands of an airborne 0.5 m orthoimage (Red, Green, Blue, and Near Infra-Red) allowing to derive the Normalized Difference Vegetation Index (NDVI). The stand mapping solution is based on the Object-Based Image Analysis concept. It is composed of two main phases in a cyclic process: first, segmentation, then classification. The first level consists in over-segmenting the area of interest and performing fine-grained land cover classification. The second level aims to transfer the vegetation type provided by a land cover geodatabase in the stand polygons, already retrieved from another segmentation procedure. The multi-scale analysis appears to have a significant benefit on the stand labeling but it is highly heuristic and requires a correct definition of the stand while we consider it is an interleaved problem.

Following the work of [174] with IKONOS images, Quickbird-2 panchromatic images are used in [111] to automatically delineate forest stands. A standard image segmentation technique is used and the novelty mainly lies on the fact that its initial parameters are optimized with respect to NFI protocols. They show that meaningful stand heights can be derived, which are a critical input for various modeled inventory attributes.

2.1.2 Stand segmentation using lidar

A seminal stand mapping method using low density airborne lidar data is proposed in [78]. It is composed of several steps of feature extraction, creation and raster-based classification. Forest stands are created by grouping neighboring cells within each class. Then, only the stands with a pre-defined minimum size are accepted. Neighboring small areas of different forest types that do not reach the minimum size are merged together to an existing forest stand. The approach offers the advantage of detecting 15 forest types (deciduous/coniferous and maturity) that match very well with the ground truth but to the detriment of simplicity: the flowchart has to be highly reconsidered to fit to other stand specifications. Additionally, the tree species discrimination is not addressed.

The forest stand delineation proposed in [143] also uses low density airborne lidar still coupling an object-oriented image segmentation and a supervised classification procedure. Three features are computed and rasterized. The segmentation is performed using a region growing approach. Spatially adjacent pixels are grouped into homogeneous discrete image objects or regions. Then, a supervised discrimination of the segmented image is performed using a Battacharya classifier, in order to determine the maturity of the stands. The tree species are ignored and the procedure requires a careful inspection of the raw data both for feature generation and model training.

The method proposed in [38] aims to generate a forest mask (*forested area* label only) using low density airborne lidar. A Canopy Height Model (CHM) with a spatial resolution of 1 m is derived. The positions and heights of single trees are determined from the CHM using a local maximum filter, based on a moving window approach. Only detected positions with a CHM height superior to 3 m are considered. The crown radii are estimated using an empirical function. The three neighboring trees are connected using a Delaunay triangulation applied to the previously-detected tree position. The crown cover is then calculated using the crown areas of three neighboring trees and the area of their convex hull for each tree triple. The forest

mask is derived from the canopy cover values. While this is not a genuine stand delineation method, this approach could be easily extended to a multi-class problem and enlightens the necessity of individual tree extraction even with limited point densities as a basis for the stand-level analysis.

A forest stand delineation also based on airborne lidar data is proposed in [172]. Three features are first directly extracted from the point cloud. A coarse forest stand delineation is then performed on the feature image using the unsupervised Mean-Shift algorithm, in order to obtain under-segmented raw forest stands. A forest mask is then applied to the segmented image in order to retrieve forest and non-forest raw stands. It may create some small isolated areas, iteratively merged to their most similar neighbor until their size is larger than a user-defined threshold in order to product big raw forest stands. They are then refined into finer level using a seeded region growing based on superpixels. The idea is to select several different superpixels in a raw forest stand and merge them. This method provides a coarse-to-fine segmentation with relatively large stands. The process was only applied on a small area of a forest in Finland, thus, general conclusions can not be drawn.

2.1.3 Stand segmentation using VHR optical images and lidar

The analysis of the lidar and multispectral data is performed at three levels in [146], following a given hierarchical nomenclature of classes in forested environments. The first level represents small objects (single tree scale, individual trees or small groups of trees) that can be differentiated by spectral and structural characteristics using a rule-based classification. The second level corresponds to the stand level. It is built using the same classification process which summarizes forest development phases by referencing to small scale sub-objects at level 1. The third level is generated by merging objects of the same classified forest-development into larger spatial units. The multi-scale analysis offers the advantage of alleviating the standard issue of individual tree crown detection and proposing development

stage labels. Nevertheless, the pipeline is highly heuristic, under-exploits lidar data and significant confusions between classes are reported.

The automatic segmentation process of forests in [36] is also supplied with Lidar and VHR multispectral images. The idea is to divide the forests into higher and lower sections with lidar. An unsupervised classification process is applied to the two images. The final stand delineation is achieved by segmenting the classification results with pre-defined thresholds. The segmentation results are improved using morphological operators such as opening and closing, which fill the gaps and holes at a specified extent. This method is efficient if the canopy structure is homogeneous and requires a strong knowledge on the area of interest. Since it is based on height information only, it cannot differentiate two stands of similar height but different species.

In [95] a stand segmentation technique for a forest composed of *Scots Pine*, *Norway Spruce* and *Hardwood* is defined. A hierarchical segmentation on the Crown Height Model followed by a restricted iterative region growing approach is performed on images composed of rasterized lidar data and Colored Infra-Red images. The process was only applied on a limited area of Finland and prevents from drawing strong conclusions. However, the quantitative analysis carried out by the authors shows that lidar data can help to define statistically meaningful stands (here the criterion was the timber volume) and that multispectral images are inevitable inputs for tree species discrimination.

2.1.4 Challenges of stand segmentation

Table 2.1 summarizes the presented methods of forest stands segmentation. Firstly, it appears that the fusion of the remote sensing modalities (optical images and lidar) improve the results for the problematic of forest stand delineation. However, the stands are not defined the same way in the different proposed methods, preventing from drawing general conclusion.

Reference	Data processed	Country	Segmentation criteria
[92]	Hyperspectral images	Canada	Tree species (7)
[61]	Multispectral images	Spain	Vegetation type
[111]	Panchromatic images	Canada	Height
[78]	Lidar	Germany	Forest types (15)
[143]	Lidar	USA	Tree maturity
[38]	Lidar	Austria	Forest mask
[172]	Lidar	Finland	Tree size, tree density
[146]	Lidar and multispectral images	Germany	Development phase
[36]	Lidar and multispectral images	Germany	Canopy structure, height
[95]	Lidar and multispectral images	Finland	Tree species (3)

TABLE 2.1: Existing methods for forest stand segmentation, see text for more details.

Regarding the existing state of the art on the forest stand segmentation, it appears that such task is very complex to implement. Indeed, a simple segmentation (without semantic information) is not sufficient since it does not allow to retrieve consistent stands. A classification is mandatory in order to obtain the tree species. However, it is very difficult to discriminate species, since some have a very close looking (e.g. deciduous oak and beech), and the intra-class variability might be important (depending on age, maturity). Eventually, the desired stands are not totally pure, a certain level of generalization is desired in order to have a consistent mapping at large scale. Thus, a regularization process can be employed for such purpose. It also appears that the type of data employed has an impact on the results.

- The VHR optical images permits to obtain information about the tree species, especially when using textural features [47].
- The lidar data provides information about the vertical structure of the forest that can also be useful for the discrimination of tree species [15]. It also brings information about the height that allows to separate forest stands of different ages. Most of the time, lidar is deeply under exploited since it is used only as a simple DSM.

2.2 Segmentation

The direct segmentation of optical image and/or lidar point clouds is not sufficient in order to retrieve forest stands. Indeed, such segmentation methods can not take into account the information needed to define the stand. However, with adapted parameters, segmentations algorithms might be useful to obtain relevant segmentation of the data [33]. They can be divided in two categories:

- The "traditional" segmentation methods; in these methods, a specific attention must be paid to the choice of the parameters in order to obtain relevant results. Such segmentation can be applied on an image or a point cloud. Specific methods have also been developed for the segmentation of lidar point cloud [114].

- The superpixels segmentation methods: they natively produce an over-segmentation of the image. The parameters control the size and the shape of the resulting segments.

2.2.1 "Traditional" segmentation methods

The segmentation of an image can be performed using a large variety of techniques [171, 115, 117, 179].

The easiest way to segment an image is the thresholding of a gray level histogram of the image [145]. When the image is noisy or the background is uneven and illumination is poor, such thresholding is not sufficient. Thus, adaptive thresholding methods have been developed [176].

The watershed transformation is also a simple segmentation method that considers the gradient magnitude of an image as a topographic surface. Pixels having the highest gradient magnitude intensities correspond to watershed lines, which represent the region boundaries. Water placed on any pixel enclosed by a common watershed line flows downhill to a common local intensity minimum. Pixels draining to a common minimum form a catch basin, which represents a segment.

The segmentation can be considered as an unsupervised classification problem. Algorithms dealing with such problems adopt iterative process. The most popular algorithm is the k-means algorithm. Segmentation methods using the spatial interaction models like Markov Random Field (CRF) [59] or Gibbs Random Field (GRF) [34]. Neural networks are also interesting for image segmentation [48] as they take into account the contextual information.

The segmentation of an image can also be obtained by the detection of the edges of the image [123]. The idea is to extract points of significant changes in depth values. Edges are local features and are determined based on local information.

Eventually, hierarchical segmentation algorithms can be employed. They analyze simultaneously the image at several different scales of analysis. Their output is not a single partition, but a hierarchy of regions or data structure that captures different partitions for different scales of analysis [151, 56, 5]. These methods allow to control the complexity of the segmentation, which was not the case for the previous methods. The algorithm is a bottom-up approach that starts with an initial over-segmentation (e.g. segmenting almost each pixel on a different own region) and uses this level as a base for the construction of subsequent significant levels. The segmentation process is guided by an energy E of the form:

$$E = D + \mu C \quad (2.1)$$

where, D is a fit-to-data measure (how well the segmentation fits to the original image, better fits give lower values of D); C is a measure of segmentation complexity (less complex solutions give lower values of C); and μ is a dimensional parameter, the scale parameter. The parameter μ balances between a perfect fit to the original data ($\mu = 0$), consisting of one segmentation region for each pixel in the original image, and the simplest segmentation, consisting of a single region containing the whole image [56] (see Figure 2.1). The level of segmentation can be adjusted gradually from the finest to the coarsest depending of the image complexity.

Top-down approaches can also be employed for image segmentation. In [87] working-set/greedy algorithms to efficiently solve problems penalized respectively by the total variation on a general weighted graph are proposed. The algorithms exploit this structure by recursively splitting the level-sets of a piecewise-constant candidate solution using graph cuts.

2.2.2 Superpixels methods

Several superpixels algorithms have been developed [1]. They group pixels into perceptually meaningful atomic regions. Many traditional segmentation algorithms have been employed with more or less success to generate superpixels [134, 42, 26, 157, 160]. These algorithms produce satisfactory results, however, they may be relatively slow and the number, size and

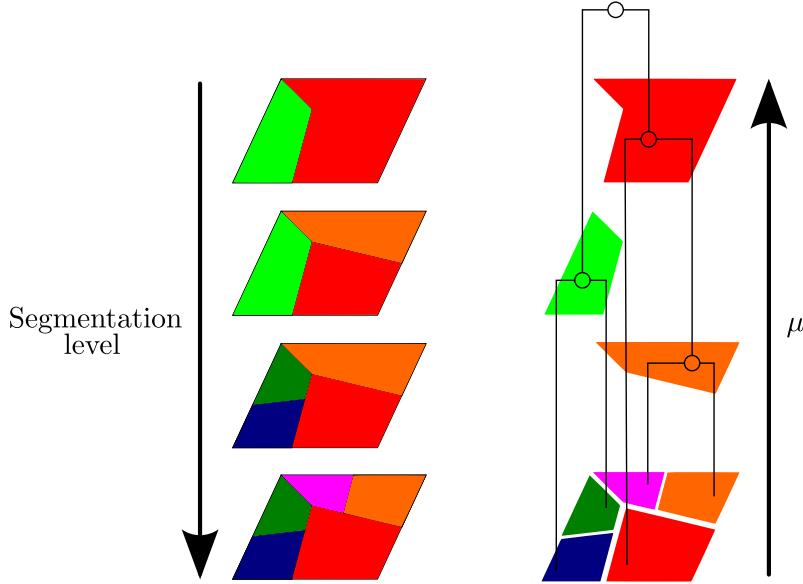


FIGURE 2.1: Graphical depiction of concepts related to hierarchical segmentation. The diagram on the left shows partitions of an image at four different scales μ . The partition at the top has the highest μ and is therefore the coarsest, the partition at the bottom is the finest.

shape of the superpixels might not be specified.

Superpixels algorithms have then been developed. One can control the number of superpixel, their size and their shape. [110] creates superpixels based on a grid. Optimal path are found using graph cut methods. [159] proposes a generation of superpixels based on a global optimization. They are obtained by stitching together overlapping image patches such that each pixel belongs to only one of the overlapping regions. [96] generate superpixels by a dilatation of a set of seed locations using level-set geometric flow. Resulting superpixels are constrained to have uniform size, compactness, and boundary adherence. Finally, [1] proposes a generation of superpixels based on the k-means algorithms. A weighted distance that combines color and spatial proximity is introduced in order to control the size and the compactness of the superpixels.

2.2.3 Segmentation of point cloud

The segmentation of point cloud has been highly assessed [114]. The aim is to extract meaningful objects. Such extraction has two principal objectives:

- Objects are detected so as to ease or strengthen subsequent classification task. A precise extraction is not mandatory since the labels would be refined after.
- Objects are precisely delineated in order to derive features from these objects. A high spatial resolution is therefore expected.

In forested areas, the only reliable objects to extract are trees. The first way to extract trees from lidar data is to rasterize the point cloud and use image-based segmentation techniques to obtain trees. Several methods have been developed for single tree delineation [28, 158, 72].

2.3 Classification

A classification is a process that aims to categorize observation. The idea is to assign an observation to one or more classes. This can be done manually or automatically. The classification can be unsupervised, the classes need to be learned and the observation assigned. Such classification is similar to segmentation (see section 2.2). The classification can be supervised, the target classes are known and observations with labels are available.

2.3.1 Supervised classification

A great number of supervised classification algorithms have been developed and used for remote sensing issues [86, 101, 108]. There are two kind of algorithms: the parametric (or generative) and the non-parametric (or discriminative) methods.

The parametric method assume that each class follow a specific distribution (mainly gaussian). The parameters of the distribution are estimated using the learning set. This is the case for the maximum likelihood [140], maximum a posteriori [40] or in [152].

The non parametric methods do not make any assumption on the classes distribution. In this category of algorithms, the most popular are the Support Vector Machines (SVM) [12, 130] and the Random Forest (RF) [16]. The artificial neural networks are also efficient algorithms [60, 4]. However, despite their great performance in terms of accuracy, they have several drawbacks: firstly, the training process is time consuming and good GPU cards or specific architectures are required in order to reach decent training times [31, 112]. Secondly, it requires an important amount of training data in order to correctly optimize the large number of parameters (e.g., hundred of millions). Simpler methods exist, such as the k-nearest neighbor [65] or the decision trees [17]. The non parametric methods are more efficient for the discrimination of complex classes [119, 46], and are considered as a basis for land cover classification [20].

We chose to use the RF, which besides their widespread use, since they also offer the possibility of obtaining the probability of belonging of a pixel to a class. This posterior probabilities can be then integrated into a smoothing process. They also report good results, similar to SVM (see Chapter 4). The RF are described in section 2.3.2.

2.3.2 Random Forest

The RF have been introduced by [16] and are defined by the aggregation of predictors (decision trees). Here, we refer to the RF with random inputs proposed in [16].

The idea is to create an ensemble of samples $\mathcal{S}_n^{\Theta_1}, \dots, \mathcal{S}_n^{\Theta_k}$ from an initial training set. A Classification and Regression Tree (CART) [17] is built on each sample $\mathcal{S}_n^{\Theta_i}$. Each tree is built using a random pool of m features among the M available features. The final classification is obtained by majority vote; each tree votes for a class and the class reaching the most votes wins (see Figure 2.2). This algorithm has two parameters: the number of trees k and the number of features m used to build a tree. The first parameter is arbitrary fixed to a high value. The second is generally fixed to the square root of the total number of feature [49].

RF have shown better classification performances than traditional Boosting methods [16] or SVM [116]. They are also able to handle big dataset

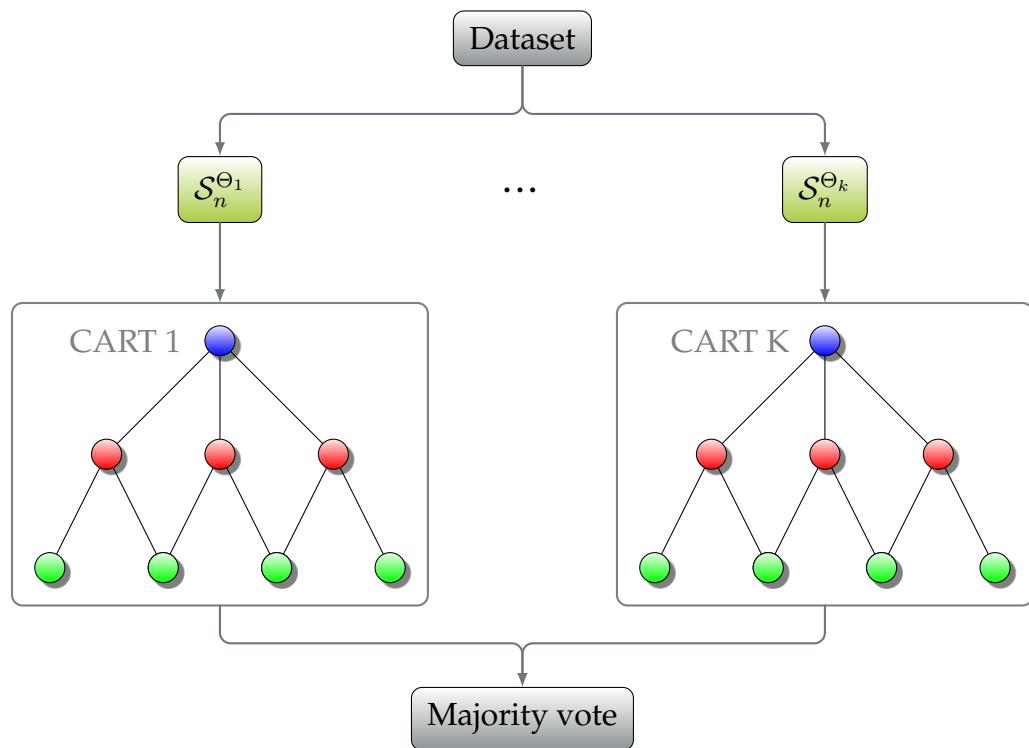


FIGURE 2.2: General diagram of the operation of the Random Forest

with large number of feature. Furthermore, a measure of feature importance have been introduced in [16]. It allows to qualify the relevance of the feature in the classification process [141].

The importance of a feature \mathbf{X}_j , $j \in \{1, \dots, q\}$ (with q the number of feature) is defined as follow. Let $\mathcal{S}_n^{\Theta_i}$ be a ensemble of sample and OOB_i all the observations that does not belong to $\mathcal{S}_n^{\Theta_i}$. $errOOB_i$, the error on OOB_i using $\mathcal{S}_n^{\Theta_i}$, is then computed. A random permutation on the value of the j^{th} feature of OOB_i is performed in order to obtain \widetilde{OOB}_i^j . \widetilde{errOOB}_i^j is then computed. The importance of the feature j , $FI(\mathbf{X}_j)$ is the mean of the difference of the errors (see Equation 2.2).

$$FI(\mathbf{X}_j) = \frac{1}{k} \sum_{i=1}^k (\widetilde{errOOB}_i^j - errOOB_i) \quad (2.2)$$

where k is the number of CART.

2.4 Dimension reduction and feature selection

It is possible to derive a lot a features from the original data. All the features are used for the classification. The feature selection methods try to overcome the curse of high dimensionality [11, 64]. Indeed, the increasing number of features available tends to decrease the accuracy of the classifiers. Furthermore, the computation times increase with the number of features. Thus, reducing the feature dimension is beneficial for the classification task.

Two kind of approaches exist: first the ones based on the extraction of new features summarizing the information by the transformation of the data, generally using a projection in a space of lower dimensionality. Secondly, feature selection approaches that aim to search for an optimal subset of the features.

2.4.1 Dimension reduction: feature extraction

The most popular dimension reduction method is the Principal Component Analysis (PCA). It is an unsupervised method that aim to maximize the variance between data [69]. However, it has been demonstrated that PCA is not optimal for the purpose of classification [24]. Other methods have

been developed based on the PCA: the Independent Component Analysis (ICA) [71] maximizes the statistical independence between data, and the Maximum Autocorrelation Factor (MAF) [88] maximizes the spatial auto-correlation. When training samples are available, supervised methods exist, such as the linear discriminant analysis (LDA) that tries to maximize both the intra-class homogeneity and the inter-class variance [45, 91].

2.4.2 Feature selection

Feature selection aims to search for an optimal subset of features without modifying them. To obtain such subset, one can explore the subsets of features or define a criteria to evaluate the subsets. Furthermore, the selection can be supervised or unsupervised. The first aims to discriminate the better the classes while the second are looking for an optimal subset that contains the most informative and less redundant features. Many exploration methods for feature selection have been proposed in the literature. The naive exhaustive exploration of all the subsets can be envisaged when the number of features is not important.

Existing methods

The feature selection methods can be separated into 3 categories: filters, wrapper and embedded. Within the filter methods, one can distinguish the supervised and unsupervised case depending on whether the notion of classes is taken into account or not.

• Filters

The filters methods use a feature selection criteria independent from the classifier. They consider the features according to their capacity to bring together elements of the same class and separate the different elements [68]. Thus, these methods compute an individual importance score for each feature, classify the features according to this score and keep only the best. Such scores can be computed using training sample or not. Such methods are independent from a classifier and are used as preliminary step to classification. When training samples are available, separability measures (e.g., Fisher [45], Bhattacharrya or Jeffires-Matusia) allow to determine whether a

feature or a subset of feature is well adapted to discriminate the classes [19, 62, 30, 132]. Statistical measures derived from information theory such as the divergence, the entropy or the mutual information have been proposed in the unsupervised case [106, 89] or supervised case [8, 57, 37, 137, 21]. To summarize, criteria for filter selection methods are numerous and cover different approaches. The supervised ones, which sort features according to an individual importance score and retain only the n best remain limited since they do not take into account the dependencies between the selected features. Approaches that directly associate relevance scores with feature sets are more interesting. A distinction is made between supervised and unsupervised approaches. The unsupervised criteria are interesting, but present a risk of selecting attributes that would not all also be useful for classification.

• Wrapper

The wrapper methods weight the features according to their pertinence for the prediction [79]. This weighting is related to the performance of a classifier. [37, 98, 175, 180] propose approaches with SVM classifiers. [178, 40] use maximum likelihood classifiers. The RF is also employed in [35]. Data are separated into two subset. The first is used for the training, while the second for the evaluation. The use of a classifier is a big advantage as it fits more to the envisaged problem but can lead to overfitting. However, the use of a classifier significantly increases the computation times. Furthermore, worse results could be obtained when using a feature subset with another classifier.

• Embedded

Eventually, the embedded methods also involve a classifier and select the features during the training process [144]. They have two advantages: since they use the data as training, they are robust. Furthermore, the feature selection and the classification are performed together, thus, they are faster than the wrapper methods. Many methods have been proposed. The RF allow to assess the feature importance [16] an is also natively embedded since the irrelevant features will not be used in the classification process. Other methods are based on the SVM classifiers, the SVM-RFE (Recursive Feature

Elimination) [154] recursively removes the less pertinent features according to a weight estimated with a SVM.

Optimize the selection

The set of possible solutions is generally too large to be visited entirely. Thus, using heuristic rules allows to find a solution close enough to the optimal solution while visiting only a reasonable number of configurations. These optimization methods can generally be distinguished in sequential or incremental methods and stochastic methods.

• Sequential approaches

The first idea is to add features step by step (forward approaches), also called Sequential Forward Selection (SFS) [105]. It could also be methods that start from the entire feature set and remove feature step by step (backward approaches), also called Sequential Backward Selection (SBS) [170]. A generalization of these methods have been proposed in [77]. Finally, the forward and backward methods could be combined in order to improve the process. The Sequential Floating Forward Selection (SFFS) and the Sequential Floating Backward Selection (SFBS) [125] propose such improvement.

• Stochastic approaches

Stochastic algorithms will involve hazard in their exploration of the space of solutions. The random initialization and search for a solution can therefore propose different solutions of equivalent quality from a single dataset. The generation of the subset can be totally random [100]. Genetic algorithms propose a ponderation of the subsets according to their importance [50]. They allow a faster convergence to a more stable solution. The Particle Swarm Optimization (PSO) algorithm [175] is also a fast and select relevant features. For finding an approximate optimal subset of features, simulated annealing [30, 22].

2.5 Smoothing methods

Pixel-wise classification is not sufficient for both accurate and smooth land-cover mapping with VHR remote sensing data. This is particularly true in forested areas: the large intra-class and low inter-class variabilities of classes result in noisy label maps at pixel or tree levels. This is why various regularization solutions can be adopted from the literature (from simple smoothing to probabilistic graphical models).

According to [129], both local and global methods can provide a regularization framework, with their own advantages and drawbacks.

2.5.1 Local methods

In local methods, the neighborhood of each element is analyzed by a filtering technique. The labels of the neighboring pixels (or the posterior class probabilities) are combined so as to derive a new label for the central pixel. Majority voting, Gaussian and bilateral filtering can be employed if it is not targeted to smooth class edges. The majority vote can also be used when a segmentation is available: the majority class is assigned to the segment.

The probabilistic relaxation is an other local smoothing method that aims at homogenizing probabilities of a pixel according to its neighboring pixels. The relaxation is an iterative algorithm in which the probability at each pixel is updated at each iteration in order to have it closer to the probabilities of its neighbors [51]. It reports good accuracies with decent computing time and offers an alternative to edge aware/gradient-based techniques that may not be adapted in semantically unstructured environments.


2.5.2 Global methods

Global methods consider the full area of interest at the same time. They are based on Markov Random Fields (MRF, see Figure 2.3), the labels at different locations are not considered to be independent. The optimal configuration of labels is retrieved when finding the Maximum A Posteriori over the entire field [113]. The problem is therefore considered as the minimization procedure of an energy E over the full image I . Despite a simple

neighborhood encoding (pairwise relations are often preferred), the optimization procedure propagates over large distances. Depending on the formulation of the energy, the global minimum may be reachable. However, a large range of optimization techniques allow to reach local minima close to the real solution, in particular for random fields with pairwise terms [83]. For genuine structured predictions, in the family of graphical probabilistic models, Conditional Random Fields (CRF, see Figure 2.3) have been massively adopted during the last decade. Interactions between neighboring objects, and subsequently the local context can be modeled and learned. In particular, Discriminative Random Fields (DRF, [84]) are CRF defined over 2D regular grids, and both unary/association and binary/interaction potentials are based on labeling procedure outputs. Many techniques extending this concept or focusing on the learning or inference steps have been proposed in the literature [80, 85]. A very recent trend even consists in jointly considering CRF and deep-learning techniques for the labeling task [76].

In standard LC classification tasks, global methods are known to provide significantly more accurate results [129] since contextual knowledge is integrated. This is all the more true for VHR remote sensing data, especially in case of a large number of classes (e.g., 10, [3]), but presents two disadvantages. For large datasets, their learning and inference steps are expensive to compute. Furthermore, parameters should often be carefully chosen for optimal performance, and authors that managed to alleviate the latter problem still report a significant computation cost [102].

Markovian Random Field

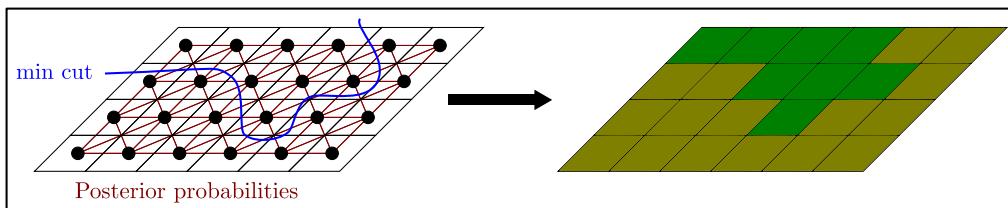

Conditional Random Field

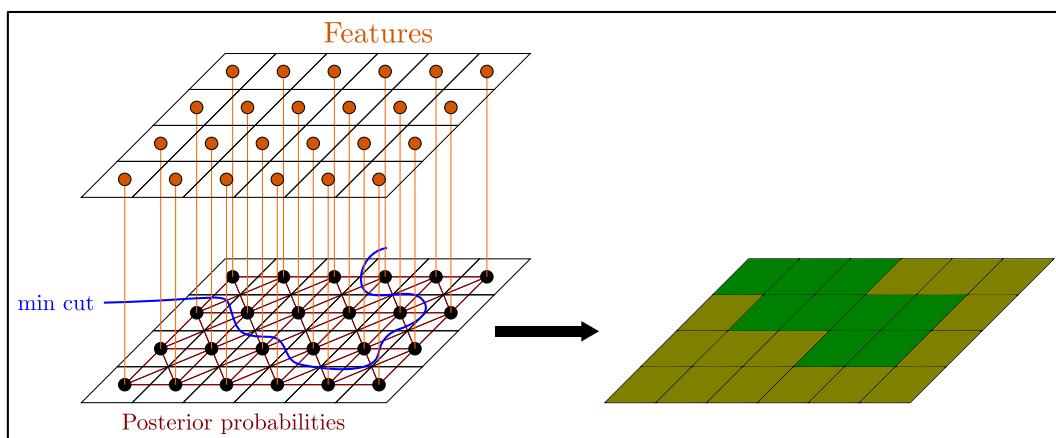


FIGURE 2.3: 8-connected MRF and CRF. The MRF only take into account the posterior probabilities to compute the graph, while CRF also include contextual information (the features).

3

Method

3.1	General flowchart	38
3.2	Over-segmentation	38
3.2.1	Segmentation of lidar data	38
3.2.2	Segmentation of optical images	40
3.3	Feature extraction	41
3.3.1	Point-based lidar features.	41
3.3.2	Pixel-based multispectral features.	42
3.3.3	Pixel-based lidar features.	43
3.3.4	Object-based feature map.	43
3.4	Classification	44
3.4.1	Training set design	44
3.4.2	Feature selection	45
3.5	Smoothing	46
3.5.1	Local methods	46
Filtering	46	
Probabilistic relaxation	47	
3.5.2	Global smoothing	48
Unary term	49	
Prior	50	
Energy minimization	52	

3.1 General flowchart

With respect to the methods mentioned above, it appears that there are no forest stand segmentation method, based on tree species, that can satisfactorily handle a large number of classes (>5). The proposed framework is a fully automatic and modular method for species-based forest stand segmentation. The method is composed of four main steps. An over-segmentation is firstly performed in order to retrieve relevant objects. Features are then computed at the pixel level for the optical images and at the point level for the lidar data. The object extracted from the over-segmentation and the computed features allows to derive features at the object level. A classification of the vegetation type (mainly tree species) is then performed at the object level, since it significantly improve the discrimination results. Here, the training set is automatically derived from an existing forest LC database. Specific attention is paid to the extraction of the most relevant training pixels, which is highly challenging with outdated and generalized vector databases. Because of the high number of features, a feature selection is also carried out in order to increase the classification accuracy, reduce the computational load and time, but also to assess the complementarity of the features (multispectral optical images/lidar point cloud). Finally, a regularization is performed in order to retrieve homogeneous forest stands. The flowchart of the method is presented in Figure 3.1.

3.2 Over-segmentation

The over-segmentation aims to extract small object that are consistent according to the input data. They are detected so as to ease and strengthen subsequent classification task. A precise extraction is not mandatory since the labels would be refined after.

3.2.1 Segmentation of lidar data

Two approaches could be envisaged: the direct segmentation of the point cloud or the segmentation of a rasterized lidar feature using image-based

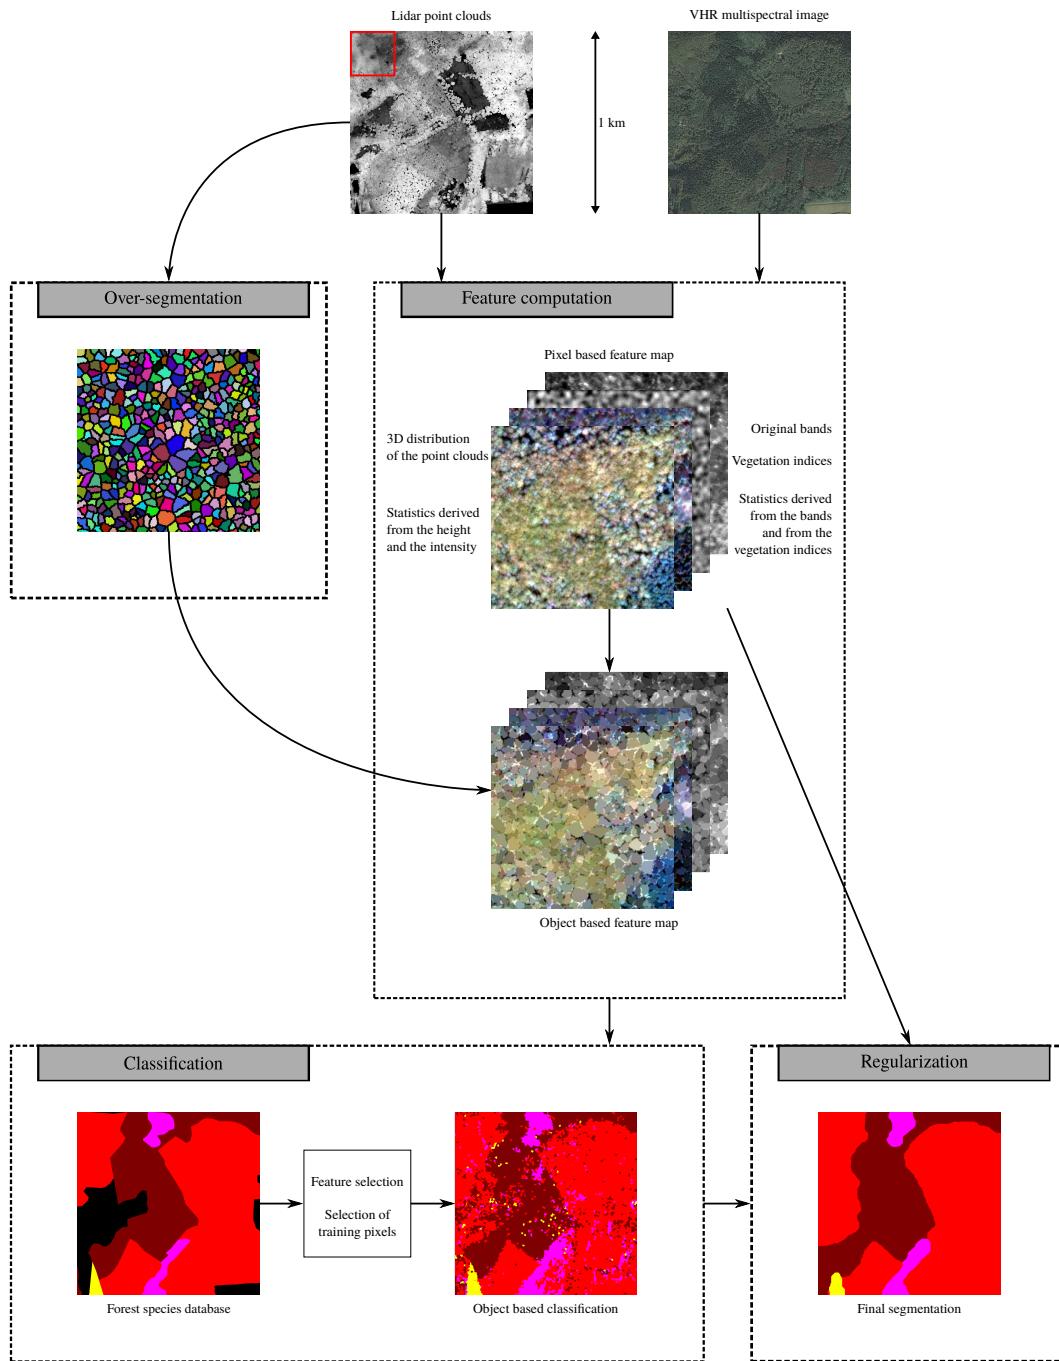


FIGURE 3.1: Flowchart of the proposed method.

segmentation algorithms.

The tree extraction from the point cloud is a complex task that has been widely discussed [28, 158, 72]. However, a precise tree extraction is not needed here, since the extracted trees are only needed to improve the classification task. A coarse method is therefore adopted: the tree tops are first extracted from the lidar point clouds using a local maximum filter. A point is considered as a tree top when it has the highest height value within a 5 meter radius. Only the points above 3 meters are retained as it is a common threshold of the literature [38], and appears to be highly discriminative in non-urban areas. Points belonging to a tree are obtained through two criteria. (i) If the height of a point within a 5 m radius is greater or equal than 80% the height of the closest tree top, it is aggregated to the tree top. (ii) If the distance in the (x, y) plane between an unlabeled point and the closest tree point is smaller than 3 m they are also aggregated. This delineation method allows to discard low vegetation, but buildings might be extracted and considered as trees.

The image-based segmentation are also very efficient for the over-segmentation of lidar data. They are mainly applied on the normalized digital surface model (height). Thus a method using a single band is needed. The watershed algorithm [160] with specific parameters allow to obtain quickly a consistent over-segmentation of the image. A hierarchical segmentation [56] is more adapted since only one parameter that control the segmentation level needs to be provided.

3.2.2 Segmentation of optical images

Several algorithms have been developed for the over-segmentation of optical RGB (Red-Green-Blue) images. The most common are the superpixels methods [1]. Superpixels can be generated using segmentation algorithms [134, 42, 26, 157, 160]. A special attention must be paid to the parameters in order to obtain relevant superpixels. These methods produces superpixels that might not be homogeneous in terms of size and shape but

delineate precisely objects. Superpixels algorithms have then been developed, they allow to control the number of superpixel, their size and their shape [110, 159, 96, 1]. For the over-segmentation of the optical images, we will use both "traditional" and superpixels methods.

3.3 Feature extraction

3.3.1 Point-based lidar features.

Lidar-derived features require a consistent neighborhood for their computation. For each lidar point, 3 cylindrical neighborhoods, aligned with the vertical axis, are used (1 m, 3 m and 5 m radii, infinite height). A cylinder appears to be the most relevant environment in forested areas so as to take into account the variance of altitudes of the lidar points. Three radius values are considered so as to handle the various sizes of the trees and assuming a feature selection step will prune the initial set of attributes. Two vegetation density features, \mathcal{D}_1 and \mathcal{D}_2 , are computed: the first one based on the number of local maxima within the neighborhoods, and the second one related to the number of non-ground points within the neighborhoods (ground points were previously determined by a filtering step). \mathcal{D}_1 and \mathcal{D}_2 are calculated as follows:

$$\mathcal{D}_1 = \sum_{r_1 \in \{1,3,5\}} \sum_{r_2 \in \{1,3,5\}} Nt_{r_1,r_2}, \quad (3.1)$$

$$\mathcal{D}_2 = \frac{1}{3} \sum_{r \in \{1,3,5\}} \frac{Ns_r}{Ntot_r}, \quad (3.2)$$

where Nt_{r_1,r_2} is the number of local maxima retrieved from a r_1 maximum filter within the cylindrical neighborhood of radius r_2 . Ns_r is the number of points classified as ground points within the cylindrical neighborhood of radius r and $Ntot_r$ is the total number of points within the cylindrical neighborhood of radius r . Additionally, the scatter \mathcal{S} and the planarity \mathcal{P}

features are computed following Weinmann et al. [168]:

$$\mathcal{S} = \frac{1}{3} \sum_{r \in \{1,3,5\}} \frac{\lambda_{3,r}}{\lambda_{1,r}}, \quad (3.3)$$

$$\mathcal{P} = \frac{1}{3} \sum_{r \in \{1,3,5\}} 2 \times (\lambda_{2,r} - \lambda_{3,r}), \quad (3.4)$$

where $\lambda_{1,r} \geq \lambda_{2,r} \geq \lambda_{3,r}$ are the eigenvalues of the covariance matrix within the cylindrical neighborhood of radius r . They are retrieved with a standard Principal Component Analysis.

Statistical features, known to be relevant for vegetation type (mainly tree species) classification [28, 149], are also derived. For each lidar point, the same 3 cylindrical neighborhoods are used. Two basic information from the lidar data, namely height and intensity, are used to derive statistical features. A statistical feature f_d , derived from an original feature f_o , (height or intensity) is computed as follows:

$$f_d = \frac{1}{3} \sum_{r \in \{1,3,5\}} f_s(\mathbf{p}_{r,f_o}), \quad (3.5)$$

where f_s is a statistical function (minimum; maximum; mean; median; standard deviation; median absolute deviation from median (medADmed); mean absolute deviation from median (meanADmed); skewness; kurtosis; 10th, 20th, 30th, 40th, 50th, 60th, 70th, 80th, 90th and 95th percentiles), and \mathbf{p}_{r,f_o} a vector containing the sorted values of the original feature f_o within the cylindrical neighborhoods of radius r . All the statistical functions are used for the height. Only the mean is used for the intensity: it is hard to know how well the sensor is calibrated and a suitable correction of intensity values within tree canopies has not yet been proposed.

24 features are extracted during this step; 2 related to vegetation density, 2 related to the 3D local distribution of the point cloud (planarity and scatter), and 20 statistical features.

3.3.2 Pixel-based multispectral features.

The original 4 spectral bands of the image are kept and considered as multispectral features. The Normalized Difference Vegetation Index (NDVI),

[153], the Difference Vegetation Index (DVI), [6] and the Ratio Vegetation Index (RVI) [70] are computed as they are relevant vegetation indices. Many other vegetation indices have been proposed [7]. Indeed, they can provide more information about the species than the original bands alone [177]. As the point-based lidar features, statistical features are also derived from each band and each vegetation index according to Equation 3.5 (3 circular neighborhoods of 1 m, 3 m and 5 m radii). Other statistical functions are used (minimum; maximum; mean; median; standard deviation; mean absolute deviation from median (meanADmed); mean absolute deviation from mean (meanADmean); median absolute deviation from median (medADmed); median absolute deviation from mean (medADmean)). Finally, the pixel-based multispectral feature set is composed of 70 attributes.

3.3.3 Pixel-based lidar features.

The lidar features are rasterized at the same resolution of the multispectral image using a pit-free method proposed in [74]. This rasterization method is interesting because it produces smooth images that will lead to better results for classification and regularization [97]. Such data fusion process at the feature level is valid since both datasets have approximately the same spatial resolution. The Canopy Height Model (CHM) is also computed using this method, at the same spatial resolution using an existing 1 m Digital Terrain Model provided with the filtered point cloud [43]. The CHM is very important as it allows to derive the height above the ground and is known as a very discriminative feature for classification [104, 167].

3.3.4 Object-based feature map.

The pixel-based multispectral and lidar maps are merged so as to obtain a pixel-based feature map. Then, an object-based feature map is created using the over-segmentation and the pixel-based feature map. The value v_t of a pixel belonging to an object t in the object-based feature map is computed as follows:

$$v_t = \frac{1}{N_t} \sum_{p \in t} v_p, \quad (3.6)$$

where N_t is the number of pixels in object t , and v_p is the value of the pixel p . If a pixel does not belong to a tree, it keeps the value of the pixel-based feature map. Here, only the mean value of the pixels within the tree is envisaged but one can also consider other statistical values (minimum, maximum, percentiles etc.).

Other morphological features could also be directly derived from the lidar cloud point at the object-level. For instance, an alpha-shape can be performed on the individual trees [156] and a penetration feature can be derived as it can help to classify vegetation type (mainly tree species). However, low point densities (1-5 points/m²) compatible with large-scale lidar surveys are not sufficient in order to derive a significant penetration indicator.

3.4 Classification

The classification is performed using a supervised classifier, in order to discriminate the vegetation type (mainly tree species) provided by an existing forest land-cover database. The classifier used in this study is the Random Forest (RF), implemented in OpenCV [14], as it has been shown relevant in the literature [10] and in a previous study compared to SVM [32], since it provide similar results while being faster. The outputs of the classification are (i) label map and (ii) probability map (posterior class probabilities for each pixel/object). This probability map is the main input for the subsequent regularization step.

In order to reduce the computation times, a feature selection is carried out to identify an "optimal" feature subset. Additionally, a strategy is proposed in order to select the most suitable training pixels for an existing land-cover forest maps, subsequently improving the classification accuracy.

3.4.1 Training set design

Using an existing forest land-cover (LC) database for training a model is not straightforward [52, 127, 103]. First, locally it can suffer from a lack of information (not all the classes of interest are present). Secondly, this

database may also be semantically and, more frequently, geometrically incorrect: changes may have happened (forest cut or grow) and the geodatabase may have been generalized, resulting in sharp polygon vertices that do not exactly correspond to the class borders. Thirdly, in many forest LC databases, polygons of a given vegetation type (mainly tree species) may contain other vegetation type (mainly tree species) in a small proportion.

In order to correct the potential errors of the LC database, a k-means clustering has been therefore performed on each of the labels in the training area. We assume that erroneous pixels are present in a small proportion and that therefore the main cluster corresponds to the class of interest. Let $p_{i-c,t}$ be the i^{th} pixel of the vegetation type (mainly tree species) t in the cluster c of the k-means. The pixels P_t used to train the model for the vegetation type (mainly tree species) t correspond to the set:

$$P_t = \{p_{i-c,t} \mid c = \underset{c \in [1,k]}{\operatorname{argmax}} \operatorname{Card}(\cup_i p_{i-c,t})\}. \quad (3.7)$$

That is to say, only samples belonging to the main k-mean cluster among training pixels for one class are kept in the training dataset.

In practice, $k = 3$: the main cluster corresponds to the label of interest whereas the two other ones correspond to the ground and minority vegetation type (mainly tree species) within the polygons. 1000 samples per class are then randomly selected in order to design the final training set.

3.4.2 Feature selection

Due to the high number of features involved, an automatic Feature Selection (FS) has been integrated. This selection is composed of two steps: the choice of the number of features to select and the feature selection itself. Indeed, the choice of the number of features is very important because it enables to greatly decrease the computation times.

The Sequential Forward Floating Search (SFFS) [125] algorithm is used for both steps. The SFFS algorithm has two main advantages: (i) it can be used with many classification score (in this study, the Kappa coefficient), (ii) it

enables to access to the evolution of the classification score/accuracy according to the number of selected features. The accuracy of the classification is assessed through the Kappa coefficient of the RF classifier. The SFFS algorithm selects p features by maximizing FS score criterion (the Kappa coefficient). In order to retrieve the optimal number of features, the SFFS algorithm is performed n times on different training sets with p equal to the total number of features (95). The classification accuracy is conserved for each selection of s features ($s \in [1, p]$) and averaged over the n iterations. The number of optimal features n_{opt} corresponds to the size of the selection of s features having the maximal mean accuracy.

The feature selection is then carried out for each area of interest (one selection for each area) with $p = n_{\text{opt}}$. The selected features are used for both the classification and the energy minimization framework. The feature selection could be carried out only once samples from multiple areas in order to retrieve the relevant features and thus only compute them.

3.5 Smoothing

After the classification, we assume that a label map is provided for the areas of interest, and is accompanied with a class membership probability map, which provides, for each pixel of the image, the posterior class membership for all classes of interest. These are the necessary inputs for all methods described below.

Here, both local and global methods are tested. For local techniques, majority voting and probabilistic relaxation are selected. For global methods, various energy formulations based on a feature-sensitive Potts model are proposed.

3.5.1 Local methods

Filtering

An easy way to smooth a probability map is to filter it. All the pixels in a $r \times r$ pixels moving window \mathcal{W} are combined in order to generate an output label of the central pixel. The most popular filter is the majority filter. Firstly, the class probabilities are converted into labels, assuming that the

label of pixel \mathbf{x} is the label of the most probable class.

$$C(\mathbf{x}) = [c_i | P(\mathbf{x}, c_i) \geq P(\mathbf{x}, c_j) \forall j], \quad (3.8)$$

with $i, j \in [1, n_c]$, where n_c is the number of classes. From this label image, the final smoothed result is obtained by taking the majority vote in a local neighborhood.

$$C_{smooth}(\mathbf{x}) = \arg \max_i \left[\sum_{\mathbf{u} \in \mathcal{W}} [C(\mathbf{u}) = c_i] \right]. \quad (3.9)$$

The majority filter does not take into account the original class posterior likelihoods. For example, if in a 5×5 neighborhood, 13 pixels have a probability of 51% for class *Douglas fir*, and the 12 other pixels have a 99% probability for class *beech*, the voting will nevertheless prefer *Douglas fir*. There are variants which give pixels closer to the center more voting power, but typically yield similar results. Other filters have been developed such as the Gaussian Filter, the Bilateral Filter [120, 121] and the Edge-Aware Filter [23].

Probabilistic relaxation

The probabilistic relaxation aims at homogenizing probabilities of a pixel according to its neighboring pixels. The relaxation is an iterative algorithm in which the probability at each pixel is updated at each iteration in order to have it closer to the probabilities of its neighbors [51]. It was adopted for simplicity reasons. First, good accuracies are reported with decent computing time, which is beneficial over large scales. Secondly, it offers an alternative to edge aware/gradient-based techniques that may not be adapted in semantically unstructured environments like forests. The probability $P_k^t(\mathbf{u})$ of class k at a pixel \mathbf{u} at the iteration t is defined by $\delta P_k^t(\mathbf{u})$ which depends on:

- The distance $d_{\mathbf{u}, \mathbf{v}}$ between the pixel \mathbf{u} and its neighbors \mathbf{v} (the pixels that are distant of less than r pixels from \mathbf{u}).
- A co-occurrence matrix $T_{k,l}$ defining a priori correlation between the probabilities of neighboring pixels. The local co-occurrence matrix has been tuned arbitrarily, but can also be estimated using training pixels

[163]. The matrix is expressed as follow:

$$T_{k,l} = \begin{bmatrix} 0.8 & p & \cdots & p \\ p & \ddots & \ddots & \vdots \\ \vdots & \ddots & \ddots & p \\ p & \cdots & p & 0.8 \end{bmatrix}, \text{ with } p = \frac{0.2}{n_c - 1}.$$

The update factor is then defined as:

$$\delta P_k^t(\mathbf{u}) = \sum_{\mathbf{v} \in \mathcal{N}_{\mathbf{u}}} d_{\mathbf{u}, \mathbf{v}} \sum_{l=1}^{n_c} T_{k,l}(\mathbf{u}, \mathbf{v}) \times P_l^t(\mathbf{v}). \quad (3.10)$$

In order to keep the probabilities normalized, the update is performed in two steps using the unnormalized probability $Q_k^{t+1}(\mathbf{u})$ of class k at a pixel \mathbf{u} at the iteration $t + 1$:

$$Q_k^{t+1}(\mathbf{u}) = P_k^t(\mathbf{u}) \times (1 + \delta P_k^t(\mathbf{u})), \quad (3.11)$$

$$P_k^{t+1}(\mathbf{u}) = \frac{Q_k^{t+1}(\mathbf{u})}{\sum_{l=1}^{n_c} Q_l^{t+1}(\mathbf{u})}. \quad (3.12)$$

3.5.2 Global smoothing

The global smoothing method uses only a small number of pairwise cliques between neighboring pixuseels (4-neighbors or 8-neighbors) to describe the smoothness. Over the entire resulting first order random fields, the maximization of the posterior probability leads to a smoothed results. This can be done by finding the minimum of the negative log-likelihood, $\arg \min_C E(I, C, A)$ with

$$E(I, C, A) = \sum_{\mathbf{u} \in I} E_{\text{data}}(\mathbf{u}, P(\mathbf{u})) + \gamma \sum_{\mathbf{u} \in I, \mathbf{v} \in \mathcal{N}_{\mathbf{u}}} E_{\text{pairwise}}(\mathbf{u}, \mathbf{v}, C(\mathbf{u}), C(\mathbf{v}), A(\mathbf{u}), A(\mathbf{v})), \quad (3.13)$$

where $P(\mathbf{u}) = [P(\mathbf{u}, c_i) | P(\mathbf{u}, c_i) \geq P(\mathbf{u}, c_j) \forall j]$, $A(\mathbf{u})$ are the values of the features at pixel \mathbf{u} (such as height, reflectance...) and $\mathcal{N}_{\mathbf{u}}$ is the 8-connected neighborhood of the pixel \mathbf{u} (only the 8-connected neighborhood has been investigated). When $\gamma = 0$, the pairwise term has no effect in the energy

formulation; the most probable class is attributed to the pixel, leading to the same result as the classification output. When $\gamma \neq 0$, the resulting label map becomes more homogeneous, and the borders of the segments/stands are smoother. However, if γ is too high, the small areas are bound to be merged into larger areas, removing a part of the useful information provided by the classification step. The automatic tuning of the parameter γ has been addressed in [113] but is not used here.

In spite of having only connections between neighbors, the optimization propagates information over larger distances. The problem is NP-hard, but strong approximate optimization algorithms exist [13, 81, 41].

Here, two formulations of E_{data} (unary term) and four formulations of E_{pariwise} (prior) are investigated.

Unary term

A widely used formulation for the unary term is the log-inverse formulation using the natural logarithm. It corresponds to the information content in information theory and is formulated as follow:

$$E_{\text{data}} = -\log(P(\mathbf{u})). \quad (3.14)$$

It highly penalizes the low-probability classes but increase the complexity with potential infinite values.

An other simple formulation for the unary term is the linear formulation,

$$E_{\text{data}} = 1 - P(\mathbf{u}). \quad (3.15)$$

It penalizes less than the log-inverse formulation but has the advantage of having values lying in $[0, 1]$.

Prior

In this work, the prior has a value depending on the class of neighboring pixels. In the four formulations, two neighboring pixels pay no penalty if they are assigned to the same class. Two basic and popular priors, the *Potts model* and the *contrast-sensitive Potts model* (called here *z-Potts model*), are investigated. In the *Potts model*, two neighboring pixels pay the same penalty if they are assigned to different labels, the prior for the *Potts model* is:

$$\begin{aligned} E_{\text{pairwise}}(C(\mathbf{u}) = C(\mathbf{v})) &= 0, \\ E_{\text{pairwise}}(C(\mathbf{u}) \neq C(\mathbf{v})) &= 1. \end{aligned} \quad (3.16)$$

In the *z-Potts model*, the penalty for a change of label depends on the gradient of height between two neighboring pixels. The *z-Potts model* is a standard *contrast-sensitive Potts model* applied to the height obtained from the point clouds. Here, since we are dealing with forest stands that are likely to exhibit distinct heights, the gradient of the height map (given with the 3D lidar point cloud) is computed for each of the four directions separately. The maximum M_g over the whole image in the four directions is used to compute the final pairwise energy. A linear function has been used: the penalty is highest when the gradient is 0, and decreases until the gradient reaches its maximum value. The prior of the *z-Potts model* is therefore:

$$\begin{aligned} E_{\text{pairwise}}(C(\mathbf{u}) = C(\mathbf{v})) &= 0, \\ E_{\text{pairwise}}(C(\mathbf{u}) \neq C(\mathbf{v})) &= 1 - \frac{g_{\mathbf{u} \rightarrow \mathbf{v}}}{M_g}, \end{aligned} \quad (3.17)$$

where $g_{\mathbf{u} \rightarrow \mathbf{v}}$ is the gradient between pixel \mathbf{u} and pixel \mathbf{v} , i.e., the absolute value of the height difference of the two pixels.

An other pairwise energy investigated is a global feature sensitive energy (called here *Exponential-features model*). The pairwise energy is computed with respect to a pool of n features. When the features have close values, the penalty is high and decreases when the features tends to be very different.

The pairwise energy in this case is expressed as follows:

$$\begin{aligned} E_{\text{pairwise}}(C(\mathbf{u}) = C(\mathbf{v})) &= 0, \\ E_{\text{pairwise}}(C(\mathbf{u}) \neq C(\mathbf{v})) &= \frac{1}{n} \sum_{i=1}^n \exp(-|A_i(\mathbf{u}) - A_i(\mathbf{v})|), \end{aligned} \quad (3.18)$$

where $A_i(\mathbf{u})$ is the value of the i^{th} feature of the pixel \mathbf{u} . To compute such energy, the features need to be first normalized (i.e., zero mean, unit standard deviation) in order ensure that they all have the same dynamic.

The last formulation investigated is also a global feature sensitive energy (called here *Distance-features model*). The pairwise energy is still computed with respect to a pool of n features. In this case, the energy is computed according to the distance between the two neighboring pixels in the feature space, the penalty is high when the pixels are close in the feature space and decrease when they get distant. The pairwise energy in this case is expressed as follow:

$$\begin{aligned} E_{\text{pairwise}}(C(\mathbf{u}) = C(\mathbf{v})) &= 0, \\ E_{\text{pairwise}}(C(\mathbf{u}) \neq C(\mathbf{v})) &= 1 - \|A(\mathbf{u}); A(\mathbf{v})\|_{n,2}, \end{aligned} \quad (3.19)$$

with

$$\|A(\mathbf{u}); A(\mathbf{v})\|_{n,2} = \frac{1}{\sqrt{n}} \sqrt{\sum_{i=1}^n (A_i(\mathbf{u}) - A_i(\mathbf{v}))^2}. \quad (3.20)$$

To compute such energy, the features need to be first normalized (i.e., zero mean, unit standard deviation) in order ensure that they all have the same dynamic. They are then rescaled between 0 and 1 to ensure that $\|A(\mathbf{u}); A(\mathbf{v})\|_{n,2}$ lies in $[0; 1] \forall (\mathbf{u}, \mathbf{v})$.

In [33], a high number of features was extracted from available lidar and optical images (~ 100) but can be selected. They can also be weighted according to their importance, computed through the Random Forest classification process. Since the most important features (20) are almost all equally weighted, it does not bring additional discriminative information for the global feature sensitive energy.

Energy minimization

The energy minimization is performed using graph-cut methods. The graph-cut algorithm employed is the quadratic pseudo-boolean optimization (QPBO). The QPBO is a popular and efficient graph-cut method as it efficiently solves energy minimization problems (such as the proposed ones) by constructing a graph and computing the min-cut [82]. α -expansion moves are used, as they are an efficient way to deal with the multi-class problems [83].

4

Results

4.1	Data	56
4.2	Segmentation methods	58
4.2.1	Retrieve stands borders	59
4.2.2	Add semantic information	63
4.3	Results of the method	64
4.3.1	Over-segmentation	64
4.3.2	Feature selection	64
4.3.3	Classification	64
4.3.4	Regularization	64
4.4	Co-products of the method	64
4.5	Semi-automatic update	64
4.6	Inventory	64

4.1 Data

VHR optical images

The VHR images are a part of a national database. In this thesis, the images used have a spatial resolution of 50 cm. Two type of ortho-images are available, a color image (3 bands; red: 600-720 nm, green: 490-610 nm and blue: 430-550 nm) and and IRC image (3 bands; near infra-red: 750-950 nm, red and green) captured by the IGN digital cameras [138]. It is then possible to obtain four band ortho-images by the combination of the two ortho-images type.

Airborne Laser Scanning

IGN also process lots of flights over forested areas with a laser scanning device. The airborne lidar data were collected using an Optech 3100EA device. The footprint was 0.8 m in order to increase the probability to reach the ground. The point density for all echoes ranges from 2 to 4 points/m². Data were acquired under leaf-on conditions and fit with the standards used in many countries for large-scale operational forest mapping purposes.

A prerequisite for data fusion is the most accurate alignment of the two data [150]. A frequently used technique is to geo-rectify images using ground controls points (GCPs). A geometric transformation is established between the coordinates of GCPs and their corresponding pixels in the image. It is then applied to each pixel, so that coordinate differences on those points are reduced to the lowest possible level. This method can be easily applied and is relatively fast in terms of computation time. However the use of GCPs can still cause that the unknowns in the trajectory of the platforms produce some remarkable residual errors. Automatic methods for data registration have also been developed [58, 107].

The registration between airborne lidar point clouds and VHR multispectral images was performed by IGN itself using ground control points. This is a standard procedure in the French mapping agency since IGN operates both sensors and has also a strong expertise in data georeferencing

(this is in fact the national institute responsible for that in France for both airborne and spaceborne sensors).

National Forest Land Cover database

The IGN's forestry reference frame is a reference tool for professionals in the wood industry and for environmental and spatial planning stakeholders.

The forest LC database is a reference vector database for forest and semi-natural environments. Developed by photo-interpretation of VHR IRC optical images, The forest LC database is realized by departmental authorities in the metropolitan territory.

• Forest LC database, version 1

The version 1 of the forest LC database, was developed by photo-interpretation of aerial images in infrared colors. Its minimum mapped surface area is 2.25 ha. The version 1 of the forest LC database presents the soil cover (by description of the structure and the dominant composition of wooded or natural formations), based on a departmental nomenclature ranging from fifteen to sixty positions according to diversity Forestry of the mapped department. Constituted, until 2006, at the departmental level, it is available throughout the metropolitan territory. For more than half of the departments, several versions of the version 1 of the forest LC database are available.

• Forest LC database, version 2

The forest LC database version 2 has been developed since 2007 by photo-interpretation of VHR IRC optical images. It assigns to each mapped range of more than 5000m² a type of vegetation formation. Its main characteristics are the following:

- A national nomenclature of 32 posts based on a hierarchical breakdown of the criteria, distinguishing, for example, pure stands from the main forest tree species in the French forest (see Figure 4.1).
- A type of vegetation formation assigned to each mapped range greater than or equal to 50 ares (5000 m²).

- A layer geometrically compatible with the other vegetation layers produced by the IGN.

Produced by department in metropolitan France, the version 2 of the forest LC database in 75 (out of 95) departments.

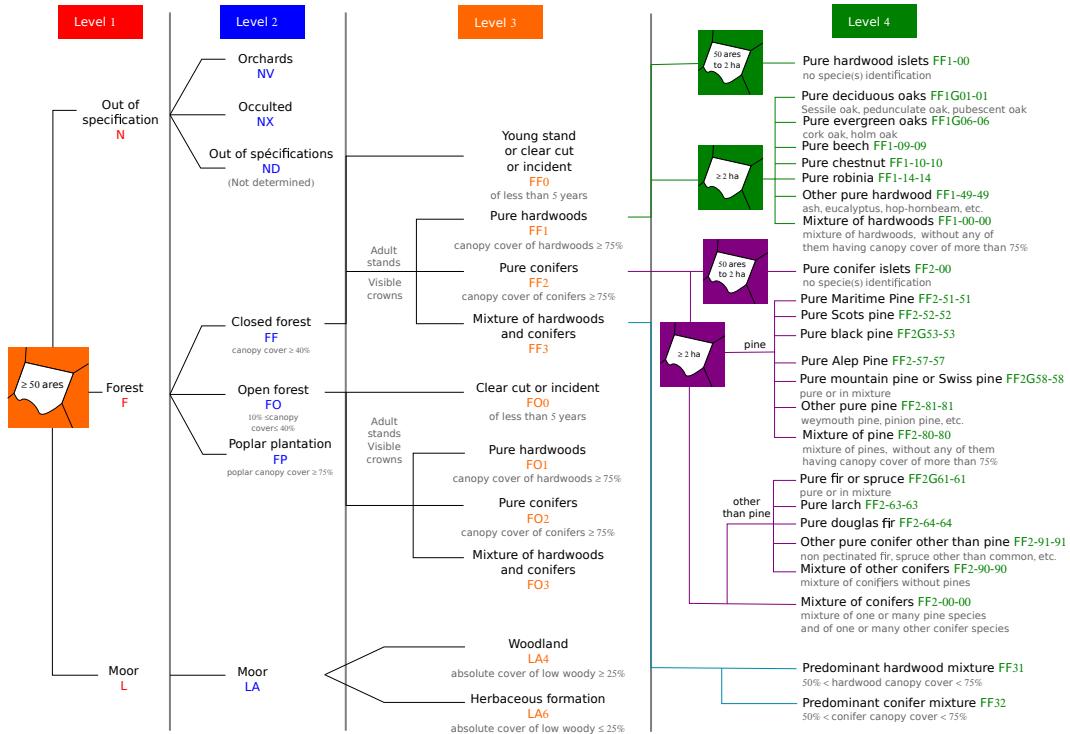


FIGURE 4.1: Organizational chart of the version 2 of the forest LC database.

4.2 Segmentation methods

A naive method to retrieve forest stands is to segment the input data. Such segmentation algorithms do not take into account the species information. Two algorithms were employed in order to obtain relevant stands only through the segmentation of the data. The first segmentation algorithm is the one proposed in [56]. It is a hierarchical segmentation algorithm that allows to control the level of segmentation through a unique scale parameter μ .

The second segmentation algorithm (called here PFF) employed is presented in [42]. It is a method for image segmentation based on pairwise

region comparison considering the minimum weight edge between two regions in measuring the difference between them. 3 simples parameters need to be tuned in order to obtain relevant segmentation. σ is the standard deviation of the gaussian filter employed to smooth the image as a pre-processing (the authors recommend $\sigma = 0.8$). k is a second parameter that set a scale of observation (a larger k will lead to larger segments). Finally, the parameter m permits to define the minimum size of a segment.

Such segmentation could allow to retrieve the stands borders easily. Furthermore, once the segmentation is performed, one can add semantic information using classification results.

These experiments have been performed only on one area presented in Figure 4.2. It is a 1 km² area, the spatial resolution of the VHR optical image is 0.5 m, and the nDSM has been rasterized at the same resolution. From these data one can see that a stand is composed of zones that are not homogeneous in term of reflectance and/or height. Furthermore, one can also note that the variability between two stands in terms of reflectance and/or height might not be important.

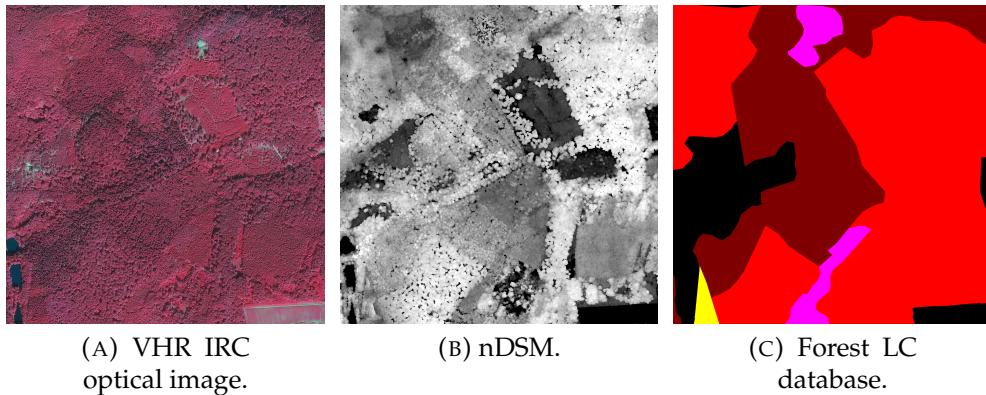


FIGURE 4.2: VHR IRC optical image, rasterized nDSM and forest LC of the proposed area for the direct segmentation tests.

4.2.1 Retrieve stands borders

Two strategies are employed to apply the segmentation in order to retrieve the forest stands borders from the forest LC database:

- The segmentation is applied to the VHR optical images, thus the resulting segment will correspond to "stands" that are homogeneous in terms of spectral reflectance. Since the optical images are employed by photo-interpreters in order to derive the forest LC, such segmentation should produce results similar to the forest LC.
- The segmentation is also applied to the rasterized normalized digital surface model (nDSM) (canopy height without ground relief). Such segmentation would produce "stands" that are homogeneous in term of height.

The results of the segmentation of the VHR optical image using the two segmentation algorithm is presented in Figure 4.3. In both cases, most of the borders found are not consistent with the forest LC database. Visually, the hierarchical segmentation seems to be more relevant than the PFF segmentation. However, the hierarchical segmentation produces small segments due to high variation of illumination in the image, while the PFF segments are all relatively large.

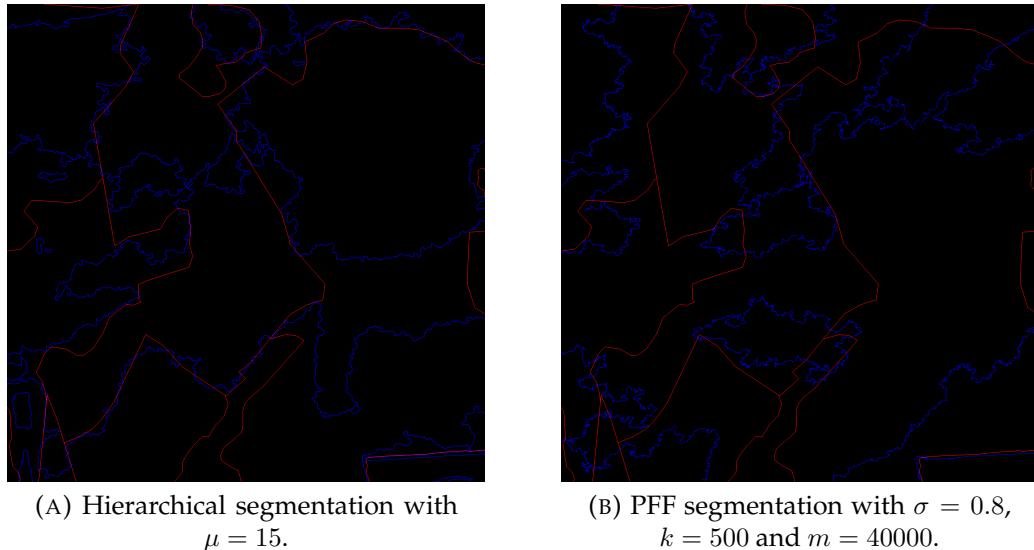


FIGURE 4.3: Result of the segmentation of the VHR optical image for the two segmentation algorithms. Blue lines correspond to the borders of the segments, red lines correspond to the borders of the forest LC.

The results of the segmentation of rasterized nDSM using the two segmentation algorithm is presented in Figure 4.4. Just like the segmentation

of the VHR optical image, most of the borders found are not consistent with the forest LC database. Here, the PFF segmentation seems to perform better than the hierarchical segmentation visually.

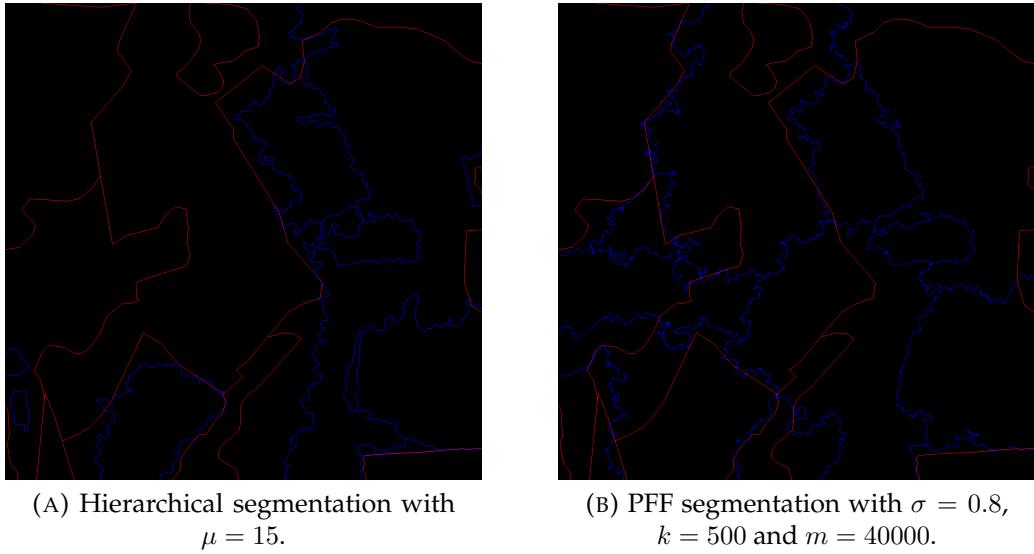


FIGURE 4.4: Result of the segmentation of the nDSM for the two segmentation algorithms. Blue lines correspond to the borders of the segments, red lines correspond to the borders of the forest LC.

Since the segmentation on the VHR optical image and the nDSM does not allow to retrieve the borders from the forest LC database, different values of the parameter μ for the hierarchical segmentation on the VHR optical images (see Figure 4.5). It appears that decreasing μ does not allow to obtain the borders of the forest LC. It only leads to an over-segmentation of the image. Such over-segmentation is employed in the proposed method but is not employed as a relevant segmentation for stand delineation but as an input for object based classification.

The two proposed segmentation algorithms are very efficient for image segmentation tasks [56, 42] but are not adapted to retrieve forest stands borders. However, they can produce interesting over-segmentation since they are able to retrieve some relevant borders.

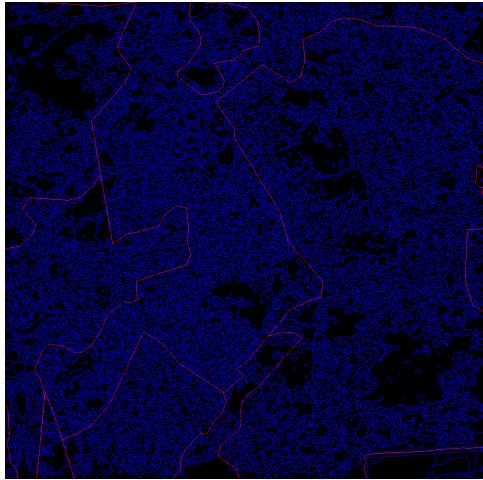
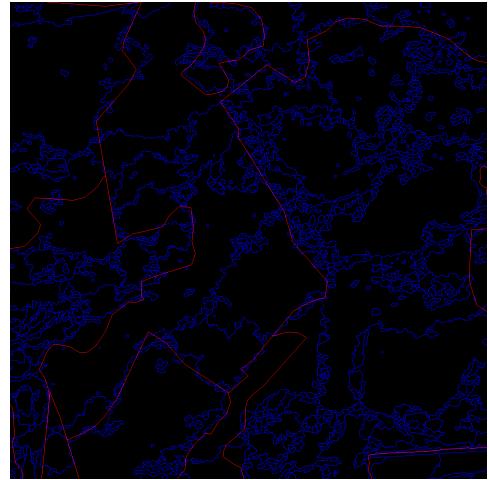
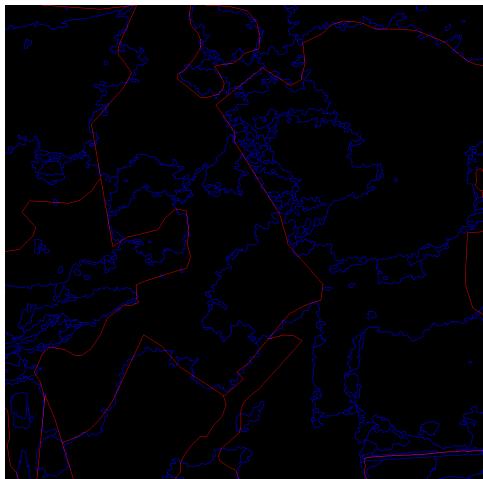
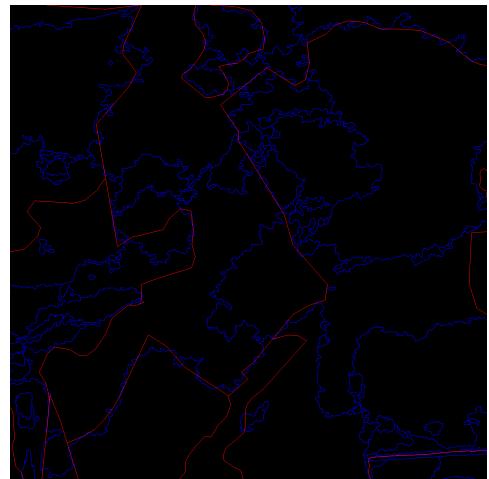
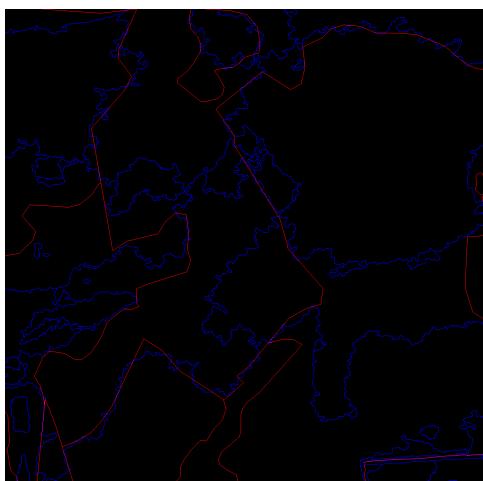
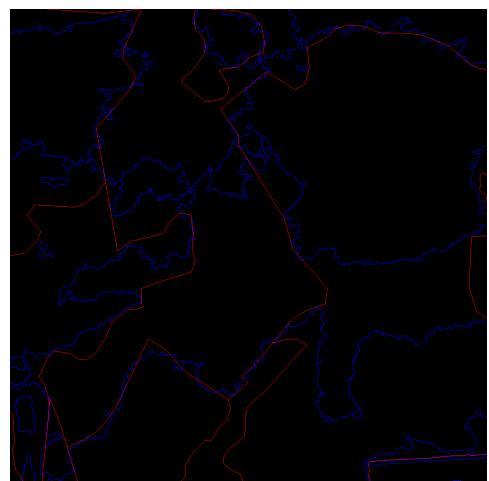
(A) Hierarchical segmentation with $\mu = 3$.(B) Hierarchical segmentation with $\mu = 6$.(C) Hierarchical segmentation with $\mu = 8$.(D) Hierarchical segmentation with $\mu = 10$.(E) Hierarchical segmentation with $\mu = 12$.(F) Hierarchical segmentation with $\mu = 15$.

FIGURE 4.5: Result of the segmentation of the VHR optical image using different values of μ for the hierarchical segmentation. Blue lines correspond to the borders of the segments, red lines correspond to the borders of the forest LC.

4.2.2 Add semantic information

The classification proposed in the method give information about the species at the object level. Since the segments extracted below are large than the small objects, a majority vote can be applied for each segment. The obtained label map could be compared with the forest LC. The result of the classification for the area of interest is presented in Figure 4.6, the confusion matrix and other accuracy metrics for this classification are presented in Table C.2.

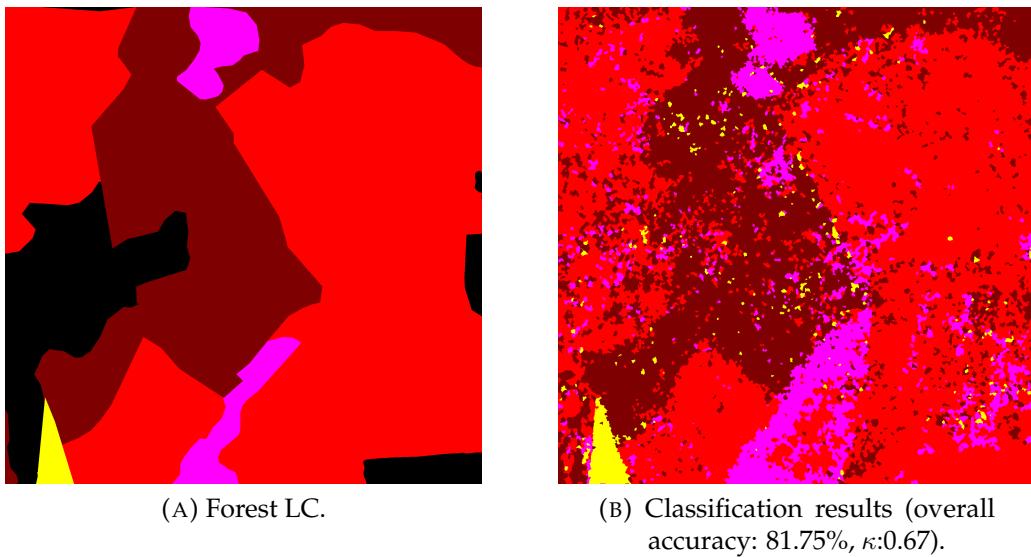


FIGURE 4.6: Forest LC and classification results.

The results of the majority vote for the segmentation of the VHR optical images is presented in Figure 4.7, the confusion matrices and other metrics are presented in Tables C.3 & C.4.

From a visual inspection, it appears that adding semantic information to the obtained segments does not allow to retrieve a relevant mapping. Indeed, some classes are not represented. For the hierarchical segmentation, the overall accuracy increases when adding semantic information through majority vote (81.94%, versus 81.75% for the classification). The κ (0.64) is also revealing a good agreement. This shows the limitation of the two metrics: the result appears to be good when inspecting them, while it is not.

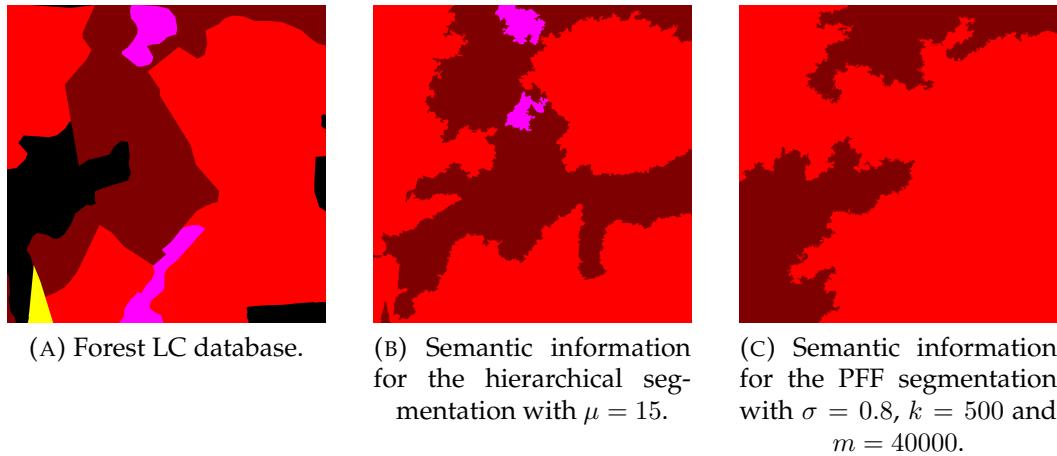


FIGURE 4.7: Results of the majority vote on the segmentation of the VHR optical images.

The Intersection over Union is more relevant in order to underline the irrelevance of the majority vote on a segmentation (41.1%). The F-score (50.68%) also concurs to this conclusion.

4.3 Results of the method

4.3.1 Over-segmentation

4.3.2 Feature selection

4.3.3 Classification

4.3.4 Regularization

4.4 Co-products of the method

4.5 Semi-automatic update

4.6 Inventory



5

Conclusions and perspectives





Color code

- *Chênes décidus*
- *Chênes sempervirents*
- *Hêtre*
- *Châtaignier*
- *Robinier*
- *Autre feuillu pur*
- *Pin maritime*
- *Pin sylvestre*
- *Pin laricio ou pin noir*
- *Pin d'Alep*
- *Pin à crochet ou pin cembro*
- *Autre pin pur*
- *Sapin ou épicéa*
- *Mélèze*
- *Douglas*
- *Autre conifère pur autre que pin*
- *Lande ligneuse*
- *Formation herbacée*
- *Peupleraie*

TABLE A.1: Vegetation type color code

**B**

Publication

B.1	Journal articles	74
B.2	Peer-reviewed conference papers	74

B.1 Journal articles

C. Dechesne, C. Mallet, A. Le Bris, V. Gouet-Brunet. *Semantic segmentation of forest stands of pure species combining airborne lidar data and very high resolution multispectral imagery.* ISPRS Journal of Photogrammetry and Remote Sensing, 126 (2017), pp.129–145, 2017. 

M. Fauvel, C. Dechesne, A. Zullo, F. Ferraty. *Fast forward feature selection of hyperspectral images for classification with gaussian mixture models.* IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing, vol. 8(6), pp. 2824-2831, 2015. 

B.2 Peer-reviewed conference papers

C. Dechesne, C. Mallet, A. Le Bris, V. Gouet-Brunet. *How to combine LiDAR and very high resolution multispectral images for forest stand segmentation?* Proc. of the IEEE International Geoscience and Remote Sensing Symposium (IGARSS), Fort Worth, USA, July 2017. 

C. Dechesne, C. Mallet, A. Le Bris, V. Gouet-Brunet. *Semantic segmentation of forest stands of pure specie as a global optimisation problem.* ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences, 2017. 

C. Dechesne, C. Mallet, A. Le Bris, V. Gouet-Brunet. *Segmentation sémantique de données de télédétection multimodale : application aux peuplements forestiers.* ORASIS, Colleville-sur-Mer, France, Juin 2017. 

C. Dechesne, C. Mallet, A. Le Bris, V. Gouet-Brunet, A. Hervieu. *Forest stand segmentation using airborne Lidar data and very high resolution multispectral imagery.* International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences, vol. 41 (B3), pp 207-214 , ISPRS Congress, Prague, Juillet 2016. 



Results - Confusion matrices and accuracy metrics

C.1 Accuracy metrics	78
C.2 Segmentation methods	80
C.3 Results of the method	80
C.3.1 Classification	80
C.3.2 Regularization	80

C.1 Accuracy metrics

In this section, the different accuracy metrics presented in the following tables are detailed. Most are standard metrics for classification evaluation.

They are based on the confusion matrix. In this section, the metrics are defined using the r -class confusion matrix presented in Table C.1.

Classes	Confusion matrix				Total
	1	2	...	r	
1	n_{11}	n_{12}	...	n_{1r}	$n_{1.}$
2	n_{21}	n_{22}	...	n_{2r}	$n_{2.}$
\vdots	\vdots	\vdots	..	\vdots	\vdots
r	n_{r1}	n_{r2}	...	n_{rr}	$n_{r.}$
Total	$n_{.1}$	$n_{.2}$...	$n_{.r}$	n

TABLE C.1: Confusion Matrix.

Precision

For the class $i \in [1, r]$, the precision (or producer's accuracy) p_i is defined as follow:

$$p_i = \frac{n_{ii}}{n_{i.}}. \quad (\text{C.1})$$

It is the accuracy from the point of view of the map maker (the producer). This is how often are real features on the ground correctly shown on the classified map or the probability that a certain land cover of an area on the ground is classified as such. The Producer's Accuracy is complement of the Omission Error, Producer's Accuracy = 100%-Omission Error. It is also the number of reference sites classified accurately divided by the total number of reference sites for that class

Recall

For the class $i \in [1, r]$, the recall (or user's accuracy) r_i is defined as follow:

$$r_i = \frac{n_{ii}}{n_{.i}}. \quad (\text{C.2})$$

It is the accuracy from the point of view of a map user, not the map maker. The User's accuracy essentially tells use how often the class on the map

will actually be present on the ground. This is referred to as reliability. The User's Accuracy is complement of the Commission Error, User's Accuracy = 100%-Commission Error. When a class is not represented in the classification map, the recall can not be computed.

Kappa coefficient [25]

The Kappa coefficient (κ) is generated from a statistical test to evaluate the accuracy of a classification. Kappa essentially evaluate how well the classification performed as compared to just randomly assigning values (i.e. did the classification do better than random.) The Kappa Coefficient can range from -1 to 1. A value of 0 indicated that the classification is no better than a random classification. A negative number indicates the classification is significantly worse than random. A value close to 1 indicates that the classification is significantly better than random. The Kappa coefficient is computed as follow:

$$\kappa = \frac{P_0 - P_e}{1 - P_e}, \quad (\text{C.3})$$

where P_0 is the relative observed agreement among raters, and P_e is the hypothetical probability of chance agreement. They are defined as follow:

$$P_0 = \frac{1}{n} \sum_{i=1}^r n_{ii} \quad (\text{C.4})$$

$$P_e = \frac{1}{n^2} \sum_{i=1}^r n_i \cdot n_i \quad (\text{C.5})$$

F-score

It considers both the precision p and the recall r of the test to compute the score. The F-score can be interpreted as a weighted average of the precision and recall, where an F-score reaches its best value at 1 and worst at 0. The F-score (F_1) of the class i is defined as follow

$$F_{1,i} = 2 \frac{p_i r_i}{p_i + r_i} \quad (\text{C.6})$$

Intersection over Union

The Intersection over Union (or Jaccard index) [66] measures similarity

between finite sample sets, and is defined as the size of the intersection divided by the size of the union of the sample sets. For a class i , the Intersection over Union (IoU_i) is defined as follow:

$$IoU_i = \frac{n_{ii}}{n_{i\cdot} + n_{\cdot i} - n_{ii}} \quad (\text{C.7})$$

C.2 Segmentation methods

Confusion matrix					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Precision
1 (1)	1783941	13837	204918	219306	80.29
2 (4)	63	29545	62	285	98.63
3 (5)	6482	726	145449	9054	89.94
4 (13)	113114	19865	52105	907266	83.06
Recall	93.71	46.18	36.13	79.87	

Accuracy metrics					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Overall
IU	76.18	45.89	34.73	68.68	56.37
F-score	86.48	62.91	51.56	81.43	70.59
Accuracy	84.09	99.01	92.2	88.2	81.75
P0	84.09	99.01	92.2	88.2	81.75
Pe	51.15	97.35	84.97	56.63	45.05
κ	0.6744	0.6247	0.4814	0.7279	0.6679

TABLE C.2: Confusion Matrix and accuracy metrics of the classification.

C.3 Results of the method

C.3.1 Classification

C.3.2 Regularization

Confusion matrix					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Precision
1 (1)	1869715	0	6022	346265	84.15
2 (4)	8142	0	0	21813	0
3 (5)	82695	0	44484	34532	27.51
4 (13)	108307	0	25382	958661	87.76
Recall	90.37	0	58.62	70.42	

Accuracy metrics					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Overall
IU	77.22	0	23.03	64.13	41.1
F-score	87.15	0	37.44	78.14	50.68
Accuracy	84.27	0	95.76	84.7	81.94
P0	84.27	0	95.76	84.7	81.94
Pe	52.41	0	93.42	54.21	49.59
κ	0.6695	0	0.3555	0.6659	0.6417

TABLE C.3: Confusion Matrix and accuracy metrics when adding semantic information to a direct hierarchical segmentation ($\mu = 15$).

Confusion matrix					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Precision
1 (1)	2021033	0	0	200969	90.96
2 (4)	0	0	0	29955	0
3 (5)	83682	0	0	78029	0
4 (13)	589638	0	0	502712	46.02
Recall	75.01	0	0	61.94	

Accuracy metrics					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Overall
IU	69.8	0	0	35.87	26.42
F-score	82.22	0	0	52.81	33.76
Accuracy	75.06	0	0	74.37	71.98
P0	75.06	0	0	74.37	71.98
Pe	57.18	0	0	60.12	55.92
κ	0.4176	0	0	0.3573	0.3644

TABLE C.4: Confusion Matrix and accuracy metrics when adding semantic information to a direct PFF segmentation ($\sigma = 0.8$, $k = 500$ and $m = 40000$).

Confusion matrix					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Precision
1 (1)	1788281	0	59707	374014	80.48
2 (4)	5687	0	0	24268	0
3 (5)	2510	0	44950	114251	27.8
4 (13)	244694	0	2	847654	77.6
Recall	87.61	0	42.95	62.32	

Accuracy metrics					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Overall
IU	72.26	0	20.3	52.82	36.34
F-score	83.89	0	33.75	69.12	46.69
Accuracy	80.42	0	94.97	78.4	76.47
P0	80.42	0	94.97	78.4	76.47
Pe	52.2	0	92.68	54.22	49.12
κ	0.5903	0	0.3126	0.5282	0.5374

TABLE C.5: Confusion Matrix and accuracy metrics of the regularization.

Confusion matrix					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Precision
1 (1)	1526001	0	0	696001	68.68
2 (4)	0	0	0	29955	0
3 (5)	109	0	0	161602	0
4 (13)	105832	0	0	986518	90.31
Recall	93.51	0	0	52.64	

Accuracy metrics					
Classes	1 (1)	2 (4)	3 (5)	4 (13)	Overall
IU	65.55	0	0	49.83	28.84
F-score	79.19	0	0	66.51	36.43
Accuracy	77.13	0	0	71.67	71.66
P0	77.13	0	0	71.67	71.66
Pe	49.08	0	0	48.7	46.15
κ	0.5508	0	0	0.4477	0.4737

TABLE C.6: Confusion Matrix and accuracy metrics of the regularization.

Bibliography

- [1] Radhakrishna Achanta, Appu Shaji, Kevin Smith, Aurelien Lucchi, Pascal Fua, and Sabine Süsstrunk. "SLIC superpixels compared to state-of-the-art superpixel methods". In: *IEEE transactions on pattern analysis and machine intelligence* 34.11 (2012), pp. 2274–2282.
- [2] Frédéric Achard. *Vital forest graphics*. UNEP/Earthprint, 2009.
- [3] L. Albert, F. Rottensteiner, and C. Heipke. "Contextual land use classification: How detailed can the class structure be?" In: *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences* XLI-B4 (2016), pp. 11–18.
- [4] PM Atkinson, MEJ Cutler, and H Lewis. "Mapping sub-pixel proportional land cover with AVHRR imagery". In: *International Journal of Remote Sensing* 18.4 (1997), pp. 917–935.
- [5] Martin Baatz, Gerd Binnig, Peter Eschenbacher, Andreas Melchinger, and Michael Sogtrop. *Method of iterative segmentation of a digital picture*. US Patent 6,832,002. 2004.
- [6] Cédric Bacour, François-Marie Bréon, and Fabienne Maignan. "Normalization of the directional effects in NOAA–AVHRR reflectance measurements for an improved monitoring of vegetation cycles". In: *Remote Sensing of Environment* 102.3 (2006), pp. 402–413.
- [7] A Bannari, D Morin, F Bonn, and AR Huete. "A review of vegetation indices". In: *Remote sensing reviews* 13.1-2 (1995), pp. 95–120.
- [8] Roberto Battiti. "Using mutual information for selecting features in supervised neural net learning". In: *IEEE Transactions on neural networks* 5.4 (1994), pp. 537–550.

- [9] A Beaudoin, T Le Toan, S Goze, E Nezry, A Lopes, E Mougin, CC Hsu, HC Han, JA Kong, and RT Shin. "Retrieval of forest biomass from SAR data". In: *International Journal of Remote Sensing* 15.14 (1994), pp. 2777–2796.
- [10] Mariana Belgiu and Lucian Drăguț. "Random Forest in remote sensing: A review of applications and future directions". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 114 (2016), pp. 24–31.
- [11] Richard E Bellman. *Adaptive control processes: a guided tour*. Princeton university press, 2015.
- [12] Bernhard E Boser, Isabelle M Guyon, and Vladimir N Vapnik. "A training algorithm for optimal margin classifiers". In: *Proceedings of the fifth annual workshop on Computational learning theory*. ACM. 1992, pp. 144–152.
- [13] Yuri Boykov, Olga Veksler, and Ramin Zabih. "Fast approximate energy minimization via graph cuts". In: *IEEE Transactions on pattern analysis and machine intelligence* 23.11 (2001), pp. 1222–1239.
- [14] Gary Bradski and Adrian Kaehler. *Learning OpenCV: Computer vision with the OpenCV library*. " O'Reilly Media, Inc.", 2008.
- [15] Tomas Brandtberg. "Classifying individual tree species under leaf-off and leaf-on conditions using airborne lidar". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 61.5 (2007), pp. 325–340.
- [16] Leo Breiman. "Random forests". In: *Machine learning* 45.1 (2001), pp. 5–32.
- [17] Leo Breiman, Jerome Friedman, Charles J Stone, and Richard A Olshen. *Classification and regression trees*. CRC press, 1984.
- [18] Thomas M Brooks, Russell A Mittermeier, Gustavo AB da Fonseca, Justin Gerlach, Michael Hoffmann, John F Lamoreux, Cristina Goettsch Mittermeier, John D Pilgrim, and Ana SL Rodrigues. "Global biodiversity conservation priorities". In: *science* 313.5783 (2006), pp. 58–61.

- [19] Lorenzo Bruzzone and Sebastiano B Serpico. "A technique for feature selection in multiclass problems". In: *International Journal of Remote Sensing* 21.3 (2000), pp. 549–563.
- [20] Gustau Camps-Valls and Lorenzo Bruzzone. *Kernel methods for remote sensing data analysis*. John Wiley & Sons, 2009.
- [21] Shuang Cang and Hongnian Yu. "Mutual information based input feature selection for classification problems". In: *Decision Support Systems* 54.1 (2012), pp. 691–698.
- [22] Yang-Lang Chang, Kun-Shan Chen, Bormin Huang, Wen-Yen Chang, Jon Atli Benediktsson, and Lena Chang. "A parallel simulated annealing approach to band selection for high-dimensional remote sensing images". In: *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 4.3 (2011), pp. 579–590.
- [23] Jiawen Chen, Sylvain Paris, and Frédo Durand. "Real-time edge-aware image processing with the bilateral grid". In: *ACM Transactions on Graphics (TOG)* 26.3 (2007), p. 103.
- [24] Anil Cheriyadat and L Mann Bruce. "Why principal component analysis is not an appropriate feature extraction method for hyperspectral data". In: *Geoscience and Remote Sensing Symposium, 2003. IGARSS'03. Proceedings. 2003 IEEE International*. Vol. 6. IEEE. 2003, pp. 3420–3422.
- [25] Jacob Cohen. "A coefficient of agreement for nominal scales". In: *Educational and psychological measurement* 20.1 (1960), pp. 37–46.
- [26] Dorin Comaniciu and Peter Meer. "Mean shift: A robust approach toward feature space analysis". In: *IEEE Transactions on pattern analysis and machine intelligence* 24.5 (2002), pp. 603–619.
- [27] Michele Dalponte, Francesco Reyes, Kaja Kandare, and Damiano Giannelle. "Delineation of Individual Tree Crowns from ALS and Hyperspectral data: a comparison among four methods". In: *European Journal of Remote Sensing* 48 (2015), pp. 365–382.
- [28] Michele Dalponte, Hans Ole Ørka, Liviu Theodor Ene, Terje Gobakken, and Erik Næsset. "Tree crown delineation and tree species

- classification in boreal forests using hyperspectral and ALS data". In: *Remote Sensing of Environment* 140 (2014), pp. 306–317.
- [29] Michele Dalponte, Lorenzo Bruzzone, and Damiano Gianelle. "Tree species classification in the Southern Alps based on the fusion of very high geometrical resolution multispectral/hyperspectral images and LiDAR data". In: *Remote Sensing of Environment* 123 (2012), pp. 258–270.
- [30] Steve De Backer, Pieter Kempeneers, Walter Debruyn, and Paul Scheunders. "A band selection technique for spectral classification". In: *IEEE geoscience and remote sensing letters* 2.3 (2005), pp. 319–323.
- [31] Jeffrey Dean, Greg Corrado, Rajat Monga, Kai Chen, Matthieu Devin, Mark Mao, Andrew Senior, Paul Tucker, Ke Yang, Quoc V Le, et al. "Large scale distributed deep networks". In: *Advances in neural information processing systems*. 2012, pp. 1223–1231.
- [32] C Dechesne, C Mallet, A Le Bris, V Gouet-Brunet, and A Hervieu. "Forest stand segmentation using airborne lidar data and very high resolution multispectral imagery". In: *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 41-B3 (2016), pp. 207–214.
- [33] Clément Dechesne, Clément Mallet, Arnaud Le Bris, and Valérie Gouet-Brunet. "Semantic segmentation of forest stands of pure species combining airborne lidar data and very high resolution multispectral imagery". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 126 (2017), pp. 129–145.
- [34] Haluk Derin and Howard Elliott. "Modeling and segmentation of noisy and textured images using Gibbs random fields". In: *IEEE Transactions on pattern analysis and machine intelligence* 1 (1987), pp. 39–55.
- [35] Ramón Díaz-Uriarte and Sara Alvarez De Andres. "Gene selection and classification of microarray data using random forest". In: *BMC bioinformatics* 7.1 (2006), p. 3.
- [36] Oliver Diedershagen, Barbara Koch, and Holger Weinacker. "Automatic segmentation and characterisation of forest stand parameters

- using airborne lidar data, multispectral and fogis data". In: *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences* 36(8/W2) (2004), pp. 208–212.
- [37] Pablo A Estévez, Michel Tesmer, Claudio A Perez, and Jacek M Zurada. "Normalized mutual information feature selection". In: *IEEE Transactions on Neural Networks* 20.2 (2009), pp. 189–201.
- [38] Lothar Eysn, Markus Hollaus, Klemens Schadauer, and Norbert Pfeifer. "Forest delineation based on airborne LIDAR data". In: *Remote Sensing* 4.3 (2012), pp. 762–783.
- [39] Timothy J Fahey, Peter B Woodbury, John J Battles, Christine L Goodale, Steven P Hamburg, Scott V Ollinger, and Christopher W Woodall. "Forest carbon storage: ecology, management, and policy". In: *Frontiers in Ecology and the Environment* 8.5 (2010), pp. 245–252.
- [40] Mathieu Fauvel, Clément Dechesne, Anthony Zullo, and Frederic Ferraty. "Fast forward feature selection of hyperspectral images for classification with Gaussian mixture models". In: *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 8.6 (2015), pp. 2824–2831.
- [41] Pedro F Felzenszwalb and Daniel P Huttenlocher. "Efficient belief propagation for early vision". In: *International journal of computer vision* 70.1 (2006), pp. 41–54.
- [42] Pedro F Felzenszwalb and Daniel P Huttenlocher. "Efficient graph-based image segmentation". In: *International journal of computer vision* 59.2 (2004), pp. 167–181.
- [43] António Ferraz, Clément Mallet, and Nesrine Chehata. "Large-scale road detection in forested mountainous areas using airborne topographic lidar data". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 112 (2016), pp. 23 –36.
- [44] António Ferraz, Sassan Saatchi, Clément Mallet, and Victoria Meyer. "Lidar detection of individual tree size in tropical forests". In: *Remote Sensing of Environment* 183 (2016), pp. 318–333.

- [45] Ronald A Fisher. "The use of multiple measurements in taxonomic problems". In: *Annals of human genetics* 7.2 (1936), pp. 179–188.
- [46] Giles M Foody. "Status of land cover classification accuracy assessment". In: *Remote sensing of environment* 80.1 (2002), pp. 185–201.
- [47] SE Franklin, RJ Hall, LM Moskal, AJ Maudie, and MB Lavigne. "Incorporating texture into classification of forest species composition from airborne multispectral images". In: *International journal of remote sensing* 21.1 (2000), pp. 61–79.
- [48] Ashish Ghosh, Nikhil R Pal, and Sankar K Pal. "Image segmentation using a neural network". In: *Biological Cybernetics* 66.2 (1991), pp. 151–158.
- [49] Pall Oskar Gislason, Jon Atli Benediktsson, and Johannes R Sveinsson. "Random forests for land cover classification". In: *Pattern Recognition Letters* 27.4 (2006), pp. 294–300.
- [50] David E Goldberg. "Genetic algorithms in search, optimization, and machine learning, 1989". In: *Reading: Addison-Wesley* (1989).
- [51] P. Gong and P.J. Howarth. "Performance analyses of probabilistic relaxation methods for land-cover classification". In: *Remote Sensing of Environment* 30.1 (1989), pp. 33–42.
- [52] A. Gressin, C. Mallet, N. Vincent, and N. Paparoditis. "Updating land cover databases using a single very high resolution satellite image". In: *ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences* II-3/W2 (2013), pp. 13–18.
- [53] Adrien Gressin, Nicole Vincent, Clément Mallet, and Nicolas Paparoditis. "A unified framework for land-cover database update and enrichment using satellite imagery". In: *Image Processing (ICIP), 2014 IEEE International Conference on*. IEEE. 2014, pp. 5057–5061.
- [54] Adrien Gressin, Clément Mallet, Nicole Vincent, and Nicolas Paparoditis. "Updating land cover databases using a single very high resolution satellite image". In: *The ISPRS Workshop on Image Sequence Analysis*. Vol. 2. 3. 2013, pp. 13–18.

- [55] Adrien Gressin, Clément Mallet, Nicole Vincent, and Nicolas Paparoditis. "Updating the new French national land cover database". In: *Geoscience and Remote Sensing Symposium (IGARSS), 2014 IEEE International*. IEEE. 2014, pp. 3534–3537.
- [56] L. Guigues, J.-P. Cocquerez, and H. Le Men. "Scale-sets image analysis". In: *IJCV* 68.3 (2006), pp. 289–317.
- [57] Baofeng Guo, Robert I Damper, Steve R Gunn, and James DB Nelson. "A fast separability-based feature-selection method for high-dimensional remotely sensed image classification". In: *Pattern Recognition* 41.5 (2008), pp. 1653–1662.
- [58] Ayman Habib, Mwafag Ghanma, Michel Morgan, and Rami Al-Ruzouq. "Photogrammetric and LiDAR data registration using linear features". In: *Photogrammetric Engineering & Remote Sensing* 71.6 (2005), pp. 699–707.
- [59] FR Hansen and Howard Elliott. "Image segmentation using simple Markov field models". In: *Computer Graphics and Image Processing* 20.2 (1982), pp. 101–132.
- [60] Georgef Hepner, Thomas Logan, Niles Ritter, and Nevin Bryant. "Artificial neural network classification using a minimal training set-Comparison to conventional supervised classification". In: *Photogrammetric Engineering and Remote Sensing* 56.4 (1990), pp. 469–473.
- [61] A Hernando, Dirk Tiede, Florian Albrecht, and Stefan Lang. "Spatial and thematic assessment of object-based forest stand delineation using an OFA-matrix". In: *International Journal of Applied Earth Observation and Geoinformation* 19 (2012), pp. 214–225.
- [62] Martin Herold, Margaret E Gardner, and Dar A Roberts. "Spectral resolution requirements for mapping urban areas". In: *IEEE Transactions on Geoscience and remote sensing* 41.9 (2003), pp. 1907–1919.
- [63] Johan Holmgren. "Prediction of tree height, basal area and stem volume in forest stands using airborne laser scanning". In: *Scandinavian Journal of Forest Research* 19.6 (2004), pp. 543–553.

- [64] Gordon Hughes. "On the mean accuracy of statistical pattern recognizers". In: *IEEE transactions on information theory* 14.1 (1968), pp. 55–63.
- [65] Piotr Indyk and Rajeev Motwani. "Approximate nearest neighbors: towards removing the curse of dimensionality". In: *Proceedings of the thirtieth annual ACM symposium on Theory of computing*. ACM. 1998, pp. 604–613.
- [66] Paul Jaccard. "The distribution of the flora in the alpine zone." In: *New phytologist* 11.2 (1912), pp. 37–50.
- [67] Marek K Jakubowski, Qinghua Guo, and Maggi Kelly. "Tradeoffs between lidar pulse density and forest measurement accuracy". In: *Remote Sensing of Environment* 130 (2013), pp. 245–253.
- [68] George H John. "Enhancements to the data mining process". PhD thesis. stanford university Ph. D. thesis, 1997.
- [69] Ian Jolliffe. "Principal component analysis". In: *International encyclopedia of statistical science*. Springer, 2011, pp. 1094–1096.
- [70] Carl F Jordan. "Derivation of leaf-area index from quality of light on the forest floor". In: *Ecology* 50.4 (1969), pp. 663–666.
- [71] Christian Jutten and Jeanny Herault. "Blind separation of sources, part I: An adaptive algorithm based on neuromimetic architecture". In: *Signal processing* 24.1 (1991), pp. 1–10.
- [72] Kaja Kandare, Michele Dalponte, Damiano Gianelle, and Jonathan Cheung-Wai Chan. "A new procedure for identifying single trees in understory layer using discrete LiDAR data". In: *Geoscience and Remote Sensing Symposium (IGARSS), 2014 IEEE International*. IEEE. 2014, pp. 1357–1360.
- [73] Annika Kangas and Matti Maltamo. *Forest inventory: methodology and applications*. Vol. 10. Springer Science & Business Media, 2006.

- [74] Anahita Khosravipour, Andrew K Skidmore, Martin Isenburg, Tiejun Wang, and Yousif A Hussin. "Generating pit-free canopy height models from airborne lidar". In: *Photogrammetric Engineering & Remote Sensing* 80.9 (2014), pp. 863–872.
- [75] M. Kim, M. Madden, and T.A. Warner. "Forest Type Mapping using Object-specific Texture Measures from Multispectral Ikonos Imagery: Segmentation Quality and Image Classification Issues". In: *Photogrammetric Engineering & Remote Sensing* 75.7 (2009), pp. 819–829.
- [76] Alexander Kirillov, Dmitrij Schlesinger, Walter Forkel, Anatoly Zelenin, Shuai Zheng, Philip Torr, and Carsten Rother. "A Generic CNN-CRF Model for Semantic Segmentation". In: *arxiv:1511.05067* (2015).
- [77] Josef Kittler. "Feature set search algorithms". In: *Pattern recognition and signal processing* (1978).
- [78] B Koch, Ch Straub, M Dees, Y Wang, and H Weinacker. "Airborne laser data for stand delineation and information extraction". In: *International Journal of Remote Sensing* 30.4 (2009), pp. 935–963.
- [79] Ron Kohavi and George H John. "Wrappers for feature subset selection". In: *Artificial intelligence* 97.1-2 (1997), pp. 273–324.
- [80] Pushmeet Kohli, L'. Ladický, and P. Torr. "Robust Higher Order Potentials for Enforcing Label Consistency". English. In: *International Journal of Computer Vision* 82.3 (2009), pp. 302–324. ISSN: 0920-5691.
- [81] Vladimir Kolmogorov. "Convergent tree-reweighted message passing for energy minimization". In: *IEEE transactions on pattern analysis and machine intelligence* 28.10 (2006), pp. 1568–1583.
- [82] Vladimir Kolmogorov and Carsten Rother. "Minimizing non-submodular functions with graph cuts-a review". In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 29.7 (2007), pp. 1274–1279.
- [83] Vladimir Kolmogorov and Ramin Zabih. "What energy functions can be minimized via graph cuts?" In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 26.2 (2004), pp. 147–159.

- [84] S. Kumar and M. Hebert. "Discriminative random fields." In: *International Journal of Computer Vision* 68.2 (2006), pp. 179–201.
- [85] L'ubor Ladický, Chris Russell, Pushmeet Kohli, and Philip Torr. "Inference Methods for CRFs with Co-occurrence Statistics". In: *International Journal of Computer Vision* 103.2 (2012), pp. 213–225.
- [86] David A Landgrebe. *Signal theory methods in multispectral remote sensing*. Vol. 29. John Wiley & Sons, 2005.
- [87] Loic Landrieu and Guillaume Obozinski. "Cut Pursuit: fast algorithms to learn piecewise constant functions". In: *Artificial Intelligence and Statistics*. 2016, pp. 1384–1393.
- [88] Rasmus Larsen. "Decomposition using maximum autocorrelation factors". In: *Journal of Chemometrics* 16.8-10 (2002), pp. 427–435.
- [89] Steven Le Moan, Alamin Mansouri, Yvon Voisin, and Jon Yngve Harderberg. "A constrained band selection method based on information measures for spectral image color visualization". In: *IEEE Transactions on Geoscience and Remote Sensing* 49.12 (2011), pp. 5104–5115.
- [90] Thuy Le Toan, André Beaudoin, J Riom, and Dominique Guyon. "Relating forest biomass to SAR data". In: *IEEE Transactions on Geoscience and Remote Sensing* 30.2 (1992), pp. 403–411.
- [91] L Lebart, A Morineau, and Mr Piron. "Multidimensional exploratory statistics". In: *París: Ed. Dunod* (1997).
- [92] Donald G Leckie, François A Gougeon, Nicholas Walsworth, and Dennis Paradine. "Stand delineation and composition estimation using semi-automated individual tree crown analysis". In: *Remote Sensing of Environment* 85.3 (2003), pp. 355–369.
- [93] J. Lee, X. Cai, J. Lellmann, M. Dalponte, Y. Malhi, N. Butt, M. Morecroft, C. B. Schönlieb, and D. A. Coomes. "Individual Tree Species Classification From Airborne Multisensor Imagery Using Robust PCA". In: *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 9.6 (2016), pp. 2554–2567. ISSN: 1939-1404.

- [94] TC Lemière, PY Bernier, AL Carroll, MD Flannigan, RP Gilsenan, DW McKenney, EH Hogg, JH Pedlar, D Blain, et al. "The importance of forest sector adaptation to climate change". In: *Nat. Resour. Can., Can. For. Serv., North. For. Cent., Edmonton, AB. Inf. Rep. NOR-X-416E* (2008).
- [95] VJ Leppänen, T Tokola, M Maltamo, L Mehtätalo, T Pusa, and J Mustonen. "Automatic delineation of forest stands from LIDAR data". In: *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences* 38(4/C1) (2008), pp. 5–8.
- [96] Alex Levinstein, Adrian Stere, Kiriakos N Kutulakos, David J Fleet, Sven J Dickinson, and Kaleem Siddiqi. "Turbopixels: Fast superpixels using geometric flows". In: *IEEE transactions on pattern analysis and machine intelligence* 31.12 (2009), pp. 2290–2297.
- [97] Jili Li, Baoxin Hu, and Thomas L. Noland. "Classification of tree species based on structural features derived from high density LiDAR data". In: *Agricultural and Forest Meteorology* 171–172 (2013), pp. 104 –114.
- [98] Shijin Li, Hao Wu, Dingsheng Wan, and Jiali Zhu. "An effective feature selection method for hyperspectral image classification based on genetic algorithm and support vector machine". In: *Knowledge-Based Systems* 24.1 (2011), pp. 40–48.
- [99] Kevin Lim, Paul Treitz, Michael Wulder, Benoît St-Onge, and Martin Flood. "LiDAR remote sensing of forest structure". In: *Progress in physical geography* 27.1 (2003), pp. 88–106.
- [100] Huan Liu and Rudy Setiono. "Feature selection and classification—a probabilistic wrapper approach". In: *Proceedings of 9th International Conference on Industrial and Engineering Applications of AI and ES*. 1997, pp. 419–424.
- [101] Dengsheng Lu and Qihao Weng. "A survey of image classification methods and techniques for improving classification performance". In: *International journal of Remote sensing* 28.5 (2007), pp. 823–870.

- [102] A. Lucchi, Y. Li, X. Boix, K. Smith, and P. Fua. "Are Spatial and Global Constraints Really Necessary for Segmentation?" In: *Proc. of ICCV*. 2011, pp. 9–16.
- [103] A. Maas, F. Rottensteiner, and C. Heipke. "Using label noise robust logistic regression for automated updating of topographic geospatial databases". In: *ISPRS Annals of Photogrammetry, Remote Sensing and Spatial Information Sciences III-7* (2016), pp. 133–140.
- [104] Clément Mallet, Frédéric Bretar, Michel Roux, Uwe Soergel, and Christian Heipke. "Relevance assessment of full-waveform lidar data for urban area classification". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 66.6 (2011), S71–S84.
- [105] Thomas Marill and D Green. "On the effectiveness of receptors in recognition systems". In: *IEEE transactions on Information Theory* 9.1 (1963), pp. 11–17.
- [106] Adolfo Martínez-UsÓMartinez-Uso, Filiberto Pla, José Martínez Sotoca, and Pedro García-Sevilla. "Clustering-based hyperspectral band selection using information measures". In: *IEEE Transactions on Geoscience and Remote Sensing* 45.12 (2007), pp. 4158–4171.
- [107] Andrew Mastin, Jeremy Kepner, and John Fisher. "Automatic registration of LIDAR and optical images of urban scenes". In: *Computer Vision and Pattern Recognition, 2009. CVPR 2009. IEEE Conference on*. IEEE. 2009, pp. 2639–2646.
- [108] Paul Mather and Brandt Tso. *Classification methods for remotely sensed data*. CRC press, 2016.
- [109] Joseph E Means, Steven A Acker, Brandon J Fitt, Michael Renslow, Lisa Emerson, and Chad J Hendrix. "Predicting forest stand characteristics with airborne scanning lidar". In: *Photogrammetric Engineering & Remote Sensing* 66.11 (2000), pp. 1367–1372.
- [110] Alastair P Moore, Simon JD Prince, Jonathan Warrell, Umar Mohammed, and Graham Jones. "Superpixel lattices". In: *Computer Vision and Pattern Recognition, 2008. CVPR 2008. IEEE Conference on*. IEEE. 2008, pp. 1–8.

- [111] Brice Mora, Michael A. Wulder, and Joanne C. White. "Segment-constrained regression tree estimation of forest stand height from very high spatial resolution panchromatic imagery over a boreal environment". In: *Remote Sensing of Environment* 114.11 (2010), pp. 2474–2484.
- [112] Philipp Moritz, Robert Nishihara, Ion Stoica, and Michael I Jordan. "Sparknet: Training deep networks in spark". In: *arXiv preprint arXiv:1511.06051* (2015).
- [113] G. Moser, S.B. Serpico, and J.A. Benediktsson. "Land-Cover Mapping by Markov Modeling of Spatial Contextual Information in Very-High-Resolution Remote Sensing Images". In: *Proceedings of the IEEE* 101.3 (2013), pp. 631–651.
- [114] Anh Nguyen and Bac Le. "3D point cloud segmentation: A survey". In: *Robotics, Automation and Mechatronics (RAM), 2013 6th IEEE Conference on*. IEEE. 2013, pp. 225–230.
- [115] Mark Nitzberg, David Mumford, and Takahiro Shiota. *Filtering, segmentation and depth*. 1993.
- [116] M Pal. "Random forest classifier for remote sensing classification". In: *International Journal of Remote Sensing* 26.1 (2005), pp. 217–222.
- [117] Nikhil R Pal and Sankar K Pal. "A review on image segmentation techniques". In: *Pattern recognition* 26.9 (1993), pp. 1277–1294.
- [118] Yude Pan, Richard A Birdsey, Oliver L Phillips, and Robert B Jackson. "The structure, distribution, and biomass of the world's forests". In: *Annual Review of Ecology, Evolution, and Systematics* 44 (2013), pp. 593–622.
- [119] JD Paola and RA Schowengerdt. "A review and analysis of back-propagation neural networks for classification of remotely-sensed multi-spectral imagery". In: *International Journal of remote sensing* 16.16 (1995), pp. 3033–3058.

- [120] Sylvain Paris and Frédo Durand. "A fast approximation of the bilateral filter using a signal processing approach". In: *Computer Vision–ECCV 2006* (2006), pp. 568–580.
- [121] Sylvain Paris, Pierre Kornprobst, Jack Tumblin, Frédo Durand, et al. "Bilateral filtering: Theory and applications". In: *Foundations and Trends® in Computer Graphics and Vision* 4.1 (2009), pp. 1–73.
- [122] Genevieve Patenaude, Ronald Milne, and Terence P Dawson. "Synthesis of remote sensing approaches for forest carbon estimation: reporting to the Kyoto Protocol". In: *Environmental Science & Policy* 8.2 (2005), pp. 161–178.
- [123] Tamar Peli and David Malah. "A study of edge detection algorithms". In: *Computer graphics and image processing* 20.1 (1982), pp. 1–21.
- [124] Arne Pommerening. "Approaches to quantifying forest structures". In: *Forestry: An International Journal of Forest Research* 75.3 (2002), pp. 305–324.
- [125] Pavel Pudil, Jana Novovičová, and Josef Kittler. "Floating search methods in feature selection". In: *Pattern Recognition Letters* 15.11 (1994), pp. 1119–1125.
- [126] Julien Radoux and Pierre Defourny. "A quantitative assessment of boundaries in automated forest stand delineation using very high resolution imagery". In: *Remote Sensing of Environment* 110.4 (2007), pp. 468–475.
- [127] Julien Radoux, Céline Lamarche, Eric Van Bogaert, Sophie Bontemps, Carsten Brockmann, and Pierre Defourny. "Automated Training Sample Extraction for Global Land Cover Mapping". In: *Remote Sensing* 6.5 (2014), p. 3965. ISSN: 2072-4292. DOI: 10.3390/rs6053965.
- [128] Michael H Ramage, Henry Burridge, Marta Busse-Wicher, George Fereday, Thomas Reynolds, Darshil U Shah, Guanglu Wu, Li Yu, Patrick Fleming, Danielle Densley-Tingley, et al. "The wood from the trees: The use of timber in construction". In: *Renewable and Sustainable Energy Reviews* 68 (2017), pp. 333–359.

- [129] Konrad Schindler. "An overview and comparison of smooth labeling methods for land-cover classification". In: *IEEE Transactions on Geoscience and Remote Sensing* 50.11 (2012), pp. 4534–4545.
- [130] Bernhard Scholkopf and Alexander J Smola. *Learning with kernels: support vector machines, regularization, optimization, and beyond*. MIT press, 2001.
- [131] Andreas Schuck, Risto Päivinen, Tuomo Hytönen, and Brita Pajari. *Compilation of forestry terms and definitions*. European Forest Institute, 2002.
- [132] Sebastiano B Serpico and Gabriele Moser. "Extraction of spectral channels from hyperspectral images for classification purposes". In: *IEEE transactions on geoscience and remote sensing* 45.2 (2007), pp. 484–495.
- [133] Jie Shan and Charles K Toth. *Topographic laser ranging and scanning: principles and processing*. CRC press, 2008.
- [134] Jianbo Shi and Jitendra Malik. "Normalized cuts and image segmentation". In: *IEEE Transactions on pattern analysis and machine intelligence* 22.8 (2000), pp. 888–905.
- [135] John Miles Smith and Diane CP Smith. "Database abstractions: aggregation and generalization". In: *ACM Transactions on Database Systems (TODS)* 2.2 (1977), pp. 105–133.
- [136] William H Smith. *Air pollution and forests: interactions between air contaminants and forest ecosystems*. Springer Science & Business Media, 2012.
- [137] José Martínez Sotoca and Filiberto Pla. "Supervised feature selection by clustering using conditional mutual information-based distances". In: *Pattern Recognition* 43.6 (2010), pp. 2068–2081.
- [138] Jean-Philippe Souchon, Christian Thom, Christophe Meynard, and Olivier Martin. "A large format camera system for national mapping purposes". In: *Revue Française de Photogrammétrie et de Télédétection* 200 (2012), pp. 48–53.

- [139] Frances S Sterrett. *Alternative fuels and the environment*. CRC Press, 1994.
- [140] Alan H Strahler. "The use of prior probabilities in maximum likelihood classification of remotely sensed data". In: *Remote sensing of Environment* 10.2 (1980), pp. 135–163.
- [141] Carolin Strobl, Anne-Laure Boulesteix, Achim Zeileis, and Torsten Hothorn. "Bias in random forest variable importance measures: Illustrations, sources and a solution". In: *BMC bioinformatics* 8.1 (2007), p. 25.
- [142] Jacob Strunk, Hailemariam Temesgen, Hans-Erik Andersen, James P Flewelling, and Lisa Madsen. "Effects of lidar pulse density and sample size on a model-assisted approach to estimate forest inventory variables". In: *Canadian Journal of Remote Sensing* 38.05 (2012), pp. 644–654.
- [143] Alicia A Sullivan, Robert J McGaughey, Hans-Erik Andersen, and Peter Schiess. "Object-oriented classification of forest structure from light detection and ranging data for stand mapping". In: *Western Journal of Applied Forestry* 24.4 (2009), pp. 198–204.
- [144] Jiliang Tang, Salem Alelyani, and Huan Liu. "Feature selection for classification: A review". In: *Data Classification: Algorithms and Applications* (2014), p. 37.
- [145] Torfinn Taxt, Patrick J Flynn, and Anil K Jain. "Segmentation of document images". In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 11.12 (1989), pp. 1322–1329.
- [146] Dirk Tiede, Thomas Blaschke, and Marco Heurich. "Object-based semi automatic mapping of forest stands with Laser scanner and Multi-spectral data". In: *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences* 36(8/W2) (2004), pp. 328–333.
- [147] Timo Tokola. "Remote Sensing Concepts and Their Applicability in REDD+ Monitoring". In: *Current Forestry Reports* 1.4 (2015), pp. 252–260.

- [148] Erkki Tomppo, Håkan Olsson, Göran Ståhl, Mats Nilsson, Olle Hagner, and Matti Katila. "Combining national forest inventory field plots and remote sensing data for forest databases". In: *Remote Sensing of Environment* 112.5 (2008), pp. 1982–1999.
- [149] H Torabzadeh, R Leiterer, ME Schaepman, and F Morsdorf. "Optimal structural and spectral features for tree species classification using combined airborne laser scanning and hyperspectral data". In: *Geoscience and Remote Sensing Symposium (IGARSS), 2015 IEEE International*. IEEE. Milano, Italy, 2015, pp. 5399–5402.
- [150] Hossein Torabzadeh, Felix Morsdorf, and Michael E Schaepman. "Fusion of imaging spectroscopy and airborne laser scanning data for characterization of forest ecosystems—A review". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 97 (2014), pp. 25–35.
- [151] Roger Trias-Sanz. "Semi-automatic rural land cover classification from high-resolution remote sensing images". PhD thesis. PhD thesis, Université Paris 5, 2006.
- [152] Roger Trias-Sanz and Didier Boldo. "A high-reliability, high-resolution method for land cover classification into forest and non-forest". In: *Image Analysis* (2005), pp. 417–441.
- [153] Compton J Tucker. "Red and photographic infrared linear combinations for monitoring vegetation". In: *Remote sensing of Environment* 8.2 (1979), pp. 127–150.
- [154] Devis Tuia, Fabio Pacifici, Mikhail Kanevski, and William J Emery. "Classification of very high spatial resolution imagery using mathematical morphology and support vector machines". In: *IEEE Transactions on Geoscience and Remote Sensing* 47.11 (2009), pp. 3866–3879.
- [155] A Ullrich and M Pfennigbauer. "Linear LIDAR versus Geiger-mode LIDAR: impact on data properties and data quality". In: *SPIE Defense+ Security*. International Society for Optics and Photonics. 2016, pp. 983204–983204.

- [156] Jari Vauhkonen, Ilkka Korpela, Matti Maltamo, and Timo Tokola. "Imputation of single-tree attributes using airborne laser scanning-based height, intensity, and alpha shape metrics". In: *Remote Sensing of Environment* 114.6 (2010), pp. 1263–1276.
- [157] Andrea Vedaldi and Stefano Soatto. "Quick shift and kernel methods for mode seeking". In: *Computer vision–ECCV 2008* (2008), pp. 705–718.
- [158] Cédric Véga, A Hamrouni, S El Mokhtari, J Morel, J Bock, J-P Renaud, M Bouvier, and Sylvie Durrieu. "PTrees: A point-based approach to forest tree extraction from lidar data". In: *International Journal of Applied Earth Observation and Geoinformation* 33 (2014), pp. 98–108.
- [159] Olga Veksler, Yuri Boykov, and Paria Mehrani. "Superpixels and supervoxels in an energy optimization framework". In: *Computer Vision–ECCV 2010* (2010), pp. 211–224.
- [160] Luc Vincent and Pierre Soille. "Watersheds in digital spaces: an efficient algorithm based on immersion simulations". In: *IEEE Transactions on Pattern Analysis & Machine Intelligence* 6 (1991), pp. 583–598.
- [161] Maurizio Viterbini, Alberto Adriani, and Guido Di Donfrancesco. "Single photon detection and timing system for a lidar experiment". In: *Review of scientific instruments* 58.10 (1987), pp. 1833–1839.
- [162] Kristina A Vogt, JM Honea, DJ Vogt, T Patel-Weynand, RL Edmonds, R Sigurdardottir, DG Briggs, MG Andreu, et al. "Global societies and forest legacies creating today's forest landscapes." In: *Forests and society: sustainability and life cycles of forests in human landscapes* (2006), pp. 30–59.
- [163] M. Volpi and V. Ferrari. "Semantic segmentation of urban scenes by learning local class interactions". In: *Proc. of CVPR Workshops*. 2015, pp. 1–9.
- [164] George Vosselman and Hans-Gerd Maas. *Airborne and terrestrial laser scanning*. CRC Press, 2010.

- [165] Zuyuan Wang, Ruedi Boesch, and Christian Ginzler. "Forest delineation of aerial images with Gabor wavelets". In: *International journal of remote sensing* 33.7 (2012), pp. 2196–2213.
- [166] Mahwash Wasiq and Masood Ahmad. *Sustaining forests: A development strategy*. The World Bank, 2004.
- [167] Martin Weinmann. "Reconstruction and Analysis of 3D Scenes". In: *Springer International Publishing, Cham. doi 10* (2016), pp. 978–3.
- [168] Martin Weinmann, Boris Jutzi, Stefan Hinz, and Clément Mallet. "Semantic point cloud interpretation based on optimal neighborhoods, relevant features and efficient classifiers". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 105 (2015), pp. 286 –304.
- [169] Joanne C White, Nicholas C Coops, Michael A Wulder, Mikko Vastaranta, Thomas Hilker, and Piotr Tompalski. "Remote sensing technologies for enhancing forest inventories: A review". In: *Canadian Journal of Remote Sensing* 42.5 (2016), pp. 619–641.
- [170] A Wayne Whitney. "A direct method of nonparametric measurement selection". In: *IEEE Transactions on Computers* 100.9 (1971), pp. 1100–1103.
- [171] Roland Wilson and Michael Spann. *Image segmentation and uncertainty*. John Wiley & Sons, Inc., 1988.
- [172] Zhengzhe Wu, Ville Heikkinen, Markku Hauta-Kasari, Jussi Parkkinen, and Timo Tokola. "ALS data based forest stand delineation with a coarse-to-fine segmentation approach". In: *IEEE Congress on Image and Signal Processing (CISP)*. Dalian, China, 2014, pp. 547–552.
- [173] Michael A Wulder, Christopher W Bater, Nicholas C Coops, Thomas Hilker, and Joanne C White. "The role of LiDAR in sustainable forest management". In: *The Forestry Chronicle* 84.6 (2008), pp. 807–826.
- [174] Michael A Wulder, Joanne C White, Geoffrey J Hay, and Guillermo Castilla. "Towards automated segmentation of forest inventory polygons on high spatial resolution satellite imagery". In: *The Forestry Chronicle* 84.2 (2008), pp. 221–230.

- [175] Hua-chao YANG, Shu-bi ZHANG, Ka-zhong DENG, and Pei-jun DU. "Research into a feature selection method for hyperspectral imagery using PSO and SVM". In: *Journal of China university of mining and technology* 17.4 (2007), pp. 473–478.
- [176] Shimon D Yanowitz and Alfred M Bruckstein. "A new method for image segmentation". In: *Computer Vision, Graphics, and Image Processing* 46.1 (1989), pp. 82–95.
- [177] Amin Zargar, Rehan Sadiq, Bahman Naser, and Faisal I Khan. "A review of drought indices". In: *Environmental Reviews* 19 (2011), pp. 333–349.
- [178] Liangpei Zhang, Yanfei Zhong, Bo Huang, Jianya Gong, and Pingxiang Li. "Dimensionality reduction based on clonal selection for hyperspectral imagery". In: *IEEE Transactions on Geoscience and Remote Sensing* 45.12 (2007), pp. 4172–4186.
- [179] Yu-Jin Zhang. *Advances in image and video segmentation*. IGI Global, 2006.
- [180] Li Zhuo, Jing Zheng, Xia Li, Fang Wang, Bin Ai, and Junping Qian. "A genetic algorithm based wrapper feature selection method for classification of hyperspectral images using support vector machine". In: *Proc. Geoinformat. Joint Conf. GIS Built Environ. Classif. Remote Sens. Images Int. Soc. Opt. Photonics*. 2008, 71471J–71471J.