
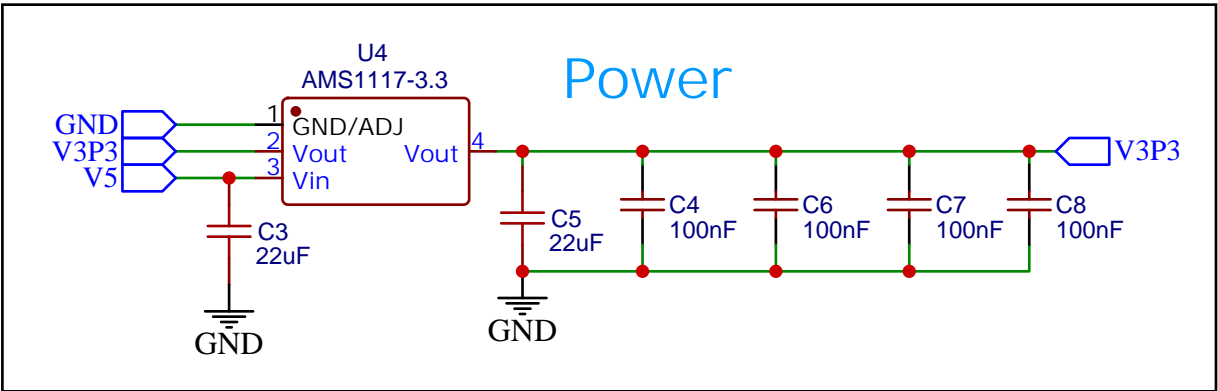
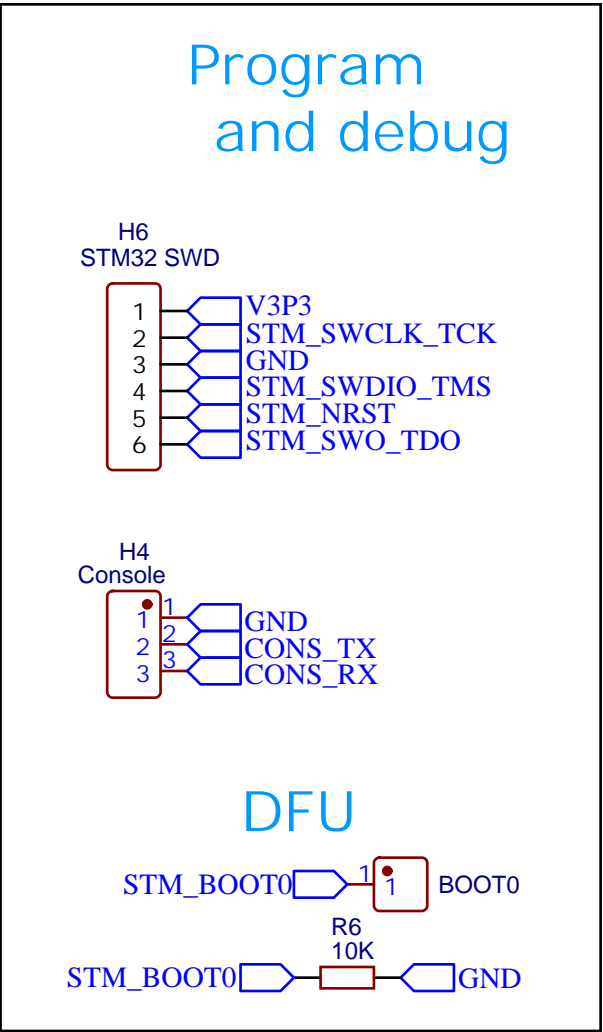
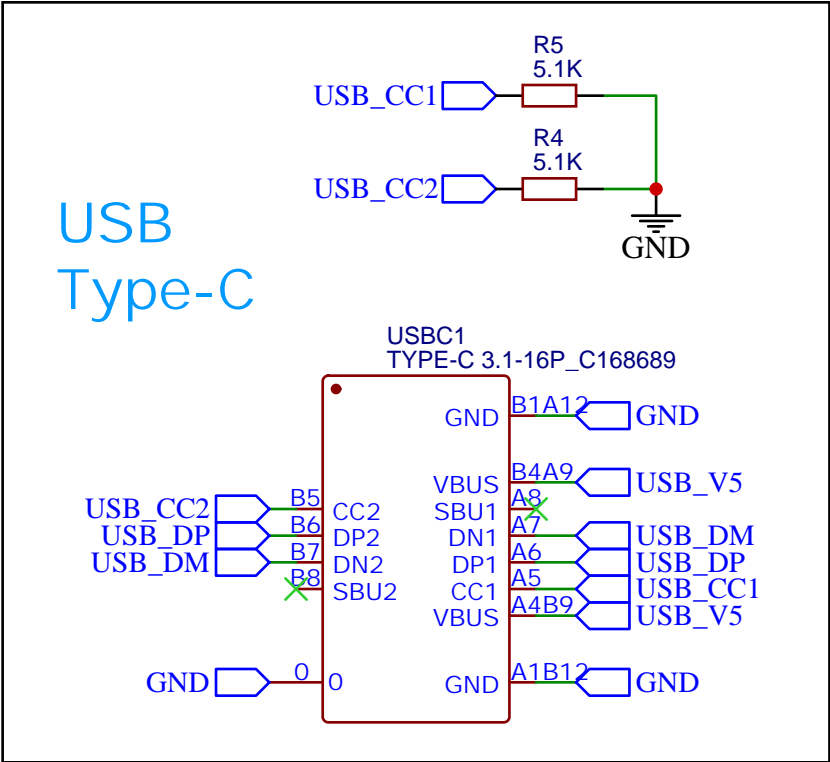


# Amiga KickSmash 32 - In-system smart flash EEPROM


Rev 7 2025-03-12

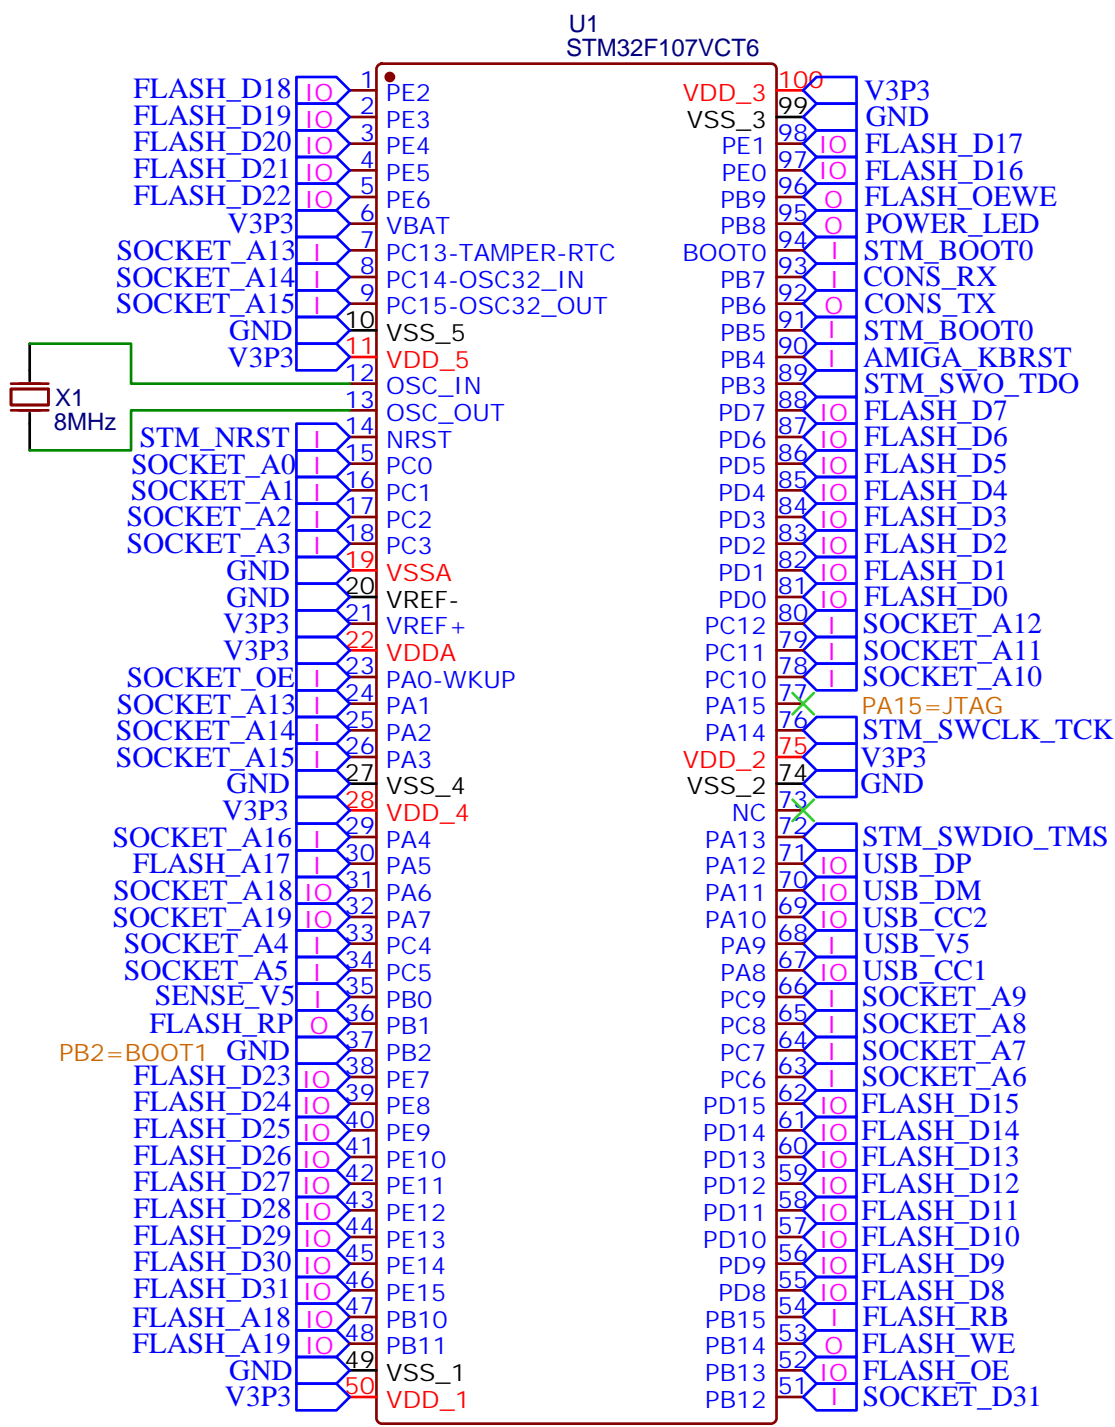


Capture Amiga reset

AMIGA\_KBRST to 1 KBRST


TITLE: STM32		REV: 7.1
EasyEDA	Company: eebugs.com	Sheet: 1/4
	Date: 2025-03-13	Drawn By: cdhooper

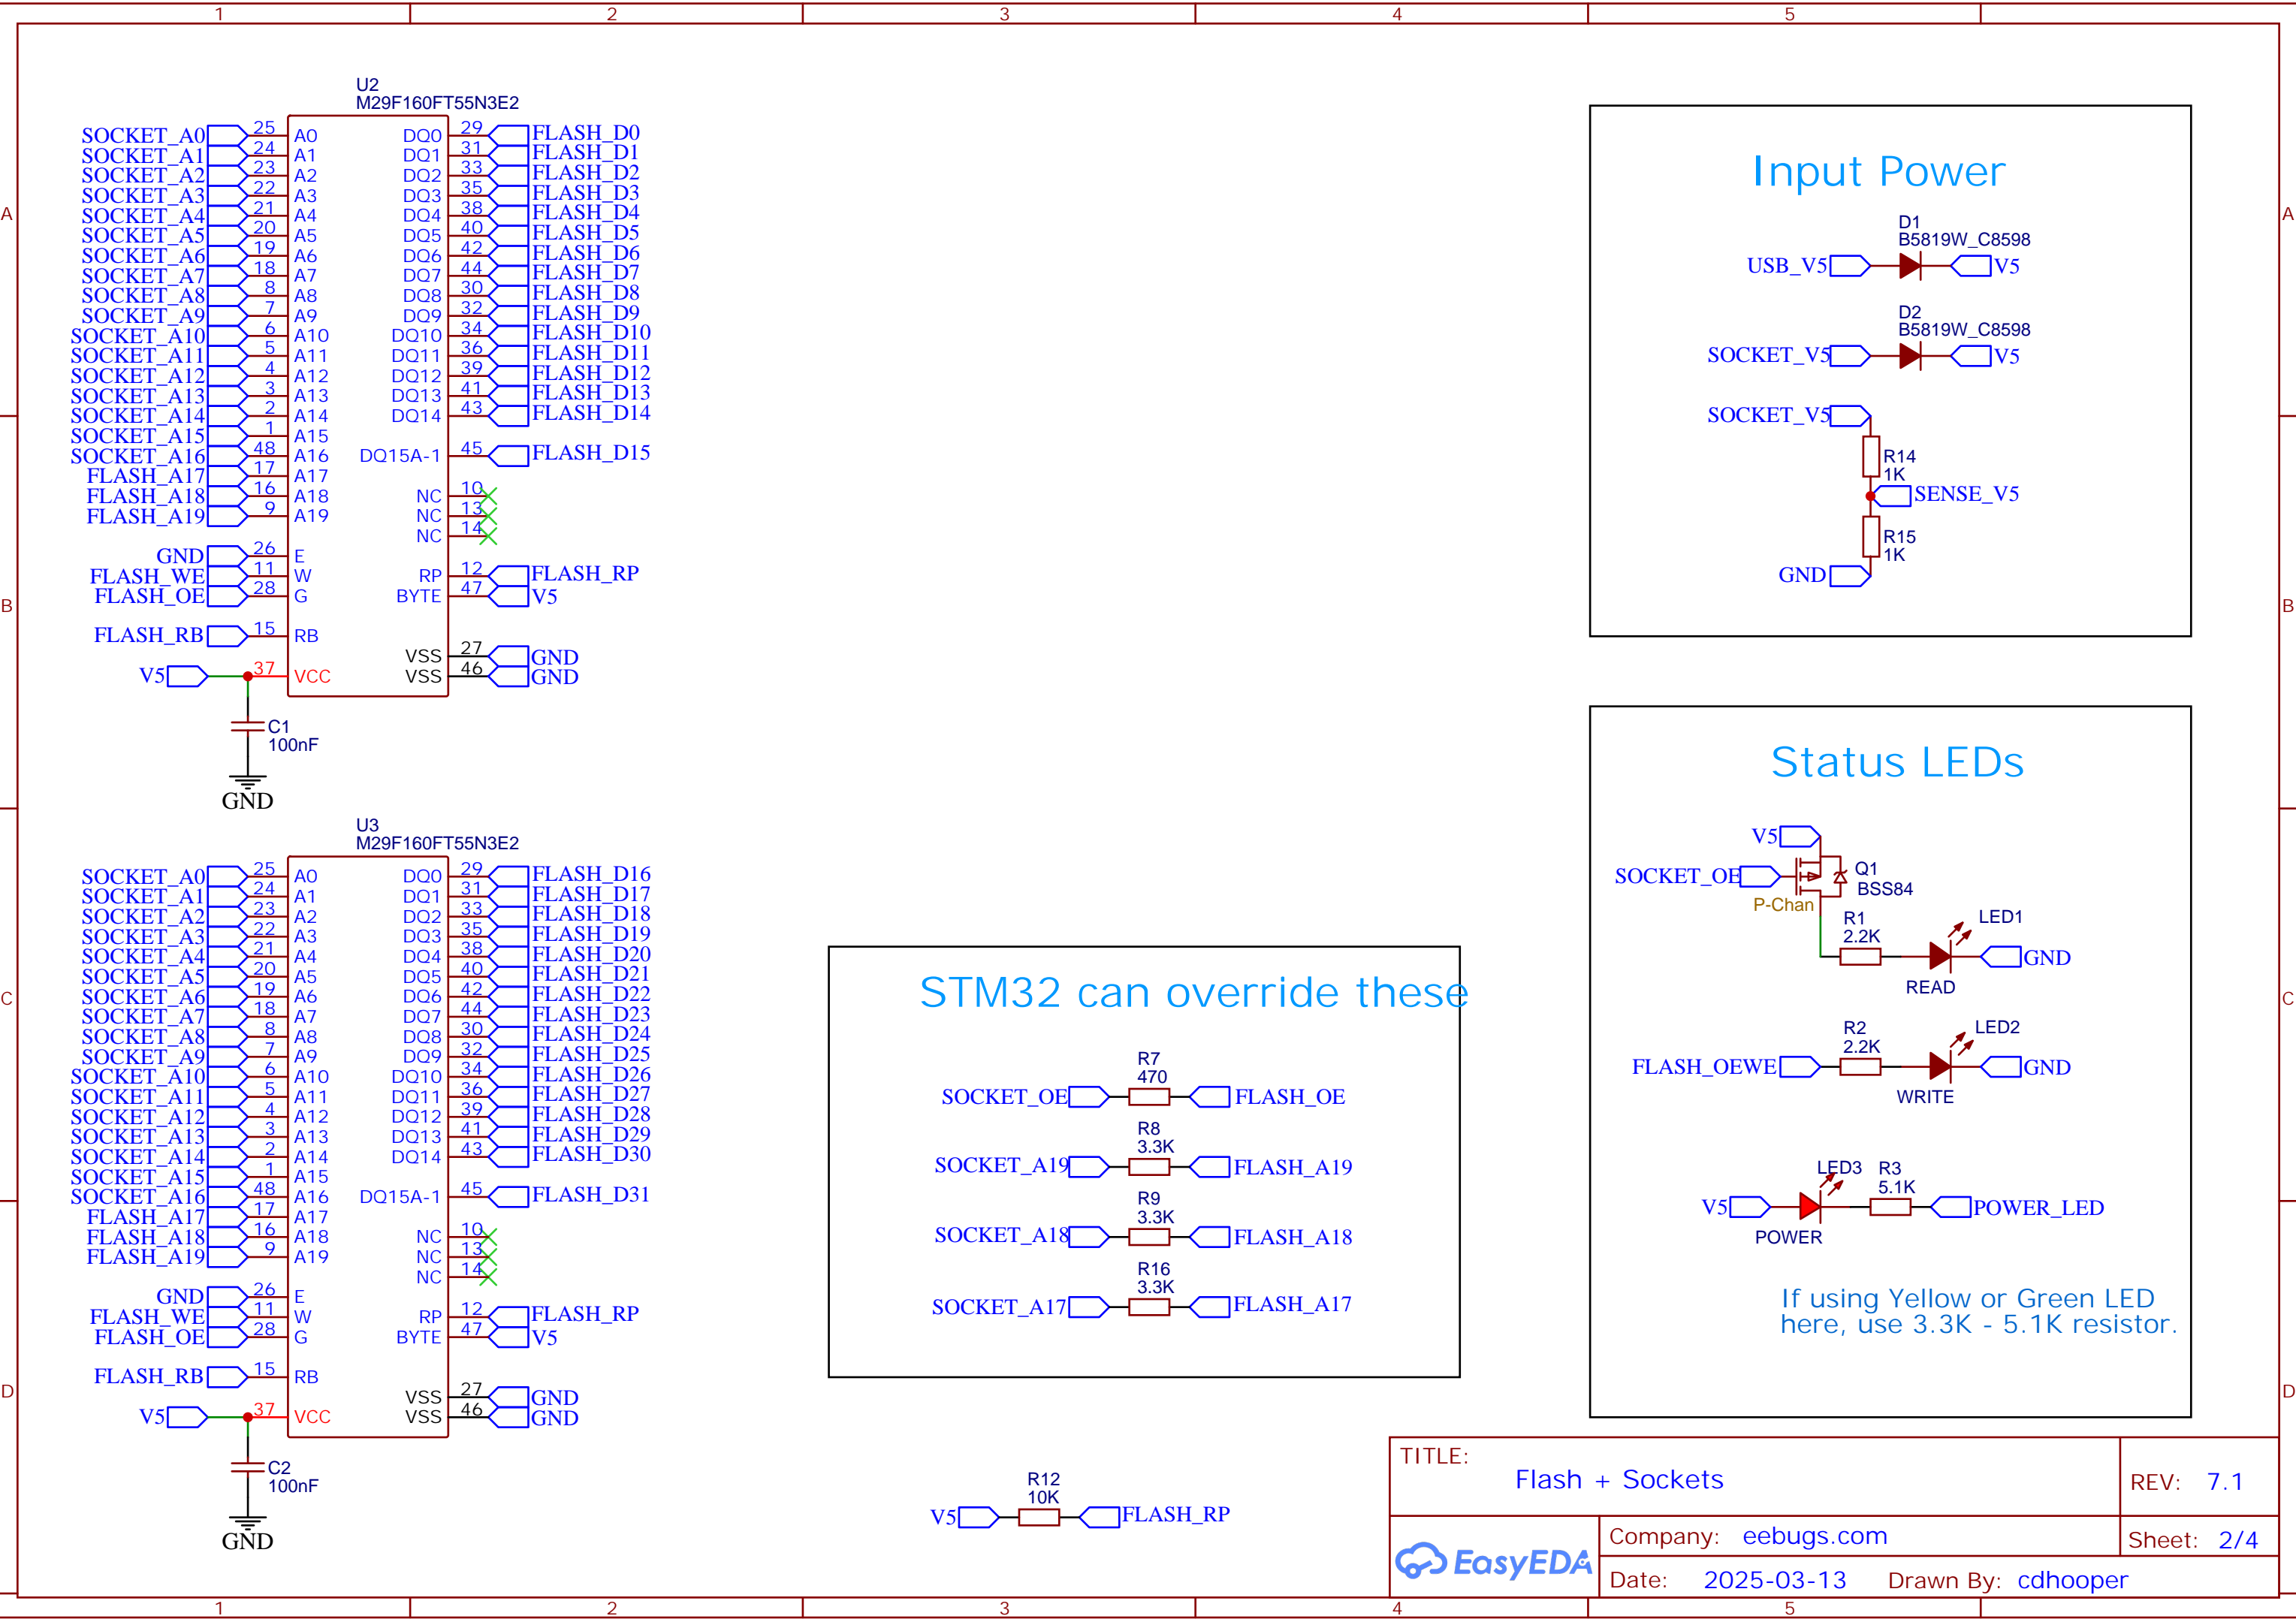

## Input Power


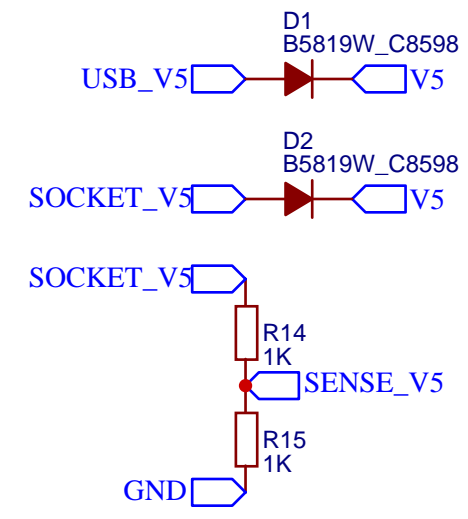


## Status LEDs


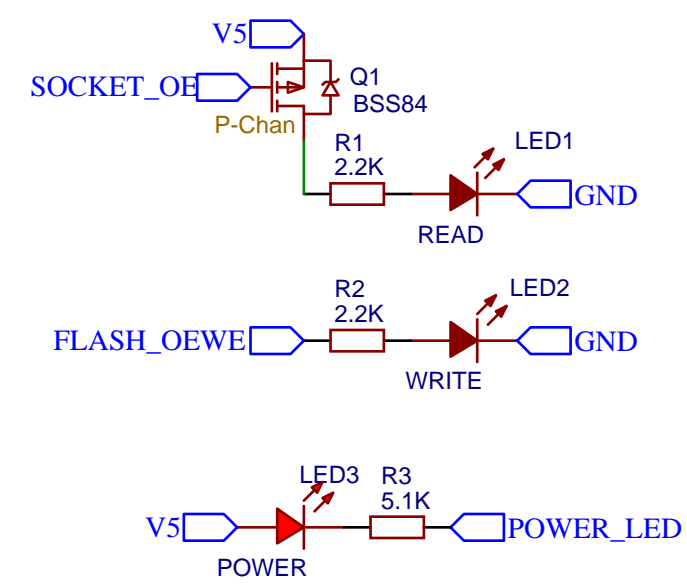


If using Yellow or Green LED here, use 3.3K - 5.1K resistor.




STM32 can override these

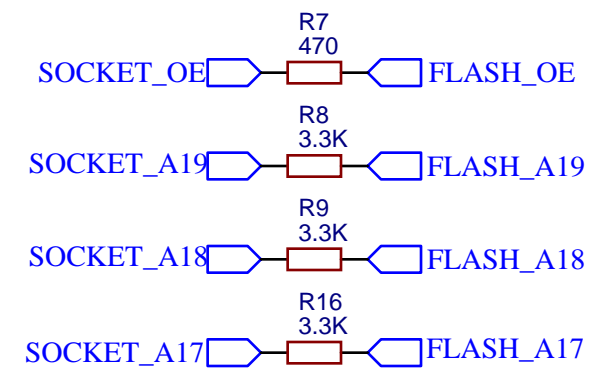

A3000/A4000

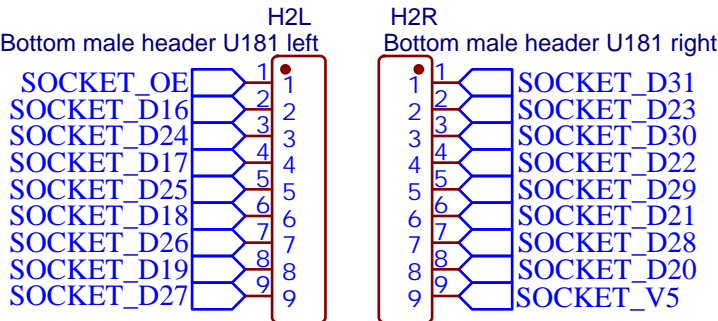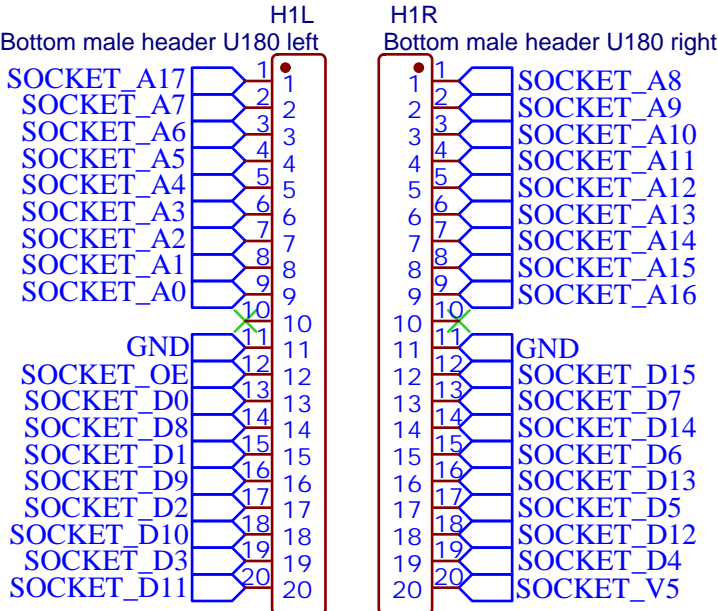

A3000 U182/U183  
ROM Tower

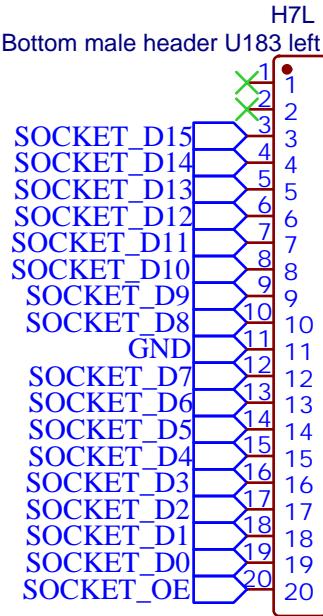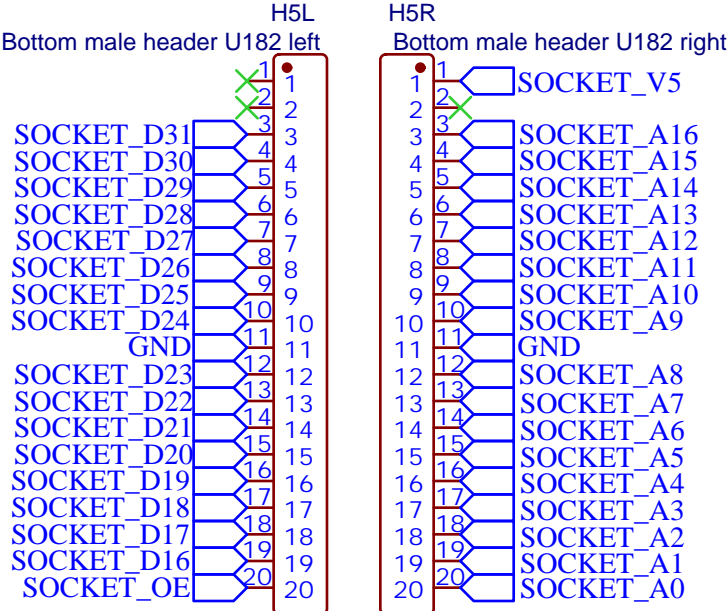

Bus drivers are used to decouple STM32 putting response and flash write data on the bus from when the Amiga CPU does a read.

