



World Racing League 2026 Rules Version: 2026.1.3



MISSION: World Racing League delivers a pro-racing experience on an amateur racing budget.

We, as racers, believe that concise rules, consistent enforcement, sportsmanship, respect, and camaraderie make for a great racing series. Each WRL event is designed to offer teams of drivers hours of cost-effective track time, going wheel-to-wheel with those who share their passion for clean competition, strategy, and fun.

World Racing League is defined by five simple ideas:

- Provide true, multi-class endurance racing with classes defined by power-to-weight ratio.
- Host Competitive races with experienced drivers and properly prepared race cars.
- Enforce a no-contact philosophy with a driver tracking system to help promote clean racing.
- Remain open to most cars built for clubs and series across North America regardless of budget.
- Keep racing fun and affordable for enthusiasts who are passionate about the sport.

CONTENTS:

A. Race Registration	2
B. Drivers and Crew	2
C. Load In and Inspections	3
D. Racing Rules and Penalties	4
APPENDIX A - Vehicle Preparation and Classing	8
APPENDIX B - Roll Cage Design and Construction Specifications	17
APPENDIX C - Flagtronics system Installation and use	19
APPENDIX X - Warnings, Disclaimers and Other Information	20



THE PRIMARY RULE

Because WRL intends to provide fair competition while preventing cost creep, rules creep, and cheating, and with the realization that no set of rules can cover all situations and possibilities, WRL authorizes our officials to enforce both the letter and intent of the rules. This means that no matter how many loopholes you think you've found, the officials always rule in the interest of fairness and safety for all. To that end, the decisions by the officials are final and are not subject to negotiation, interpretation, etc. We welcome your input, but ultimately the officials' interpretation of the rules is the only one that matters. If you have questions relating to interpretation contact race@racewrl.com for clarification before proceeding.

PLEASE READ THE ENTIRE RULEBOOK

If after reading this rulebook you find that you still have questions, please contact us at race@racewrl.com

A. RACE REGISTRATION

1. **Schedule:** Go to RaceWRL.com to see all events, entry fees, deadlines, race length(s) and other information.
2. **Entry Limits:** Entries will be limited to 25 cars per track-mile +/-10% based on track design or other factors.
3. **Registration Process:** All teams and drivers must be pre-registered online
<https://www.motorsportreg.com/orgs/world-racing-league>
 - a. All drivers must be registered w/ membership on MotorsportReg prior to arriving at the track. At track registration fee is \$25
4. **Refunds & Credits:** Fees and Deposits are non-refundable unless an event is canceled. All cancellations are subject to a \$250 cancellation fee. With the exception of Deposits, Late Fees, Membership Fees or where otherwise noted, payments are eligible for a refund (less applicable cancellation fees) if cancellation is received in writing more than 21 days prior to the event date (fee exception applies if a car is rendered inoperable at another WRL race within the 21-day window). In order to keep entry fees as reasonable as possible, Cancellations received within 21 days of the first event date for any reason are not eligible for refunds or credits of any kind. This includes cancellations/retirement resulting from mechanical damage during Qualifying, Practice, WRL partner testing, racing, etc.

B. DRIVERS AND CREW

1. **Participant eligibility:** Drivers and crew must be at least 16 years old at the time of the event and in good general health, not under the influence of alcohol, controlled substances or prescription medications that may impair judgment and/or coordination. The driver must be a WRL member in good standing. WRL memberships can be purchased via registration system on MotorsportReg (link above). Only those over the age of 16 will be permitted on the cold-side of pit road or in garages during hot-track.
2. **Personal safety gear:** All drivers and any crew involved in fueling must wear the specified protective gear.
 - a. **Helmet:** Full-face with visor (face shield). No structural damage. Rated Snell SA/SAH-2015 or 2020 for drivers. Crew may substitute open face helmet per rule D.3.c. Helmets meeting current FIA standards are permitted.
 - b. **Suit:** Fire retardant racing suit rated FIA 8856-2000 (or later), or SFI 3.2A/5, or higher. SFI 3.2A/1 suits may be worn with SFI 3.3 rated underwear top and bottom. The suit must be in good condition - no holes, oil stains, etc.
 - c. **Nomex Balaclava:** A SFI 3.3 or FIA 8856-2000 rated balaclava is required for fueling and firebottle crew personnel.
 - d. **Gloves and Shoes:** SFI 3.3/5 & FIA 8856/2000 rated gloves & shoes are required for all drivers and crew members involved in fueling.
 - e. **Socks:** SFI 3.3 or FIA 8856/2000 rated socks are required for drivers and crew members involved in fueling.
 - f. **Neck Protection:** Drivers must wear a FIA 8858 or SFI 38.1 rated Head and Neck device and must carry an in-date certification.
3. **Driver Eligibility:** Any of the following are accepted as sufficient racing credentials by World Racing League:
 - a. **GTO/GTU Licensing requirements:**
 - A full racing license issued by SCCA, NASA, BMWCCA, PCA, NARRA, Vintage or other org with approval.
 - FIA, IMSA, SRO or other professional sanctioning body license in good standing.
 - Drivers lacking one of the above may petition for GTO eligibility after 10 hours of WRL race experience in the



General Production category. Drivers must be in good standing to petition. Approval is at the sole discretion of WRL stewards. Submit petition to race@racewrl.com

b. GP1/GP2 Licensing requirements:

- Driver are automatically eligible for the GP classes if they meet the requirements of B.3.a above
- HPDE advanced status: Instructor, solo or open passing qualification
- Budget/entry-level (Chump/Champ, LeMons, etc.): 8 hours or more of seat time, with proof of races, or less seat time combined with additional HPDE or Time Trial experience.
- **Unless drivers meet the requirements of B.3.a, GP drivers must submit a racing resume covering their relevant experience to race@racewrl.com. Approval is at the sole discretion of WRL stewards.**

c. Drivers may be restricted / downgraded or prevented from participating in WRL events until adequate experience is gained at the sole discretion of WRL stewards.

4. **Minors:** Drivers under 18 must submit a racing resume, have a signed parental consent and minor waiver form on file, and a parent or legal guardian must be present at the event at all times.
5. **Probation/Suspension:** Drivers currently on probation with another series must obtain a waiver from WRL to race. Drivers currently suspended or banned from another series are not eligible for competition in WRL without approval.
6. **Credentials:** WRL reserves the right to demand proof of experience/license credentials at any time.
7. **Novice Drivers:** Drivers without the required wheel-to-wheel experience, or written series approval meeting one of the above conditions will not be allowed to race.
8. **Alcohol:** **ABSOLUTELY NO OPEN ALCOHOLIC BEVERAGES DURING HOT TRACK** - This includes spectator areas, pits, paddock, garages, etc. This extends to all family, crew, drivers, etc. Failure to follow this rule will result in immediate removal from the track facility and potential suspension / ban from WRL.

C. LOAD IN AND INSPECTIONS

1. **Load In:** Check the event info page on the WRL website or app for specifics related to arrival time, parking, etc.
2. **Vehicle Inspection:** Vehicle inspection will be on an annual basis unless item “c” below is applicable. Vehicle inspection consists of two parts
 - **DISCLOSURE FORM:** All teams must bring 2 copies of disclosure sheet and dyno printout to **each race**. One copy must be presented to tech and another copy should be kept to present in post-race impound. **ANY CHANGES TO A VEHICLES CONFIGURATION REQUIRES SUBMISSION OF AN UPDATED DISCLOSURE**
 - **SAFETY INSPECTION** will be on an annual basis and will be recorded in the car's digital logbook.
 - **PREPARATION AND CLASSING INSPECTION** will be completed prior to a car's first race with WRL or as needed thereafter (see section d. below). You must disclose all modifications that are not compliant with Appendix A Section A & B. Intentionally undeclared modifications or attempts to hide modifications will result in steward action up to and including a lifetime ban depending on severity. Qualifying sessions will be DQ until a car has current WRL classing inspection completed.
- a. A car undergoing inspection for any reason must submit a Disclosure Worksheet (available on the WRL website) to the officials. Disclosure worksheets should be emailed to race@racewrl.com
- b. Issuance/update of Logbook: Upon passing scrutiny, WRL officials will update or complete your digital logbook and assign your car to the appropriate Class (See Appendix A, Section E). An ID tag will be affixed to your roll cage, this is your digital logbook identifier, do not remove or obscure it.
- c. A car that has been modified in any way, wrecked, undergone major repair or a weight change since its last inspection must be re-inspected.
- d. Officials may suspend or disqualify your car from racing at any time until any outstanding issues are resolved.
- e. Eligibility rulings of the officials made at the event are final and cannot be appealed until after the event. Email race@racewrl.com with any questions ahead of the event to avoid issues.
3. **Check-In:** Each Team Captain and driver must report to the Check-In desk at each event for credentials.
 - a. Team Captain will verify payment, car number, and transponder number at the Check-In desk.
 - b. All team members must be listed along with their emergency contact information.
 - c. Drivers not properly registered will not receive credentials and will not race. Anyone discovered on track without proper credentials will be ejected from the premises and the team will be disqualified.
4. **Driver's Safety Gear Inspection:** All drivers new to WRL must present the gear self-check form and helmet prior to their first race and annually thereafter. New helmets will require a new ID tag.
 - a. An ID barcode will be affixed to the driver's helmet. Drivers without ID barcode will not be allowed on track.



- b. Drivers must wear the required safety gear while on track and when fueling. Gear must be in serviceable condition - no holes, tears, cracks, oil/fuel stains, etc. Non-compliant drivers will not be allowed on track.
- c. Drivers may not share helmets.
- d. **Driver ID** - Flagtronics Driver ID module and driver pucks are required for all drivers participating in WRL events. Driver ID devices are the responsibility of the drivers and must have adequate charge / battery power for the duration of the event. Driver ID device must be presented during gear check. Drivers may not share pucks.
- 5. **Drivers Meeting:** There will be a mandatory Drivers meeting on Friday evenings. See the event info page on the WRL website for an event schedule including social activities, meetings, briefings, seminars, etc. All other meetings will be listed on the event info page. ATTENDANCE AT DRIVERS MEETING IS REQUIRED. Attendance will be checked. Failure to attend any drivers meeting / orientation may result in loss of driver's credentials for the weekend. If you cannot attend contact Race@RaceWRL.com in advance.
- 6. **Orientation Meeting:** The WRL orientation meeting is required and must be completed once per-year by all drivers before going on track. This will occur immediately following each event's driver's meeting and attendance will be checked. Drivers on probation also must attend all orientation meetings during their probation period.

D. RACING RULES AND PENALTIES

- 1. **Race Formats:** World Racing League runs two-day or three-day endurance races lasting up to 24 hours. Events will include Friday qualifying. The specific race format, qualifying format, fees and schedule for each race will be outlined on each event's page accessible from the WRL website.
- 2. **Racing Conduct:**
 - a. WRL does not tolerate drivers who do not respect the safety and equipment of other drivers.
 - b. **Contact:** World Racing League is a non-contact racing series. We believe that most contact is avoidable. To avoid contact, all drivers will maintain racing room at all times. "Racing room" is defined as allowing all competitors room to maneuver their car on the racing surface—more simply put, giving your competitor a lane to race in without forcing them off track. World Racing League defines contact in three categories:
 - Unavoidable Contact: Any contact that damages a car or moves a car off its line, but where one or more drivers could not reasonably be expected to avoid the contact.
 - Incidental Contact: Minor contact incidental to close quarters racing that leaves minimal damage and/or does not move a car off its line. Includes "racing incidents" - extremely light and inconsequential "racing incidents" meeting the requirements above may not incur a penalty at WRL steward's sole discretion.
 - Avoidable Contact: Repeated contact, contact resulting from reckless or careless driving, or any contact where a driver could have taken reasonable measures to prevent or avoid contact.
 - Drivers involved in contact MUST report to race control before getting back into the car. Drivers should not leave the facility grounds until a final determination has been made on the contact and the driver has consulted with WRL officials. Failure to report may result in an indefinite suspension from WRL.
 - c. **Passing:** Safe passing requires that everyone adhere to the following rules. For the purpose of defining at-fault contact while passing, the passing rules are weighted in the following order:
 - Drivers attempting a pass are responsible for planning and executing a safe pass. Unless given a point-by, faster cars shall pass off-line. Overtaking cars must ensure they present the pass by driving "in the mirrors" of the car being overtaken and meeting position requirements of D.2.d.
 - Drivers being passed shall stay on the racing line so that drivers closing from behind can predict where all cars will be as they overtake. Drivers being overtaken must exhibit a reasonable level of awareness, must leave racing room and adhere to the position requirements of D.2.d..
 - d. **Position:** For the purpose of determining position, a car attempting a pass is considered to have established position once the front axle has pulled even with the centerline of the driver door of the car being overtaken. Position must be established in or before the brake zone and prior to the turn-in point of the car being overtaken. The overtaking car must present the pass in a manner such that an aware driver can see you (IE: do not present at the extreme opposite side of the racetrack). Reasonable awareness of the car being overtaken is required.
 - e. **Safe Pass:** A safe pass is defined as a pass where no contact takes place and no car involved in the pass spins or leaves the racing surface because all parties maintained racing room at all times. If a car has position and you deprive it of racing room by causing contact or "squeezing" it off the track, you have violated safe passing etiquette and will be penalized for contact.
 - f. **Unsafe maneuvers:** "Dive-bombing" into corners, chopping, and blocking are unsafe maneuvers and may result in a penalty.



- g. **Loss of control:** Drivers are always expected to maintain control of their vehicle at all times. Multiple spins or 4-wheels-off may result in required driver change at the sole discretion of WRL officials.
 - h. Reckless/dangerous behavior on course may require a driver change at WRL officials discretion.
 - i. **Emergency Vehicle (EV)** etiquette will vary by track and be outlined in Supplemental Rules and/or Driver's meetings, but in all circumstances, racers must be single file & reduce pace when passing EVs.
 - j. **Driving Stints:** 3 hours maximum. Race officials will observe drivers for signs of fatigue, deterioration of judgment, etc. and will act accordingly. Minimum 1 hour break between stints.
 - k. **Professional Drivers:** Professional drivers are welcome and encouraged to participate in WRL. We believe that the presence of these professionals increases the quality of WRL competition and the learning environment we promote. HOWEVER - we feel it is against the amateur-forward spirit of WRL for professional driver(s) to drive more than 50% of any WRL race regardless of which class they're participating in. WRL will be actively monitoring this situation throughout 2025 and rules may be implemented mid-year if we feel it is necessary to maintain the competition and environment WRL wishes to promote. WRL is optimistic that teams will support WRL in maintaining the amateur-driven spirit of WRL so that we can avoid rules or definitions that are inherently subjective.
 - l. **Timing/scoring:** Only AMB/Mylaps equipment will be used for timing and scoring WRL events. You are responsible for the proper installation and operation of your car's MyLaps transponder. WRL does not accept team-submitted timing / lap evidence in lieu of transponder under any circumstance (data, etc). WRL reserves the right to verify timing against GPS timing data from Flagtronics ONLY.
 - m. Race or track-specific rules can be found in the event supplemental rules on the website or wrl app.
 - n. **Track Damage:** All "track damage" from any incident, including barrier damage, oil-downs or fuel spills will be billed to the team captain of the car(s) deemed responsible for causing the incident. Determination of fault will be at the sole discretion of WRL staff and officials. WRL will not "mark up" track damage, but will apply a \$100 administrative fee to all track damage invoices. All open track damage invoices must be paid within 15 days of receipt or will be subject to a 25% late fee unless arrangements have been made with WRL staff.
3. **Fueling/pit lane:** Fueling will take place on Pit Road only during hot track. Driver change is allowed during fueling, or the driver may remain in the car. All spills shall be cleaned up immediately.
- a. No one may cross the Pit Wall onto hot pits until their car comes to a complete stop in the pit box.
 - b. No more than five team members, including the driver, may be over the wall at any time during a pit stop
 - c. **Cars in pit lane for service must not impede any other car from completing their own service by way of occupying or blocking another car's stall. Cars must park within the confines of their assigned pit box for service.**
 - d. During fueling, all persons on the "hot" side of the pits wall must wear approved fire-retardant suits, gloves, shoes, and helmets with face shields down. Pit-crew type or open face helmets are allowed with FIA or SFI 3.3 rated full face balaclava and goggles for crew members not involved in fueling. Fuelers and fire bottle operators must wear Snell SA/SAH-2015 or 2020 helmets and FIA/SFI rated balaclava. No air gaps or skin/hair visible around goggles.
 - e. During fueling any crew member who is handing fuel **jugs** across the pit wall or otherwise handling fuel near the pit wall must wear approved fire-retardant suits, gloves, FIA rated balaclava, shoes and helmets with face shields down. Crew members not involved in fueling should stand clear of the fueling process and pit wall.
 - f. Fueling shall not begin until the engine is off and fire bottle attendant is in place.
 - g. "Fueling" begins when the first fuel jug crosses the plane of the pit wall. Fueling is finished when the last fuel jug crosses back over the plane of the pit wall. Fueling rules are in effect during this time. Fire bottle operator must be in-place before fueling begins and must remain in place until fueling is complete. Vent / overflow jugs are excluded but must be clearly marked with bright tape and "vent only" and may serve no other purpose.
 - h. A team cannot have more than one fuel jug over the wall at a time. No staging of jugs or tools in hot pit or wall **when fueling or waiting for car to arrive in pit box.**
 - i. No Spill Rule: Fuel spills are not permitted on the pavement. A catch pan, drip pan or absorbent mat must be used where fuel may spill onto the ground. Pans or mats must cover a minimum of 3 sq. ft. in area and/or have a minimum capacity of 3 gallons. **All pans must contain an absorbent material covering the bottom of the pan.** Spills will be cleaned up immediately. Liquids will be disposed of properly. Teams may be penalized and/or fined for excessive fuel and oil spills on the asphalt.
 - j. The Fireman's sole function is to man a fully charged and inspected 10lb fire bottle while fueling is in process, approx. 10' from the fuel port on the hot side of the pit wall facing oncoming traffic *if possible*. Fireman must stay in place until the last fuel jug has crossed back over the pit wall.



- k. With the exceptions of servicing cool shirt boxes, radios, driver drink bottles, cameras or cleaning windshield no work may be performed on the car during fueling. Due to static discharge, windshield tear-offs shall not be removed until fueling is completed and fuel port is closed.
 - l. Only commercially available fuel jugs designed for storing and transferring gasoline by hand may be used to fuel the car. Fuel Jugs may not exceed a maximum total length at the longest point of 42.00" measured in a straight plane (measurement includes vents, fill spouts, dry breaks, etc). Dry-break fittings are permitted. The widest inside diameter of any coupling, pipe, hose, tube or elbow in a dry break system may not exceed 2.25". Jugs will be clearly marked at the 6 US gallon level and will not be filled beyond that point. The narrowest point (restrictor) of the hose, nozzle or funnel spout must be no larger than 1.000" inside diameter and made of a solid material. Fuel jugs determined to be noncompliant via go/no-go gauge will result in a 1 lap penalty per fueling stop from the beginning of the race until the jugs are in compliance. Fuel shall not be at or past the point of restriction while being transferred between the cold and hot side of the pit wall. Jug vents may be modified but must not spill fuel. Fuel jugs must be leak free at all times.
 - m. A quick disconnect (QD) or dry break (DB) may be used to collect fuel vapors/overflow. This shall be its only purpose and the fitting must be rated for fuel. Vent QD/DB must terminate into a container rated for fuel and must not leak. For any cars utilizing a QD/DB for overflow no larger than 1.000" restriction must be in place between QD/DB and container. 1" restrictors must also be in place on the vent side of a double-drybreak system where the vent recycles back into the dump can. Vent jugs must be clearly marked per D.3.a
 - n. **Front & Rear Fill Systems:** Any cars utilizing a front hood or rear trunk refueling system must follow all requirements of D.3.l and D.3.m but may utilize a 1.400" inside diameter restrictor made of a solid material. To be eligible the fill port must be within 4.00" of the centerline of the vehicle as viewed from the front / back.
 - o. **NO PRESSURIZED SYSTEMS.** Any fuel delivery system found by officials to be unsafe will not be allowed.
 - p. Cars leaving their pit boxes with improperly attired or strapped-in drivers will be penalized, 1 lap minimum.
 - q. **Pit lane penalties:** Teams will receive ONE warning for pit lane violations, including pit lane speeding. Second violation will result in an OPTIONAL drive through penalty or 1 lap penalty. Teams wishing to dispute the infraction with evidence must opt for the 1 lap penalty and submit video per D.7. Pit lane drive through penalties must be served within 2 green flag laps of issuance and may not be served under full course caution or code-35. If the drive through penalty is not served within 2 green-flag laps a 1 lap penalty will be assigned. Third and subsequent violations will incur a one lap penalty. Teams are encouraged to film pit stops to dispute violations.
 - r. Excessive speeding or speeding on pit lane to gain an advantage may result in an immediate one lap penalty regardless of warning status at WRL official's discretion.
4. **Tire Changes:** Tire Changes in the hot pit are restricted as follows. The Chief Steward may waive these restrictions if weather conditions change during the race (i.e. rain):
- a. Only one tire tool or one impact wrench allowed in the hot pit (excluding torque wrench(es)).
 - b. Only manually operated floor jacks may be used.
 - c. Only two wheels may be lifted off the pavement at a time - except GT cars, see below.
 - d. A total of 5 tires may be in the hot pit at any given time, including tires mounted on the car.
 - GT class cars with centerlock wheels may only have a total of 4 tires in the hot pit at any given time, including tires mounted on the car.
 - e. Air jacks (pneumatic jacks)
 - GT class cars are permitted to use installed air jacks during tire changes or service.
 - GT class cars opting not to utilize air jacks may use TWO tire tools / impact wrenches.
 - GP class cars may have air jacks installed, but may not use them during the race.
 - f. Overhead booms / towers or other methods of supporting pneumatic hoses or tire changing tools / equipment overhead are not permitted.
5. **Compliance & Data Collection:** Regardless of podium status, and at any time during the event, Teams may be required to verify compliance with the rules including but not limited to: making parts available for inspection, making aim/motec/etc. data available for download, black box, dyno, verification of fuel jug restriction, etc. Failure to comply with scrutineering may result in disqualification. Teams will be notified and must be prepared to pump out vehicle fuel systems post race (Equipment needed to pump out, fuel to fill completely, etc).
- a. **GTO / GTU Data Compliance:** ALL GTO/GTU cars are required to log the parameters identified below. Logs must be available to WRL data stewards immediately following any official practice / qualifying / race session and must capture the entire session. Failure to provide this data as described may result in DQ if other compliance systems (such as Flagtronics acceleration/speed data) indicate rules violations. Any manipulation



of this data via math channels, CAN injection, or any other method may result in penalties from DQ to indefinite series ban, categorized as intentional cheating.

- Required logging parameters: Pedal position, throttle position, RPM, Gear position, GPS Speed, Manifold pressure (MAP), Lambda (bank 1 & 2 if available), Brake pressure (front & rear if available), Ignition advance, G-force (lat, long, vert), Ambient Air Temp, Ambient Air Pressure, Water Temperature, steering angle, ANY/ALL adjustable variables/outputs that affect engine performance in any way, including but not limited to: SPD, SPD out, LT, Baro, power stick, etc.

b. GP Data Compliance: GP data compliance requirements will be updated during the 2026 season once we have canvassed the class and identified the data acquisition capabilities of all cars in this category. Our goal will be to build data capture requirements to the class with minimal required expense and maximum compliance impact.

6. **Radios:** In car radio communication to the pits/team is required. Teams should also scan (only) official WRL team frequencies for information, penalties, etc:

Primary: 461.2 DPL 432 | **Secondary:** 464.6 DPL 631

7. **Cameras:** Forward facing, functional cameras are REQUIRED. A rear facing camera is also highly encouraged. Video should show driver hands if possible. Live/streaming video systems are acceptable so long as it also includes LOCAL storage to a SD card or USB stick. Rear facing cameras are highly recommended but not required. Video may be requested by officials at any time for the purpose of reviewing incidents to determine fault. Video is required to dispute lap/contact penalties with officials. Video must be presented to an official within 2 hours of the incident no later than 1 hour before race finish. If an incident occurs within the last hour videos must be presented in impound within 15-minutes of race finish. Teams involved in an incident that fail to provide video may be found at fault if available evidence is inconclusive / incomplete. Teams must have a 2nd SD card to install should video be requested. If a team brings video to race control to dispute a call, video must be queued to the correct time and the team must be able to prove video is correlated to the incident. See supplemental rules for additional information regarding submission.

8. Penalty Schedule

VIOLATION	BASIC PENALTY	MAXIMUM	NOTES
Contact, Incidental	None	1 lap	Repeated incidental treated as Avoidable. See D.2.b
Contact, Avoidable*	2 laps	Ejection	Possible probation or ejection - See D.2.b
Contact, Unavoidable	None	Driver change	"racing incident" - Multiple or patterns may lead to escalation.
Cutting Course	Warning	Driver Change	Exceeding limits for advantage. See event supplemental rules.
Pit/Paddock Speeding	Warning	Ejection	See D.3.q/r
Fueling/Pit road violation	Warning	1 lap	See D.3.q
Unsafe/Reckless Driving	Driver change	Ejection	Driver change will be required
Passing Under Yellow	1 lap	- - -	Per car passed
Missed Black Flag**	1 lap	- - -	Per lap missed, after 1st missed lap
General Rules violation	- - -	- - -	Official's discretion
Lap penalties will be assessed in the Timing system by deducting the penalty lap(s) from the team's count * Includes intentional contact which may result in immediate ejection from the series. ** Sending a team member to a WRL official to ask why the car is being black flagged may incur a lap penalty in addition to the "laps completed after being black flagged" penalty.			



9. Driver Probation and Suspension

- a. A driver may be placed on probation for car-to-car contact if the corner workers, safety crew and/or officials determine they are at fault and if the contact results in one or more vehicles being towed, causes damage to any vehicle that requires repairs to continue or to retire from the race at steward's discretion.
- b. Drivers involved in contact that disables their vehicle must report to the Chief Steward immediately upon returning to the pits or paddock unless under the care of medical staff.
- c. A driver may be placed on probation or suspended at WRL discretion if he/she has a history of contact or exhibits a pattern of reckless driving.
- d. Probation period: One year from the date of the incident unless otherwise mandated by WRL.
- e. Probation terms: Driver may continue to race while on probation but must meet the following.
 - The driver on probation will not cause car-to-car contact during the probation period.
 - The driver on probation may not start the race unless given a waiver by WRL officials
 - In the event that a probation driver sets a fast qualifying lap, the next-fastest driver's time will be recognized and that driver shall start the race
 - The driver on probation will meet any other condition(s) provided in writing by WRL.
 - The driver on probation must request reinstatement by WRL at the end of the probation period.
- f. Failure to meet the probation terms will result in a suspension from racing with WRL for a period of at least 3-months and up to lifetime ban based on Official's discretion. If suspended by failing to meet probation Terms, probation re-starts at the end of the suspension period. A second violation of a continuous probation Term will result in a minimum one-year suspension and up to a lifetime ban based on official discretion.
- g. **Suspension/Ban:** In addition to a violation of the probation terms, a driver may be suspended or banned from racing with WRL for gross violation of the WRL rules (i.e. cheating), egregious or repetitive contact, intentional contact / intent to harm or for physically or verbally abusive behavior toward any official, safety worker, driver, guest or track employee at WRL official sole discretion.
- h. **Official discretion:** the stewards will assess the violation objectively, applying their experience and insight, using the information at hand, and levy a fair penalty that is commensurate with the severity of the violation.

10. Finish:

- a. The checkered flag will be shown to the overall leader once time expires. Lap counts end as cars cross the timing loop after that point in time.
- b. To score an official finish, a car must have completed at least 50% of the class leader's lap count.
- c. Podium is per class, finishing order will be determined by total laps completed in the allotted time.
- d. Impound: Podium cars will be impounded after each race at the discretion of the Race Steward. Cars will be inspected by World Racing League officials and competitors for a period determined by the race officials.
 - Podium cars must report directly to impound upon exiting the track. Failure to report may result in DQ.
 - "Parc-ferme" rules apply during impound. Teams are not to open doors, trunk, hood or otherwise touch the vehicle for any reason while in impound without the permission and supervision of a WRL official.
 - Impounded cars may be weighed without a driver and weight verified against their log book. The car must weigh the minimum for the class it is entered in based on POWER (See Appendix A Section C) and modifications.
 - Impounded cars may have fuel capacity checked by pump-out. It is the responsibility of each team to provide a means for completely emptying the fuel system into a fuel container. Cars that cannot pump from within 36" of the fuel rail will be inspected to ensure there is no additional capacity. It is strongly recommended that teams add a quick-disconnect (Jiffy-Tite or similar, must be rated for fuel) under hood to speed fuel pump-outs.
 - Fuel density will be determined by weighing 1 gallon of a team's fuel in a certified 1-gallon container - the weight of this gallon of fuel will determine the density.
 - Fuel capacity will be determined by filling the car entirely under WRL supervision and pumping the system dry into jugs which will be weighed. The total weight of the fuel will be divided by the determined fuel density figure. The density of the fuel used to fill the car may also be checked.
 - Impounded cars may have POWER verified by dyno. Cars will be operated by a WRL appointed official without exception and run to fuel-cut/redline per APP A.D.1. WRL is not responsible for damage to vehicles while on the dyno. Failure to comply with the dyno verification process may result in disqualification. Teams must be able to direct dyno operators on how to connect a tach lead during impound. If work is required to access tach lead (removal of engine cover, etc) teams must bring tools required to perform that work to post-race impound and must be observed by an official during any mechanical or computer related process required to prepare a car for the dyno.



- All podium finishing cars must provide a printed copy of the disclosure worksheet for review by the officials and other competitors while in impound. Failure to do so may result in disqualification.
- A competitor may protest a podium car if he/she finds any undisclosed modification or major rule violation. All protests will be made by filling out a protest form and submitting it to the Chief Steward along with a protest fee which will be refunded to the protesting party if the protest is upheld
- protesters may remain anonymous. Only impound cars (P1-P4) are eligible for protest. GTO protest fee: \$200. GTU protest fee: \$150. GP1-2 protest fee: \$100.

11. Awards:

- a. The top finishers in each class will receive a World Racing League team trophy. Individual trophies may be ordered after the event.
 - Podium teams may receive other awards based on sponsorships, contingencies or event type/duration.
 - Additional awards will be given as warranted. Recipients must be present to win.
- b. Season Points: WRL will use a points system for determining various season or regional championships see "Season Points" under the Event tab on the WRL website for points programs, rules, and standings.

APPENDIX A - VEHICLE PREPARATION AND CLASSING

A. CAR PREPARATION

1. **Car Eligibility:** Most mass-produced passenger cars that are eligible for registration and use on public streets are eligible to compete in WRL General Production classes. Many purpose built race cars that meet the requirements of this appendix are eligible to race in Grand Touring Open. Vehicles with street counterparts lacking legal vin numbers may be petitioned for competition in the General Production classes. (ex: F87 M2CSR Competition Mustang FR500c, TCA, etc) but they must take all applicable PWR Modifiers beyond the BASE model of that street chassis. Inclusion of these vehicles is at the sole discretion of WRL. Email Race@Racewrl.com to petition for inclusion.
2. **Logbook:** World Racing League stores your logbook information digitally.
3. **Safety Requirements:** The following are the minimum safety requirements. All safety equipment must be properly installed and in good condition. Anything deemed unsafe by officials may prevent you from racing.
 - a. **ROLL CAGE:** A full roll cage is required, equivalent to those generally required by SCCA, NASA, LeMons, and others. Limited exceptions may apply. See Appx. B for WRL roll cage specifications.
 - b. **FIRE SUPPRESSION:** Fire Suppression Systems must be FIA technical list # 16 or 52, Or SFI 17.1
 - The fire suppression system must be within current service dates. Both FIA & SFI require them to be serviced by an authorized service center every 2 years to make sure they are in good working order and or to the standard as to which they were tested. Also note: FIA systems have a 10 year cylinder life and SFI have a 6 year cylinder life.
 - There must be an activation point within easy reach of the driver when seated and belts are tight. It is highly recommended that there be a location that can be activated outside the car by safety personnel. These locations should be marked with a "E" (round) label as close to the activation as possible. Also highly recommended to have the outside location as close or next to the master switch / battery /power kill switch (marked with a triangle lighting bolt label)
 - The fire suppression system should be mounted to withstand the G-loads of a heavy impact and not break free. It is highly recommended to keep all components of the fire suppression system within the main crash structure of the vehicle to keep them from being removed or damaged in an impact.
 - Install the system per the manufacturer's instructions and do not add or subtract anything without contacting the manufacturer or their representative.
 - Recommend to check that the activation(s) will function as intended. Pull or push cable moves freely. Electrical systems: the power pack should have a battery check and circuit check function.
 - Before going on track remove all safety pin(s), open valves or switch electrical system power packs to the ON / Active position.
 - For larger cockpit cars it is recommended with FIA technical list # 16 systems to go with a 3kg (6.6lbs) or 3L (roughly 6lbs) or larger. As per FIA rally and some GT class rules that do not require FIA Technical list # 52 systems (for certain fire fighting agents FIA has cockpit volume specifications /amount of agent allowed to be used for tech list # 52) . For SFI 17.1 systems a 10lb system.



- c. **MASTER SWITCH:** Switch location is open if it can be easily located and deactivated by the driver, crew member, or safety worker. The switch must isolate the battery from all circuits and must interrupt the ignition circuit. Positive terminals of the battery and switch must be insulated. A "Master Switch" decal with the universal "lightning bolt" and the word "OFF" must be displayed on the exterior as near the switch as possible.
- d. **BATTERY:** The battery shall be properly secured with a clamp or hold down. Ratchet straps and camlock straps are not permitted. The positive terminal must be insulated. If mounted in the cockpit, batteries other than AGM or LiFePO4 must be enclosed in a battery box (Marine style or similar).
- e. **HARNESS:** 5, 6, or 7-point racing harnesses with current FIA or SFI rating are required to be installed and used per manufacturer specifications. Webbing must not be stretched, cut, frayed, or deteriorated from weather. Sub belts and lap belts must be attached to structural members or bolted through the floor with 3" Dia. (minimum) backing washers or plates. Shoulder straps shall be properly secured to the harness bar.
- f. **WINDOW NET:** Window nets must meet SFI 27.1 (**intrusion**) specification for ALL CARS not running lexan windows per Appx. A - 4.b. Window nets must completely cover the window opening such that the driver's hands or arms cannot extend outside of the window opening when belted. Window nets should be installed to manufacturer specification and be updated at two-year intervals from the date of manufacture. Triangular containment nets not meeting SFI 27.1 specifications will not be permitted for use as "window nets" but may be used with lexan windows meeting requirements of Appx. A - 4.b or in addition to a SFI 27.1 window net. Penetration of webbing, except as performed by the manufacturer, is prohibited. GTU cars running a window opening of 8"x14" or smaller per Appx A - A.4.b may run a triangular containment net only.
- g. **SEAT:** One-piece seat with a rigid shell, designed specifically for auto racing is required. The seat must be securely mounted at a minimum of four points at the base. If bolting through the floor, 3" Dia. (min) washers or backing plates are required. Seats that don't have a current FIA rating must have a seat back brace installed if the seat back will be more than 3" from the harness bar for any driver. Back brace can be adjustable and must not present a risk to the driver by its design or installation.
- h. **OEM SAFETY:** Ignition and steering locks shall be disabled. Airbags shall be removed.
- i. **MIRRORS:** One functional side view mirror on each side of the car and one interior rearview are required.
- 4. **GENERAL REQUIREMENTS:** Cars may be "freshened" with OEM/equivalent drivetrain internals, bushings, bearings, etc. so that they are generally safe and reliable as when new. You are encouraged to make your car look presentable (50/50 rule).
 - a. **CHASSIS:** Shall be structurally sound. All body panels must be in place including bumpers resembling the factory shape. Aftermarket panels and body kits are acceptable. Panels made of alternate materials must resemble the OE panel. Bumper cuts are acceptable but may not extend above the lowest point of the factory crashbar.
 - b. **GLASS:** Except for mirrors, and headlights, any glass used must be the OEM (lamine or tempered). Front and rear glass must be in place OR MAY BE REPLACED with polycarbonate/lexan. Front windows will be removed or fully down during the race. Windshields should be free of large cracks or damage that could compromise its integrity. Windshields that sustain minor damage may be allowed at the discretion of WRL. Cars that sustain windshield damage that compromises its ability to protect the driver may not be allowed to continue.
 - **Front Quarter Window Coverings:** lexan or other rigid transparent materials may be used to cover the space between the front of the window opening and the window net for the purpose of driver containment. Measured from the frontmost part of the factory window opening, this lexan window covering must not extend more than 12" rearward in any plane as measured along the window sill. Any kickout / gurney will be included in the measurement (as measured from the lexan outward).
 - **GTO/GTU:** Polycarbonate/lexan driver/passenger door windows may be run in factory-built GTO/GTU racecars expressly designed to be raced with door windows in place under the following conditions: (1) with conventional air conditioning system as installed and homologated by a recognized professional sanctioning body; OR (2) with freon-based or thermoelectric driver cooling system (IE: Chillout, Rini, Koolbox, contact WRL for approval of other devices) - must be installed and functional (Ice based systems are not acceptable). Cars with factory AC are encouraged to also utilize a persistent cooling system if windows are in place. Cars that wish to run door windows and meet the conditions above will take a .1 PWR modifier per installed window. Teams wishing to avoid modifier may remove lexan from windows or replace with street-car doors with window glass removed. No other material may be used to cover window areas.



- **GTU:** Same as GTO - for cars without removable lexan/poly side windows and NO factory installed air conditioning/driver cooling as described above, windows must be removed OR a minimum opening of 8"x14" must be cut into the windows.
- c. **EXHAUST:** Shall be secure, leak-free and exit behind the main hoop of the roll cage. Noise restrictions listed in any event's information must be met.
- d. **TOW HOOKS:** Must be installed securely on the front and rear of all vehicles and easily visible. Hidden or folding or otherwise obscured tow hooks must be marked with a "TOW" sticker. IF YOU DO NOT HAVE A TOW POINT AND YOUR CAR BECOMES DISABLED. CREWS WILL USE ANY MEANS NECESSARY TO MOVE YOUR DISABLED VEHICLE WHICH MAY CAUSE DAMAGE TO BODY, SUSPENSION, ETC.
- e. **FUEL TANKS AND LINES:** Fuel cells are allowed if properly installed and maintained. Fuel, brake, or oil lines passing through the passenger compartment must be rigid metal tubing or steel-braid armored with properly installed AN fittings, free of damage, kinks or leaks. Fuel cells must be designed for automotive use, consist of a deformable bladder or rotary-molded plastic vessel with a metallic enclosure and be manufactured by recognized manufacturers approved by WRL. All removable fuel and vent caps shall lock securely when closed. Spring loaded "Monza-style" are not allowed. Cell must be properly protected, plumbed and vented. WRL officials will make the final determination on what is a proper and safe installation. Onboard fuel storage is recommended to be limited to 1 factory fuel tank plus **one auxiliary / surge tank, an auxiliary tank may be used with WRL approval (photos/description of aux cell must be submitted to race@racewrl.com at least 30 days before event)** If an auxiliary tank is used, both primary and auxiliary tanks must be vented independently, include a check valve, if check valve is not designed as a rollover valve, a rollover valve must also be installed. A fill neck spill collector shall be fitted for non-factory fill locations so as to prevent fuel from being spilled inside the car. At no time may either the main or auxiliary tank become pressurized or leak fuel. If there is any doubt, please ask before arriving at tech.
- f. **FUEL CAPACITY:** Any increase to OEM fuel capacity must be disclosed and meet the requirements above..
 - **GENERAL PRODUCTION (GP) FUEL:** The fuel capacity of any GP1-GP2 car will be physically limited to the maximum fuel capacity offered in any USDM variant of the same make/model/generation plus 15%+.5 gallons (115% of OEM capacity + ½ gallon) OR minimum fuel formula below, whichever is greater.
 - **GENERAL PRODUCTION MINIMUM FUEL:** For GP cars where factory fuel capacity + 15% falls under the threshold generated by the formula below, teams may increase capacity to the product of the below formula. Minimum fuel capacities are total pump out capacities and do not receive 15% or surge tank allowances. HP is the actual dyno horsepower found on the dyno plot per Appx A - D.1 and must match the HP number on your disclosure.
 - **GP1 MINIMUM FUEL FORMULA:** Capacity (US gal) = (HP*.051)+6
 - **GP2 & GP2 MINIMUM FUEL FORMULA:** Capacity (US gal) = (HP*.051)+7.5
 - **GRAND TOURING OPEN (GTO & GTU) FUEL:** Fuel capacity in Grand Touring classes will be determined by using Horsepower and the formula below. The formula generates total pump out capacity for GT cars. GT cars do not receive additional capacity allowances beyond the capacity generated by the formula. HP is the actual dyno horsepower found on the dyno plot per Appx A - D.1 and must match the HP number on your disclosure.
 - **GTO & GTU Fuel Formula:** Capacity (US gal) = (HP*.052)+4
 - **GRAND TOURING MINIMUM FUEL:** For GT class cars where the GT formula falls under the below thresholds, teams may increase capacity to the below minimum fuel capacities. Minimum fuel capacities are total pump out capacities and do not receive 15% or surge tank allowances. Increasing to class minimum fuel capacity is not a requirement. Adoption of the "Minimum fuel" rule must be disclosed.
 - **GTO: 17 US GALLONS**
 - **GTU: 12 US GALLONS**
 - **Carburetor allowance:** Vehicles with carbureted engines may add an additional 5% (result of any fuel calculation may be multiplied by 1.05 for Carbureted vehicles)
- g. **FIREWALLS:** Must be present between the fuel cell/fuel tank/fuel filler neck and the driver, and between the engine and driver. Any holes or gaps 1/4"Dia. or larger must be closed or sealed.
- h. **LIGHTING:** Cars must have at least two **BRIGHT** functional red brake lights. It is recommended that OEM brake running lights remain in place and functional. Headlights may be OEM or aftermarket. Mounting points



will be no higher than the base of the windshield. **A minimum of one functional headlight or one bright light bar of a minimum of 18" must be installed and engaged in the case of precipitation.** WRL officials may require teams to alter lighting if they present a safety hazard to other competitors.

- **Rain Light:** One rain light meeting FIA Standard 8874-2019 is mandatory for all cars. This rain light must be set to run at 4hz, continuously flashing and must be enabled in wet conditions. Rain light must be disabled if it is not raining. Headlights should also be on during rain conditions.
- i. **CAR NUMBERS:** Numbers must be 8" or taller required on both doors. 4" tall numbers (minimum) are required on windshield (passenger side, perforated vinyl is recommended for any numbers placed on glass/lexan) and 4" tall numbers (minimum) on rear of car (deck, bumpers and glass are acceptable). All numbers must be high contrast and clearly legible for track workers. Non-compliant numbers will not be allowed on track. **LEADING-ZERO NUMBERS ARE NOT PERMITTED.** Prototypes with small windshields may place windshield numbers just above the windshield such that it can be viewed from the front.
- **NUMBER RESERVATIONS:** Car numbers may be reserved for the season by purchasing WRL number boards from the registration system on a first-come first-served basis. Non-reserved numbers will be reserved on a per-event basis based on registration date. Duplicate numbers will not be permitted.
- j. **DECALS:** WRL-provided class badges must be placed on the front and rear of the car on the bumper or vertical surface as well as one per side of the vehicle such that classing is easy for other drivers to distinguish. Series sponsor decals, if available, are required.
- k. **APPEARANCE:** Cars should not have excessive body damage. Body panels including hood and trunk/hatch lid must be in place (or opening properly covered). Non-OEM exterior parts including aero must be completely secure and not present a safety hazard to you or other drivers or cars.
- l. **WIDTH:** No part of the car may extend further than the widest point of the stock side mirrors, or the widest point of the stock body plus 6" total, whichever is less.
- m. **TIRES:** The top of the tire may not protrude from the fender opening/flare as viewed from the top. Must be commercially available: prototype tires or those not available to the public for purchase will not be permitted. Chemical agents used to "soften" a tire or modify the properties of the rubber are not permitted.
 - **GTO** - Any commercially available tire carrying **200+** Treadwear rating is accepted.
 - **GTU** - Any commercially available tire carrying **200+** Treadwear rating is accepted. **Hoosier Radial Wet W2 is permitted as a GTU rain option. Delivery to track available, email: jaspeer@hoosiertire.com**
 - **GP1-GP2 (General Production)** - General Production categories are "SPEC TIRE" classes utilizing Continental Tires. Eligible tires are limited exclusively to the following models: Continental ExtremeContact Force (dry/int), Continental ExtremeContact Sport 02 (int/wet). Tire choice between models for certain conditions will not be enforced by the series, distinction is made for clarity. Tires may be purchased from any source - free mounting and balancing at WRL events.
 - Tires should be ordered a minimum of 21 days in advance for any event to ensure adequate stock and availability (including rain option Sport 02).
 - Email: jaspeer@hoosiertire.com for direct ordering of ECF tires for pickup at the track. Track pickup orders should be placed a minimum of 21 days in advance. It is recommended that teams check stock and purchase tires upon successful registration for the event (including rain option Sport 02).
- 5. **TRANSPONDERS:** Teams are responsible for providing their own MyLaps Transponder, and for providing an accurate transponder number to WRL at registration. Mount the transponder as low to the ground as possible with an unobstructed view of the track below. Do not mount near heat sources. NOTE: WRL is not responsible for any fault, misapplication or failure of transponders. Laps missed due to transponder failure will not be credited back under any circumstance. Transponders may be checked during Friday practice, where available.

B. BASIC PREPARATION RULES (BPR)

1. **Open, Allowed or "Free" Modifications:** All cars are allowed to make the following modifications to build reliable, cost-effective, and competitive cars. Cars prepped above this level are still legal to race but will be subject to additional scrutiny, classing modifiers, dyno plots and possible class change. NOTE: OE-Originally equipped. OEM - Original Equipment Manufacturer.



- a. **Engine:** Open. Engine Modifications are addressed by dyno testing as described in section D.
- b. **Brakes:** Stock master cylinder or OE equivalent. For General Production (GP) Classes, caliper/rotor may be upgraded to any caliper/rotor offered in a USDM variant of the same make/model/generation. OE Calipers or non-OE calipers with 4 or fewer pistons, single piece metallic rotors, and pads are open. Proportioning valves are allowed.
- c. **ABS:** Any ABS system from a mass-produced, non-motorsports specific vehicle is allowed. Must retain original programming unless reprogram modifier is taken per the modifier table.
- d. **Springs:** Metallic springs open, may heat or cut.
- e. **Shocks/Struts:** Shocks, struts, and coil overs with non-adjustable dampening characteristics are allowed. Adjustable shocks with adjustment knobs removed are still classified as adjustable and shall take the associated modifier per the modifier table.
- f. **Other Suspension:** Sway bars and Panhard bars/Watt's linkage open. Camber and toe adjustment through camber plates; eccentric bolts, bushings, ball joints or adjustable control arms are allowed if these components attach to the OE mounting point(s) and serve no other purpose. Adding reinforcement to suspension attachment points to gain durability is allowed.
- g. **Bushings:** Open
- h. **Factory Aero:** Any factory, OE aero that was sold in the US Market for the make/model/submodel of the chassis is open. Added aero items specific to factory prepared race cars, even if it is the same model, will be assessed as aftermarket aero.
- i. **Wheels:**
 - GP Classes:** Must affix to hubs via 4 or more "lugs" and lug nuts. Centerlock wheels are not permitted.
 - GT Classes:** Open, Centerlock wheels are permitted but must adhere to tire-change rules outlined in D.4.d
- j. **Powertrain Cooling:** Transmission, engine and other oil coolers allowed.
- k. **Limited Slip Differential:** Factory and aftermarket limited slip differentials installed in OE differential housings that do not fit the differential modifier criteria in Appendix A, Section H are allowed.
- l. **Exhaust:** Open, must meet any sound restrictions listed in Race-specific information and/or supplementals.
- m. **Weight reduction:** Open, but exterior skin, and chassis structural integrity must be retained. Fenders, hoods, trunk lids, firewalls, floors, and inner wheel wells must remain intact. Alternate bodies must be approved.
- n. **Driver comfort/information:** Cooling, gauges, control devices, data and telemetry systems are open.
2. **Additional Modifications:** Modifications not listed in Section B:1 above are allowed, but must be fully disclosed and may require a classing modifier as listed in Section F below based on the discretion of the Officials after a thorough inspection of the number and extent of the additional modifications.
3. **Engine and Drivetrain Swaps:** Engine/drivetrain swaps are allowed and must be fully disclosed.
4. **Multiple / Switchable tunes:** Any device, switch, software program, boost controller, etc. that alters ECU or other engine parameters to change tunes, whether mechanical or electrical, shall not be installed within reach of the driver. If one exists within reach of the driver it must be disclosed, disabled and inspected by tech officials. Tunes that change based on vehicle parameters like boost-by-gear, wheel speed, etc are not permitted. Deliberate tuning to change tunes on-the-fly or subvert the intent of the switchable tune rule will result in immediate DQ up to series ban. Under hood manual boost controllers must be disclosed and will be taped with tamper-evident tape prior to the event. Compliance will be verified by black box, radar, physical inspection or other means at WRL official's discretion. Power sticks, or any empty port that can accept changeable ECU maps must be inspected and security taped by WRL officials. TEAMS MUST SELF-REPORT THESE FOR TAPE BEFORE GOING ON TRACK.
5. **Sensor Manipulation:** External, in-line devices that intercept, modify and/or manipulate engine sensor signals to alter factory or flashed ECU parameters, boost pressure, fuel mapping or the way engine variables are logged in data are not permitted (IE: "Piggyback" devices, etc). Alteration or interruption of any ECU input / output by physical switch or other method to reduce engine output on the dyno or any other scenario is strictly prohibited and categorized as intentional cheating. The presence of these devices in any WRL vehicle without approval will result in penalties ranging from immediate DQ up to suspension or series ban. For older cars where "piggyback" devices are the only method of tuning the factory ECU teams must petition WRL for use and the implementation of the device must be detailed in an attachment to the disclosure worksheet and data acquisitions systems must monitor and



record the modified output parameters of the device. If you have any device, switch, etc between the ECU and engine you must contact WRL prior to running in any official session - email race@racewrl.com for clarification.

6. Cars with adjustable variables such as: power sticks, barometric pressure adjustments, PWR/LT settings, or any configurable parameter that affects vehicle performance that can be changed by a driver or crew without intervention of another device such as a PC or handheld tuner must be disclosed on the disclosure worksheet. **Teams using physical or tune-based throttle stops must disclose the maximum % of throttle as reflected in logged data.** Changes to these settings must be disclosed to tech. Failure to update tech with changes to these parameters will result in penalties up to disqualification or in the case of intentional cheating, a lifetime series ban. These parameters may NOT be changed during any official qualifying or race session under any circumstance and all changes must be disclosed to tech..
7. **Failure to Disclose:** Any team that does not fully disclose modifications outside of the scope of this section may be subject to disqualification. Teams that blatantly subvert the classing rules may be banned from competing in future WRL events.

C. POWER TO WEIGHT CLASSING OVERVIEW

WRL allows a wide variety of cars to be raced, including cars already racing in most other clubs and series. In order to be as inclusive as practical while maintaining competitiveness, WRL has adopted a classification system based on the POWER to WEIGHT ratio.

For the purposes of determining class, POWER shall be defined as the greater of peak dyno horsepower OR .89 x peak dyno torque as collected using the process described in D.1 - peak dyno torque will be defined as dynojet measured wheel torque above 3000 rpm for gasoline powered vehicles only.

A car's Class is determined primarily by its Power to Weight Ratio (PWR) as defined in this Appendix, less any classing modifiers for modifications not allowed in Section B above. Also see the WRL Disclosure Worksheet (found on www.racewrl.com) for help in determining class.

D. DETERMINING POWER OUTPUT

1. **Dyno Guidelines:** Dyno testing and the resulting plots must conform to these guidelines:
 - a. Must be produced on DynoJet chassis dynamometers and include shop name and contact information.
 - b. All readings must be corrected to SAE J1349 Rev JUN90 (29.23 in/hg, 77F, zero humidity) and the dyno plot smoothing factor must be set to 5.
 - c. Engine shall be at operating temperature with engine cover open and high-volume fan(s) directed at the radiator.
 - d. Tires shall be at 30 psi (minimum) prior to starting a dyno run.
 - e. Dyno pulls shall be performed in whichever gear is closest to 1:1 unless otherwise specified by WRL officials for compliance purposes.
 - f. Dyno runs / plots shall begin at or below 2500rpm.
 - g. Plots must show both engine torque and horsepower on one axis and engine RPM on the other axis.
 - h. Entire plot must be visible and must not be obscured by text boxes, logos, etc.
 - i. Testing must be performed with the same engine modifications, specifications, and configuration as will be used in competition.
 - j. 3 pulls must be plotted on the dyno graph for official classing. The highest POWER result of the 3 pulls will be used for classing and GTO fuel considerations.
 - k. It is highly recommended that teams submit a "runfile" from the dyno in .WP8 or .DRF for flat curve analysis in 50 rpm increments.
2. **Flat Horsepower Curves:** Flat horsepower curves will incur a modifier whether by detune or natural shape as outlined below. The duration of a "flat" curve will be defined as the cumulative rpm that the curve remains within 3% of peak horsepower from the disclosure sheet.
 - a. The only curve/run that will be analyzed for "flatness" is the curve/run that produced the peak HP figure matching the HP figure from your disclosure sheet.
 - b. Any horsepower curve that remains flat for 0-999.9 rpm will NOT incur a flat curve modifier.
 - c. Any horsepower curve that remains flat for 1000-1249.9 rpm will incur a .1 modifier
 - d. Any horsepower curve that remains flat for 1250-1499.9 rpm will incur a .1 modifier



- e. Any horsepower curves that remain flat for more than 1500.0 rpm will incur an additional .1 per 500 rpm
Example: 2000 rpm of flat curve = .4 PWR modifier;
- f. Teams must submit dyno sheets but may also submit the CSV export from the dyno run in 50 rpm intervals to assist in this determination if they feel their curves may be ruled as flat. Flatness may be determined by the “ruler method” and your paper dyno sheet or .CSV or .wp8 runfile analysis. Contact your dyno center for more information about obtaining .CSV files or .wp8 DynoJet run file for submission.
- g. This modifier applies regardless of which method you use to determine POWER. If you think you might have a flat curve, please email race@RaceWRL.com for an official ruling before you arrive in the tech line.
3. **Re-submission of Plots:** If any changes or modifications are made to the car, a new dyno plot must be submitted before the car is eligible to compete for a podium finish or season points. Examples include, but are not limited to: Replacement of any part with a different part that could have an impact of performance such as fuel injectors, headers, intake, camshafts, etc. Engine replacement or rebuild. Any change to tune, cam timing, boost, etc.
 - a. Officials may require a team to provide an updated dyno plot before their next event based on several criteria including performance, protests, and modifications.
 - b. Dyno plots must be included as part of the disclosure worksheet and provided to WRL officials, and the peak wheel horsepower & torque must be recorded on the first page of the disclosure worksheet form.

E. DETERMINING CAR CLASS

1. **Calculating PWR:** The car’s peak POWER (See Section C) will be divided into the weight of the car, as weighed by WRL at the track with fuel tank full, no driver, no cool shirt water and no undisclosed ballast. The result will be rounded to the nearest tenth and represents the car’s Base POWER to Weight ratio (Base PWR). Modifications not allowed in the BASIC PREPARATION RULES will be assigned a modifier value based on the tables in section F below to arrive at the Adjusted PWR which is then used to determine the car’s class.
Example: $([\text{WEIGHT}] / [\text{POWER}]) + [\text{MODIFIERS}] = \text{PWR}$
 $(2350\text{lb} / 150) + (-0.2) = 15.5 \text{ PWR}$
2. **Competition Classes:** Cars are classed into one of the following groups per their PWR rating which includes any PWR modifiers assigned.
 - a. **GENERAL PRODUCTION (GP):** Any mass-produced car offered for sale and operation on public roads. GP-class cars are subject to the Basic Prep Rules and Modifiers in Section F below. Cars with a PWR of 18.0 or above will not be allowed to race. See Appx. A - A.1 for information on non-vin carrying race versions of production cars.
 - **GP2** - Cars with a PWR of 12.8 to 15.099
 - **GP1** - Cars with a PWR of 10.5 to 12.799
 - b. **GRAND TOURING (GT):** Any race-prepared car, including mass-produced, tube-frame, purpose-built, factory homologated, etc. will fall into one of the GT classes below. Cars that, with or without modifiers, are below 10.5:1 PWR will be categorized in one of the below GT classes.
 - **GTO:** Any cars weighing more than 2400.00 lbs per the guidelines in Appx. A - E.1.
 - GTO cars are Subject to modifiers in Section F below.
 - PWR of 9.0:1 or higher (9.0 – 18.0)
 - Minimum windshield height of 42” as measured from the top of the windshield (where glass/lexan meets gasket or windshield frame) to the ground as-raced.
 - **GTU:** Any cars weighing less than 2400.00 lbs per the guidelines in Appx. A - E.1.
 - GTU cars are NOT subject to the modifiers in Section F below.
 - PWR of 9.0:1 or higher (9.0 – 18.0)
 - Minimum windshield height of 36” as measured from the top of the windshield (where glass/lexan meets gasket or windshield frame) to the ground as-raced.
 - Any cars with a windshield height less than 42” must have a front-facing light beacon of at least 3000 lumens mounted such that the centerline of the light is at a minimum height of 36” from the ground as-raced. Light should be white in color, diffused (IE: flood-light style).
3. **Ballast:** Teams may add ballast for the purpose of reclassing their car, with the following stipulations:
 - a. Any ballast amount (weight) must be disclosed to WRL officials and recorded in your log book.
 - b. Ballast may not exceed 200 pounds and must be safely secured.



- c. Ballast / competition weight may not change during a race weekend without disclosure to WRL tech.
4. **Petition Process:** A team may petition the World Racing League to allow a non-compliant car to compete. The petition must be made in writing at least 30 days in advance of the race and must include supporting evidence justifying the request. At the track petitions will not be allowed.
5. **Reclassing:** Unless an oversight or omission occurred during the classing process a car will not be moved to another class during a race.
6. **Enforcement:** WRL may require any team to submit their car for monitoring and testing at any time to verify performance. Methods include at-the-track dyno runs, Flagtronics and/or installation of a WRL black box.

F. GTO POWER TO WEIGHT MODIFIERS (PWR MODIFIERS)

The following values will be deducted from a car's PWR. The value on a given line is for EACH of the items in the list. Any missing items or gray areas will be dealt with at the WRL Officials' discretion and must be disclosed on the car's disclosure worksheet. GTO modifiers are subject to change, changes will not go into effect until 30 days after their announcement. **Modifiers in this section do not apply to GTU or GP classes. POSITIVE MODIFIERS:** Intended to offset inherent design disparities in the interest of increasing parity across platforms and are driven by data collected at WRL events. These modifiers increase the adjusted PWR per the formula found at Appx A - E.1.

GTO AERO	
Lexan front windows (<u>both windows</u>) - Must meet requirements of Appx. A - A.4.b	-0.1
GTO Positive Modifiers	
Manual Transmission: Conventional manual transmissions, dog rings permitted	+0.2

G. GTO Adjustable Performance Variables

Adjustable Performance Variables have been introduced based on significant data collection and observation, and a product of award modifiers and subsequent effects on performance

1. **Petition for APV:** Cars not listed in the APV table but with a performance envelope within the scope of the existing APV table should email race@racewrl.com for a ruling and inclusion. This is a LIVE DOCUMENT and we expect to add cars actively to this table.
2. **Adjustment of APV:** APV variables may be adjusted between events at WRL discretion and this adjustment will be based on data collected at WRL events. APV values may range between 0 and .6 maximum. Cars without historical data may be adjusted during this process to align with cars of similar initial value.
3. **Factory Built cars:** (eg: GT4, GT3 Cup, etc) will be separated from street-vin / street converted cars for the purpose of assigning APVs but will take into account the values of corresponding factory built cars if they already exist in the table. If you have a street version of a car in the table email race@racewrl.com for a ruling on your chassis.
4. **Initial Modifiers:** APVs will carry over from the prior year, but may be adjusted based on data collection and findings at the discretion of WRL compliance officials.
5. **APV Table:** The most recent version can be found at the following link: [WRL 2026 APV Table](#)



H. GENERAL PRODUCTION (GP) POWER TO WEIGHT MODIFIERS (PWR MODIFIERS)

The following values will be deducted from a car's PWR. The value on a given line is for EACH of the items in the list, **each independent item is separated by a semicolon (;)**. If you have any questions pertaining to modifiers in this section please email race@racewrl.com. **Modifiers in this section do not apply to GTO or GTU classes.**

POSITIVE MODIFIERS: Intended to offset inherent design disparities in the interest of increasing parity across platforms and are driven by data collected at WRL events. These modifiers increase the adjusted PWR per the formula found at APPX A.E, 1. **Modifiers may be adjusted in quarterly intervals at WRL discretion to maintain performance balance and parity. If adjustments are made, maximum notice will be given prior to the next event.**

GP AERO*	
Simple rear spoiler; side skirts; canards	-0.1
Air dam and/or splitter; rear diffuser; flat underbody; fixed single element wing/airfoil	-0.2
Multi-element wing; dynamically adjustable wing	-0.4

**Must take all applicable aero modifiers (modifiers stack)*

GP BRAKES*	
2-piece brake rotors; Racing or multi-master cylinder system / adjustable pedal boxes	-0.1
Any non-OE caliper with >4 pistons; ABS reprogram (See Appx A: B.1.c);	-0.2
Aftermarket or race-developed electronic ABS/traction control systems	-0.4
Rotors made from exotic materials (carbon ceramic, etc.)	-0.6

**Must take all applicable aero modifiers (modifiers stack)*

GP SUSPENSION**	
Single adjustable shocks/struts*; custom valved non-adjustable shocks/struts; minor changes in suspension members other than what is open	-0.2
Multi-adjustable shocks/struts*; Changes to suspension members in excess of what is described in Appx. A - B.1	-0.4
Remote reservoir or piggyback systems*; significantly modified suspension mounting points;; components made of exotic materials.	-0.6

***Take only the highest applicable shock/strut modifier (do not stack)*



GP DRIVETRAIN (ENGINE / TRANSMISSION)

Naturally Aspirated Engines over: (GP2 >2999cc, GP1 > 3699cc)	-0.1
OE / OEM manual transmissions with aftermarket and/or redesigned internal components, incl. straight cut / dog rings. OE / OEM torque-converter automatic transmissions with 6 or fewer forward gears.	-0.1
Turbocharged / Supercharged Engines over 2399cc (2.4L)	-0.2
OE / OEM transmissions with electronic or hydraulic automated clutch(es); PDK, DCT, SMG or similar; OE / OEM automatic transmissions with 7+ forward gears	-0.3
Aftermarket Sequential Gearbox	-0.6

**Must take all applicable aero modifiers (modifiers stack)*

GP DIFFERENTIAL

Dedicated race differential unit (xtrac, quickchange or similar); significantly modified OEM differential that is lightweight, exotic in design, materials, installation method or location; externally adjustable differentials.	-0.6
---	------

GP POSITIVE MODIFIERS

DRIVETRAIN: All cars utilizing a front wheel drive (fwd) drivetrain layout.	+0.3
--	------

APPENDIX B - ROLL CAGE DESIGN AND CONSTRUCTION SPECIFICATIONS

This section provides the generally accepted minimum roll cage design and construction requirements. Existing roll cages used in NASA, SCCA, and other national road racing sanctions, if properly built and inspected, should meet or exceed the standard below. If you are contemplating building a new cage yourself and do not have a proper tubing bender, welder and notch saw, don't know how to weld or don't understand why cardboard comes into play in the process, stop here. This is a safety issue and homemade cages **WILL FAIL** at the event if they are not built properly regardless of what other series passed the cage. Take this Appendix and the car to a reputable fabricator

A. General Criteria

1. Professionally designed and built roll cages are highly recommended. This is not something the untrained or unskilled should attempt to do themselves.
2. Professionally manufactured bolt-in cages are allowed provided they are installed using the manufacturer provided or specified tools and hardware and meet the design criteria in Section B. (Bolt-together cages are not permitted). EXCEPTION - non-steel chassis may affix the rollcage to the chassis with mounting plates of .188" or thicker steel, with appropriate sized backing plates. 4 or more 5/16" or 8mm bolts, grade 8 or higher per mounting plate. All tubing junctions must be welded completely.)
3. Welds must be professional quality, 360 degrees around every tube joint, with full penetration
4. Minimum tubing size will be determined by the weight of the car. All tubing will be seamless mild steel or DOM, ERW is not acceptable unless a waiver is granted for an existing cage
 - a. Under 2500 lbs - 1.50" x 0.095"
 - b. 2501 and over - 1.50" x 0.120" or 1.75" x 0.095"
5. Tubing will be Rotary Drawn or Mandrel Bent and properly notched with appropriate tools. Bends must have a radius no less than 3 times the outside diameter of the tubing and will not show any signs of crimping, stretching or another potential failure
6. Any cut made in a firewall to accommodate tubing must be re-sealed once the tubing is installed
7. The use of gussets to strengthen connecting points is open



8. Any portion of the finished roll cage that may be contacted by the driver's helmet, body or limbs must be padded with roll bar padding
9. Vehicles not meeting the letter of this criteria but carrying a FIA homologation on the safety cell may petition for approval by emailing race@racewrl.com

B. Roll Cage Design

1. Main Hoop must be a single, continuous length of tubing with no more than 4 bends and should follow the B pillars and roofline as closely as possible with a rake of no more than 15 degrees off vertical. The Main Hoop will be tall enough so that any driver's helmet does not extend above a line connecting the centerlines of the Front Hoop and Main Hoop.
2. A diagonal brace will be added in the same plane as the Main Hoop, with one end connecting at lower right of the Main Hoop at the mounting plate or as close as possible, and the other end connecting to the top left (horizontal) of the Main Hoop within 12" of the bend nearest the driver's head
3. The Main Hoop will be braced with two uncut, continuous tubes extending rearward from the top corners (bends) of the Main Hoop, or within 6" thereof, running straight to the floor, factory cross member or strut/shock towers. The rearmost point of the rear bracing must not terminate on another tube. Rear bracing will not have any bends and should be at a 30-60 degree angle to the plane of the Main Hoop.
4. Forward section of the main cage may be one of three configurations:
 - a. Side Hoops (aka "Forward Hoops"): Tubes extending forward from the top corners (bends) of the Main Hoop and down to the front floor, following the roof line and a-pillars as closely as possible, each with no more than 2 bends, and both connected by a tube running as close to the top of the windshield as possible. (SCCA Production cages that do not follow the original roof line may qualify, petition the officials before the race to gain approval), or;
 - b. Halo: A single tube bent into a "halo" that extends forward from either corner of the Main Hoop in a horizontal plane to the top of the windshield and follows the roof line as closely as possible. The front of the halo will be supported from the floor/sill by a continuous section of tubing that follows the A-pillar as closely as possible from each front corner of the halo to the floor.
 - c. Front Hoop: A single, continuous length of tubing with no more than 4 bends, which should follow the A- pillars and roofline along the top of the windshield as closely as possible, mounted on either side to a floor plate or sill. The front Hoop and Main Hoop will be connected together on either side by tubing running from the top corners of each hoop and following the roof line as closely as possible.
5. Door Bars: A minimum of two door bars are required on the driver's side, x-bars are acceptable. Bars must be placed to protect the driver in the event of a side impact. Door bars may be bent to push into the door cavity, but S-bends are prohibited* on new cage builds (2014 or later) unless the car has a valid log book from a club racing or higher-level organization and are approved by WRL officials. A minimum of one door bar is required on the passenger side. If you are unsure, submit pictures and descriptions to WRL BEFORE you show up to race
*S-bend bars may be submitted for exception to: race@racewrl.com in cases where they are the only option..
6. Dash bar: A dash bar running horizontally between the front hoop a-pillar bars, and at the height of the original dash is required. Factory dash bars may be approved at WRL discretion - email Race@racewrl.com for approval.
7. Harness Bar: A horizontal bar between the left down tube of the Main Hoop and the Diagonal Bar may be installed for shoulder harness strap mounting, at a height recommended by the harness manufacturer. Harness bar may have bends to accommodate aft seat travel
8. Seat Mount: A seat mount tube or tubes mounting the seat to the roll cage is highly encouraged, and does not count toward cage attachment points

C. Mounting points

1. Cage must be mounted to the floor, frame, factory cross member, towers and/or sill plates at a minimum of 6 points (2 each at the Main Hoop, Rear Braces and Front Hoop). 2 additional mounting points may be used at the Front Hoop to the firewall or front wheel wells
2. The use of Body Tabs is open, but tubes added for no other reason than to increase chassis rigidity may be disallowed or penalized at the officials' discretion
3. Mounting plates must be at least 16 square inches at 0.080" thick and must be welded completely around the perimeter. If bolted in, the plate must be 3/16" thick minimum, bolted at a minimum of three points with Grade 5 hardware



Final Authority on whether your cage passes a safety inspection or not lies solely and completely with the race officials.. If the cage is deemed unsafe at WRL's sole discretion it will not be allowed to race. For example - if there are missing bars, missing/inconsistent welds, or any other issue that presents a safety hazard, the car cannot be allowed on track. When in doubt, submit pictures and descriptions before you show up to an event.


APPENDIX C - FLAGTRONICS INSTALLATION AND USE

A. Flagtronics FT200 Installation

1. Flagtronics FT200 units MUST be securely mounted to a rigid structure.
2. The GPS antenna must be securely mounted on the exterior of the car's roof as close to the roof centerline and as far forward on the roof as possible (within 6" of windshield preferred).. The GPS is directional and the rear, where the wire exits, should point to the rear of the car.
3. Teams are responsible for ensuring the FT200 has an adequate 12V power source via flying leads or a USB adapter (Type A plug) power source capable of 10W (5V 2A) or more. It should be located on a separate circuit not shared by other electronic devices. This power source must power on and off with the Main Power switch of the car. It must not be controlled by an auxiliary switch or other type of secondary power source.
4. The inline backup battery supplied with the FT200 wiring harness must be connected and in good working order. The FT200 must stay powered for at least 15 minutes after Main Power to the car has been shut off. The inline battery charges while the FT200 is powered on.
5. Optional Canbus system installation information can be found at: <https://flagtronics.com/pages/downloads>

B. Flagtronics FT200 Location

1. The FT200 shall be mounted with the RF antenna upward and the LED display facing the driver. The unit must be mounted horizontal to the ground with a left-to-right pitch variance of no more than +/- 10 degrees. The unit may be tilted upward or downward no more than 30 degrees to create a better visual angle for the driver. Several hardware mounting options are available at <https://Flagtronics.com/WRL>
2. The Unit shall be located 10 inches either direction of the vertical centerline of the steering wheel.
3. The Unit shall be located above the horizontal centerline of the steering wheel with a maximum of 15 inches above the horizontal centerline.
4. Blocking the FT200 Antenna with an in-dash or in center console installation may greatly reduce performance and could result in a black flag.
5. All drivers should be able to reach the FT200 while tightly belted into the vehicle.

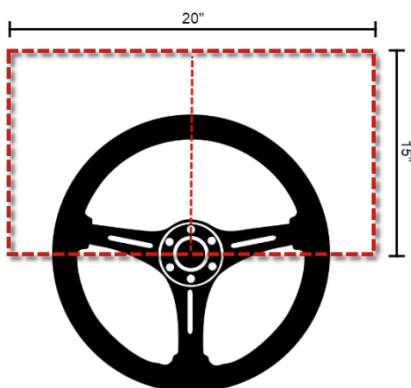



C. Flagtronics Purchase and Registration

1. Event Registration:
 - a. Flagtronics in-vehicle units are required to compete in a WRL events. You may purchase a WRL FT200 Kit directly from Flagtronics at <https://Flagtronics.com/WRL>
 - b. Flagtronics driver ID bluetooth/wifi add-on and driver pucks are required to compete in WRL events.
2. When registering for an Event, Teams must provide the 8-digit FT200 Serial Number associated with the Car Number being entered. The FT200 Serial Number is printed on the bottom of the unit or may be retrieved by downloading the Flagtronics Device Manager Software (Windows Only) and connecting the FT200's USB plug, found at the end of the wiring harness, into an available USB port on a computer running the Flagtronics Device Manager Software.
3. If a Team wishes to rent a FT200 for an Event, they must designate this choice on the Event Registration Form.

APPENDIX X - WARNINGS, DISCLAIMERS AND OTHER INFORMATION

Racing involves inherent risk to life, limb, and property. You are participating of your own volition and at your own risk. World Racing League makes no guarantee, promise or assurance of, or in regard to your health or safety.

Racing is physically, mentally and emotionally demanding and can aggravate or complicate existing or underlying medical conditions. Only you and your doctor can assess your physical fitness for road racing. If you know you have or have any reason to suspect that you may have any health-related issue that could be triggered or aggravated by this activity, seek your physician's advice before getting in a race car! Despite the extraordinary advances in safety technology and all industry-standard safety precautions, auto racing carries an inherent risk of property damage, personal injury and even death. Observance of, and strict adherence to safety requirements, instructions, rules, and precautions can help reduce, but not eliminate, these risks. Do not rely on inspections to ensure your car/equipment is safe. Any given safety item could be rendered ineffective at any time between inspections due to misuse, damage, negligence or other factors unknown to race officials. You and only you are responsible for your safety, including adhering to the safety regulations set forth in these rules and observing common safety practices. By attending a WRL event, all participants acknowledge that they are participating at their own risk, and hold harmless World Racing League Racing LLC, its owners, officers, officials, associates, contractors, venues, sponsors and assigns.

Everyone entering the premises where a World Racing League event is taking place will sign the Liability Release form before entering the property. By attending and/or participating in a WRL event, each person agrees, acknowledges and avows that he or she has read and understands this rulebook, and has signed the Liability Release form. In plain English: Under no circumstances should anyone participate in WRL event or any motorsports event without fully understanding the rules and risks; you understand, avow and affirm that the organizers are not responsible for anything that might happen to you during the event; and you agree that you understand and accept the risks involved and hold the organizers, officials, track, etc. harmless, accept all liability, and covenant not to sue the organizers, staff members, venues or safety workers. If the thought of that is not acceptable to you, your family and/or your attorney, please do not participate in motorsports.

World Racing League is in no way responsible for injury or loss. WRL does carry supplemental AD&D and hospitalization insurance, however, you, as an individual, are responsible for providing adequate medical insurance for yourself, or in the absence of such, you are responsible for any medical bills you may incur as a result of attending or participating in an event whether WRL carries any supplemental medical insurance or not. Likewise, you and only you are responsible for property damage caused by you and/or caused to you. World Racing League will not reimburse you for loss or damage to your car or other property or mediate between parties. If you damage the facilities at a venue rented by World Racing League, you may receive a bill. If you wreck someone else's car, that's between the two of you.

The Rules governing the series are subject to change at any time to address safety issues. Series officials will apply the Rules as evenly and professionally as humanly possible. There will invariably be times where an issue is not specifically covered by a rule. In that case, the officials will exercise their discretion and common sense in the interest of safety and fairness to all. See the "Primary Rule" on page 2.

World Racing League may deny entry to or eject from the premises any car, team member, spectator, or attendee at any time for any reason related to personal or public safety, illegal activity, risk or damage to the series, staff or participants, or the orderly conduct of the event.



Entry fees, rental fees, gate fees etc. are non-refundable. World Racing League reserves the right to change event dates, times, schedules and formats and/or cancel events for any reason within our control or outside of our control. If we cancel an event, we will transfer entry fees to another event, refund fees or otherwise do our best to make you whole. If you cancel you may receive a refund per the refund policy outlined in A.4.

All World Racing League and WRL logos are trademarked and/or copyrighted material and may not be reprinted, reproduced or re-used for any purpose without the consent of World Racing League LLC. World Racing League reserves the right to use images, audio and video of you, your team and your car, taken by anyone at any WRL event, for the purpose of positive marketing, promotion, advertising, sales, magazine covers, merchandise, etc. without regard to royalties, fees or any other form of compensation. Images, audio, and video recorded at World Racing League events may not be used for commercial or for-profit purposes without the consent of World Racing League Inc.

World Racing League Inc. is a Georgia corporation