MOUNT ANALYSIS REPORT

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

Site Name: SAMPLE SITE ALPHA
Site Number: SAMPLE-0001
Site Address: 100 Example Road, Sampleville, XX 00000
Structure Type: 150 ft Monopole
Carrier: EXAMPLE WIRELESS
Mount Type: Sector Frame (3) at 120 ft RAD Center

Analysis Result: Mount PASSES with modifications
Structural Rating: 87.4%

This report is a synthetic test document. Every name, address, number and result in it is invented for the Mark It Up test suite and does not describe any real structure.

ANTENNA LOADING

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

Final Loading Configuration:

Sector	RAD Center (ft)	Mfr	Model	Qty	Status	Azimuth
A	120.0	EXAMPLE	ANT-8800-XL	(3)	Proposed	0
A	120.0	EXAMPLE	RRH-4402	(4)	Proposed	0
A	118.5	EXAMPLE	SURGE-12	(1)	Existing	0
B	120.0	EXAMPLE	ANT-8800-XL	(3)	Proposed	120
B	120.0	EXAMPLE	RRH-4402	(4)	Proposed	120
B	118.5	EXAMPLE	SURGE-12	(1)	Existing	120
C	120.0	EXAMPLE	ANT-8800-XL	(3)	Proposed	240
C	120.0	EXAMPLE	RRH-4402	(4)	Proposed	240
C	118.5	EXAMPLE	SURGE-12	(1)	Existing	240

STRUCTURE USAGES

Member	Section	Usage	Result
M1	Angle L2x2x3/16	47.1%	OK
M2	Plate 0.5x6	54.2%	OK
M3	Pipe 2.375x0.154	61.3%	OK
M4	Angle L2x2x3/16	68.4%	OK
M5	Plate 0.5x6	75.5%	OK
M6	Pipe 2.375x0.154	82.6%	OK
M7	Angle L2x2x3/16	41.7%	OK
M8	Plate 0.5x6	48.8%	OK
M9	Pipe 2.375x0.154	55.9%	OK
M10	Angle L2x2x3/16	62.0%	OK
M11	Plate 0.5x6	69.1%	OK
M12	Pipe 2.375x0.154	76.2%	OK
M13	Angle L2x2x3/16	83.3%	OK
M14	Plate 0.5x6	42.4%	OK

Structural Rating: 87.4% (Mount Pipe M7 governs)
Tower Loading: acceptable per the standard referenced in Section 2.

CONCLUSION AND RECOMMENDATIONS

1. The existing sector frames are adequate to support the proposed loading after the modifications listed below are installed.
2. Install (1) New Sector Frame per sector, part EX-SF-1200.
3. Install (12) New Crossover Plate per sector, part EX-XP-7.
4. Install (6) New Pipe per sector, part EX-P-30120.
5. All bolts shall be torqued to the manufacturer's specification.
6. Contractor shall verify existing conditions prior to installation.

MOUNT DRAWING SHEET S-1

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

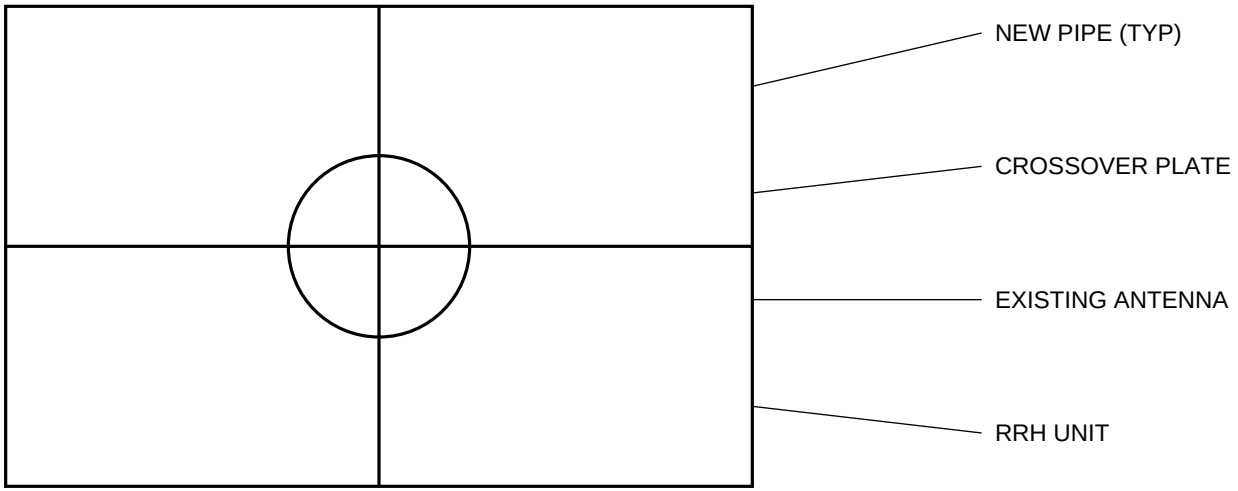

SHEET S-1
SAMPLE-0001
DRAWN: EX CHECKED: EX

MOUNT DRAWING SHEET S-2

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

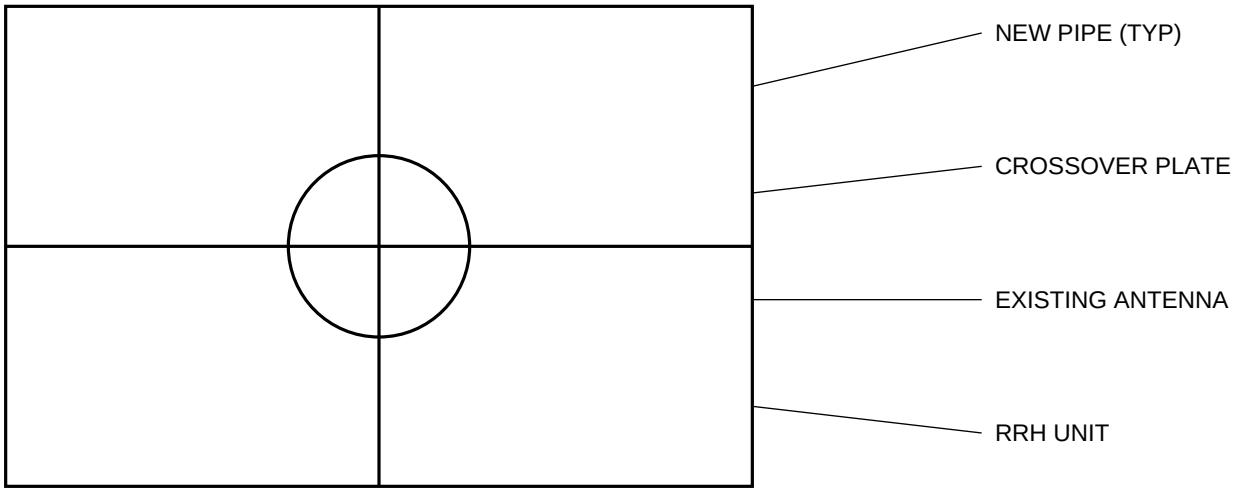

SHEET S-2
SAMPLE-0001
DRAWN: EX CHECKED: EX

MOUNT DRAWING SHEET S-3

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

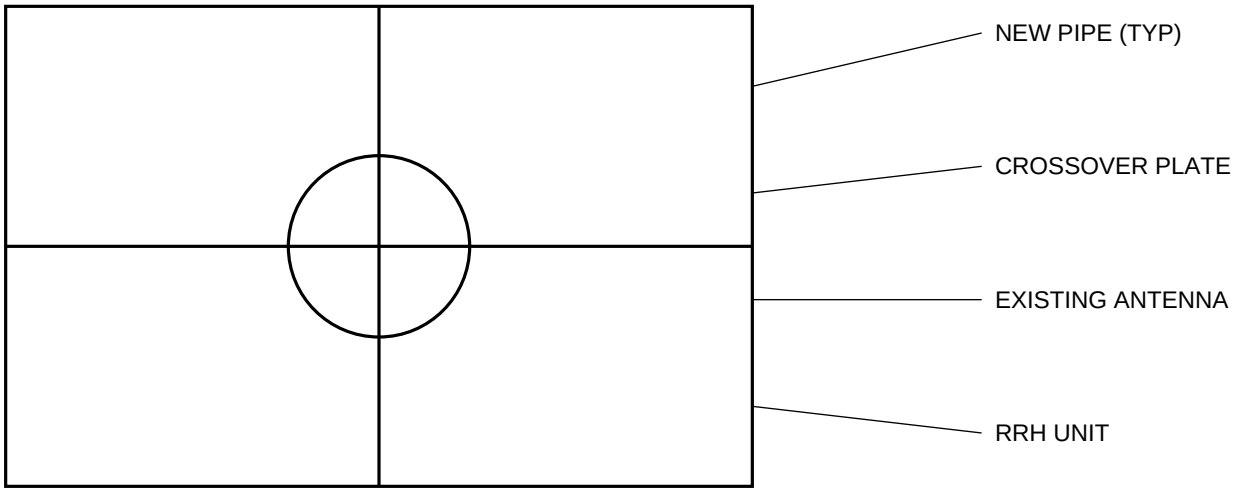

SHEET S-3
SAMPLE-0001
DRAWN: EX CHECKED: EX

MOUNT DRAWING SHEET S-4

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

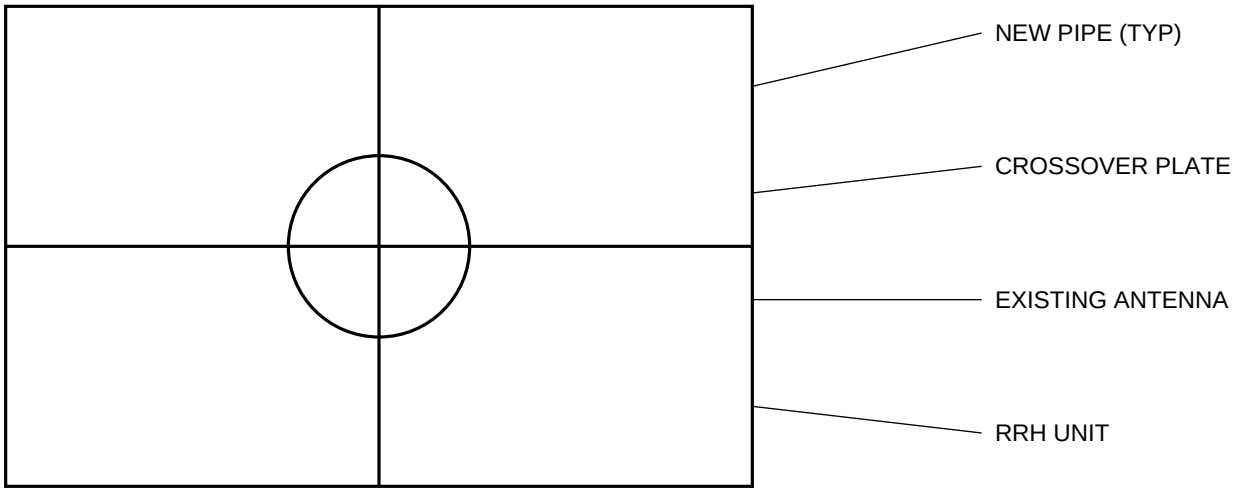

SHEET S-4
SAMPLE-0001
DRAWN: EX CHECKED: EX

MOUNT DRAWING SHEET S-5

EXAMPLE ENGINEERING GROUP - Sample Site SAMPLE-0001 - 100 Example Road, Sampleville

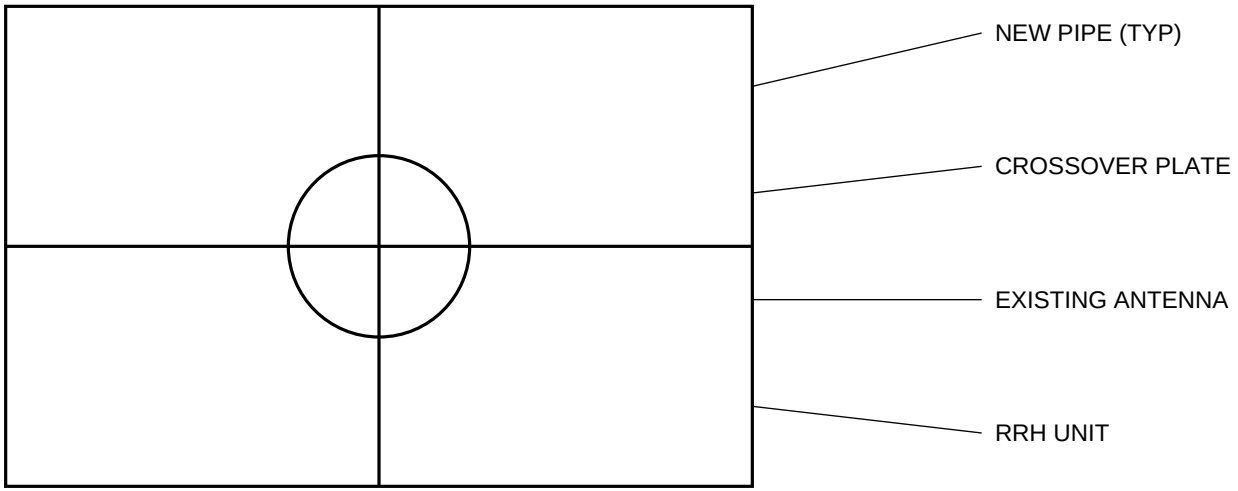

SHEET S-5
SAMPLE-0001
DRAWN: EX CHECKED: EX

Load case 1.1: wind 95 mph, ice 0.25 in, usage 54.1%

Load case 1.2: wind 100 mph, ice 0.50 in, usage 58.2%

Load case 1.3: wind 105 mph, ice 0.75 in, usage 62.3%

Load case 1.4: wind 110 mph, ice 1.00 in, usage 66.4%

Load case 1.5: wind 115 mph, ice 1.25 in, usage 70.5%

Load case 1.6: wind 120 mph, ice 1.50 in, usage 74.6%

Load case 1.7: wind 125 mph, ice 1.75 in, usage 78.7%

Load case 1.8: wind 130 mph, ice 2.00 in, usage 82.8%

Load case 1.9: wind 135 mph, ice 2.25 in, usage 86.9%

Load case 1.10: wind 140 mph, ice 2.50 in, usage 90.10%

Load case 1.11: wind 145 mph, ice 2.75 in, usage 94.11%

Load case 1.12: wind 150 mph, ice 3.00 in, usage 53.12%

Load case 1.13: wind 155 mph, ice 3.25 in, usage 57.13%

Load case 1.14: wind 160 mph, ice 3.50 in, usage 61.14%

Load case 1.15: wind 165 mph, ice 3.75 in, usage 65.15%

Load case 1.16: wind 170 mph, ice 4.00 in, usage 69.16%

Load case 1.17: wind 175 mph, ice 4.25 in, usage 73.17%

Load case 1.18: wind 180 mph, ice 4.50 in, usage 77.18%

Load case 1.19: wind 185 mph, ice 4.75 in, usage 81.19%

Load case 1.20: wind 190 mph, ice 5.00 in, usage 85.20%

Load case 1.21: wind 195 mph, ice 5.25 in, usage 89.21%

Load case 1.22: wind 200 mph, ice 5.50 in, usage 93.22%

Load case 1.23: wind 205 mph, ice 5.75 in, usage 52.23%

Load case 1.24: wind 210 mph, ice 6.00 in, usage 56.24%

Load case 1.25: wind 215 mph, ice 6.25 in, usage 60.25%

Load case 1.26: wind 220 mph, ice 6.50 in, usage 64.26%

Load case 1.27: wind 225 mph, ice 6.75 in, usage 68.27%

Load case 1.28: wind 230 mph, ice 7.00 in, usage 72.28%

Load case 1.29: wind 235 mph, ice 7.25 in, usage 76.29%

Load case 2.1: wind 95 mph, ice 0.25 in, usage 63.1%

Load case 2.2: wind 100 mph, ice 0.50 in, usage 67.2%

Load case 2.3: wind 105 mph, ice 0.75 in, usage 71.3%

Load case 2.4: wind 110 mph, ice 1.00 in, usage 75.4%

Load case 2.5: wind 115 mph, ice 1.25 in, usage 79.5%

Load case 2.6: wind 120 mph, ice 1.50 in, usage 83.6%

Load case 2.7: wind 125 mph, ice 1.75 in, usage 87.7%

Load case 2.8: wind 130 mph, ice 2.00 in, usage 91.8%

Load case 2.9: wind 135 mph, ice 2.25 in, usage 50.9%

Load case 2.10: wind 140 mph, ice 2.50 in, usage 54.10%

Load case 2.11: wind 145 mph, ice 2.75 in, usage 58.11%

Load case 2.12: wind 150 mph, ice 3.00 in, usage 62.12%

Load case 2.13: wind 155 mph, ice 3.25 in, usage 66.13%

Load case 2.14: wind 160 mph, ice 3.50 in, usage 70.14%

Load case 2.15: wind 165 mph, ice 3.75 in, usage 74.15%

Load case 2.16: wind 170 mph, ice 4.00 in, usage 78.16%

Load case 2.17: wind 175 mph, ice 4.25 in, usage 82.17%

Load case 2.18: wind 180 mph, ice 4.50 in, usage 86.18%

Load case 2.19: wind 185 mph, ice 4.75 in, usage 90.19%

Load case 2.20: wind 190 mph, ice 5.00 in, usage 94.20%

Load case 2.21: wind 195 mph, ice 5.25 in, usage 53.21%

Load case 2.22: wind 200 mph, ice 5.50 in, usage 57.22%

Load case 2.23: wind 205 mph, ice 5.75 in, usage 61.23%

Load case 2.24: wind 210 mph, ice 6.00 in, usage 65.24%

Load case 2.25: wind 215 mph, ice 6.25 in, usage 69.25%

Load case 2.26: wind 220 mph, ice 6.50 in, usage 73.26%

Load case 2.27: wind 225 mph, ice 6.75 in, usage 77.27%

Load case 2.28: wind 230 mph, ice 7.00 in, usage 81.28%

Load case 2.29: wind 235 mph, ice 7.25 in, usage 85.29%

Load case 3.1: wind 95 mph, ice 0.25 in, usage 72.1%

Load case 3.2: wind 100 mph, ice 0.50 in, usage 76.2%

Load case 3.3: wind 105 mph, ice 0.75 in, usage 80.3%

Load case 3.4: wind 110 mph, ice 1.00 in, usage 84.4%

Load case 3.5: wind 115 mph, ice 1.25 in, usage 88.5%

Load case 3.6: wind 120 mph, ice 1.50 in, usage 92.6%

Load case 3.7: wind 125 mph, ice 1.75 in, usage 51.7%

Load case 3.8: wind 130 mph, ice 2.00 in, usage 55.8%

Load case 3.9: wind 135 mph, ice 2.25 in, usage 59.9%

Load case 3.10: wind 140 mph, ice 2.50 in, usage 63.10%

Load case 3.11: wind 145 mph, ice 2.75 in, usage 67.11%

Load case 3.12: wind 150 mph, ice 3.00 in, usage 71.12%

Load case 3.13: wind 155 mph, ice 3.25 in, usage 75.13%

Load case 3.14: wind 160 mph, ice 3.50 in, usage 79.14%

Load case 3.15: wind 165 mph, ice 3.75 in, usage 83.15%

Load case 3.16: wind 170 mph, ice 4.00 in, usage 87.16%

Load case 3.17: wind 175 mph, ice 4.25 in, usage 91.17%

Load case 3.18: wind 180 mph, ice 4.50 in, usage 50.18%

Load case 3.19: wind 185 mph, ice 4.75 in, usage 54.19%

Load case 3.20: wind 190 mph, ice 5.00 in, usage 58.20%

Load case 3.21: wind 195 mph, ice 5.25 in, usage 62.21%

Load case 3.22: wind 200 mph, ice 5.50 in, usage 66.22%

Load case 3.23: wind 205 mph, ice 5.75 in, usage 70.23%

Load case 3.24: wind 210 mph, ice 6.00 in, usage 74.24%

Load case 3.25: wind 215 mph, ice 6.25 in, usage 78.25%

Load case 3.26: wind 220 mph, ice 6.50 in, usage 82.26%

Load case 3.27: wind 225 mph, ice 6.75 in, usage 86.27%

Load case 3.28: wind 230 mph, ice 7.00 in, usage 90.28%

Load case 3.29: wind 235 mph, ice 7.25 in, usage 94.29%

Load case 4.1: wind 95 mph, ice 0.25 in, usage 81.1%

Load case 4.2: wind 100 mph, ice 0.50 in, usage 85.2%

Load case 4.3: wind 105 mph, ice 0.75 in, usage 89.3%

Load case 4.4: wind 110 mph, ice 1.00 in, usage 93.4%

Load case 4.5: wind 115 mph, ice 1.25 in, usage 52.5%

Load case 4.6: wind 120 mph, ice 1.50 in, usage 56.6%

Load case 4.7: wind 125 mph, ice 1.75 in, usage 60.7%

Load case 4.8: wind 130 mph, ice 2.00 in, usage 64.8%

Load case 4.9: wind 135 mph, ice 2.25 in, usage 68.9%

Load case 4.10: wind 140 mph, ice 2.50 in, usage 72.10%

Load case 4.11: wind 145 mph, ice 2.75 in, usage 76.11%

Load case 4.12: wind 150 mph, ice 3.00 in, usage 80.12%

Load case 4.13: wind 155 mph, ice 3.25 in, usage 84.13%

Load case 4.14: wind 160 mph, ice 3.50 in, usage 88.14%

Load case 4.15: wind 165 mph, ice 3.75 in, usage 92.15%

Load case 4.16: wind 170 mph, ice 4.00 in, usage 51.16%

Load case 4.17: wind 175 mph, ice 4.25 in, usage 55.17%

Load case 4.18: wind 180 mph, ice 4.50 in, usage 59.18%

Load case 4.19: wind 185 mph, ice 4.75 in, usage 63.19%

Load case 4.20: wind 190 mph, ice 5.00 in, usage 67.20%

Load case 4.21: wind 195 mph, ice 5.25 in, usage 71.21%

Load case 4.22: wind 200 mph, ice 5.50 in, usage 75.22%

Load case 4.23: wind 205 mph, ice 5.75 in, usage 79.23%

Load case 4.24: wind 210 mph, ice 6.00 in, usage 83.24%

Load case 4.25: wind 215 mph, ice 6.25 in, usage 87.25%

Load case 4.26: wind 220 mph, ice 6.50 in, usage 91.26%

Load case 4.27: wind 225 mph, ice 6.75 in, usage 50.27%

Load case 4.28: wind 230 mph, ice 7.00 in, usage 54.28%

Load case 4.29: wind 235 mph, ice 7.25 in, usage 58.29%

Load case 5.1: wind 95 mph, ice 0.25 in, usage 90.1%

Load case 5.2: wind 100 mph, ice 0.50 in, usage 94.2%

Load case 5.3: wind 105 mph, ice 0.75 in, usage 53.3%

Load case 5.4: wind 110 mph, ice 1.00 in, usage 57.4%

Load case 5.5: wind 115 mph, ice 1.25 in, usage 61.5%

Load case 5.6: wind 120 mph, ice 1.50 in, usage 65.6%

Load case 5.7: wind 125 mph, ice 1.75 in, usage 69.7%

Load case 5.8: wind 130 mph, ice 2.00 in, usage 73.8%

Load case 5.9: wind 135 mph, ice 2.25 in, usage 77.9%

Load case 5.10: wind 140 mph, ice 2.50 in, usage 81.10%

Load case 5.11: wind 145 mph, ice 2.75 in, usage 85.11%

Load case 5.12: wind 150 mph, ice 3.00 in, usage 89.12%

Load case 5.13: wind 155 mph, ice 3.25 in, usage 93.13%

Load case 5.14: wind 160 mph, ice 3.50 in, usage 52.14%

Load case 5.15: wind 165 mph, ice 3.75 in, usage 56.15%

Load case 5.16: wind 170 mph, ice 4.00 in, usage 60.16%

Load case 5.17: wind 175 mph, ice 4.25 in, usage 64.17%

Load case 5.18: wind 180 mph, ice 4.50 in, usage 68.18%

Load case 5.19: wind 185 mph, ice 4.75 in, usage 72.19%

Load case 5.20: wind 190 mph, ice 5.00 in, usage 76.20%

Load case 5.21: wind 195 mph, ice 5.25 in, usage 80.21%

Load case 5.22: wind 200 mph, ice 5.50 in, usage 84.22%

Load case 5.23: wind 205 mph, ice 5.75 in, usage 88.23%

Load case 5.24: wind 210 mph, ice 6.00 in, usage 92.24%

Load case 5.25: wind 215 mph, ice 6.25 in, usage 51.25%

Load case 5.26: wind 220 mph, ice 6.50 in, usage 55.26%

Load case 5.27: wind 225 mph, ice 6.75 in, usage 59.27%

Load case 5.28: wind 230 mph, ice 7.00 in, usage 63.28%

Load case 5.29: wind 235 mph, ice 7.25 in, usage 67.29%

Load case 6.1: wind 95 mph, ice 0.25 in, usage 54.1%

Load case 6.2: wind 100 mph, ice 0.50 in, usage 58.2%

Load case 6.3: wind 105 mph, ice 0.75 in, usage 62.3%

Load case 6.4: wind 110 mph, ice 1.00 in, usage 66.4%

Load case 6.5: wind 115 mph, ice 1.25 in, usage 70.5%

Load case 6.6: wind 120 mph, ice 1.50 in, usage 74.6%

Load case 6.7: wind 125 mph, ice 1.75 in, usage 78.7%

Load case 6.8: wind 130 mph, ice 2.00 in, usage 82.8%

Load case 6.9: wind 135 mph, ice 2.25 in, usage 86.9%

Load case 6.10: wind 140 mph, ice 2.50 in, usage 90.10%

Load case 6.11: wind 145 mph, ice 2.75 in, usage 94.11%

Load case 6.12: wind 150 mph, ice 3.00 in, usage 53.12%

Load case 6.13: wind 155 mph, ice 3.25 in, usage 57.13%

Load case 6.14: wind 160 mph, ice 3.50 in, usage 61.14%

Load case 6.15: wind 165 mph, ice 3.75 in, usage 65.15%

Load case 6.16: wind 170 mph, ice 4.00 in, usage 69.16%

Load case 6.17: wind 175 mph, ice 4.25 in, usage 73.17%

Load case 6.18: wind 180 mph, ice 4.50 in, usage 77.18%

Load case 6.19: wind 185 mph, ice 4.75 in, usage 81.19%

Load case 6.20: wind 190 mph, ice 5.00 in, usage 85.20%

Load case 6.21: wind 195 mph, ice 5.25 in, usage 89.21%

Load case 6.22: wind 200 mph, ice 5.50 in, usage 93.22%

Load case 6.23: wind 205 mph, ice 5.75 in, usage 52.23%

Load case 6.24: wind 210 mph, ice 6.00 in, usage 56.24%

Load case 6.25: wind 215 mph, ice 6.25 in, usage 60.25%

Load case 6.26: wind 220 mph, ice 6.50 in, usage 64.26%

Load case 6.27: wind 225 mph, ice 6.75 in, usage 68.27%

Load case 6.28: wind 230 mph, ice 7.00 in, usage 72.28%

Load case 6.29: wind 235 mph, ice 7.25 in, usage 76.29%

Load case 7.1: wind 95 mph, ice 0.25 in, usage 63.1%

Load case 7.2: wind 100 mph, ice 0.50 in, usage 67.2%

Load case 7.3: wind 105 mph, ice 0.75 in, usage 71.3%

Load case 7.4: wind 110 mph, ice 1.00 in, usage 75.4%

Load case 7.5: wind 115 mph, ice 1.25 in, usage 79.5%

Load case 7.6: wind 120 mph, ice 1.50 in, usage 83.6%

Load case 7.7: wind 125 mph, ice 1.75 in, usage 87.7%

Load case 7.8: wind 130 mph, ice 2.00 in, usage 91.8%

Load case 7.9: wind 135 mph, ice 2.25 in, usage 50.9%

Load case 7.10: wind 140 mph, ice 2.50 in, usage 54.10%

Load case 7.11: wind 145 mph, ice 2.75 in, usage 58.11%

Load case 7.12: wind 150 mph, ice 3.00 in, usage 62.12%

Load case 7.13: wind 155 mph, ice 3.25 in, usage 66.13%

Load case 7.14: wind 160 mph, ice 3.50 in, usage 70.14%

Load case 7.15: wind 165 mph, ice 3.75 in, usage 74.15%

Load case 7.16: wind 170 mph, ice 4.00 in, usage 78.16%

Load case 7.17: wind 175 mph, ice 4.25 in, usage 82.17%

Load case 7.18: wind 180 mph, ice 4.50 in, usage 86.18%

Load case 7.19: wind 185 mph, ice 4.75 in, usage 90.19%

Load case 7.20: wind 190 mph, ice 5.00 in, usage 94.20%

Load case 7.21: wind 195 mph, ice 5.25 in, usage 53.21%

Load case 7.22: wind 200 mph, ice 5.50 in, usage 57.22%

Load case 7.23: wind 205 mph, ice 5.75 in, usage 61.23%

Load case 7.24: wind 210 mph, ice 6.00 in, usage 65.24%

Load case 7.25: wind 215 mph, ice 6.25 in, usage 69.25%

Load case 7.26: wind 220 mph, ice 6.50 in, usage 73.26%

Load case 7.27: wind 225 mph, ice 6.75 in, usage 77.27%

Load case 7.28: wind 230 mph, ice 7.00 in, usage 81.28%

Load case 7.29: wind 235 mph, ice 7.25 in, usage 85.29%