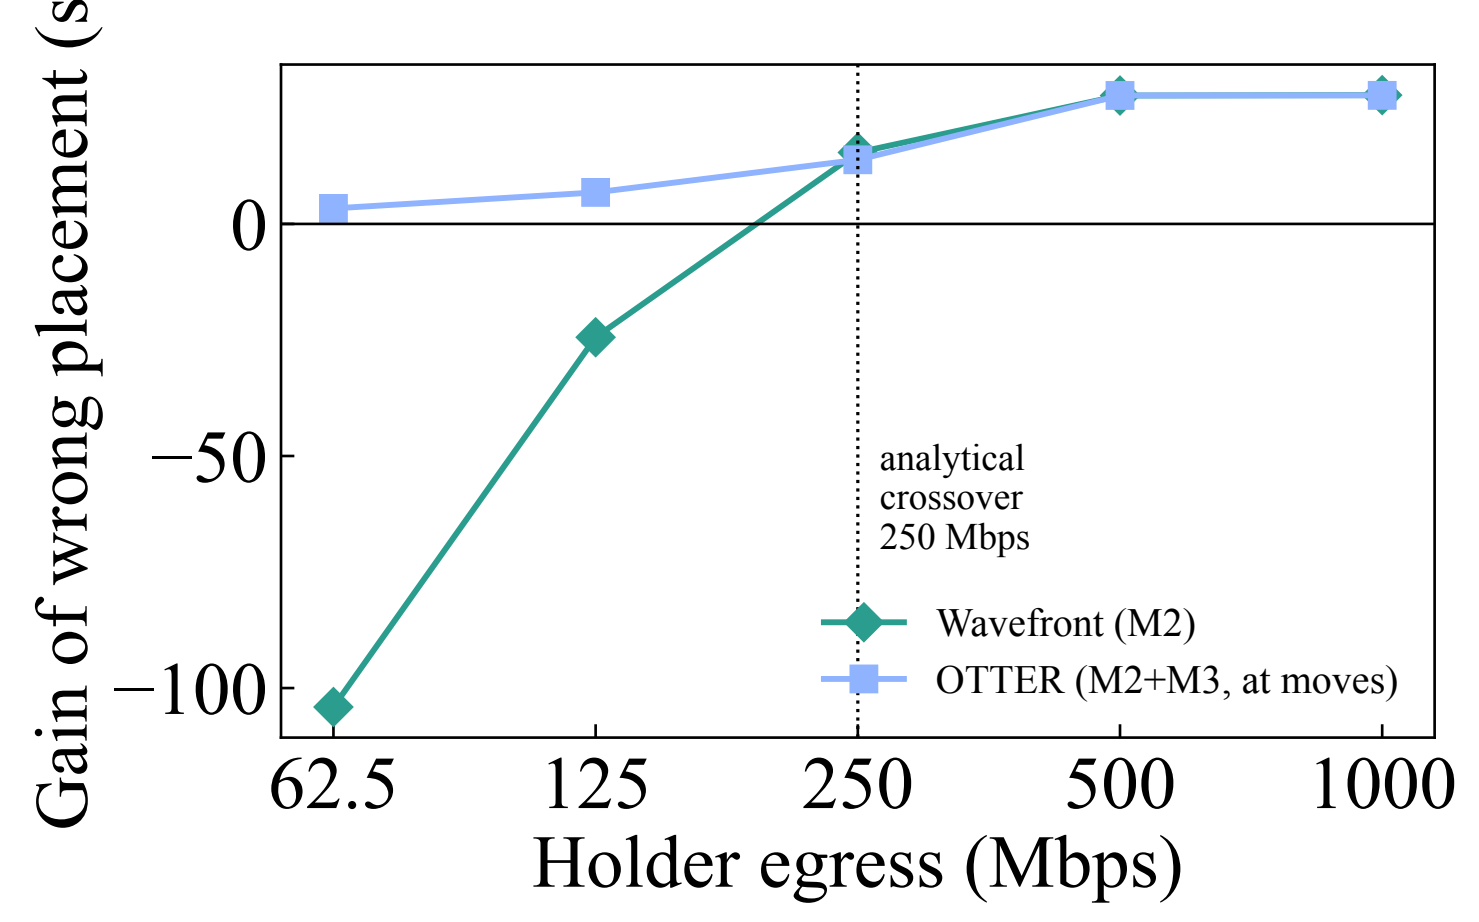
Gain of wrong placement (s
0
−50
−100
62.5
125
250
500
1000
Holder egress (Mbps)
analytical
crossover
250 Mbps
Wavefront (M2)
OTTER (M2+M3, at moves)