

Existing terrain plan

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

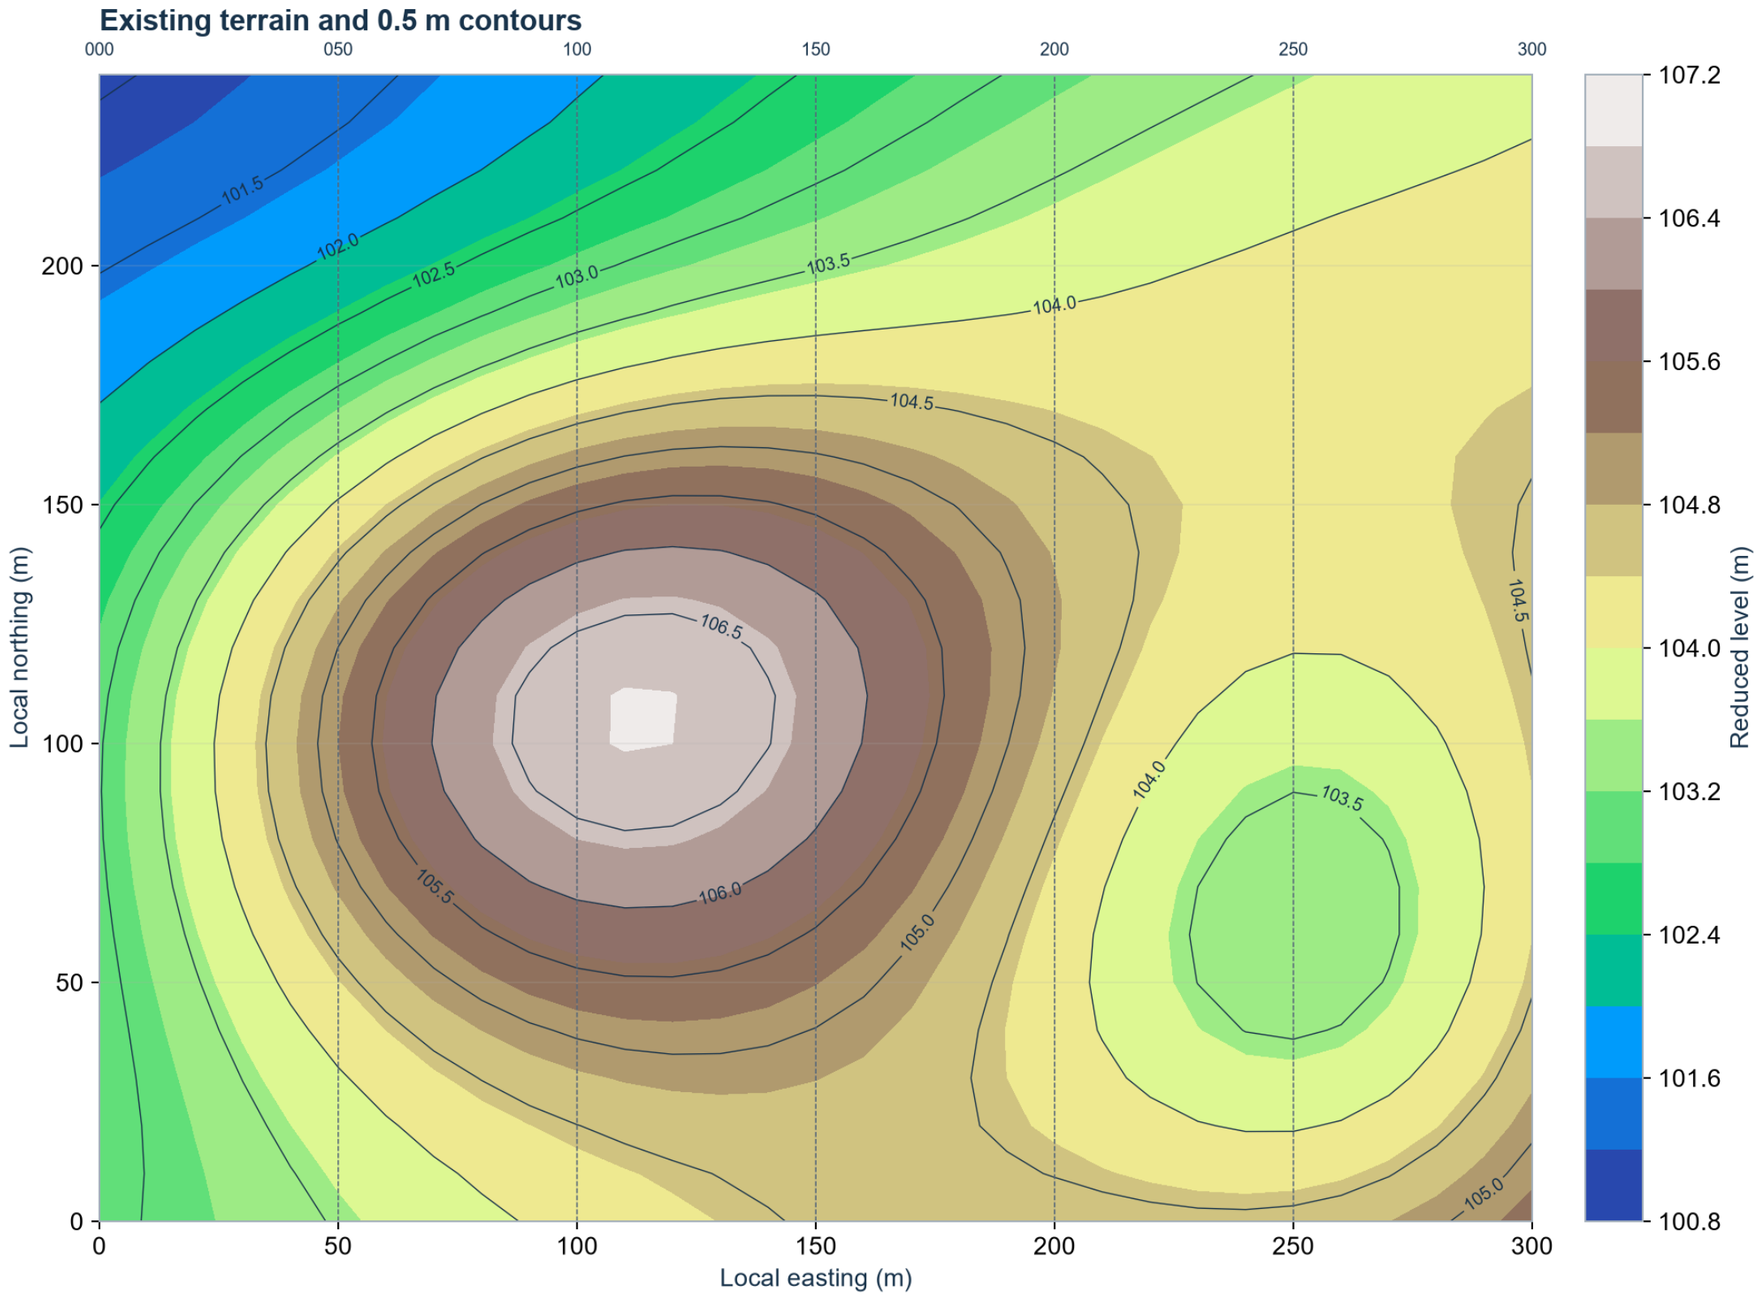


Proposed formation plan

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

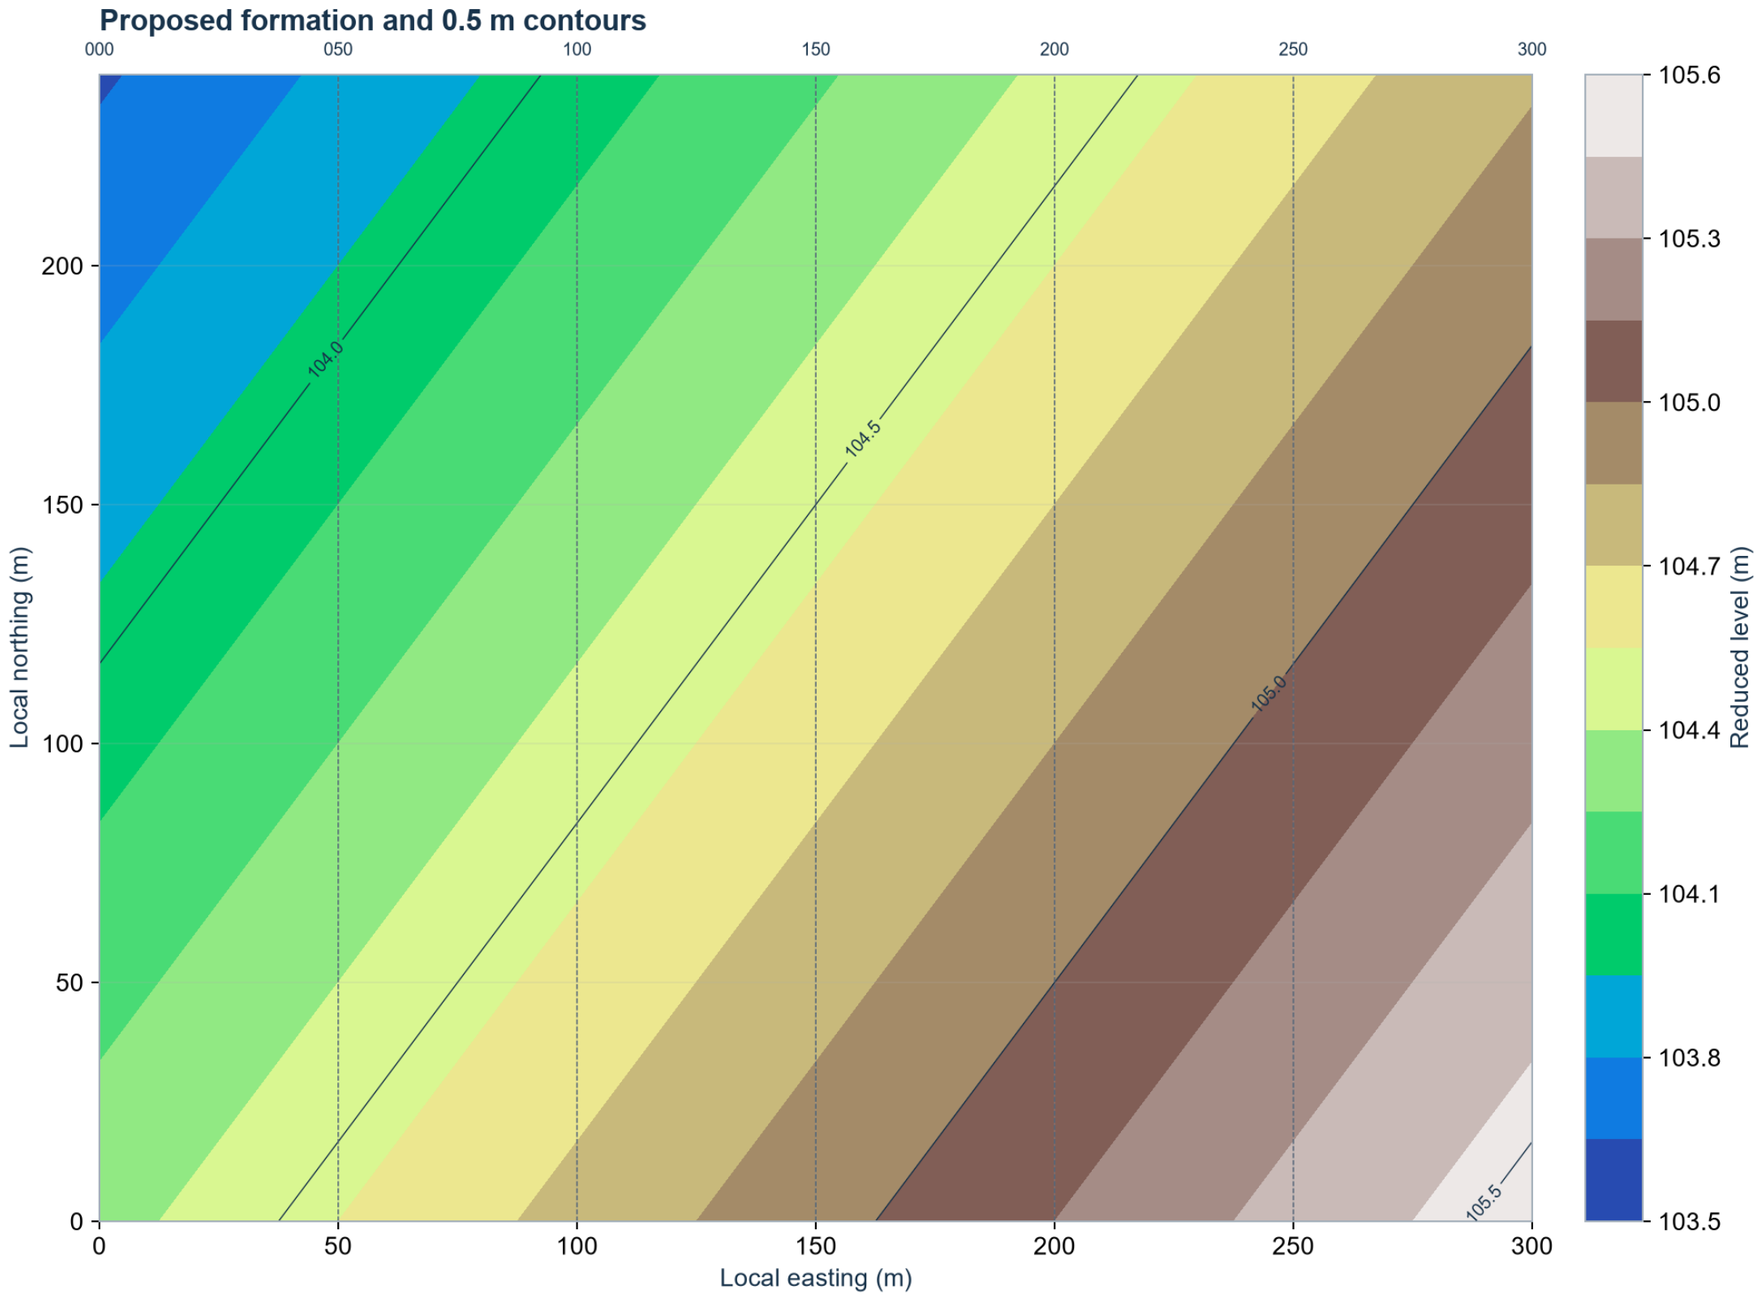

Cut and fill depth plan


IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

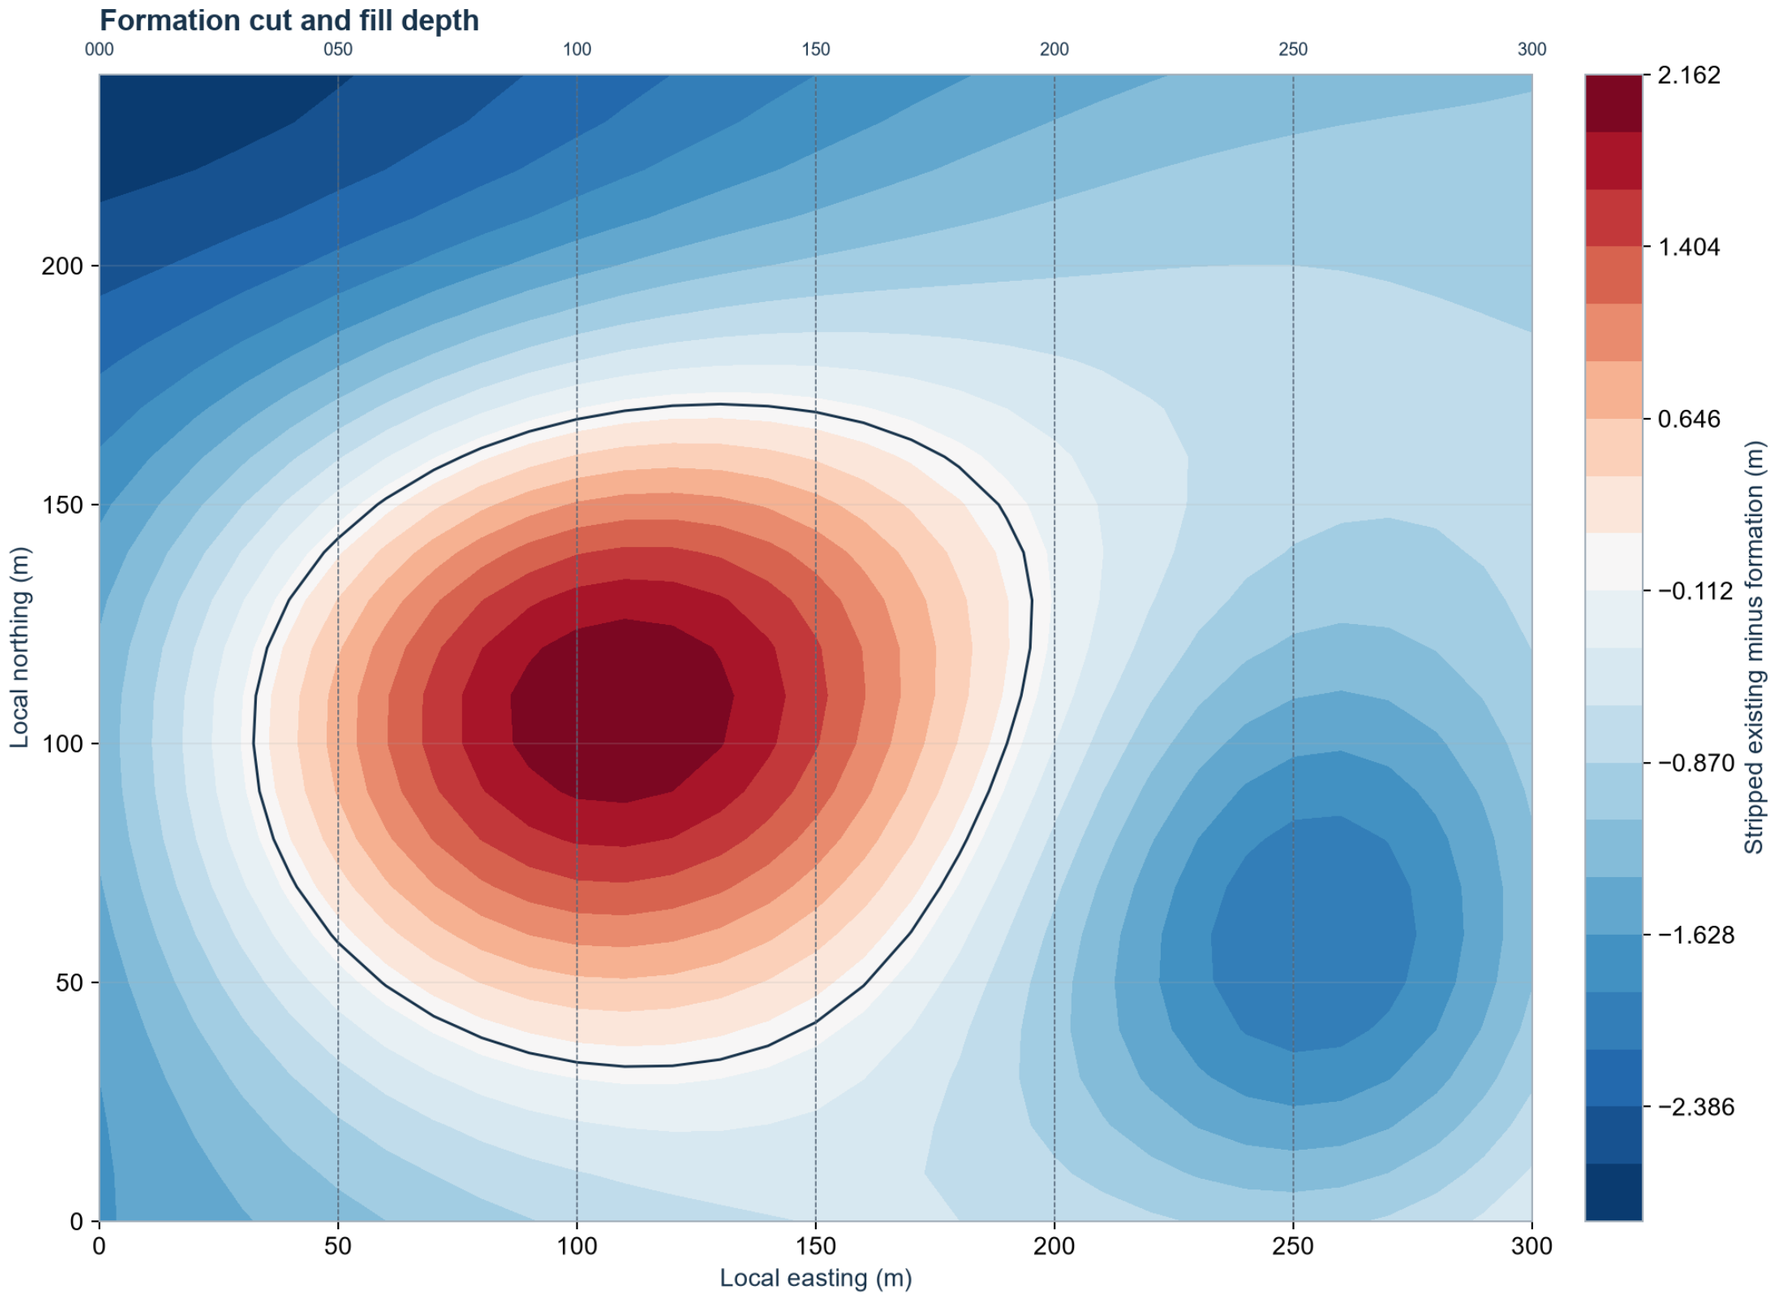

Three-dimensional surface review


IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

Existing terrain and proposed formation

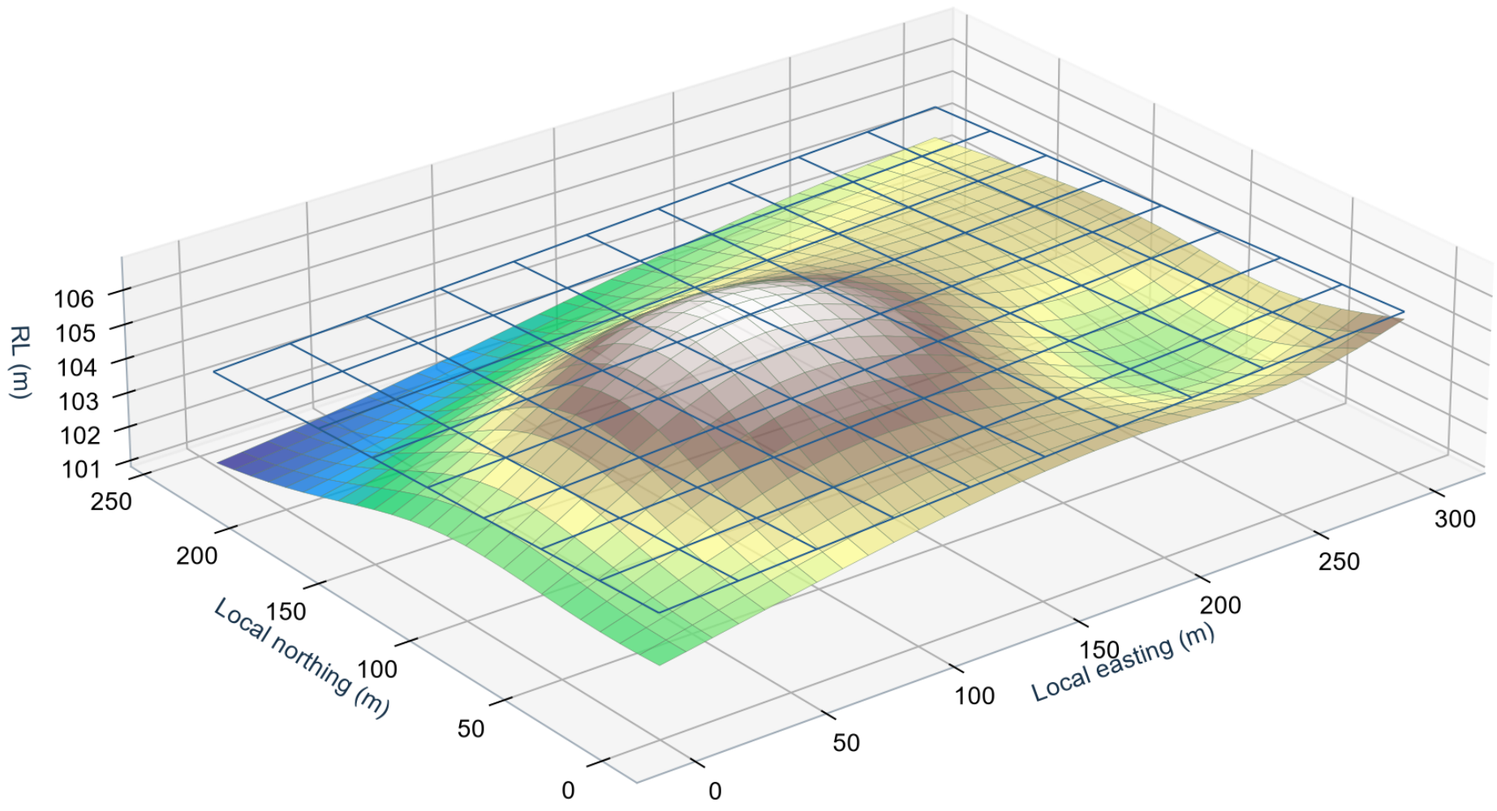


Cross section CH 000

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

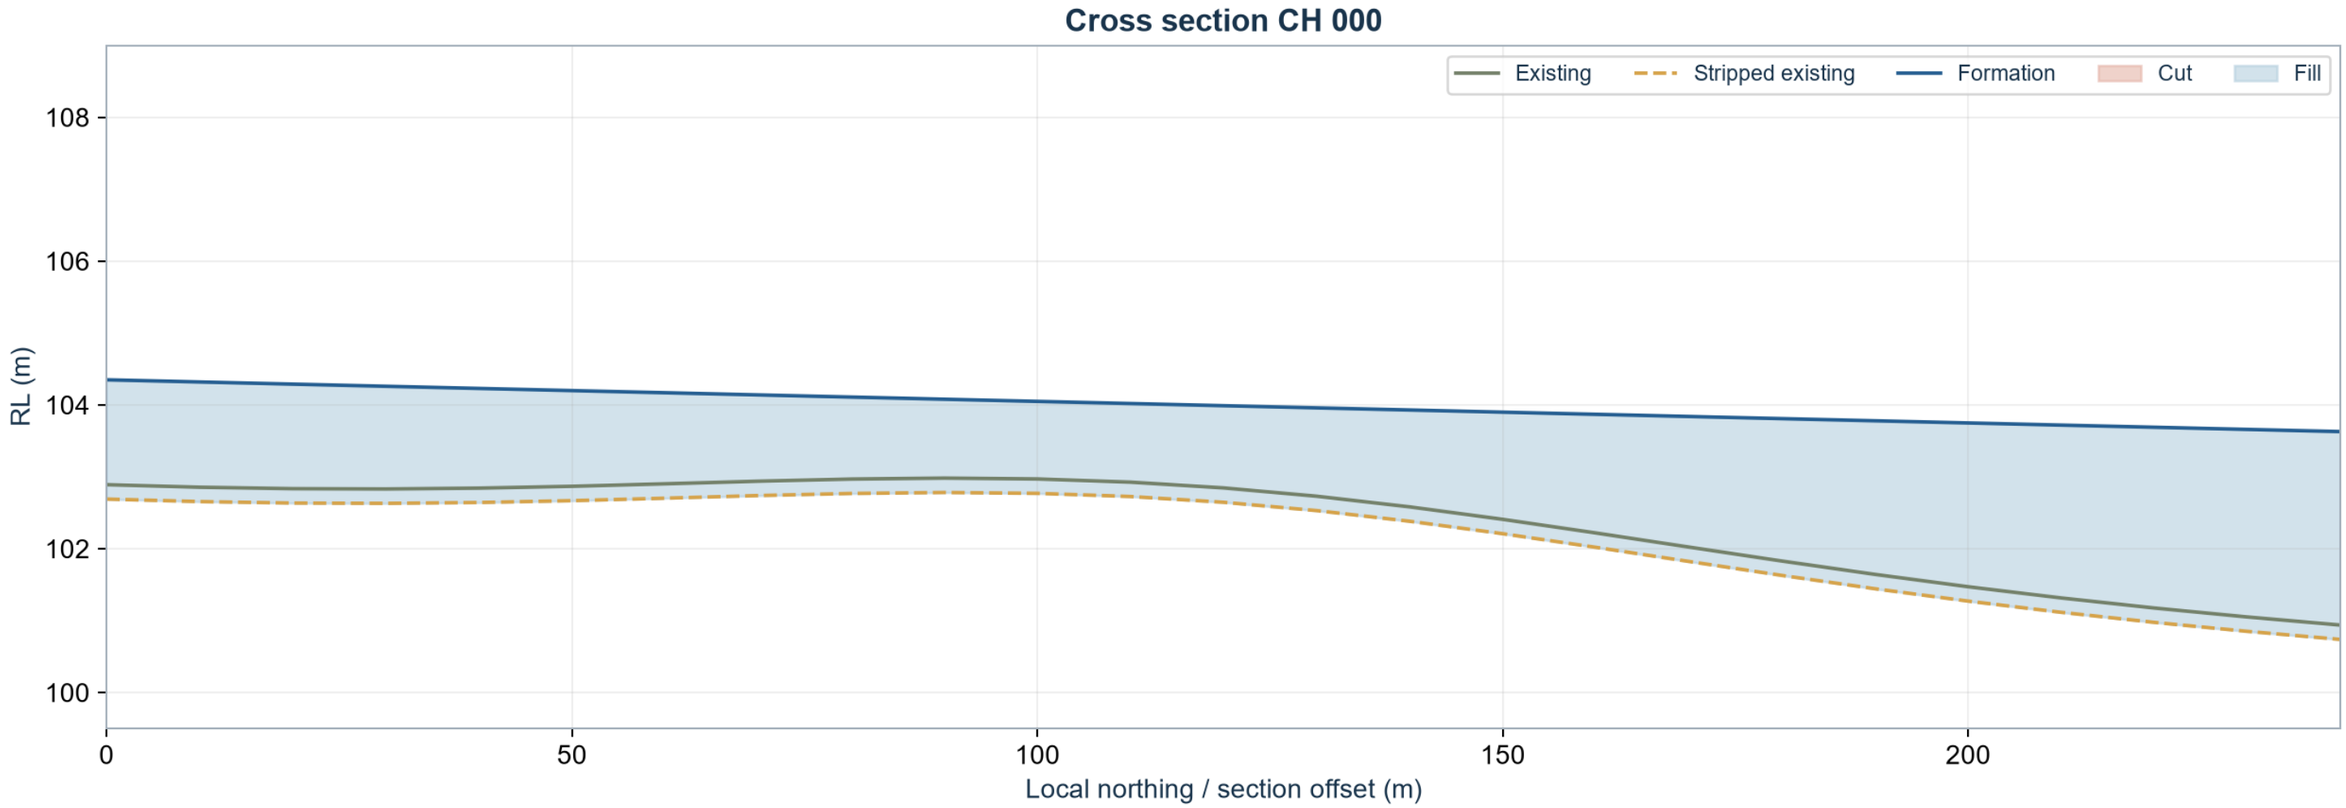


Cross section CH 050

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

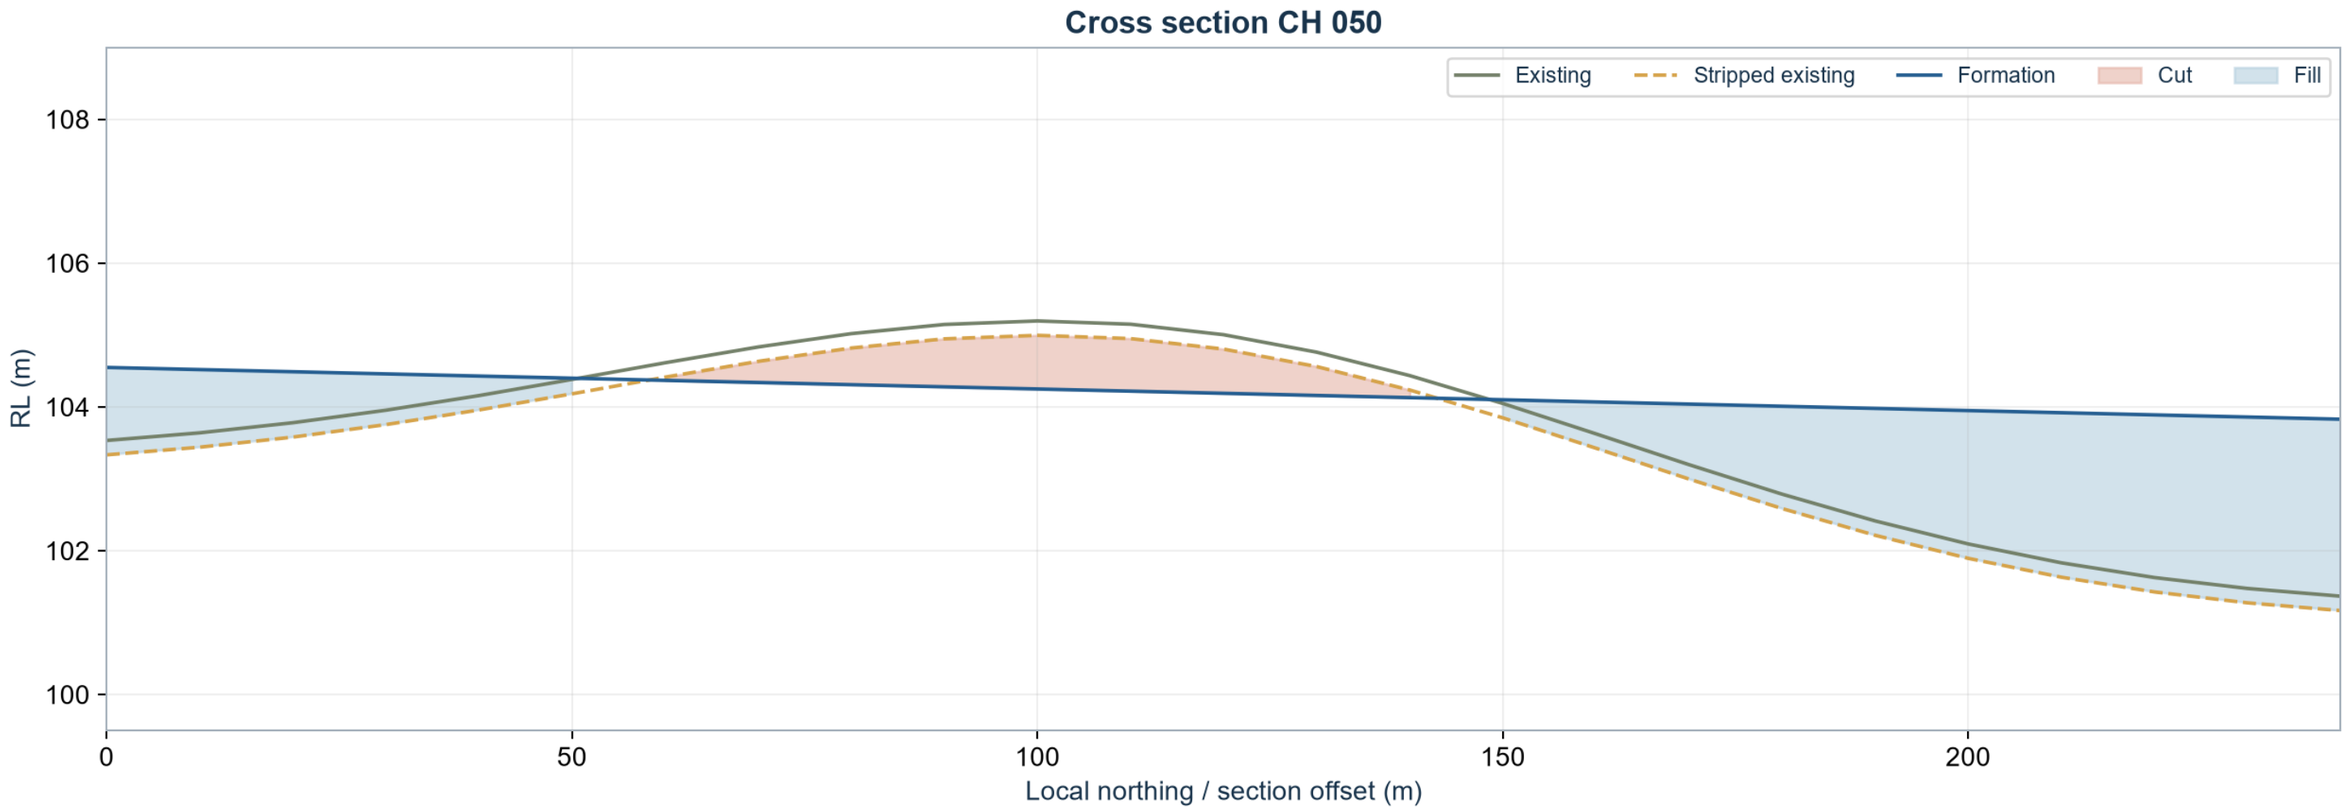


Cross section CH 100

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

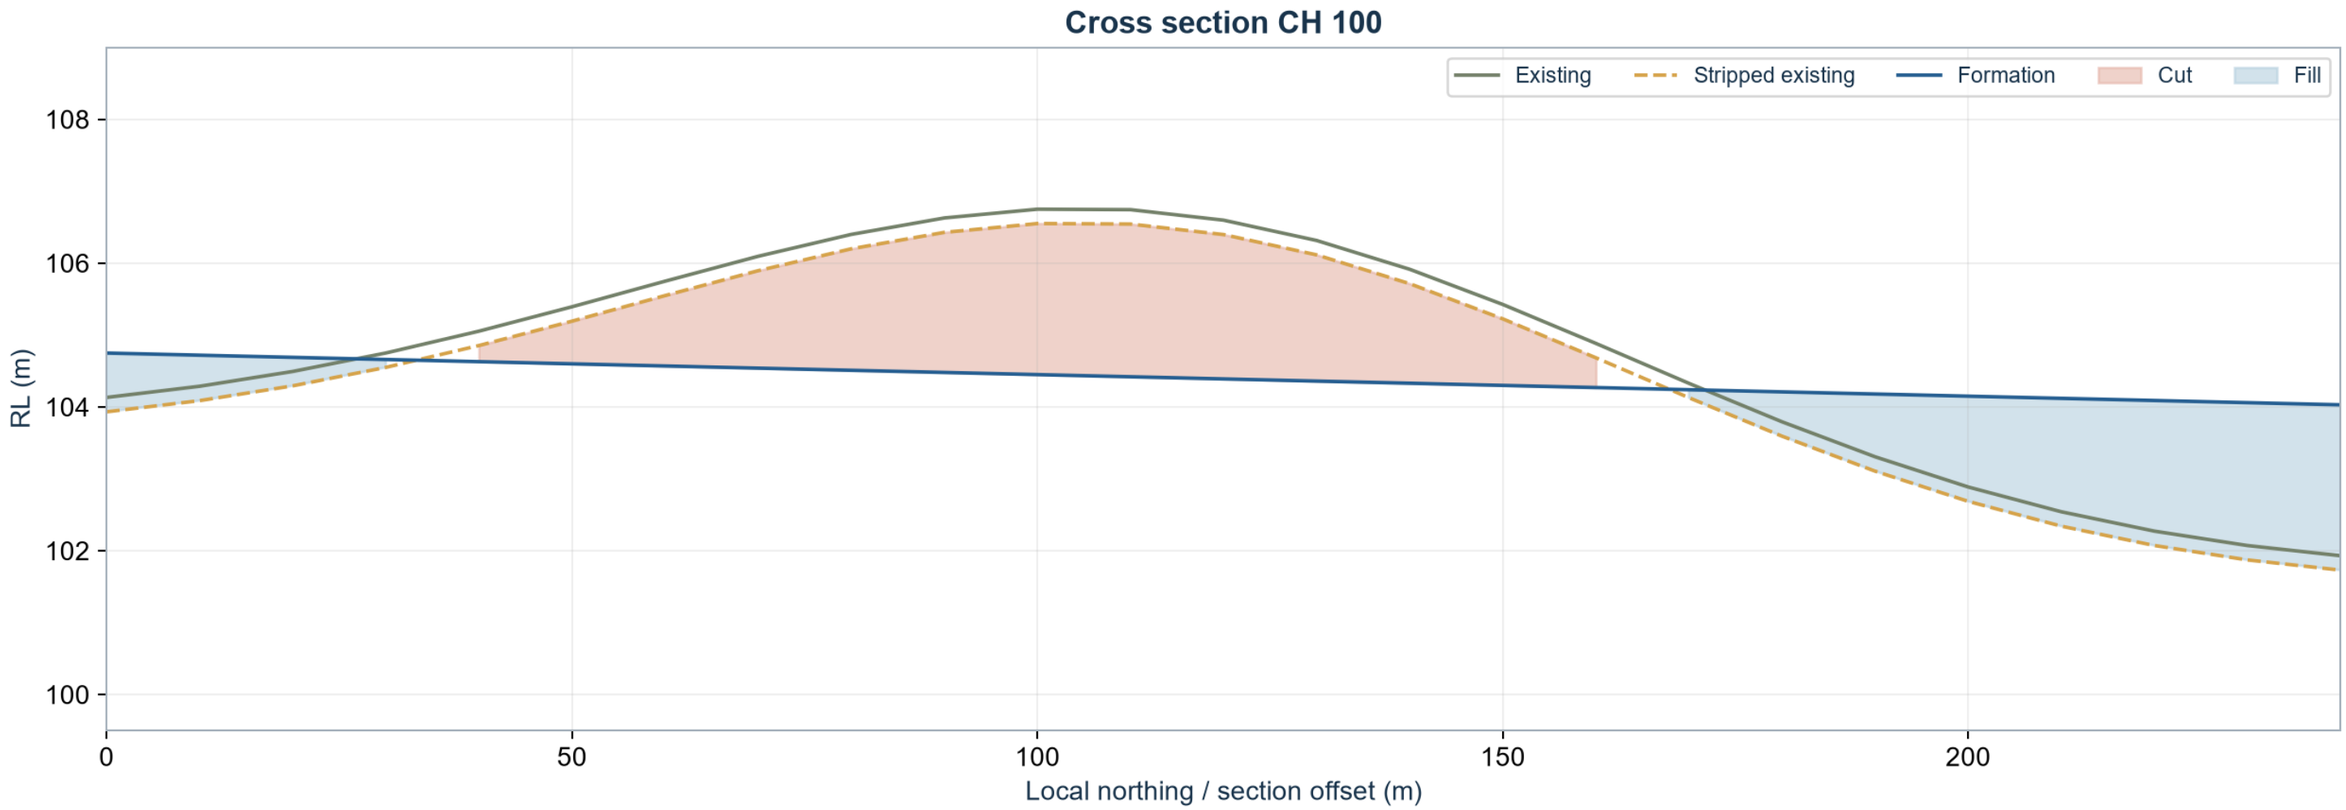


Cross section CH 150

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

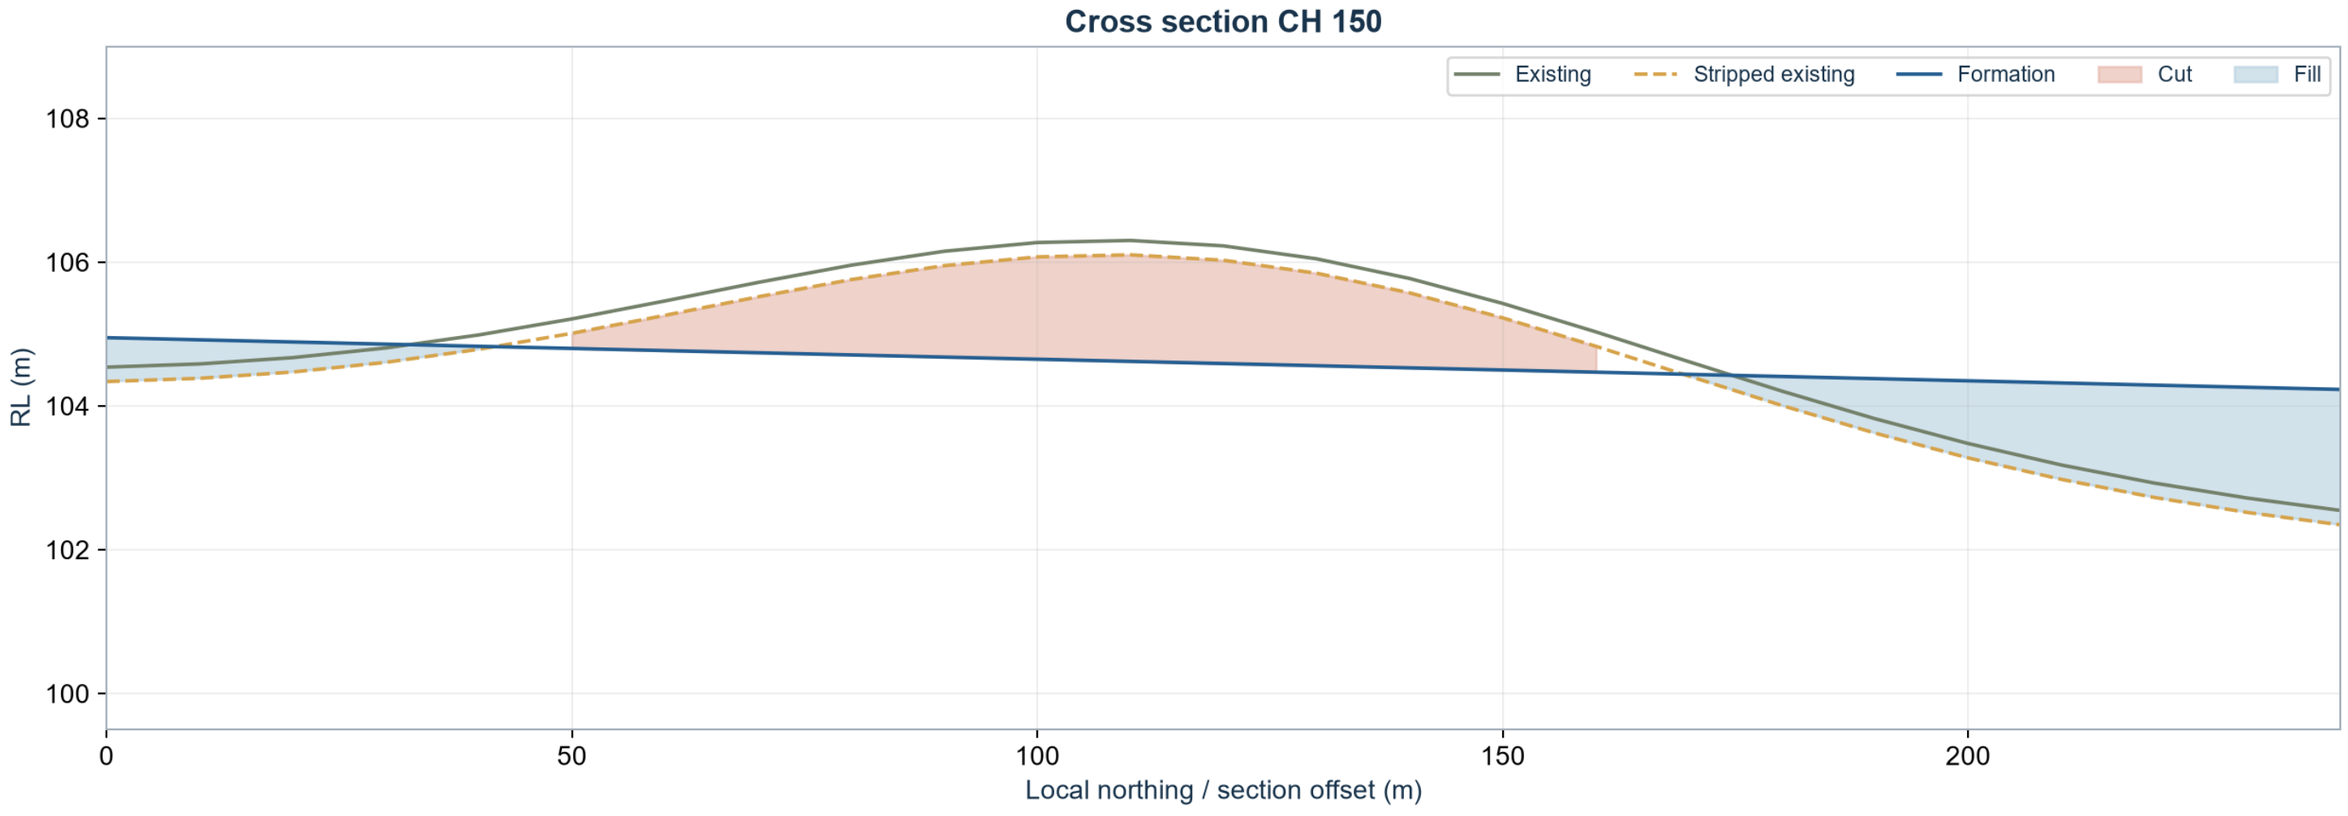


Cross section CH 200

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

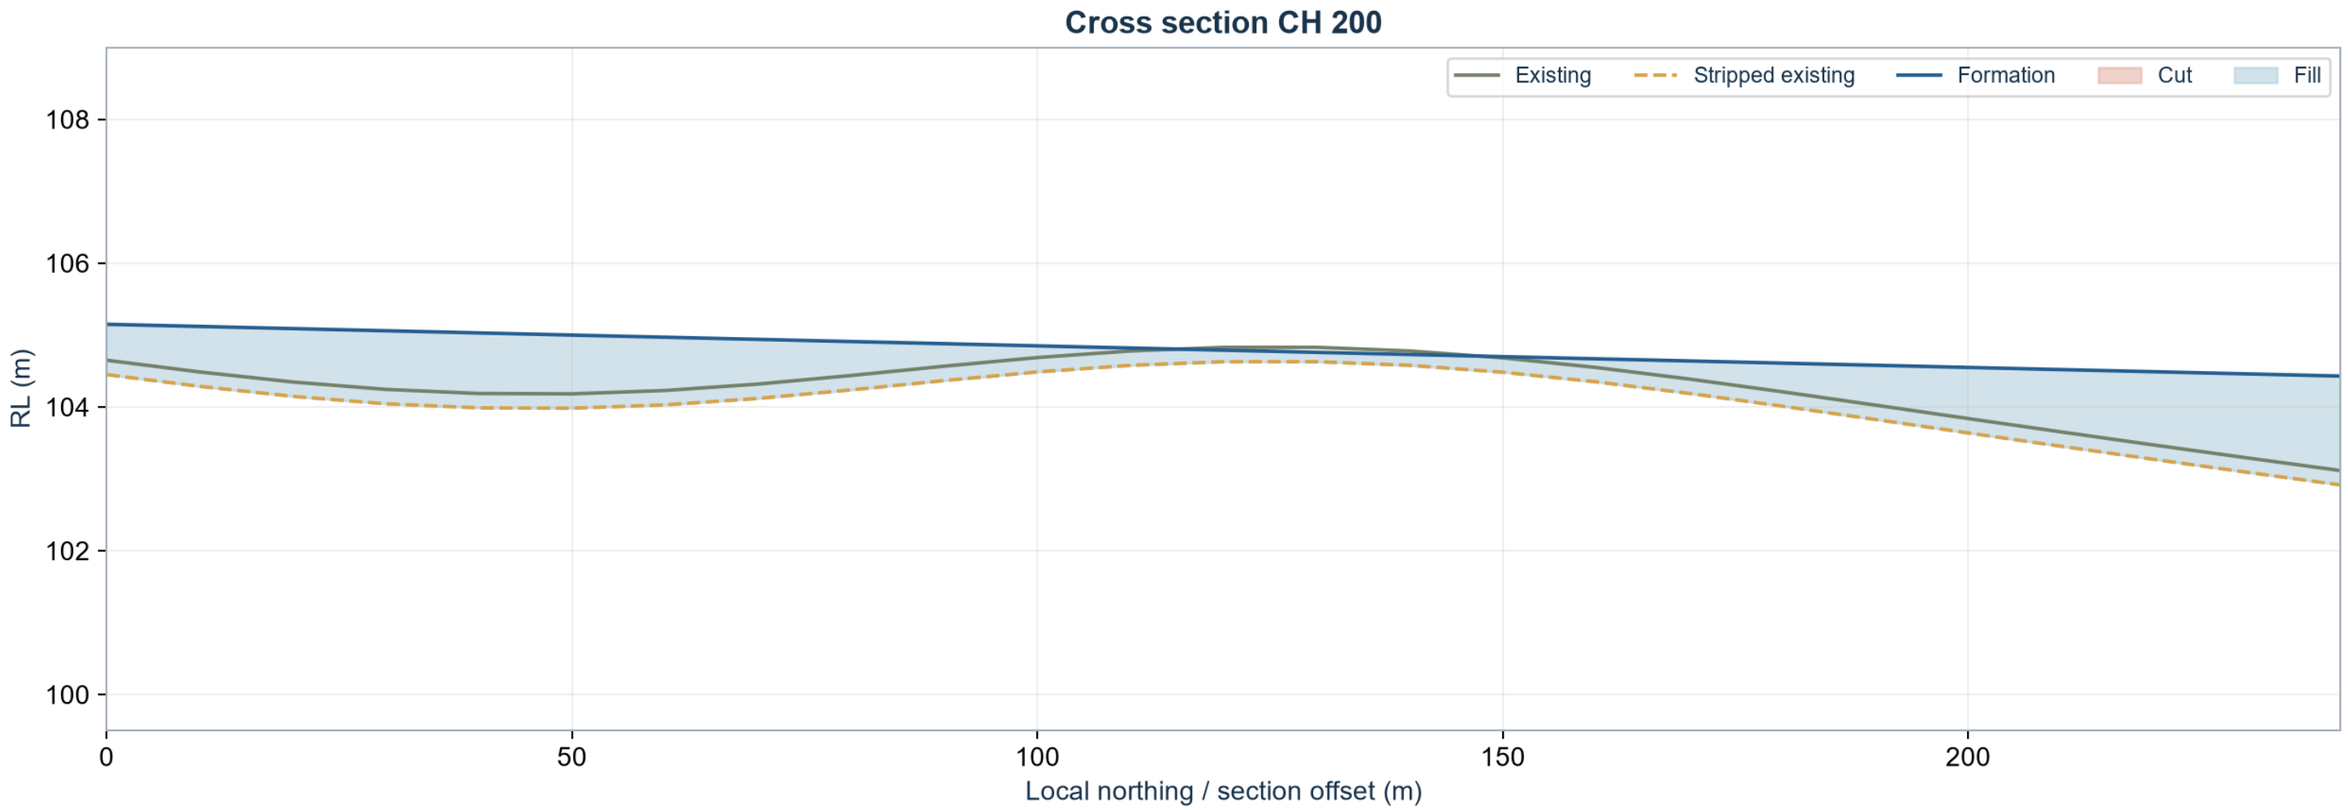


Cross section CH 250

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

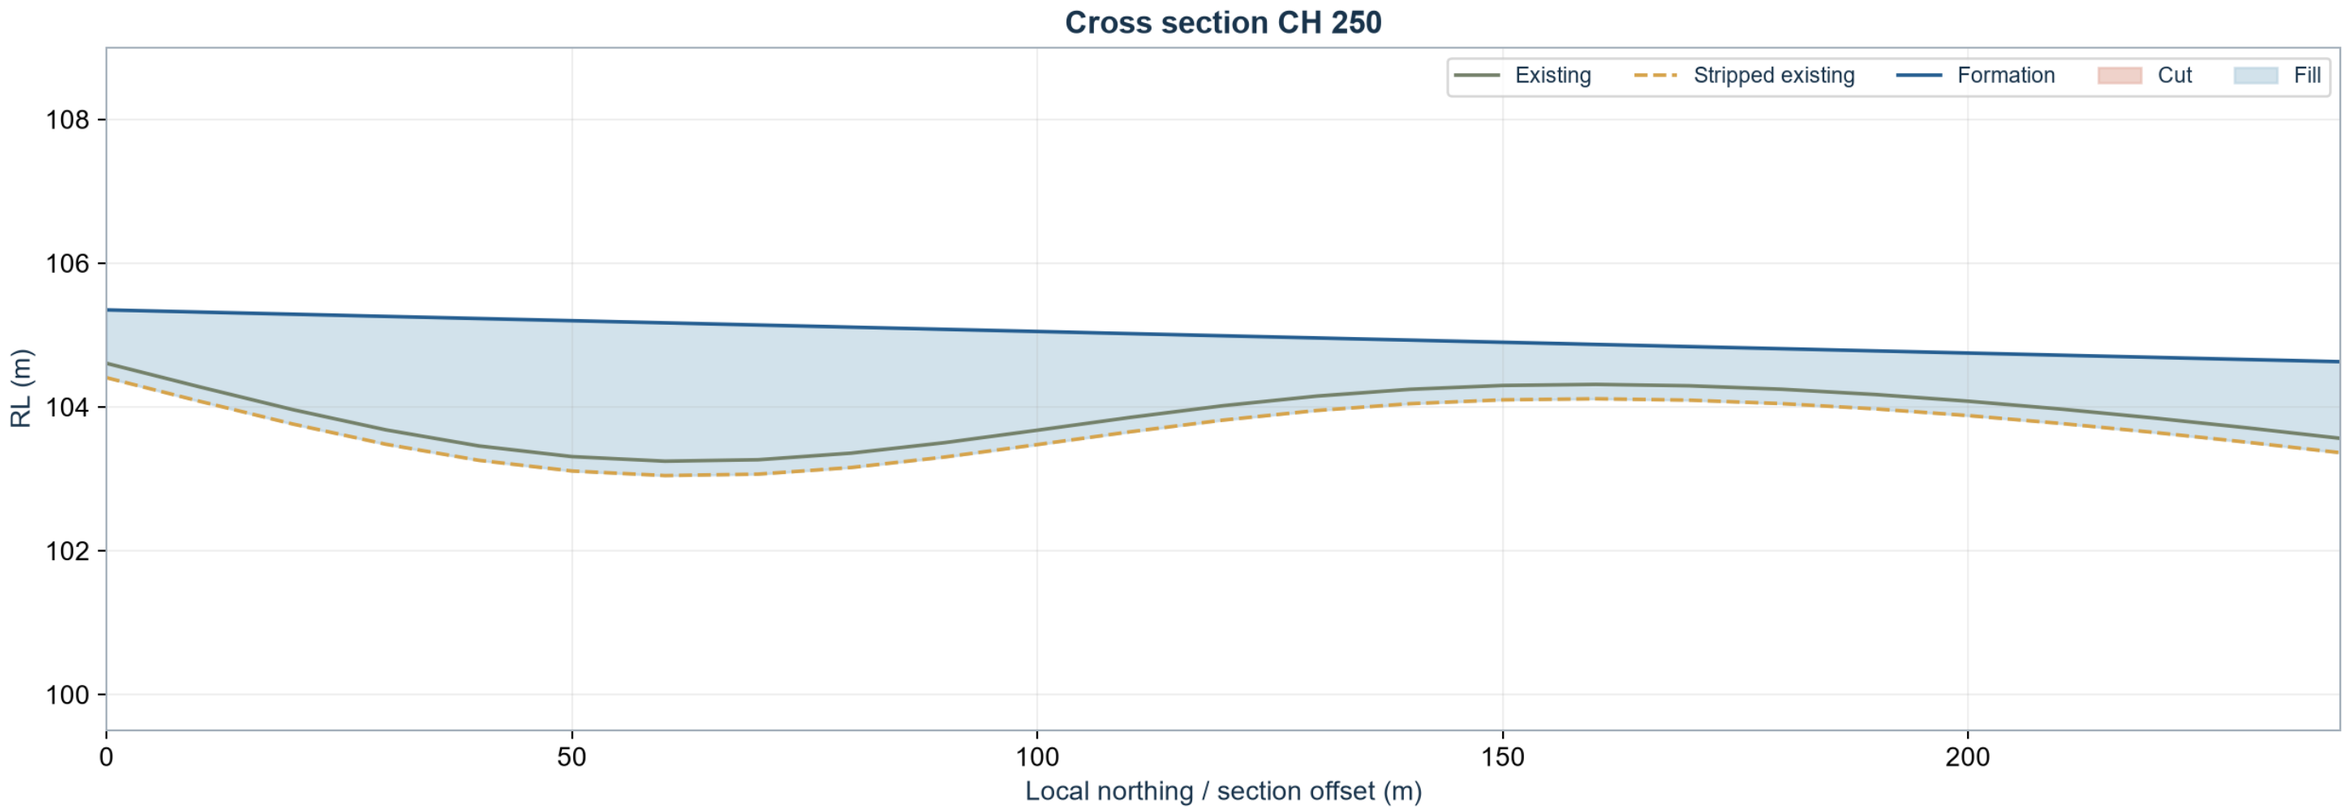

Cross section CH 300

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

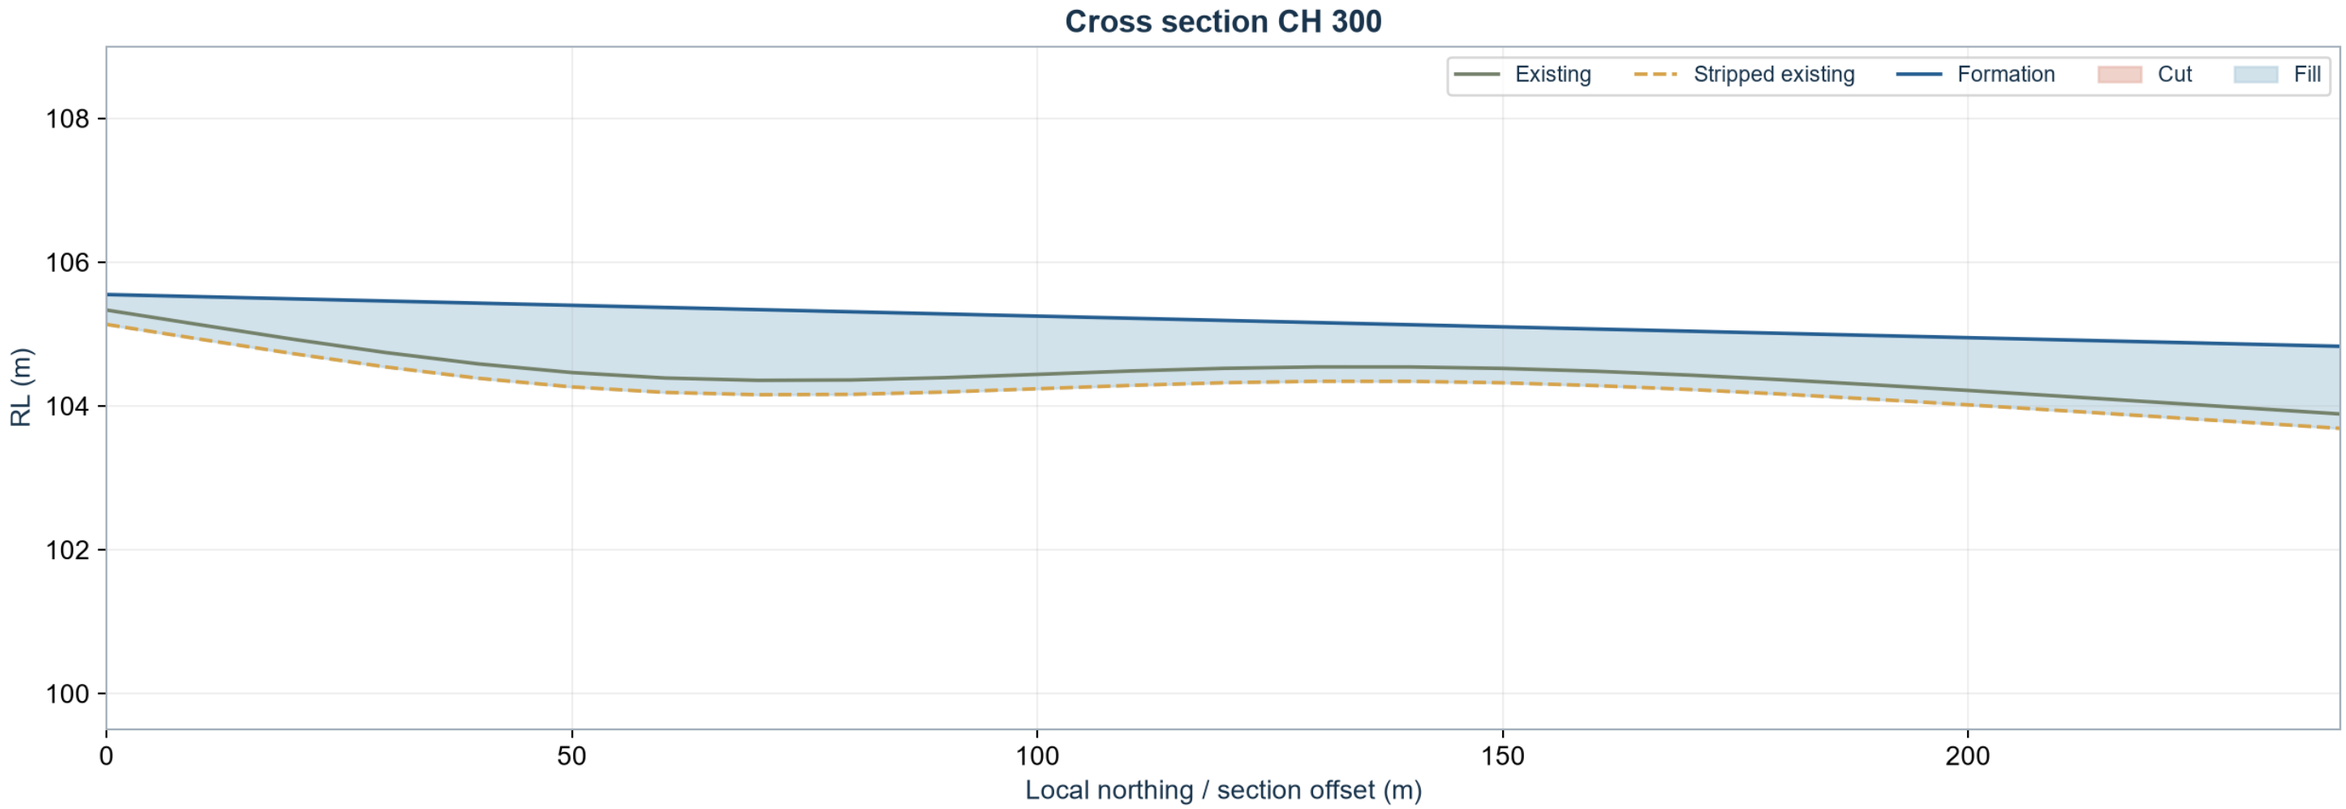

Earthworks quantities and material balance

IN-E01 / 300 x 240 m formation platform / Local coordinates in metres / Rev 01

Measure	Quantity	Unit
Formation footprint	72,000.0	m2
Topsoil stripping depth	0.200	m
Topsoil stripped	14,400.0	m3 in situ
Formation cut below topsoil	16,407.3	m3 bank
Formation fill	60,826.6	m3 compacted
Suitable fraction of cut	0.950	ratio
Bank-to-compacted yield	0.920	ratio
Compacted yield from suitable cut	14,339.9	m3 compacted
Imported fill required	46,486.6	m3 compacted
Surplus suitable cut	0.000	m3 bank
Unsuitable cut	820.4	m3 bank

Method: triangular prisms integrated exactly after clipping each triangle at the cut/fill zero line.

Topsoil removed uniformly first. Formation quantities use existing RL less 0.20 m minus proposed RL.

TIN mesh: 775 vertices, 1,440 triangles per surface. Original and formation surfaces share topology.

Independent 1 m midpoint integration of the same TIN agrees within 0.1%.

Material yield and suitability are assumed inputs, not laboratory results. No swell factor is applied.

Boundary earthworks exclude batters, retaining structures, excavation support, haul distances and disposal charges.