


Do not change SensorStation Accessory Port Pinout



Description: SCL and SDA are I2C serial lines. Pullups exists on the SensorStation board. The "CS" pin is a generic, dedicated GPIO from the Raspberry PI that can be used to enable the device, work as a chip select, or perform a function, such as PWM. Both 3.3V and 5V are available to the accessory and are directly connected to the main power bus. No current limiting, other than the main SensorStation polyfuse, is implemented. For more details, please see the SensorStation Accessory documentation.

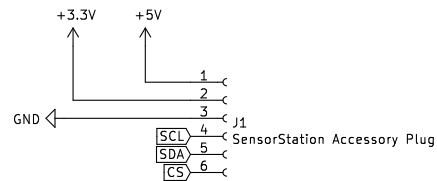


PZ Speaker Driver

Designed using MAX4410

App Note 2914

<https://www.maximintegrated.com/en/app-notes/index.mvp/id/2914>

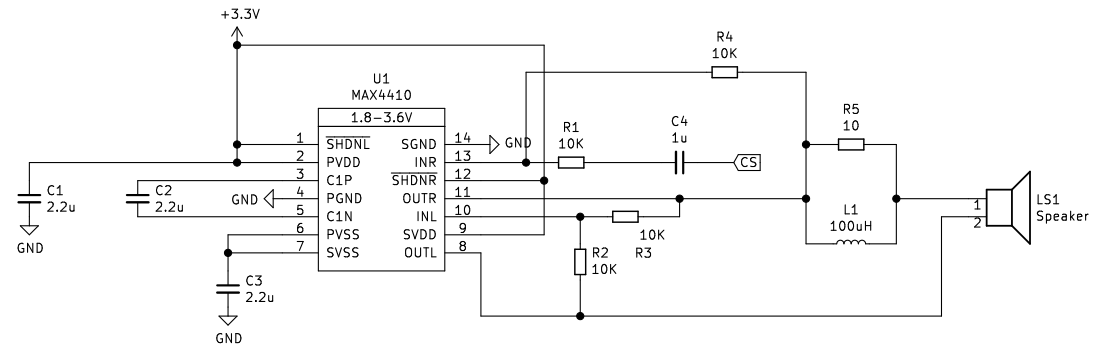

Sheet: /
File: SensorStation_Accessory_Sound.sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. kicad (5.0.1-3-g963ef8bb5)

Id: 1/1