


LUOXtech.eu - example calculations

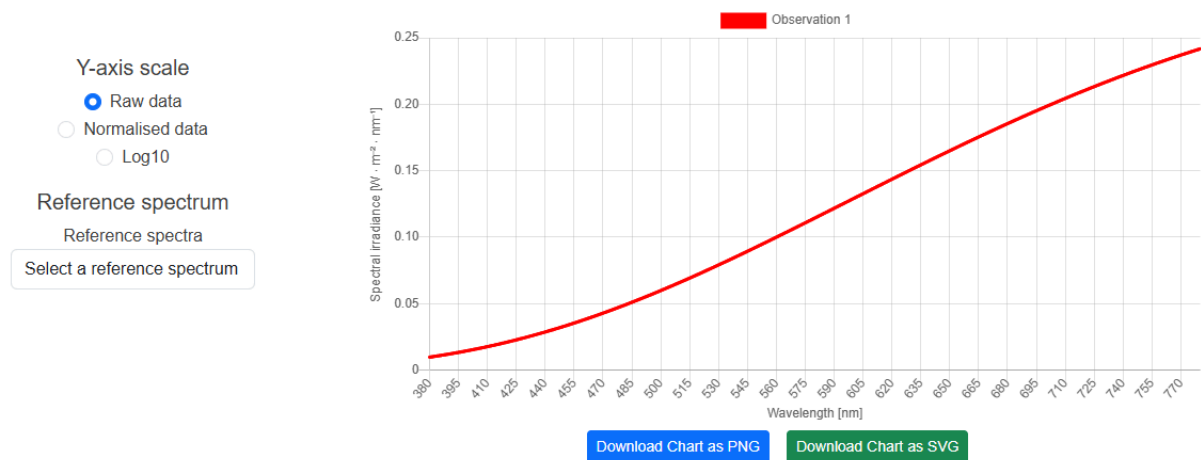

Condition	Observation 1
Illuminance [lx]	7369.2552
Melanopic EDI [lx] (CIE 2018)	3653.2724
X (CIE XYZ 1931)	1.0985
Y (CIE XYZ 1931)	1.0000
Z (CIE XYZ 1931)	0.3558
x (CIE XYZ 1931)	0.4476
y (CIE XYZ 1931)	0.4074
CCT [K] (Ohno, 2013)	2855.5241
Duv	0.0000
Colour Rendering Index [Ra] (CIE 1995)	100.0000
Colour Fidelity Index [Rf] (CIE 2017)	100.0000
Melanopic DER (CIE 2018)	0.4957
U500 [%]	7.8796

Condition	Observation 1
Illuminance [lx]	7369.2552
Melanopic EDI [lx] (CIE 2018)	3653.2724
Rhodopic EDI [lx]	4222.7761
L-cone-opic EDI [lx]	7495.0583
M-cone-opic EDI [lx]	5943.7062
S-cone-opic EDI [lx]	2291.5826
Melanopic DER	0.4957
Rhodopic DER	0.5730
L-cone-opic DER	1.0171
M-cone-opic DER	0.8066
S-cone-opic DER	0.3110
Melanopic ELR	0.6575
Rhodopic ELR	0.8307
L-cone-opic ELR	1.6567
M-cone-opic ELR	1.1742
S-cone-opic ELR	0.2541
Melanopic irradiance [$\text{mW} \cdot \text{m}^{-2}$]	4845.0180
Rhodopic irradiance [$\text{mW} \cdot \text{m}^{-2}$]	6121.7736
L-cone-opic irradiance [$\text{mW} \cdot \text{m}^{-2}$]	12208.7586
M-cone-opic irradiance [$\text{mW} \cdot \text{m}^{-2}$]	8653.0040
S-cone-opic irradiance [$\text{mW} \cdot \text{m}^{-2}$]	1872.8867
X (CIE XYZ 1931)	1.0985
Y (CIE XYZ 1931)	1.0000
Z (CIE XYZ 1931)	0.3558
x (CIE XYZ 1931)	0.4476
y (CIE XYZ 1931)	0.4074
CIE 1964 $x_{10}y_{10}$ chromaticity [x_{10}]	0.4512
CIE 1964 $x_{10}y_{10}$ chromaticity [y_{10}]	0.4059
CCT [K] (Ohno, 2013)	2855.5241
Duv	0.0000
Colour Rendering Index [Ra] (CIE 1995)	100.0000
Colour Fidelity Index [Rf] (CIE 2017)	100.0000
U500 [%]	7.8796

CIE 1960 UCS [u]	0.2560
CIE 1976 UCS [u prime]	0.2560
CIE 1960 UCS [v]	0.3495
CIE 1976 UCS [v prime]	0.5243
TM30 - CCT [K] - Ohno, 2013	2855.5796
TM30 - Duv	-0.0000
TM30 - Colour Fidelity Index [Rf]	99.9998
TM30 - Gamut Index [Rg]	99.9999
TM30 - Rcs, h1	0.0000
TM30 - Rf, h1	99.9997