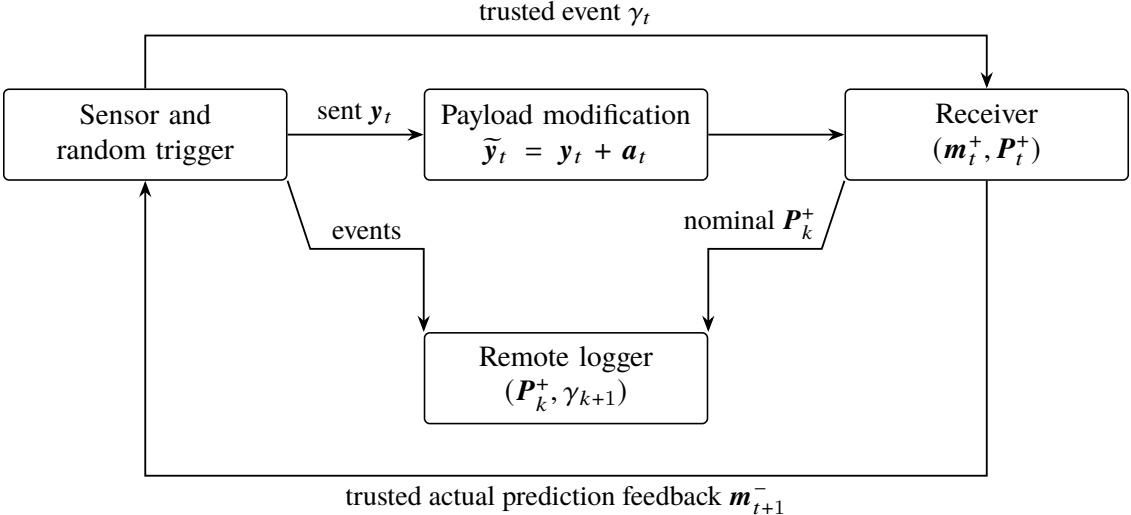
trusted event γ_t
Sensor and random trigger
sent $\boldsymbol{y}_t$
Payload modification $\widetilde{\boldsymbol{y}}_t = \boldsymbol{y}_t + \boldsymbol{a}_t$
Receiver $(\boldsymbol{m}_t^+, \boldsymbol{P}_t^+)$
events
nominal $\boldsymbol{P}_k^+$
Remote logger $(\boldsymbol{P}_k^+, \gamma_{k+1})$
trusted actual prediction feedback $\boldsymbol{m}_{t+1}^-$