

MODEL MVP

MVC is a software design pattern that separates an application into three components.

- Model: Manages data and business logic.
- View: Handles presentation and user interface (UI).
- Controller: Processes user input and updates model/view.

This separation improves maintainability, scalability, and testability in web applications.


2. Description project.

We need to create and control 1 output (a LED) using LabVIEW. The Human Machine Interface (HMI) must be programmed following the MVC (Model-View-Controller) design pattern. The system reads analog input values (0–1023) via serial communication (VISA) and displays them in a virtual tank and analog meter. Based on the received data, LabVIEW controls the LED output. The interface includes real-time data visualization and resource selection for user interaction.


3. Components.

Inputs		Outputs	
1 Potentiometer	Virtual	1 led (BLUE)	virtual/physical
Controladores			
LabView	SW	1 resistor	330 Ω
Arduino UNO	SW-Physical		
Simulator-TINKERCAD			


4. Electronic Circuit.

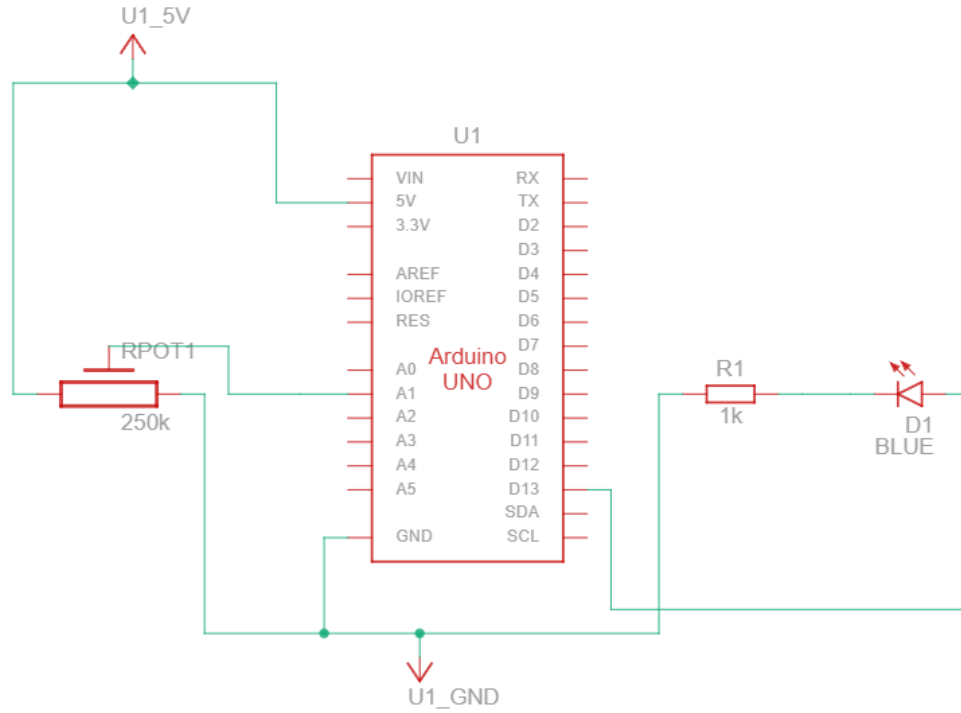


5. Simulation.

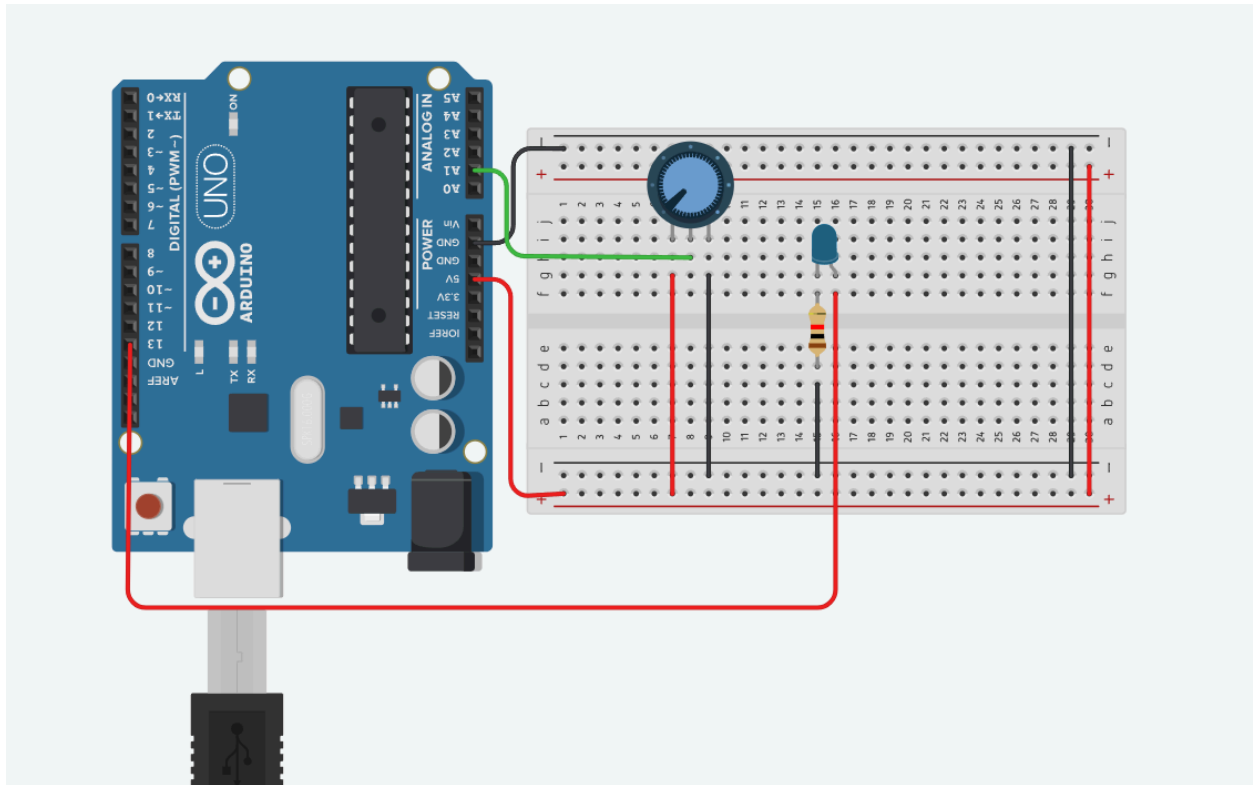


6. Model MVC “M” by model.

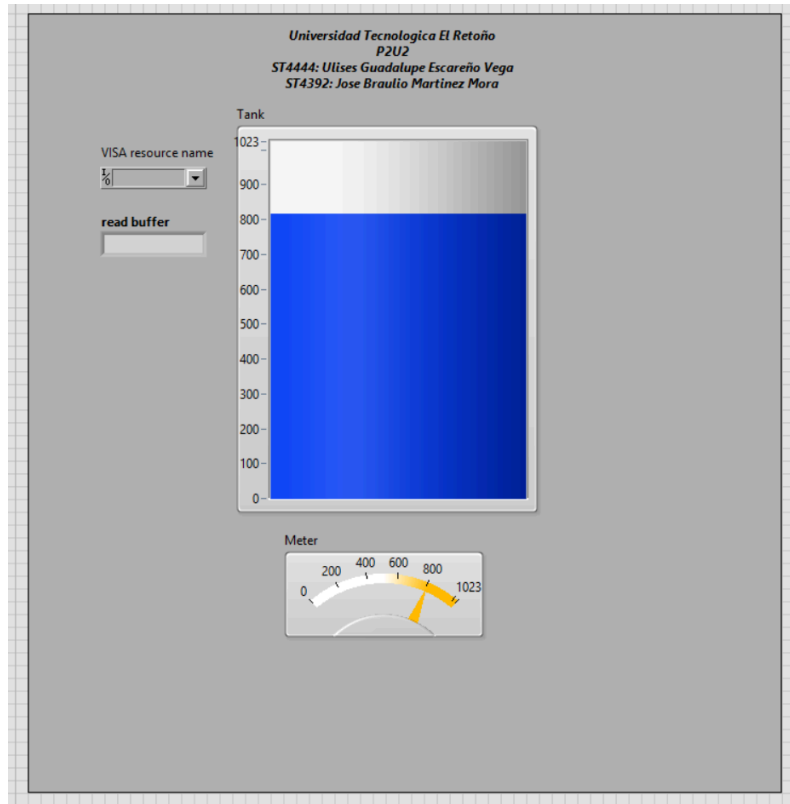


7. Model MVC “V” by VIEW.

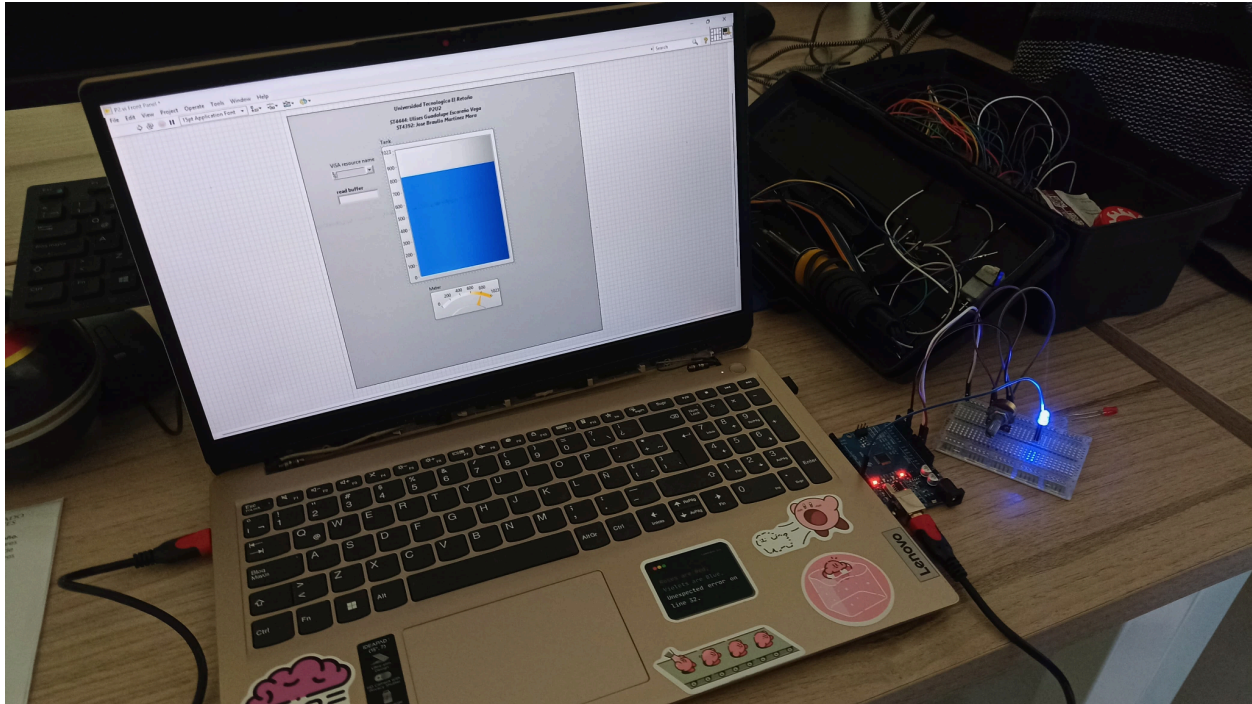

8. Model MVC “C” by CONTROLLERS.

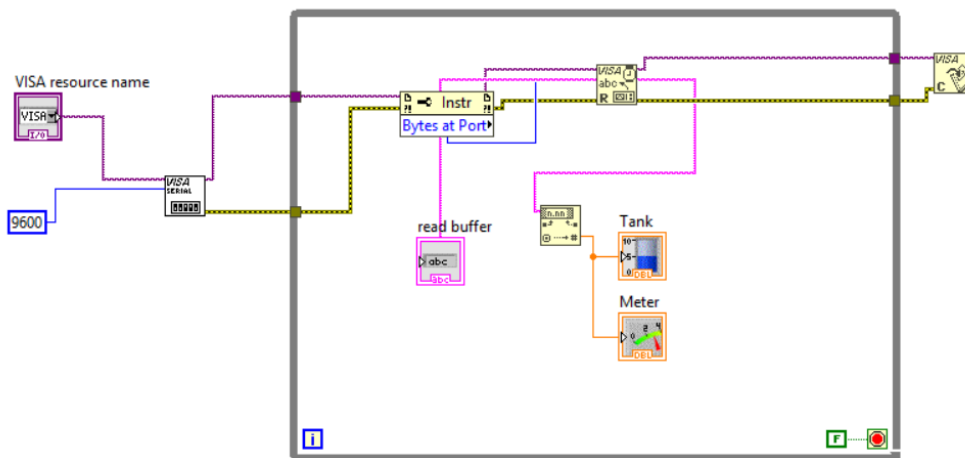

9. Diagram-chart arduino.

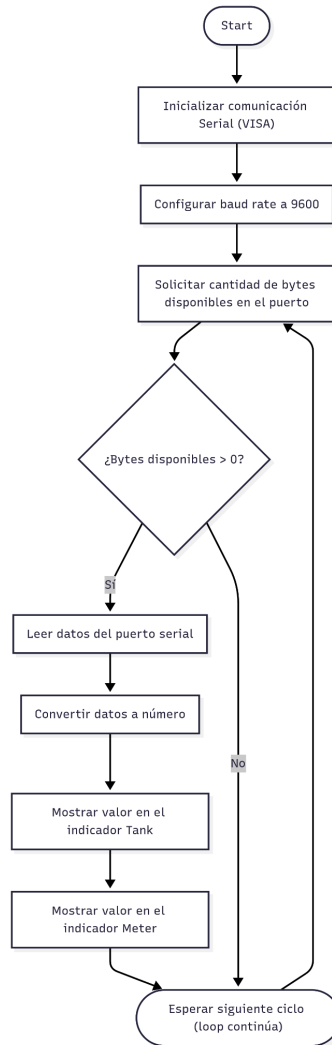

9. Team.

UG&V

Signature student 1 “EVUG”

JBMM

Signature student 2 “MMJB”