

DEMO ONLY — NOT FOR NAVIGATION

Illustrative sample from the EARNWINGS training demo. Not a certified flight plan — do not use for real-world planning or navigation.

VABB → VOBL

Chhatrapati Shivaji Maharaj Intl, Mumbai → Kempegowda Intl, Bengaluru

S PLAN SUMMARY

DISTANCE 450 NM	ENROUTE (ETE) 3h 29m	CRUISE ALTITUDE 8,500 ft · FL085	CRUISE SPEED (TAS) 110 kt
TRIP FUEL 27.9 gal	INITIAL TRACK 141° T	GROUND SPEED 129 kt	FLIGHT RULES VFR · ATS

D DISPATCH STATUS**● CONDITIONAL** Attention: — see Validation & Dispatch.**C CONTENTS**

- 1 ICAO Flight Plan (Form 7233-4) · Route & Airways · Navigation Log
- 2 Route map (with PNR & CP) · Terrain vertical profile
- 3 Winds & performance · Fuel plan · Weather METARs
- 4 Weight & balance and CG · Critical points (PNR / CP)
- 5 Validation report & dispatch summary

1 ICAO FLIGHT PLAN (FORM 7233-4)

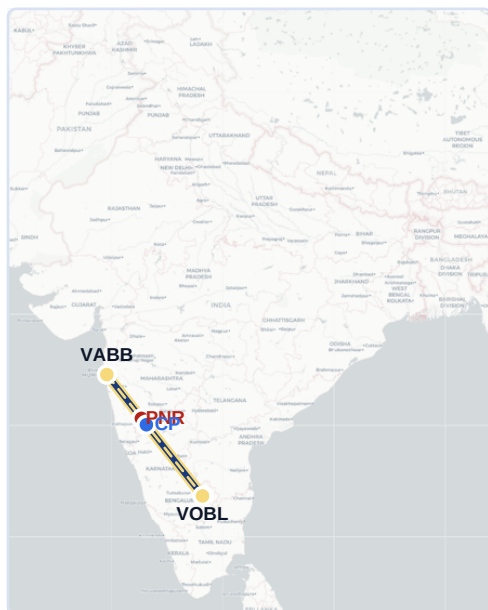
7 · Aircraft ID	VT-ABC
8 · Rules / Type	V / G (VFR · GA)
9 · No / Type / Wake	1 C172 L
10 · Equipment	S / C (std COM/NAV · Mode-C)
13 · Departure / Time	VABB ____Z
15 · Speed / Level / Route	N0110 A085 DCT
16 · Dest / EET / Altn	VOBL 0329 ____
18 · Other	DOF/____ RMK/DEMO – TRAINING SAMPLE, NOT FOR ATS FILING
19 · Endurance / POB	E/0400 P/002 R/UVE S/–

2 ROUTE & AIRWAYS

VABB VABB DCT VOBL VOBL

2 NAVIGATION LOG

LEG	FIX	TRACK °T	DIST NM	GS KT	ETE	FUEL GAL
1	VABB → VOBL	141	450	129	03:29	27.9
Totals			450	129	03:29	27.9

2 ROUTE MAP

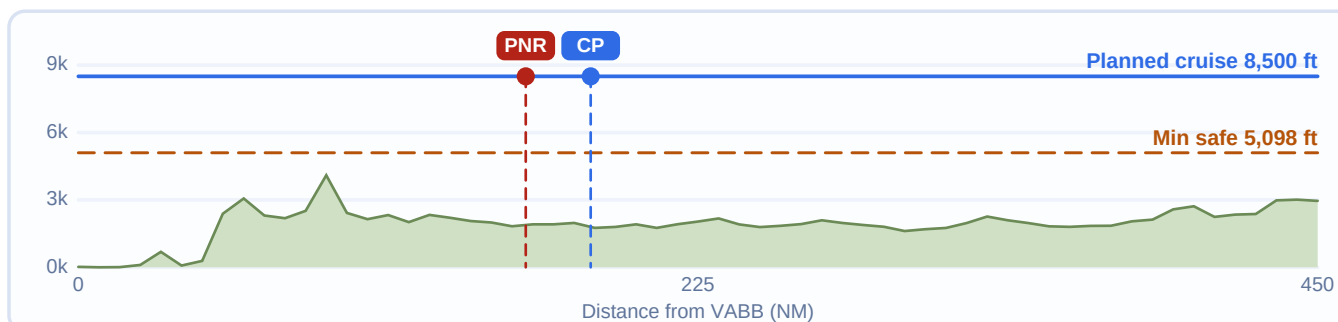
Great-circle track with the two decision points marked.

● VOBL/VOBL — departure & destination

● PNR — Point of No Return · 163 NM

● CP — Critical Point / ETP · 186 NM

Positions projected (Web Mercator). Demo only.

3 TERRAIN / VERTICAL PROFILE

3 WINDS ALOFT & PERFORMANCEWIND AT CRUISE
281/25ktHEAD/TAILWIND
19 kt tailTAS / GS
110 / 129 ktCRUISE LEVEL
8,500 ftBURN RATE
8 gal/hrENDURANCE
4h 00m**3 FUEL PLAN**

COMPONENT	US GAL	BASIS
Taxi	1.6	ground / run-up
Trip (VABB→VOBL)	27.9	ETE 3h 29m @ 8 gph
Contingency (10%)	2.8	trip reserve
Alternate	4.0	to nominated altn
Final reserve (45 min)	6.0	VFR reserve
Total required	42.3	minimum block
Usable on board	32.0	C172 usable

Fuel shortfall: 42 gal required vs 32 usable — a fuel stop is required (drives NO-GO).**4 WEATHER BRIEF — METARS**

Departure VABB · Mumbai

IFR

VABB 241530Z 25014G24KT 2200 BR FEW010 SCT018 FEW025TCU BKN090 29/25 Q1003 NOSIG

Destination VOBL · Bengaluru

MVFR

VOBL 241530Z 27010KT 6000 SCT012 SCT080 25/18 Q1014 NOSIG

5 WEIGHT & BALANCE — CESSNA 172S

ITEM	WEIGHT (LB)	ARM (IN)	MOMENT
Basic empty weight	1,680	40.9	68,712
Pilot & front passenger	340	37.0	12,580
Rear passengers	0	73.0	0
Baggage area 1	30	95.0	2,850
Fuel (40 gal usable)	240	48.0	11,520
Ramp / take-off	2,290	41.8	95,662

TAKE-OFF WEIGHT

2,290 lb

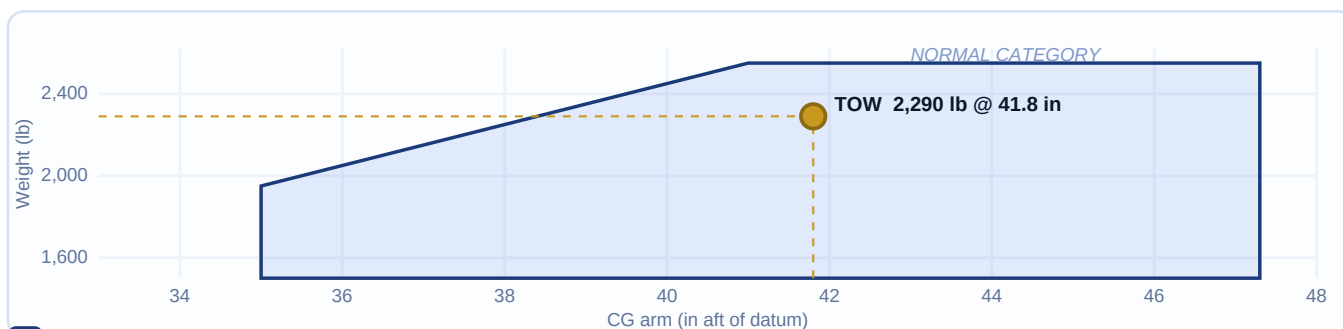
MAX TAKE-OFF

2,550 lb OK

CG (41.8 in)

WITHIN LIMITS

CG 41.8 in within the C172S envelope (aft limit 47.3 in) at 2,290 lb. Engine W&B check: PASS · within limits.

5 CG ENVELOPE**6 CRITICAL POINTS****POINT OF NO RETURN (PNR)****163 NM**

1h 16m from departure · PNR

*Beyond this point you cannot safely return to departure.***CRITICAL POINT (CP / ETP)****186 NM**

1h 27m from departure · CP

Equal time to continue or return from here.

7 GO / NO-GO

● **CONDITIONAL**

CHECK	STATUS	DETAIL
Route	PASS	VABB DCT VOBL
Fuel	PASS	39.4 gal required · 53.0 usable
Weight & Balance	PASS	Within limits
Terrain & Obstacles	PASS	max terrain 4098 ft · min safe 5098 ft (terrain clearance) · obstacle
Weather	WARN	VABB IFR · VOBL MVFR
NOTAM	WARN	37 NOTAM on corridor (13 restriction) — review
SIGMET	PASS	No SIGMETs on route corridor

7 DISPATCH SUMMARY

Recommendation — resolve before flight:

- Fuel: insert a stop — the C172 range makes VABB→VOBL (450 NM) infeasible non-stop.
- NOTAM: confirm any block/closure window against EOBT.
- Weather: carry a suitable alternate and hold fuel; reassess on current TAF.

AIRAC 2607 (eff 2026-07-09). Validation via /planning/validation-report. All values illustrative — demo only, not for navigation.