

DEMO ONLY — NOT FOR NAVIGATION

Illustrative sample from the EARNWINGS training demo. Not a certified flight plan — do not use for real-world planning or navigation.

VIDP → VOMM

Indira Gandhi Intl, New Delhi → Chennai Intl, Chennai

S PLAN SUMMARY

DISTANCE 950 NM	ENROUTE (ETE) 8h 42m	CRUISE ALTITUDE 8,500 ft · FL085	CRUISE SPEED (TAS) 110 kt
TRIP FUEL 69.6 gal	INITIAL TRACK 169° T	GROUND SPEED 109 kt	FLIGHT RULES VFR · ATS

D DISPATCH STATUS**● NO_GO**

Attention: Fuel, NOTAM — see Validation & Dispatch.

C CONTENTS

- 1 ICAO Flight Plan (Form 7233-4) · Route & Airways · Navigation Log
- 2 Route map (with PNR & CP) · Terrain vertical profile
- 3 Winds & performance · Fuel plan · Weather METARs
- 4 Weight & balance and CG · Critical points (PNR / CP)
- 5 Validation report & dispatch summary

1 ICAO FLIGHT PLAN (FORM 7233-4)

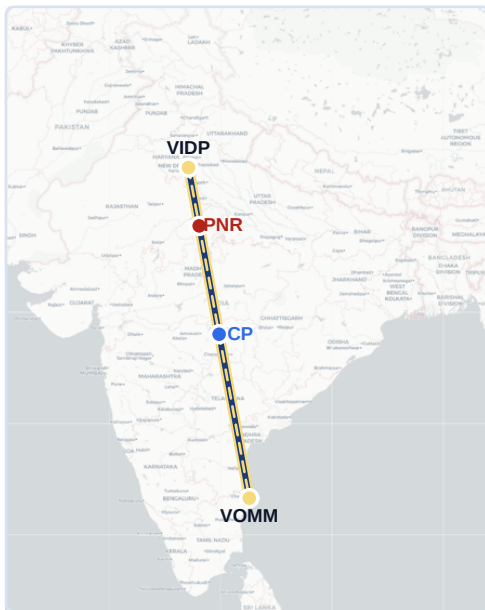
7 · Aircraft ID	VT-ABC
8 · Rules / Type	V / G (VFR · GA)
9 · No / Type / Wake	1 C172 L
10 · Equipment	S / C (std COM/NAV · Mode-C)
13 · Departure / Time	VIDP ____Z
15 · Speed / Level / Route	N0110 A085 DCT
16 · Dest / EET / Altn	VOMM 0842 ____
18 · Other	DOF/____ RMK/DEMO – TRAINING SAMPLE, NOT FOR ATS FILING
19 · Endurance / POB	E/0400 P/002 R/UVE S/–

2 ROUTE & AIRWAYS

VIDP DPN W20/Q24 BPL Q24 KAMGU W20/Q24 MMV DCT MAA VOMM

2 NAVIGATION LOG

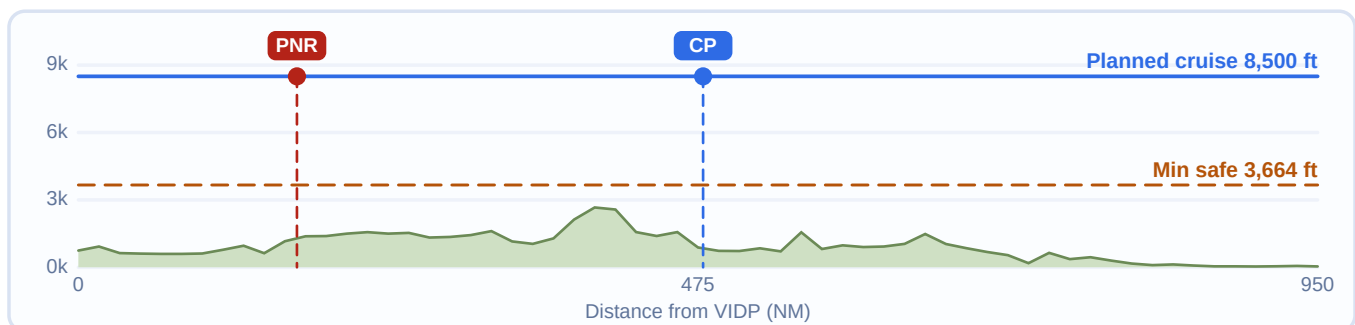
LEG	FIX	TRACK °T	DIST NM	GS KT	ETE	FUEL GAL
1	VIDP → VOMM	169	950	109	08:42	69.6
Totals			950	109	08:42	69.6

2 ROUTE MAP

Great-circle track with the two decision points marked.

- VIDP/VOMM — departure & destination
- PNR — Point of No Return · 168 NM
- CP — Critical Point / ETP · 479 NM

Positions projected (Web Mercator). Demo only.

3 TERRAIN / VERTICAL PROFILE

3 WINDS ALOFT & PERFORMANCEWIND AT CRUISE
251/6ktHEAD/TAILWIND
1 kt headTAS / GS
110 / 109 ktCRUISE LEVEL
8,500 ftBURN RATE
8 gal/hrENDURANCE
4h 00m**3 FUEL PLAN**

COMPONENT	US GAL	BASIS
Taxi	1.6	ground / run-up
Trip (VIDP→VOMM)	69.6	ETE 8h 42m @ 8 gph
Contingency (10%)	7.0	trip reserve
Alternate	4.0	to nominated altn
Final reserve (45 min)	6.0	VFR reserve
Total required	88.2	minimum block
Usable on board	32.0	C172 usable

Fuel shortfall: 88 gal required vs 32 usable — a fuel stop is required (drives NO-GO).**4 WEATHER BRIEF — METARS**

Departure VIDP · New Delhi

MVFR

VIDP 241500Z 12012KT 6000 FEW030 FEW035CB SCT090 31/26 Q1000 NOSIG

Destination VOMM · Chennai

MVFR

VOMM 241530Z 19007KT 5000 BR SCT020 FEW025TCU SCT100 31/27 Q1006 NOSIG

5 WEIGHT & BALANCE — CESSNA 172S

ITEM	WEIGHT (LB)	ARM (IN)	MOMENT
Basic empty weight	1,680	40.9	68,712
Pilot & front passenger	340	37.0	12,580
Rear passengers	0	73.0	0
Baggage area 1	30	95.0	2,850
Fuel (40 gal usable)	240	48.0	11,520
Ramp / take-off	2,290	41.8	95,662

TAKE-OFF WEIGHT

2,290 lb

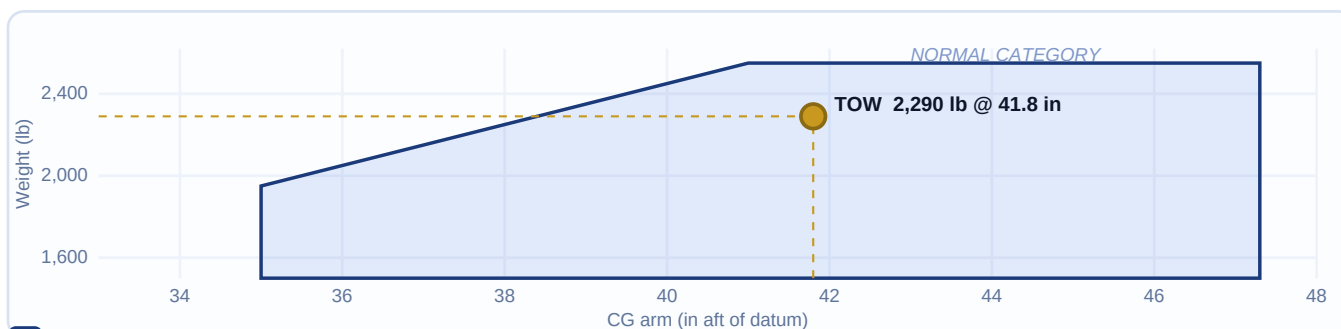
MAX TAKE-OFF

2,550 lb OK

CG (41.8 in)

WITHIN LIMITS

CG 41.8 in within the C172S envelope (aft limit 47.3 in) at 2,290 lb. Engine W&B check: PASS · within limits.

5 CG ENVELOPE**6 CRITICAL POINTS****POINT OF NO RETURN (PNR)****168 NM**

1h 32m from departure · PNR

*Beyond this point you cannot safely return to departure.***CRITICAL POINT (CP / ETP)****479 NM**

4h 24m from departure · CP

Equal time to continue or return from here.

7 GO / NO-GO

● NO_GO

CHECK	STATUS	DETAIL
Route	PASS	DPN W20/Q24 BPL Q24 KAMGU W20/Q24 MMV DCT MAA
Fuel	FAIL	356.2 gal required · 53.0 usable
Weight & Balance	PASS	Within limits
Terrain & Obstacles	PASS	max terrain 2136 ft · min safe 3300 ft (obstacle MOCA (Lido)) · obstac
Weather	PASS	VIDP MVFR · VOMM MVFR
NOTAM	FAIL	2 unavoidable BLOCK NOTAM: VOMM Work in progress on the basic strip of
SIGMET	PASS	No SIGMETs on route corridor

7 DISPATCH SUMMARY

Recommendation — resolve before flight:

- Fuel: insert a stop — the C172 range makes VIDP→VOMM (950 NM) infeasible non-stop.
- NOTAM: confirm any block/closure window against EOBT.

AIRAC 2607 (eff 2026-07-09). Validation via /planning/validation-report. All values illustrative — demo only, not for navigation.