
Sistema de lectura y cambio de fase

Diagrama de bloques General




Funciones para el usuario


```
void LCD init(void);//INICIALIzar
void LCD send character(char c);//enviar cadena de
caracteres
void LCD clear(void);//limpiar pantalla
void LCD write(const char* message, uint8 t position x,
uint8 t position y);
```

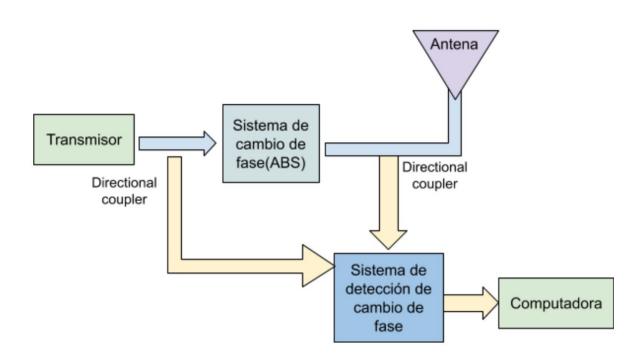



```
static void send command(uint8 t command)
static void send data(uint8 t data)
static void shift out(gpioMap t data pin, gpioMap t clock pin, enum
BYTE ENCODING TYPES bit order, uint8 t value)
```




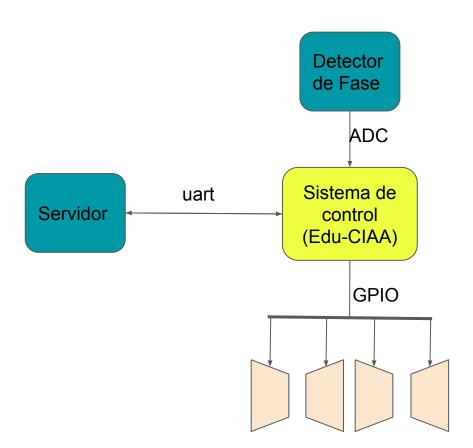

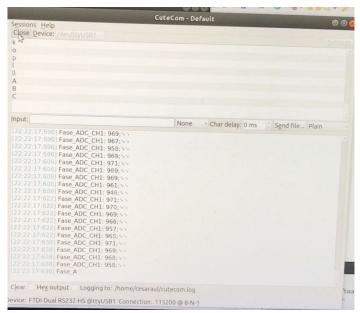



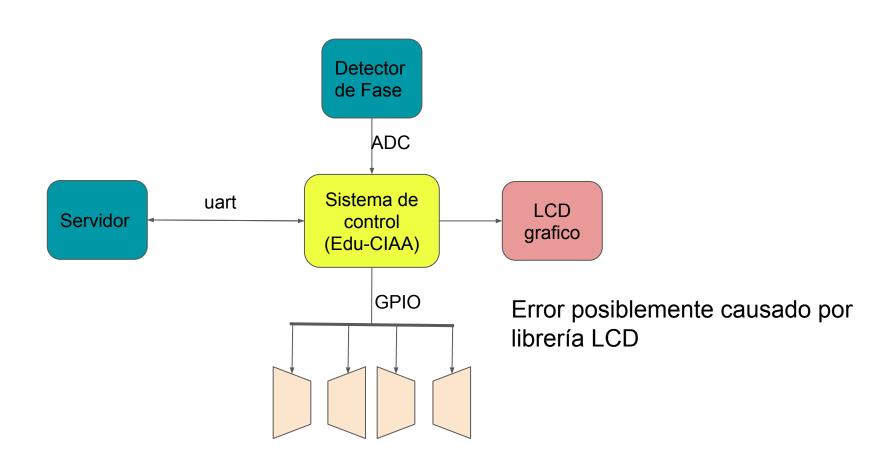

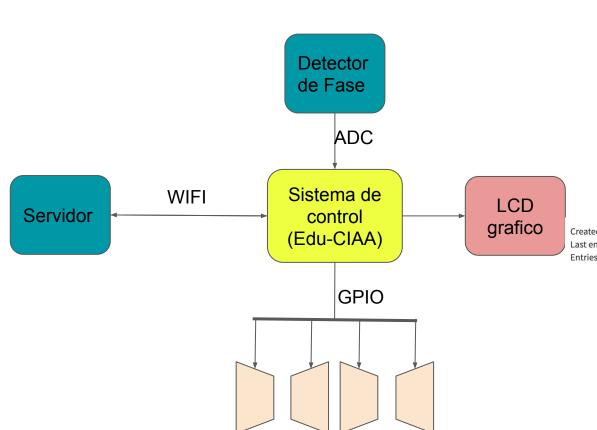



Created: about 5 hours ago

Last entry: less than a minute ago

Entries: 166

