



CURING HEAD · EXTRA SMALL (XS)

ZENITH 300W



UV-C curing head for the KG SewerLight UV LED Lite system, purpose-built for DN75–DN150 pipe rehabilitation with integrated live-view inspection.

TOTAL POWER

300 W

120 UV LED diodes

DIMENSIONS

41 × 50 × 313

mm (L×W×H)

DN RANGE

75-150

0.30 kg · hard-anodized
alu

OPTICAL SYSTEM

UV source 5× UV LED panel
Peak wavelength 400 nm (UV-C)
Lamp life 1000 h @ 60k cycles

SENSING & VISION


Core temp Internal live sensor
Live view FHD CCD, 2.8mm, FOV105
Illumination 4× LED

MECHANICAL

Bend mgmt. 90° from DN100
Cooling Patented efficient cooling
Head design QRC quick-release

FEATURES

Glass Rapid replacement
Hose Flexible
Compatibility SewerLight UV LED Lite

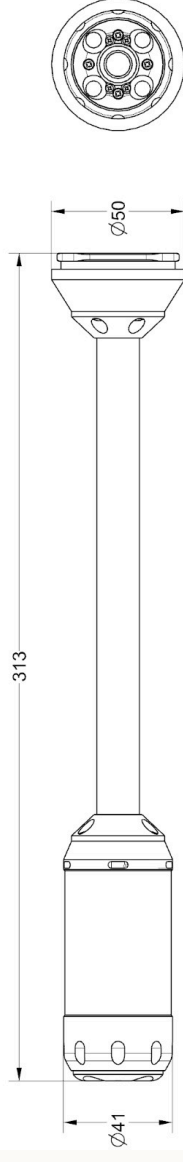



CURING HEAD · SMALL (S)

ZENITH 600W



Higher-output UV-C curing head for the KG SewerLight UV LED Lite system, scaled for DN100–DN250 pipe rehabilitation with integrated live-view inspection.

TOTAL POWER

600 W

240 UV LED diodes

DIMENSIONS

61 × 61 × 97

mm (L×W×H)

DN RANGE

100-250

0.50 kg · hard-anodized alu

OPTICAL SYSTEM

UV source10× UV LED panel

Peak wavelength400 nm (UV-C)

Lamp life1000 h @ 60k cycles

SENSING & VISION

Core tempInternal live sensor

Live viewFHD CCD, 2.8mm, FOV105

Illumination4× LED

MECHANICAL

Bend mgmt.90° from DN150

CoolingPatented efficient cooling

Head designQRC quick-release

FEATURES

GlassRapid replacement

Head designQRC quick-release

CompatibilitySewerLight UV LED Lite

