

CURING HEAD · EXTRA SMALL (XS)

ZENITH 300W

UV-C curing head for the KG SewerLight
UV LED Lite system, built for DN75–
DN150 pipe rehabilitation with integrated
live-view inspection.



TOTAL POWER

300 W

120 UV LED diodes

DIMENSIONS

41×50×313

mm (L×W×H)

DN RANGE

75-150

0.30 kg · hard-anodized alu

OPTICAL SYSTEM

UV source	5× UV LED panel
Peak wavelength	400 nm (UV-C)
Lamp life	1000 h @ 60k cycles

SENSING & VISION


Core temp	Internal live sensor
Live view	FHD CCD, 2.8mm, FOV105
Illumination	4× LED

MECHANICAL

Bend mgmt.	90° from DN100
Cooling	Patented efficient cooling
Head design	QR code quick-release

FEATURES

Glass	Rapid replacement
Hose	Flexible
Compatibility	SewerLight UV LED Lite

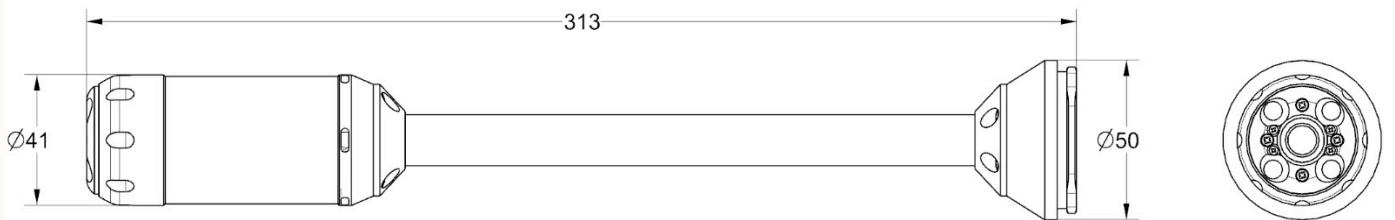

CURING HEAD · SMALL (S)

ZENITH 600W

Higher-output UV-C curing head for the KG SewerLight UV LED Lite system, scaled for DN100–DN250 pipe rehabilitation with integrated live-view inspection.



TOTAL POWER

600 W

240 UV LED diodes

DIMENSIONS

61×61×97

mm (L×W×H)

DN RANGE

100–250

0.50 kg · hard-anodized alu

OPTICAL SYSTEM

UV source	10× UV LED panel
Peak wavelength	400 nm (UV-C)
Lamp life	1000 h @ 60k cycles

SENSING & VISION

Core temp	Internal live sensor
Live view	FHD CCD, 2.8mm, FOV105
Illumination	4× LED

MECHANICAL

Bend mgmt.	90° from DN150
Cooling	Patented efficient cooling
Head design	QRC quick-release

FEATURES

Glass	Rapid replacement
Head design	QRC quick-release
Compatibility	SewerLight UV LED Lite

