


Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Analysis Parameters

Location:	Limpio II	Height (m):	41.34
Code:	ANSI/TIA-222-H	Base Elevation (m):	0.20
Shape:	Triangle	Bottom Face Width (m):	5.14
Tower Manufacturer:	Mapping	Top Face Width (m):	2.03
Tower Type:	Self Support		
Kd:	0.85		
Ke	0.99		


Ice & Wind Parameters

Exposure Category:	B	Design Windspeed Without Ice:	232 km/hr
Risk Category:	II	Design Windspeed With Ice:	0 km/hr
Topo Factor Proc:	Method 2	Operational Windspeed:	97 km/hr
Feature:	Flat	Design Ice Thickness:	0.00 cm
Crest Height (H):	0 m		
Crest Length (L):	0 m		
Distance from Apex (x):	0 m		
Upwind / Downwind	Upwind		

Load Cases

1.2D + 1.0W Normal	232.24 km/hr Normal To Face with No Ice
1.2D + 1.0W 60 deg	232.24 km/hr 60 deg with No Ice
1.2D + 1.0W 90 deg	232.24 km/hr 90 deg with No Ice
0.9D + 1.0W Normal	232.24 km/hr Normal to Face with No Ice (Reduced DL)
0.9D + 1.0W 60 deg	232.24 km/hr 60 deg with No Ice (Reduced DL)
0.9D + 1.0W 90 deg	232.24 km/hr 90 deg with No Ice (Reduced DL)
1.0D + 1.0W Service Normal	Serviceability - 96.56 km/hr Wind Normal
1.0D + 1.0W Service 60 deg	Serviceability - 96.56 km/hr Wind 60 deg
1.0D + 1.0W Service 90 deg	Serviceability - 96.56 km/hr Wind 90 deg

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.2D + 1.0W Normal

232.24 km/hr Normal To Face with No Ice

Gust Response Factor :0.85


Dead Load Factor :1.20

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	1.00	1.0	0.00	0.00	1.51	0.99	0.00	0.58	0.00	0.56	0.23	0.79
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.44	0.93	0.00	0.56	0.00	0.53	0.22	0.75
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.31	0.81	0.00	0.50	0.00	0.47	0.19	0.66
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.30	0.84	0.00	0.50	0.00	0.47	0.19	0.66
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	1.00	1.0	0.00	0.00	1.16	0.84	0.00	0.46	0.00	0.43	0.20	0.62
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	1.00	1.0	0.00	0.00	1.22	0.94	0.00	0.49	0.00	0.47	0.23	0.71
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.02	0.86	0.00	0.41	0.00	0.42	0.22	0.64
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.96	0.62	0.00	0.37	0.00	0.39	0.16	0.55
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.94	0.62	0.00	0.36	0.00	0.39	0.17	0.56
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	1.00	1.0	0.00	0.00	0.83	0.62	0.00	0.32	0.00	0.36	0.17	0.53
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	1.00	1.0	0.00	0.00	0.81	0.62	0.00	0.31	0.00	0.36	0.18	0.53
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	1.00	1.0	0.00	0.00	0.72	0.65	0.00	0.28	0.00	0.33	0.19	0.52
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	1.00	1.0	0.00	0.00	0.70	0.65	0.00	0.27	0.00	0.32	0.19	0.52
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	1.00	1.0	0.00	0.00	0.84	0.65	0.00	0.32	0.00	0.37	0.20	0.57
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.67	0.65	0.00	0.26	0.00	0.31	0.20	0.51
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	1.00	1.0	0.00	0.00	0.58	0.62	0.00	0.18	0.00	0.28	0.19	0.48
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	1.00	1.0	0.00	0.00	0.66	0.56	0.00	0.24	0.00	0.30	0.18	0.48
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	1.00	1.0	0.00	0.00	0.64	0.52	0.00	0.23	0.00	0.29	0.17	0.46
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.14	0.00	0.22	0.16	0.38
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.16	0.00	0.22	0.16	0.39
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.32	0.00	0.15	0.00	0.22	0.10	0.33
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.15	0.00	0.23	0.09	0.32
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.15	0.00	0.23	0.09	0.32
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.15	0.00	0.23	0.09	0.32
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.15	0.00	0.23	0.09	0.33
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.20	0.00	0.14	0.00	0.23	0.07	0.31
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	1.00	1.0	0.00	0.00	0.54	0.18	0.00	0.18	0.00	0.28	0.07	0.35
															8.01	0.00			13.56

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.2D + 1.0W 60 deg

232.24 km/hr 60 deg with No Ice

Gust Response Factor :0.85


Dead Load Factor :1.20

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	0.80	1.0	0.00	0.00	1.21	0.99	0.00	0.58	0.00	0.45	0.23	0.67
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	1.15	0.93	0.00	0.56	0.00	0.42	0.22	0.64
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.05	0.81	0.00	0.50	0.00	0.38	0.19	0.56
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.04	0.84	0.00	0.50	0.00	0.38	0.19	0.57
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	0.80	1.0	0.00	0.00	0.93	0.84	0.00	0.46	0.00	0.34	0.20	0.54
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	0.80	1.0	0.00	0.00	0.97	0.94	0.00	0.49	0.00	0.38	0.23	0.61
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	0.82	0.86	0.00	0.41	0.00	0.34	0.22	0.56
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.77	0.62	0.00	0.37	0.00	0.31	0.16	0.47
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.75	0.62	0.00	0.36	0.00	0.31	0.17	0.48
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	0.80	1.0	0.00	0.00	0.66	0.62	0.00	0.32	0.00	0.29	0.17	0.46
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	0.80	1.0	0.00	0.00	0.65	0.62	0.00	0.31	0.00	0.28	0.18	0.46
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	0.80	1.0	0.00	0.00	0.57	0.65	0.00	0.28	0.00	0.26	0.19	0.45
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	0.80	1.0	0.00	0.00	0.56	0.65	0.00	0.27	0.00	0.26	0.19	0.45
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	0.80	1.0	0.00	0.00	0.67	0.65	0.00	0.32	0.00	0.30	0.20	0.50
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.53	0.65	0.00	0.26	0.00	0.25	0.20	0.45
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	0.80	1.0	0.00	0.00	0.46	0.62	0.00	0.18	0.00	0.23	0.19	0.42
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	0.80	1.0	0.00	0.00	0.53	0.56	0.00	0.24	0.00	0.24	0.18	0.42
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	0.80	1.0	0.00	0.00	0.51	0.52	0.00	0.23	0.00	0.23	0.17	0.40
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.14	0.00	0.18	0.16	0.34
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.16	0.00	0.18	0.16	0.34
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.32	0.00	0.15	0.00	0.18	0.10	0.28
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.15	0.00	0.18	0.09	0.27
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.15	0.00	0.18	0.09	0.27
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.15	0.00	0.18	0.09	0.28
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.15	0.00	0.19	0.09	0.28
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.20	0.00	0.14	0.00	0.19	0.07	0.26
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	0.80	1.0	0.00	0.00	0.43	0.18	0.00	0.18	0.00	0.22	0.07	0.29
															8.01	0.00			11.73

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.2D + 1.0W 90 deg

232.24 km/hr 90 deg with No Ice

Gust Response Factor :0.85


Dead Load Factor :1.20

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	0.85	1.0	0.00	0.00	1.28	0.99	0.00	0.58	0.00	0.47	0.23	0.70
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	1.23	0.93	0.00	0.56	0.00	0.45	0.22	0.67
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.81	0.00	0.50	0.00	0.40	0.19	0.59
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.84	0.00	0.50	0.00	0.40	0.19	0.59
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	0.85	1.0	0.00	0.00	0.99	0.84	0.00	0.46	0.00	0.36	0.20	0.56
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	0.85	1.0	0.00	0.00	1.03	0.94	0.00	0.49	0.00	0.40	0.23	0.64
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	0.87	0.86	0.00	0.41	0.00	0.36	0.22	0.58
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.81	0.62	0.00	0.37	0.00	0.33	0.16	0.49
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.79	0.62	0.00	0.36	0.00	0.33	0.17	0.50
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	0.85	1.0	0.00	0.00	0.70	0.62	0.00	0.32	0.00	0.30	0.17	0.48
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	0.85	1.0	0.00	0.00	0.69	0.62	0.00	0.31	0.00	0.30	0.18	0.48
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	0.85	1.0	0.00	0.00	0.61	0.65	0.00	0.28	0.00	0.28	0.19	0.47
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	0.85	1.0	0.00	0.00	0.59	0.65	0.00	0.27	0.00	0.27	0.19	0.47
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	0.85	1.0	0.00	0.00	0.71	0.65	0.00	0.32	0.00	0.32	0.20	0.51
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.57	0.65	0.00	0.26	0.00	0.27	0.20	0.47
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	0.85	1.0	0.00	0.00	0.49	0.62	0.00	0.18	0.00	0.24	0.19	0.43
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	0.85	1.0	0.00	0.00	0.56	0.56	0.00	0.24	0.00	0.26	0.18	0.43
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	0.85	1.0	0.00	0.00	0.54	0.52	0.00	0.23	0.00	0.25	0.17	0.41
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.14	0.00	0.19	0.16	0.35
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.16	0.00	0.19	0.16	0.35
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.32	0.00	0.15	0.00	0.19	0.10	0.29
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.15	0.00	0.19	0.09	0.28
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.15	0.00	0.19	0.09	0.29
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.15	0.00	0.20	0.09	0.29
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.15	0.00	0.20	0.09	0.29
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.20	0.00	0.14	0.00	0.20	0.07	0.27
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	0.85	1.0	0.00	0.00	0.46	0.18	0.00	0.18	0.00	0.23	0.07	0.30
															8.01	0.00			12.19

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat

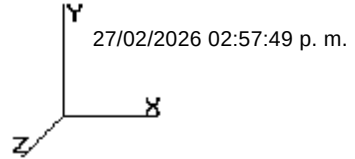

© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 0.9D + 1.0W Normal

232.24 km/hr Normal to Face with No Ice (Reduced DL)

Gust Response Factor :0.85


Dead Load Factor :0.90

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	1.00	1.0	0.00	0.00	1.51	0.99	0.00	0.44	0.00	0.56	0.23	0.79
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.44	0.93	0.00	0.42	0.00	0.53	0.22	0.75
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.31	0.81	0.00	0.38	0.00	0.47	0.19	0.66
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.30	0.84	0.00	0.38	0.00	0.47	0.19	0.66
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	1.00	1.0	0.00	0.00	1.16	0.84	0.00	0.35	0.00	0.43	0.20	0.62
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	1.00	1.0	0.00	0.00	1.22	0.94	0.00	0.37	0.00	0.47	0.23	0.71
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.02	0.86	0.00	0.31	0.00	0.42	0.22	0.64
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.96	0.62	0.00	0.28	0.00	0.39	0.16	0.55
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.94	0.62	0.00	0.27	0.00	0.39	0.17	0.56
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	1.00	1.0	0.00	0.00	0.83	0.62	0.00	0.24	0.00	0.36	0.17	0.53
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	1.00	1.0	0.00	0.00	0.81	0.62	0.00	0.23	0.00	0.36	0.18	0.53
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	1.00	1.0	0.00	0.00	0.72	0.65	0.00	0.21	0.00	0.33	0.19	0.52
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	1.00	1.0	0.00	0.00	0.70	0.65	0.00	0.20	0.00	0.32	0.19	0.52
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	1.00	1.0	0.00	0.00	0.84	0.65	0.00	0.24	0.00	0.37	0.20	0.57
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.67	0.65	0.00	0.19	0.00	0.31	0.20	0.51
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	1.00	1.0	0.00	0.00	0.58	0.62	0.00	0.14	0.00	0.28	0.19	0.48
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	1.00	1.0	0.00	0.00	0.66	0.56	0.00	0.18	0.00	0.30	0.18	0.48
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	1.00	1.0	0.00	0.00	0.64	0.52	0.00	0.17	0.00	0.29	0.17	0.46
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.11	0.00	0.22	0.16	0.38
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.12	0.00	0.22	0.16	0.39
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.32	0.00	0.11	0.00	0.22	0.10	0.33
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.11	0.00	0.23	0.09	0.32
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.11	0.00	0.23	0.09	0.32
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.11	0.00	0.23	0.09	0.32
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.11	0.00	0.23	0.09	0.33
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.20	0.00	0.11	0.00	0.23	0.07	0.31
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	1.00	1.0	0.00	0.00	0.54	0.18	0.00	0.13	0.00	0.28	0.07	0.35
															6.01	0.00			13.56

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 0.9D + 1.0W 60 deg

232.24 km/hr 60 deg with No Ice (Reduced DL)

Gust Response Factor :0.85


Dead Load Factor :0.90

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	0.80	1.0	0.00	0.00	1.21	0.99	0.00	0.44	0.00	0.45	0.23	0.67
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	1.15	0.93	0.00	0.42	0.00	0.42	0.22	0.64
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.05	0.81	0.00	0.38	0.00	0.38	0.19	0.56
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.04	0.84	0.00	0.38	0.00	0.38	0.19	0.57
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	0.80	1.0	0.00	0.00	0.93	0.84	0.00	0.35	0.00	0.34	0.20	0.54
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	0.80	1.0	0.00	0.00	0.97	0.94	0.00	0.37	0.00	0.38	0.23	0.61
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	0.82	0.86	0.00	0.31	0.00	0.34	0.22	0.56
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.77	0.62	0.00	0.28	0.00	0.31	0.16	0.47
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.75	0.62	0.00	0.27	0.00	0.31	0.17	0.48
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	0.80	1.0	0.00	0.00	0.66	0.62	0.00	0.24	0.00	0.29	0.17	0.46
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	0.80	1.0	0.00	0.00	0.65	0.62	0.00	0.23	0.00	0.28	0.18	0.46
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	0.80	1.0	0.00	0.00	0.57	0.65	0.00	0.21	0.00	0.26	0.19	0.45
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	0.80	1.0	0.00	0.00	0.56	0.65	0.00	0.20	0.00	0.26	0.19	0.45
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	0.80	1.0	0.00	0.00	0.67	0.65	0.00	0.24	0.00	0.30	0.20	0.50
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.53	0.65	0.00	0.19	0.00	0.25	0.20	0.45
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	0.80	1.0	0.00	0.00	0.46	0.62	0.00	0.14	0.00	0.23	0.19	0.42
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	0.80	1.0	0.00	0.00	0.53	0.56	0.00	0.18	0.00	0.24	0.18	0.42
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	0.80	1.0	0.00	0.00	0.51	0.52	0.00	0.17	0.00	0.23	0.17	0.40
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.11	0.00	0.18	0.16	0.34
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.12	0.00	0.18	0.16	0.34
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.32	0.00	0.11	0.00	0.18	0.10	0.28
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.11	0.00	0.18	0.09	0.27
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.11	0.00	0.18	0.09	0.27
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.11	0.00	0.18	0.09	0.28
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.11	0.00	0.19	0.09	0.28
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.20	0.00	0.11	0.00	0.19	0.07	0.26
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	0.80	1.0	0.00	0.00	0.43	0.18	0.00	0.13	0.00	0.22	0.07	0.29
															6.01	0.00			11.73

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 0.9D + 1.0W 90 deg

232.24 km/hr 90 deg with No Ice (Reduced DL)

Gust Response Factor :0.85


Dead Load Factor :0.90

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	152.67	1.51	0.00	0.00	0.13	2.85	0.85	1.0	0.00	0.00	1.28	0.99	0.00	0.44	0.00	0.47	0.23	0.70
2	3.35	152.67	1.44	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	1.23	0.93	0.00	0.42	0.00	0.45	0.22	0.67
3	5.38	152.67	1.31	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.81	0.00	0.38	0.00	0.40	0.19	0.59
4	7.29	152.67	1.30	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.84	0.00	0.38	0.00	0.40	0.19	0.59
5	9.22	154.08	1.16	0.00	0.00	0.14	2.80	0.85	1.0	0.00	0.00	0.99	0.84	0.00	0.35	0.00	0.36	0.20	0.56
6	11.24	162.88	1.22	0.00	0.00	0.14	2.82	0.85	1.0	0.00	0.00	1.03	0.94	0.00	0.37	0.00	0.40	0.23	0.64
7	13.29	170.74	1.02	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	0.87	0.86	0.00	0.31	0.00	0.36	0.22	0.58
8	15.02	176.73	0.96	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.81	0.62	0.00	0.28	0.00	0.33	0.16	0.49
9	16.52	181.54	0.94	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.79	0.62	0.00	0.27	0.00	0.33	0.17	0.50
10	18.02	186.06	0.83	0.00	0.00	0.16	2.73	0.85	1.0	0.00	0.00	0.70	0.62	0.00	0.24	0.00	0.30	0.17	0.48
11	19.52	190.31	0.81	0.00	0.00	0.16	2.72	0.85	1.0	0.00	0.00	0.69	0.62	0.00	0.23	0.00	0.30	0.18	0.48
12	21.01	194.34	0.72	0.00	0.00	0.15	2.76	0.85	1.0	0.00	0.00	0.61	0.65	0.00	0.21	0.00	0.28	0.19	0.47
13	22.51	198.17	0.70	0.00	0.00	0.16	2.74	0.85	1.0	0.00	0.00	0.59	0.65	0.00	0.20	0.00	0.27	0.19	0.47
14	24.01	201.83	0.84	0.00	0.00	0.20	2.59	0.85	1.0	0.00	0.00	0.71	0.65	0.00	0.24	0.00	0.32	0.20	0.51
15	25.51	205.32	0.67	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.57	0.65	0.00	0.19	0.00	0.27	0.20	0.47
16	27.02	208.68	0.58	0.00	0.00	0.16	2.75	0.85	1.0	0.00	0.00	0.49	0.62	0.00	0.14	0.00	0.24	0.19	0.43
17	28.45	211.75	0.66	0.00	0.00	0.21	2.57	0.85	1.0	0.00	0.00	0.56	0.56	0.00	0.18	0.00	0.26	0.18	0.43
18	29.75	214.47	0.64	0.00	0.00	0.23	2.49	0.85	1.0	0.00	0.00	0.54	0.52	0.00	0.17	0.00	0.25	0.17	0.41
19	30.98	216.94	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.11	0.00	0.19	0.16	0.35
20	32.18	219.30	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.12	0.00	0.19	0.16	0.35
21	33.38	221.59	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.32	0.00	0.11	0.00	0.19	0.10	0.29
22	34.58	223.82	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.11	0.00	0.19	0.09	0.28
23	35.78	226.00	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.11	0.00	0.19	0.09	0.29
24	36.98	228.13	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.11	0.00	0.20	0.09	0.29
25	38.18	230.21	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.11	0.00	0.20	0.09	0.29
26	39.38	232.24	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.20	0.00	0.11	0.00	0.20	0.07	0.27
27	40.58	234.24	0.54	0.00	0.00	0.21	2.55	0.85	1.0	0.00	0.00	0.46	0.18	0.00	0.13	0.00	0.23	0.07	0.30
															6.01	0.00			12.19

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service Normal

Serviceability - 96.56 km/hr Wind Normal

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	26.39	1.51	0.00	0.00	0.13	2.85	1.00	1.0	0.00	0.00	1.51	0.99	0.00	0.49	0.00	0.10	0.04	0.14
2	3.35	26.39	1.44	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.44	0.93	0.00	0.46	0.00	0.09	0.04	0.13
3	5.38	26.39	1.31	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.31	0.81	0.00	0.42	0.00	0.08	0.03	0.11
4	7.29	26.39	1.30	0.00	0.00	0.15	2.78	1.00	1.0	0.00	0.00	1.30	0.84	0.00	0.42	0.00	0.08	0.03	0.11
5	9.22	26.64	1.16	0.00	0.00	0.14	2.80	1.00	1.0	0.00	0.00	1.16	0.84	0.00	0.39	0.00	0.07	0.03	0.11
6	11.24	28.16	1.22	0.00	0.00	0.14	2.82	1.00	1.0	0.00	0.00	1.22	0.94	0.00	0.41	0.00	0.08	0.04	0.12
7	13.29	29.52	1.02	0.00	0.00	0.13	2.83	1.00	1.0	0.00	0.00	1.02	0.86	0.00	0.34	0.00	0.07	0.04	0.11
8	15.02	30.55	0.96	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.96	0.62	0.00	0.31	0.00	0.07	0.03	0.10
9	16.52	31.38	0.94	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.94	0.62	0.00	0.30	0.00	0.07	0.03	0.10
10	18.02	32.16	0.83	0.00	0.00	0.16	2.73	1.00	1.0	0.00	0.00	0.83	0.62	0.00	0.27	0.00	0.06	0.03	0.09
11	19.52	32.90	0.81	0.00	0.00	0.16	2.72	1.00	1.0	0.00	0.00	0.81	0.62	0.00	0.26	0.00	0.06	0.03	0.09
12	21.01	33.60	0.72	0.00	0.00	0.15	2.76	1.00	1.0	0.00	0.00	0.72	0.65	0.00	0.23	0.00	0.06	0.03	0.09
13	22.51	34.26	0.70	0.00	0.00	0.16	2.74	1.00	1.0	0.00	0.00	0.70	0.65	0.00	0.23	0.00	0.06	0.03	0.09
14	24.01	34.89	0.84	0.00	0.00	0.20	2.59	1.00	1.0	0.00	0.00	0.84	0.65	0.00	0.27	0.00	0.06	0.03	0.10
15	25.51	35.49	0.67	0.00	0.00	0.17	2.70	1.00	1.0	0.00	0.00	0.67	0.65	0.00	0.22	0.00	0.05	0.03	0.09
16	27.02	36.07	0.58	0.00	0.00	0.16	2.75	1.00	1.0	0.00	0.00	0.58	0.62	0.00	0.15	0.00	0.05	0.03	0.08
17	28.45	36.61	0.66	0.00	0.00	0.21	2.57	1.00	1.0	0.00	0.00	0.66	0.56	0.00	0.20	0.00	0.05	0.03	0.08
18	29.75	37.07	0.64	0.00	0.00	0.23	2.49	1.00	1.0	0.00	0.00	0.64	0.52	0.00	0.19	0.00	0.05	0.03	0.08
19	30.98	37.50	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.12	0.00	0.04	0.03	0.07
20	32.18	37.91	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.50	0.00	0.14	0.00	0.04	0.03	0.07
21	33.38	38.31	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.32	0.00	0.12	0.00	0.04	0.02	0.06
22	34.58	38.69	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.12	0.00	0.04	0.02	0.06
23	35.78	39.07	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.12	0.00	0.04	0.02	0.06
24	36.98	39.44	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.12	0.00	0.04	0.02	0.06
25	38.18	39.80	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.28	0.00	0.12	0.00	0.04	0.02	0.06
26	39.38	40.15	0.44	0.00	0.00	0.17	2.68	1.00	1.0	0.00	0.00	0.44	0.20	0.00	0.12	0.00	0.04	0.01	0.05
27	40.58	40.49	0.54	0.00	0.00	0.21	2.55	1.00	1.0	0.00	0.00	0.54	0.18	0.00	0.15	0.00	0.05	0.01	0.06
															6.68	0.00			2.35

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service 60 deg

Serviceability - 96.56 km/hr Wind 60 deg

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	26.39	1.51	0.00	0.00	0.13	2.85	0.80	1.0	0.00	0.00	1.21	0.99	0.00	0.49	0.00	0.08	0.04	0.12
2	3.35	26.39	1.44	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	1.15	0.93	0.00	0.46	0.00	0.07	0.04	0.11
3	5.38	26.39	1.31	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.05	0.81	0.00	0.42	0.00	0.07	0.03	0.10
4	7.29	26.39	1.30	0.00	0.00	0.15	2.78	0.80	1.0	0.00	0.00	1.04	0.84	0.00	0.42	0.00	0.07	0.03	0.10
5	9.22	26.64	1.16	0.00	0.00	0.14	2.80	0.80	1.0	0.00	0.00	0.93	0.84	0.00	0.39	0.00	0.06	0.03	0.09
6	11.24	28.16	1.22	0.00	0.00	0.14	2.82	0.80	1.0	0.00	0.00	0.97	0.94	0.00	0.41	0.00	0.07	0.04	0.11
7	13.29	29.52	1.02	0.00	0.00	0.13	2.83	0.80	1.0	0.00	0.00	0.82	0.86	0.00	0.34	0.00	0.06	0.04	0.10
8	15.02	30.55	0.96	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.77	0.62	0.00	0.31	0.00	0.05	0.03	0.08
9	16.52	31.38	0.94	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.75	0.62	0.00	0.30	0.00	0.05	0.03	0.08
10	18.02	32.16	0.83	0.00	0.00	0.16	2.73	0.80	1.0	0.00	0.00	0.66	0.62	0.00	0.27	0.00	0.05	0.03	0.08
11	19.52	32.90	0.81	0.00	0.00	0.16	2.72	0.80	1.0	0.00	0.00	0.65	0.62	0.00	0.26	0.00	0.05	0.03	0.08
12	21.01	33.60	0.72	0.00	0.00	0.15	2.76	0.80	1.0	0.00	0.00	0.57	0.65	0.00	0.23	0.00	0.05	0.03	0.08
13	22.51	34.26	0.70	0.00	0.00	0.16	2.74	0.80	1.0	0.00	0.00	0.56	0.65	0.00	0.23	0.00	0.04	0.03	0.08
14	24.01	34.89	0.84	0.00	0.00	0.20	2.59	0.80	1.0	0.00	0.00	0.67	0.65	0.00	0.27	0.00	0.05	0.03	0.09
15	25.51	35.49	0.67	0.00	0.00	0.17	2.70	0.80	1.0	0.00	0.00	0.53	0.65	0.00	0.22	0.00	0.04	0.03	0.08
16	27.02	36.07	0.58	0.00	0.00	0.16	2.75	0.80	1.0	0.00	0.00	0.46	0.62	0.00	0.15	0.00	0.04	0.03	0.07
17	28.45	36.61	0.66	0.00	0.00	0.21	2.57	0.80	1.0	0.00	0.00	0.53	0.56	0.00	0.20	0.00	0.04	0.03	0.07
18	29.75	37.07	0.64	0.00	0.00	0.23	2.49	0.80	1.0	0.00	0.00	0.51	0.52	0.00	0.19	0.00	0.04	0.03	0.07
19	30.98	37.50	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.12	0.00	0.03	0.03	0.06
20	32.18	37.91	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.50	0.00	0.14	0.00	0.03	0.03	0.06
21	33.38	38.31	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.32	0.00	0.12	0.00	0.03	0.02	0.05
22	34.58	38.69	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.12	0.00	0.03	0.02	0.05
23	35.78	39.07	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.12	0.00	0.03	0.02	0.05
24	36.98	39.44	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.12	0.00	0.03	0.02	0.05
25	38.18	39.80	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.28	0.00	0.12	0.00	0.03	0.02	0.05
26	39.38	40.15	0.44	0.00	0.00	0.17	2.68	0.80	1.0	0.00	0.00	0.35	0.20	0.00	0.12	0.00	0.03	0.01	0.05
27	40.58	40.49	0.54	0.00	0.00	0.21	2.55	0.80	1.0	0.00	0.00	0.43	0.18	0.00	0.15	0.00	0.04	0.01	0.05
															6.68	0.00			2.03

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service 90 deg

Serviceability - 96.56 km/hr Wind 90 deg

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.13	26.39	1.51	0.00	0.00	0.13	2.85	0.85	1.0	0.00	0.00	1.28	0.99	0.00	0.49	0.00	0.08	0.04	0.12
2	3.35	26.39	1.44	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	1.23	0.93	0.00	0.46	0.00	0.08	0.04	0.12
3	5.38	26.39	1.31	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.81	0.00	0.42	0.00	0.07	0.03	0.10
4	7.29	26.39	1.30	0.00	0.00	0.15	2.78	0.85	1.0	0.00	0.00	1.11	0.84	0.00	0.42	0.00	0.07	0.03	0.10
5	9.22	26.64	1.16	0.00	0.00	0.14	2.80	0.85	1.0	0.00	0.00	0.99	0.84	0.00	0.39	0.00	0.06	0.03	0.10
6	11.24	28.16	1.22	0.00	0.00	0.14	2.82	0.85	1.0	0.00	0.00	1.03	0.94	0.00	0.41	0.00	0.07	0.04	0.11
7	13.29	29.52	1.02	0.00	0.00	0.13	2.83	0.85	1.0	0.00	0.00	0.87	0.86	0.00	0.34	0.00	0.06	0.04	0.10
8	15.02	30.55	0.96	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.81	0.62	0.00	0.31	0.00	0.06	0.03	0.09
9	16.52	31.38	0.94	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.79	0.62	0.00	0.30	0.00	0.06	0.03	0.09
10	18.02	32.16	0.83	0.00	0.00	0.16	2.73	0.85	1.0	0.00	0.00	0.70	0.62	0.00	0.27	0.00	0.05	0.03	0.08
11	19.52	32.90	0.81	0.00	0.00	0.16	2.72	0.85	1.0	0.00	0.00	0.69	0.62	0.00	0.26	0.00	0.05	0.03	0.08
12	21.01	33.60	0.72	0.00	0.00	0.15	2.76	0.85	1.0	0.00	0.00	0.61	0.65	0.00	0.23	0.00	0.05	0.03	0.08
13	22.51	34.26	0.70	0.00	0.00	0.16	2.74	0.85	1.0	0.00	0.00	0.59	0.65	0.00	0.23	0.00	0.05	0.03	0.08
14	24.01	34.89	0.84	0.00	0.00	0.20	2.59	0.85	1.0	0.00	0.00	0.71	0.65	0.00	0.27	0.00	0.05	0.03	0.09
15	25.51	35.49	0.67	0.00	0.00	0.17	2.70	0.85	1.0	0.00	0.00	0.57	0.65	0.00	0.22	0.00	0.05	0.03	0.08
16	27.02	36.07	0.58	0.00	0.00	0.16	2.75	0.85	1.0	0.00	0.00	0.49	0.62	0.00	0.15	0.00	0.04	0.03	0.08
17	28.45	36.61	0.66	0.00	0.00	0.21	2.57	0.85	1.0	0.00	0.00	0.56	0.56	0.00	0.20	0.00	0.04	0.03	0.08
18	29.75	37.07	0.64	0.00	0.00	0.23	2.49	0.85	1.0	0.00	0.00	0.54	0.52	0.00	0.19	0.00	0.04	0.03	0.07
19	30.98	37.50	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.12	0.00	0.03	0.03	0.06
20	32.18	37.91	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.50	0.00	0.14	0.00	0.03	0.03	0.06
21	33.38	38.31	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.32	0.00	0.12	0.00	0.03	0.02	0.05
22	34.58	38.69	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.12	0.00	0.03	0.02	0.05
23	35.78	39.07	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.12	0.00	0.03	0.02	0.05
24	36.98	39.44	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.12	0.00	0.03	0.02	0.05
25	38.18	39.80	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.28	0.00	0.12	0.00	0.03	0.02	0.05
26	39.38	40.15	0.44	0.00	0.00	0.17	2.68	0.85	1.0	0.00	0.00	0.38	0.20	0.00	0.12	0.00	0.03	0.01	0.05
27	40.58	40.49	0.54	0.00	0.00	0.21	2.55	0.85	1.0	0.00	0.00	0.46	0.18	0.00	0.15	0.00	0.04	0.01	0.05
															6.68	0.00			2.11

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.


Tower Loading

Discrete Appurtenance Properties 1.0D + 1.0W Service Normal

Serviceability - 96.56 km/hr Wind Normal

Attach Elev (m)	Description	Qty	No Ice		Ice		Len (m)	Width (cm)	Depth (cm)	Ka	Orient. Factor	Vert Ecc (m)	Qz (kg/m)	F _a WL (ton)	P _a DL (ton)
			Weight (ton)	CaAa (m²)	Weight (ton)	CaAa (m²)									
26.00	Plataforma interna	1	0.15	0.000	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.00	35.68	0.000	0.15
33.00	RRU5512	3	0.02	0.240	0.00	0.000	0.480	35.60	14.00	0.80	0.70	0.00	38.18	0.013	0.05
33.00	AQU4518R23v18	3	0.03	0.900	0.00	0.000	1.499	42.90	19.60	0.80	0.76	0.00	38.18	0.053	0.08
33.00	RRU5904w	3	0.02	0.170	0.00	0.000	0.400	30.00	17.00	0.80	0.78	0.00	38.18	0.010	0.07
33.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	38.18	0.061	0.35
35.00	Side Arm	3	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	38.83	0.031	0.07
35.00	VHP2.5 -130	1	0.03	0.580	0.00	0.000	0.762	76.20	0.000	0.80	0.75	0.00	38.83	0.011	0.03
35.00	Pasolink ODU	2	0.00	0.040	0.00	0.000	0.170	17.01	6.858	0.80	0.70	0.00	38.83	0.001	0.01
35.00	UKY 210 76/SC15	1	0.01	0.400	0.00	0.000	0.635	63.50	36.32	0.80	0.79	0.00	38.83	0.008	0.01
39.00	Radio 4499 B5 B28	2	0.04	0.310	0.00	0.000	0.553	39.80	19.00	0.80	0.74	0.00	40.04	0.013	0.08
39.00	Radio 4499 B2 B66	3	0.03	0.310	0.00	0.000	0.553	39.80	14.70	0.80	0.69	0.00	40.04	0.018	0.10
39.00	KRE 101 2544/1	1	0.05	1.870	0.00	0.000	2.680	49.80	19.20	0.80	0.74	0.00	40.04	0.038	0.05
39.00	SL12436A	3	0.01	0.400	0.00	0.000	0.900	32.00	10.00	0.80	0.69	0.00	40.04	0.023	0.02
39.00	ATR4518R6	2	0.03	0.950	0.00	0.000	2.020	34.90	16.60	0.80	0.78	0.00	40.04	0.040	0.05
39.00	RRU3702	3	0.02	0.210	0.00	0.000	0.480	35.56	11.93	0.80	0.68	0.00	40.04	0.012	0.06
39.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	40.04	0.064	0.35
41.18	Lightning Rod	1	0.03	0.093	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.91	40.92	0.003	0.03
Totals		38	1.55		0.00		Number of Appurtenances :17							0.3990	1.5534

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Tower Loading

Discrete Appurtenance Properties 0.9D + 1.0W Normal

232.24 km/hr Normal to Face with No Ice (Reduced DL)

Attach Elev (m)	Description	Qty	No Ice		Ice		Len (m)	Width (cm)	Depth (cm)	Ka	Orient. Factor	Vert Ecc (m)	Qz (kg/m)	F _a WL (ton)	P _a DL (ton)
			Weight (ton)	CaAa (m²)	Weight (ton)	CaAa (m²)									
26.00	Plataforma interna	1	0.15	0.000	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.00	206.42	0.000	0.14
33.00	RRU5512	3	0.02	0.240	0.00	0.000	0.480	35.60	14.00	0.80	0.70	0.00	220.87	0.076	0.04
33.00	AQU4518R23v18	3	0.03	0.900	0.00	0.000	1.499	42.90	19.60	0.80	0.76	0.00	220.87	0.309	0.07
33.00	RRU5904w	3	0.02	0.170	0.00	0.000	0.400	30.00	17.00	0.80	0.78	0.00	220.87	0.060	0.06
33.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	220.87	0.352	0.32
35.00	Side Arm	3	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	224.59	0.180	0.06
35.00	VHP2.5 -130	1	0.03	0.580	0.00	0.000	0.762	76.20	0.000	0.80	0.75	0.00	224.59	0.066	0.03
35.00	Pasolink ODU	2	0.00	0.040	0.00	0.000	0.170	17.01	6.858	0.80	0.70	0.00	224.59	0.009	0.01
35.00	UKY 210 76/SC15	1	0.01	0.400	0.00	0.000	0.635	63.50	36.32	0.80	0.79	0.00	224.59	0.048	0.01
39.00	Radio 4499 B5 B28	2	0.04	0.310	0.00	0.000	0.553	39.80	19.00	0.80	0.74	0.00	231.61	0.072	0.07
39.00	Radio 4499 B2 B66	3	0.03	0.310	0.00	0.000	0.553	39.80	14.70	0.80	0.69	0.00	231.61	0.102	0.09
39.00	KRE 101 2544/1	1	0.05	1.870	0.00	0.000	2.680	49.80	19.20	0.80	0.74	0.00	231.61	0.217	0.05
39.00	SL12436A	3	0.01	0.400	0.00	0.000	0.900	32.00	10.00	0.80	0.69	0.00	231.61	0.130	0.02
39.00	ATR4518R6	2	0.03	0.950	0.00	0.000	2.020	34.90	16.60	0.80	0.78	0.00	231.61	0.233	0.05
39.00	RRU3702	3	0.02	0.210	0.00	0.000	0.480	35.56	11.93	0.80	0.68	0.00	231.61	0.067	0.05
39.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	231.61	0.369	0.32
41.18	Lightning Rod	1	0.03	0.093	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.91	236.69	0.019	0.03
Totals		38	1.55		0.00		Number of Appurtenances :17							2.7073	2.9516

Site Number: 434153


Location: Limpio II

Code: ANSI/TIA-222-H

Risk Category: II

Exposure : B

Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Tower Loading

Discrete Appurtenance Properties 1.2D + 1.0W Normal


232.24 km/hr Normal To Face with No Ice

Attach Elev (m)	Description	Qty	No Ice		Ice		Len (m)	Width (cm)	Depth (cm)	Ka	Orient. Factor	Vert Ecc (m)	Qz (kg/m)	F _a WL (ton)	P _a DL (ton)
			Weight (ton)	CaAa (m ²)	Weight (ton)	CaAa (m ²)									
26.00	Plataforma interna	1	0.15	0.000	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.00	206.42	0.000	0.18
33.00	RRU5512	3	0.02	0.240	0.00	0.000	0.480	35.60	14.00	0.80	0.70	0.00	220.87	0.076	0.06
33.00	AQU4518R23v18	3	0.03	0.900	0.00	0.000	1.499	42.90	19.60	0.80	0.76	0.00	220.87	0.309	0.09
33.00	RRU5904w	3	0.02	0.170	0.00	0.000	0.400	30.00	17.00	0.80	0.78	0.00	220.87	0.060	0.08
33.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	220.87	0.352	0.42
35.00	Side Arm	3	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	224.59	0.180	0.09
35.00	VHP2.5 -130	1	0.03	0.580	0.00	0.000	0.762	76.20	0.000	0.80	0.75	0.00	224.59	0.066	0.04
35.00	Pasolink ODU	2	0.00	0.040	0.00	0.000	0.170	17.01	6.858	0.80	0.70	0.00	224.59	0.009	0.01
35.00	UKY 210 76/SC15	1	0.01	0.400	0.00	0.000	0.635	63.50	36.32	0.80	0.79	0.00	224.59	0.048	0.01
39.00	Radio 4499 B5 B28	2	0.04	0.310	0.00	0.000	0.553	39.80	19.00	0.80	0.74	0.00	231.61	0.072	0.09
39.00	Radio 4499 B2 B66	3	0.03	0.310	0.00	0.000	0.553	39.80	14.70	0.80	0.69	0.00	231.61	0.102	0.12
39.00	KRE 101 2544/1	1	0.05	1.870	0.00	0.000	2.680	49.80	19.20	0.80	0.74	0.00	231.61	0.217	0.06
39.00	SL12436A	3	0.01	0.400	0.00	0.000	0.900	32.00	10.00	0.80	0.69	0.00	231.61	0.130	0.03
39.00	ATR4518R6	2	0.03	0.950	0.00	0.000	2.020	34.90	16.60	0.80	0.78	0.00	231.61	0.233	0.06
39.00	RRU3702	3	0.02	0.210	0.00	0.000	0.480	35.56	11.93	0.80	0.68	0.00	231.61	0.067	0.07
39.00	Sector Frame 3m	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	231.61	0.369	0.42
41.18	Lightning Rod	1	0.03	0.093	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.91	236.69	0.019	0.04
Totals		38	1.55		0.00		Number of Appurtenances :17							5.0156	4.8158

Linear Appurtenance Properties

Elev From (m)	Elev To (m)	Description	Qty	Width (cm)	Weight (kg/m)	Pct in Block	Spread On Faces	Bundling Arrangement	Cluster Dia (cm)	Out Of Zone	Spacing (cm)	Orientation Factor	Ka Override
0.00	41.18	Escalera	1	12.8	9.92	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
36.38	41.18	60D 3.5x3.5x0.25	2	0.51	0.77	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
30.19	40.99	60D 3.5x3.5x0.25	1	1.02	1.52	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	39.00	Coax 11.64 cm	1	8.73	2.30	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
30.38	36.38	60D 3.5x3.5x0.25	2	0.51	0.77	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	33.00	Cama guía	1	14.7	10.8	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	33.00	Coax 4.24 cm	1	3.18	1.40	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
26.27	30.38	60D 4X4X0.25	2	0.76	1.22	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
20.27	26.27	60D 4X4X0.3125	2	1.78	3.35	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
14.27	20.27	60D 5X5X0.3125	2	0.76	1.44	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
8.27	14.27	60D 5X5X0.375	2	2.29	5.07	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
2.27	8.27	60D 6X6X0.375	2	1.78	3.75	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	2.27	60D 6X6X0.375	2	2.03	4.32	100	Lin App	Individual	0.00	N	1.00	1.00	1.00

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat




© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 1		TRAMO 1		Bot Elev (m): 0.00				Height (m): 2.265							
		Force	Load Case	Len	Bracing %			F'y	phi			Shear	Bear	Use	Controls
Max Compression Member		(ton)		(m)	X	Y	Z	(kg/cm ²)	Pn (ton)	Num Bolts	Num Holes	phiRnv (ton)	phiRn (ton)	%	
LEG	60D - 60D 6X6X0.375	-82.62	1.2D + 1.0W	2.27	100	100	100	0.0	0.0	66.92	0	0	0.00	0.00	123 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-2.92	1.2D + 1.0W	5.511	50	50	50	184.9	2531.1	5.47	1	1	4.01	3.75	77 Bolt Bear
		Force	Load Case		Fy	Fu	phi	Pn	Num	Num	Shear	Bear	Blk	Shear	Use
Max Tension Member		(ton)			(kg/cm ²)	(kg/cm ²)	(ton)	Bolts	Holes		Cap (ton)	Cap (ton)	phi	Pn(ton)	% Controls
LEG	60D - 60D 6X6X0.375	68.88	0.9D + 1.0W	60	2,531	4,078	72.69	0	0		0.00	0.00			94 User Input
HORIZ		0.00			0	0	0.00	0	0		0.00	0.00		0.00	0
DIAG	SAE - 3X3X0.25	2.74	1.2D + 1.0W	90	2,531	4,078	21.16	1	1		4.01	3.75		6.16	73 Bolt Bear
Max Splice Forces		Force	Load Case		Capacity		Use %	Num Bolts		Bolt Type					
		(ton)			(ton)										
Top Tension		66.88	0.9D + 1.0W	60	0.00		0	0							
Top Compression		80.39	1.2D + 1.0W		0.00		0								
Bot Tension		71.15	0.9D + 1.0W	60	0.00		0								
Bot Compression		85.29	1.2D + 1.0W		0.00		0								

Section: 2		TRAMO 2-A		Bot Elev (m): 2.27				Height (m): 2.170							
		Force	Load Case	Len	Bracing %			F'y	phi			Shear	Bear	Use	Controls
Max Compression Member		(ton)		(m)	X	Y	Z	(kg/cm ²)	Pn (ton)	Num Bolts	Num Holes	phiRnv (ton)	phiRn (ton)	%	
LEG	60D - 60D 6X6X0.375	-78.39	1.2D + 1.0W	2.17	100	100	100	0.0	0.0	67.14	20	3	0.00	142.07	116 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-2.80	1.2D + 1.0W	90	5.265	50	50	176.7	2531.1	5.99	1	1	4.01	3.75	74 Bolt Bear
		Force	Load Case		Fy	Fu	phi	Pn	Num	Num	Shear	Bear	Blk	Shear	Use
Max Tension Member		(ton)			(kg/cm ²)	(kg/cm ²)	(ton)	Bolts	Holes		Cap (ton)	Cap (ton)	phi	Pn(ton)	% Controls
LEG	60D - 60D 6X6X0.375	65.32	0.9D + 1.0W	60	2,531	4,078	71.61	20	3		0.00	0.00			91 User Input
HORIZ		0.00			0	0	0.00	0	0		0.00	0.00		0.00	0
DIAG	SAE - 3X3X0.25	2.74	1.2D + 1.0W	90	2,531	4,078	21.16	1	1		4.01	3.75		6.16	73 Bolt Bear
Max Splice Forces		Force	Load Case		Capacity		Use %	Num Bolts		Bolt Type					
		(ton)			(ton)										
Top Tension		63.10	0.9D + 1.0W	60	0.00		0	0							
Top Compression		75.91	1.2D + 1.0W		0.00		0								
Bot Tension		66.88	0.9D + 1.0W	60	0.00		0								
Bot Compression		80.39	1.2D + 1.0W		0.00		0								

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat




© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 3		TRAMO 2-B		Bot Elev (m): 4.44				Height (m): 1.880							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 6X6X0.375	-73.95	1.2D + 1.0W	1.88	100	100	100	0.0	0.0	68.70	0	0	0.00	0.00	107 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG SAE - 3X3X0.25		-2.68	1.2D + 1.0W 90	4.960	50	50	50	166.4	2531.1	6.75	1	1	4.01	3.75	71 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes		Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 6X6X0.375	61.73	0.9D + 1.0W 60	2,531	4,078	71.61	0	0		0.00		0.00			86 User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0
DIAG SAE - 3X3X0.25		2.63	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01		3.75		6.16	70 Bolt Bear
		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		59.89	0.9D + 1.0W 60	0.00		0		0							
Top Compression		71.90	1.2D + 1.0W	0.00		0									
Bot Tension		63.10	0.9D + 1.0W 60	0.00		0									
Bot Compression		75.91	1.2D + 1.0W	0.00		0									

Section: 4		TRAMO 2-C		Bot Elev (m): 6.32				Height (m): 1.950							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 6X6X0.375	-69.95	1.2D + 1.0W	1.95	100	100	100	0.0	0.0	68.35	0	0	0.00	0.00	102 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG SAE - 3X3X0.25		-2.58	1.2D + 1.0W 90	4.806	50	50	50	161.3	2531.1	7.19	1	1	4.01	3.75	68 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes		Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 6X6X0.375	58.49	0.9D + 1.0W 60	2,531	4,078	71.61	0	0		0.00		0.00			81 User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0
DIAG SAE - 3X3X0.25		2.52	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01		3.75		6.16	67 Bolt Bear
		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		56.55	0.9D + 1.0W 60	0.00		0		0							
Top Compression		67.79	1.2D + 1.0W	0.00		0									
Bot Tension		59.89	0.9D + 1.0W 60	0.00		0									
Bot Compression		71.90	1.2D + 1.0W	0.00		0									

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat




© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 5		TRAMO 3-A		Bot Elev (m): 8.27				Height (m): 1.900								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 5X5X0.375	-65.84	1.2D + 1.0W	1.90	100	100	100	0.0	0.0	63.05	16	2	0.00	113.65	104	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 3X3X0.25	-2.50	1.2D + 1.0W 90	4.606	50	50	50	154.6	2531.1	7.83	1	1	4.01	3.75	66	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes		Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 5X5X0.375	55.15	0.9D + 1.0W 60	2,531	4,078	62.93	16	2		0.00		0.00			87	User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0	
DIAG	SAE - 3X3X0.25	2.45	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01		3.75		6.16	65	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		53.26	0.9D + 1.0W 60	0.00		0		0								
Top Compression		63.74	1.2D + 1.0W	0.00		0										
Bot Tension		56.55	0.9D + 1.0W 60	0.00		0										
Bot Compression		67.79	1.2D + 1.0W	0.00		0										

Section: 6		TRAMO 3-B		Bot Elev (m): 10.17				Height (m): 2.140								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 5X5X0.375	-61.49	1.2D + 1.0W	2.14	100	100	100	0.0	0.0	61.20	0	0	0.00	0.00	100	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 3X3X0.25	-2.52	1.2D + 1.0W 90	4.527	50	50	50	151.9	2531.1	8.10	1	1	4.01	3.75	67	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes		Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 5X5X0.375	51.07	1.2D + 1.0W 60	2,531	4,078	62.93	0	0		0.00		0.00			81	User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0	
DIAG	SAE - 3X3X0.25	2.45	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01		3.75		6.16	65	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		49.45	0.9D + 1.0W 60	0.00		0		0								
Top Compression		59.13	1.2D + 1.0W	0.00		0										
Bot Tension		53.26	0.9D + 1.0W 60	0.00		0										
Bot Compression		63.74	1.2D + 1.0W	0.00		0										

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

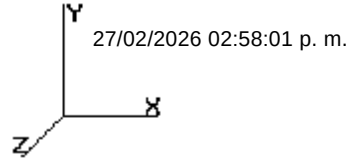


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 7		TRAMO 3-C		Bot Elev (m): 12.31				Height (m): 1.960							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 5X5X0.375	-57.05	1.2D + 1.0W	1.96	100	100	100	0.0	0.0	62.61	0	0	0.00	0.00	91 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-2.37	1.2D + 1.0W 90	4.257	50	50	50	174.5	2531.1	5.08	1	1	4.01	3.75	63 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 5X5X0.375	47.91	0.9D + 1.0W 60	2,531	4,078	62.93	0	0		0.00	0.00			76	User Input
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0	
DIAG	SAE - 2.5X2.5X0.25	2.32	1.2D + 1.0W 90	2,531	4,078	17.49	1	1		4.01	3.75		5.54	61	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		45.95	0.9D + 1.0W 60	0.00		0		0							
Top Compression		54.88	1.2D + 1.0W	0.00		0									
Bot Tension		49.45	0.9D + 1.0W 60	0.00		0									
Bot Compression		59.13	1.2D + 1.0W	0.00		0									

Section: 8		TRAMO 4-A		Bot Elev (m): 14.27				Height (m): 1.500							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 5X5X0.375	-53.33	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	47.36	16	2	0.00	113.65	112 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-2.17	1.2D + 1.0W 90	3.901	50	50	50	130.9	2531.1	10.91	1	1	4.01	3.75	57 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 5X5X0.375	44.83	0.9D + 1.0W 60	2,531	4,078	47.32	16	2		0.00	0.00			94	User Input
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0	
DIAG	SAE - 3X3X0.25	2.14	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01	3.75		6.16	57	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		43.27	0.9D + 1.0W 60	0.00		0		0							
Top Compression		51.60	1.2D + 1.0W	0.00		0									
Bot Tension		45.95	0.9D + 1.0W 60	0.00		0									
Bot Compression		54.88	1.2D + 1.0W	0.00		0									

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

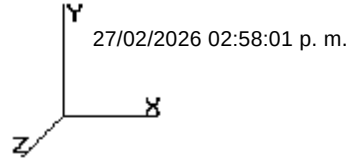


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 9		TRAMO 4-B		Bot Elev (m): 15.77				Height (m): 1.500								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 5X5X0.375	-50.04	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	47.08	0	0	0.00	0.00	100 User Input	
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG SAE - 3X3X0.25		-2.11	1.2D + 1.0W 90	3.760	50	50	50	126.2	2531.1	11.74	1	1	4.01	3.75	56 Bolt Bear	
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 5X5X0.375	42.11	0.9D + 1.0W 60	2,531	4,078	47.32	0	0	0.00	0.00			89	User Input		
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0			
DIAG SAE - 3X3X0.25		2.08	1.2D + 1.0W 90	2,531	4,078	21.16	1	1	4.01	3.75		6.16	55	Bolt Bear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		40.55	0.9D + 1.0W 60	0.00		0		0								
Top Compression		48.31	1.2D + 1.0W	0.00		0										
Bot Tension		43.27	0.9D + 1.0W 60	0.00		0										
Bot Compression		51.60	1.2D + 1.0W	0.00		0										

Section: 10		TRAMO 4-C		Bot Elev (m): 17.27				Height (m): 1.500								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 5X5X0.375	-46.73	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	47.08	0	0	0.00	0.00	99 User Input	
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG SAE - 2.5X2.5X0.25		-2.02	1.2D + 1.0W 90	3.619	50	50	50	148.3	2531.1	7.02	1	1	4.01	3.75	53 Bolt Bear	
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 5X5X0.375	39.38	0.9D + 1.0W 60	2,531	4,078	47.32	0	0	0.00	0.00			83	User Input		
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0			
DIAG SAE - 2.5X2.5X0.25		1.98	1.2D + 1.0W 90	2,531	4,078	17.49	1	1	4.01	3.75		5.54	52	Bolt Bear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		37.87	0.9D + 1.0W 60	0.00		0		0								
Top Compression		45.07	1.2D + 1.0W	0.00		0										
Bot Tension		40.55	0.9D + 1.0W 60	0.00		0										
Bot Compression		48.31	1.2D + 1.0W	0.00		0										

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat

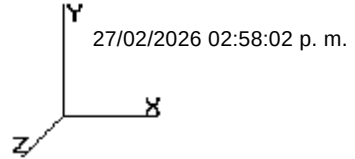


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 11		TRAMO 4-D		Bot Elev (m): 18.77				Height (m): 1.500							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 5X5X0.375	-43.57	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	47.08	0	0	0.00	0.00	92 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-1.96	1.2D + 1.0W 90	3.480	50	50	50	142.6	2531.1	7.60	1	1	4.01	3.75	52 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 5X5X0.375	36.70	0.9D + 1.0W 60	2,531	4,078	47.32	0	0	0.00	0.00			77	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0		
DIAG	SAE - 2.5X2.5X0.25	1.95	1.2D + 1.0W 90	2,531	4,078	17.49	1	1	4.01	3.75		5.54	52	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		35.10	0.9D + 1.0W 60	0.00		0		0							
Top Compression		41.78	1.2D + 1.0W	0.00		0									
Bot Tension		37.87	0.9D + 1.0W 60	0.00		0									
Bot Compression		45.07	1.2D + 1.0W	0.00		0									

Section: 12		TRAMO 5-A		Bot Elev (m): 20.26				Height (m): 1.500							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 4X4X0.3125	-40.12	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	41.73	12	2	0.00	71.04	96 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-1.91	1.2D + 1.0W	3.342	50	50	50	137.0	2531.1	8.24	1	1	4.01	3.75	50 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 4X4X0.3125	33.83	0.9D + 1.0W 60	2,531	4,078	41.89	12	2	0.00	0.00			80	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0		
DIAG	SAE - 2.5X2.5X0.25	1.85	1.2D + 1.0W 90	2,531	4,078	17.49	1	1	4.01	3.75		5.54	49	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		32.36	0.9D + 1.0W 60	0.00		0		0							
Top Compression		38.53	1.2D + 1.0W	0.00		0									
Bot Tension		35.10	0.9D + 1.0W 60	0.00		0									
Bot Compression		41.78	1.2D + 1.0W	0.00		0									

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat

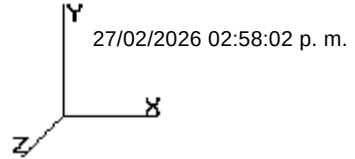


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 13		TRAMO 5-B		Bot Elev (m): 21.76				Height (m): 1.500								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 4X4X0.3125	-37.04	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	41.73	0	0	0.00	0.00	88	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2.5X2.5X0.25	-1.85	1.2D + 1.0W 90	3.205	50	50	50	131.4	2531.1	8.96	1	1	4.01	3.75	49	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 4X4X0.3125	31.19	0.9D + 1.0W 60	2,531	4,078	41.89	0	0		0.00	0.00			74	User Input	
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0		
DIAG	SAE - 2.5X2.5X0.25	1.85	1.2D + 1.0W 90	2,531	4,078	17.49	1	1		4.01	3.75		5.54	49	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		29.50	0.9D + 1.0W 60	0.00		0		0								
Top Compression		35.17	1.2D + 1.0W	0.00		0										
Bot Tension		32.36	0.9D + 1.0W 60	0.00		0										
Bot Compression		38.53	1.2D + 1.0W	0.00		0										

Section: 14		TRAMO 5-C		Bot Elev (m): 23.26				Height (m): 1.500								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 4X4X0.3125	-33.40	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	41.73	0	0	0.00	0.00	80	User Input
HORIZ	SAE - 2.5X2.5X0.25	-0.46	1.2D + 1.0W	2.602	100	100	100	213.2	2531.1	3.40	1	1	4.01	3.75	13	Member Z
DIAG	SAE - 2.5X2.5X0.25	-1.87	1.2D + 1.0W	3.070	50	50	50	125.8	2531.1	9.76	1	1	4.01	3.75	50	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 4X4X0.3125	28.10	0.9D + 1.0W 60	2,531	4,078	41.89	0	0		0.00	0.00			67	User Input	
HORIZ	SAE - 2.5X2.5X0.25	0.38	1.2D + 1.0W 60	2,531	4,078	17.49	1	1		4.01	3.75		5.54	10	Bolt Bear	
DIAG	SAE - 2.5X2.5X0.25	1.73	1.2D + 1.0W 90	2,531	4,078	17.49	1	1		4.01	3.75		5.54	46	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		26.67	0.9D + 1.0W 60	0.00		0		0								
Top Compression		31.87	1.2D + 1.0W	0.00		0										
Bot Tension		29.50	0.9D + 1.0W 60	0.00		0										
Bot Compression		35.17	1.2D + 1.0W	0.00		0										

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat

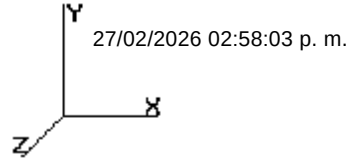


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 15		TRAMO 5-D		Bot Elev (m): 24.76				Height (m): 1.500							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 4X4X0.3125	-30.17	1.2D + 1.0W	1.50	100	100	100	0.0	0.0	41.73	12	2	0.00	71.04	72 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-1.76	1.2D + 1.0W 90	2.937	50	50	50	120.4	2531.1	10.58	1	1	4.01	3.75	46 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)			Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 4X4X0.3125	25.33	0.9D + 1.0W 60	2,531	4,078	41.89	12	2		0.00		0.00			60 User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0
DIAG	SAE - 2.5X2.5X0.25	1.72	1.2D + 1.0W 90	2,531	4,078	17.49	1	1		4.01		3.75		5.54	45 Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %		Num Bolts		Bolt Type				
Top Tension		23.77	0.9D + 1.0W 60	0.00			0		0						
Top Compression		28.47	1.2D + 1.0W	0.00			0								
Bot Tension		26.67	0.9D + 1.0W 60	0.00			0								
Bot Compression		31.87	1.2D + 1.0W	0.00			0								

Section: 16		TRAMO 6-A		Bot Elev (m): 26.26				Height (m): 1.503							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 4X4X0.25	-26.75	1.2D + 1.0W	1.51	100	100	100	0.0	0.0	29.13	12	2	0.00	56.83	91 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2X2X0.1875	-1.66	1.2D + 1.0W 90	2.807	50	50	50	141.8	2531.1	4.61	1	1	4.01	2.81	59 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)			Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 4X4X0.25	22.24	1.2D + 1.0W 60	2,531	4,078	30.86	12	2		0.00		0.00			72 User Input
HORIZ		0.00		0	0	0.00	0	0		0.00		0.00		0.00	0
DIAG	SAE - 2X2X0.1875	1.62	1.2D + 1.0W 90	2,531	4,078	10.50	1	1		4.01		2.81		3.23	57 Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %		Num Bolts		Bolt Type				
Top Tension		20.91	0.9D + 1.0W 60	0.00			0		0						
Top Compression		25.05	1.2D + 1.0W	0.00			0								
Bot Tension		23.77	0.9D + 1.0W 60	0.00			0								
Bot Compression		28.47	1.2D + 1.0W	0.00			0								

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

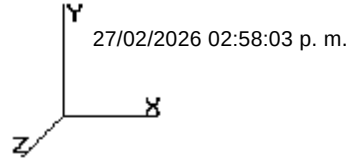


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 17		TRAMO 6-B		Bot Elev (m): 27.77				Height (m): 1.356							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 4X4X0.25	-23.60	1.2D + 1.0W	1.36	100	100	100	0.0	0.0	29.81	0	0	0.00	0.00	79 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-1.60	1.2D + 1.0W 90	2.605	50	50	50	87.4	2531.1	17.86	1	1	4.01	3.75	42 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 4X4X0.25	19.44	1.2D + 1.0W 60	2,531	4,078	30.86	0	0		0.00	0.00			63	User Input
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0	
DIAG	SAE - 3X3X0.25	1.61	1.2D + 1.0W 90	2,531	4,078	21.16	1	1		4.01	3.75		6.16	42	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		18.13	0.9D + 1.0W 60	0.00		0		0							
Top Compression		21.90	1.2D + 1.0W	0.00		0									
Bot Tension		20.91	0.9D + 1.0W 60	0.00		0									
Bot Compression		25.05	1.2D + 1.0W	0.00		0									

Section: 18		TRAMO 6-C		Bot Elev (m): 29.12				Height (m): 1.256							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 4X4X0.25	-20.37	1.2D + 1.0W	1.26	100	100	100	0.0	0.0	30.23	0	0	0.00	0.00	67 User Input
HORIZ	SAE - 1.75X1.75X0.25	-0.04	1.2D + 1.0W	2.026	100	100	100	235.6	2531.1	1.89	2	1	8.02	7.50	2 Member Z
DIAG	SAE - 2.5X2.5X0.25	-1.52	1.2D + 1.0W	2.439	50	50	50	100.0	2531.1	13.33	1	1	4.01	3.75	40 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls
Max Tension Member															
LEG	60D - 60D 4X4X0.25	16.67	1.2D + 1.0W 60	2,531	4,078	30.86	0	0		0.00	0.00			54	User Input
HORIZ	SAE - 1.75X1.75X0.25	0.01	1.2D + 1.0W	2,531	4,078	11.85	2	1		8.02	7.50		6.45	0	Blk Shear
DIAG	SAE - 2.5X2.5X0.25	1.46	1.2D + 1.0W 90	2,531	4,078	17.49	1	1		4.01	3.75		5.54	39	Bolt Bear
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		15.61	0.9D + 1.0W 60	0.00		0		0							
Top Compression		19.00	1.2D + 1.0W	0.00		0									
Bot Tension		18.13	0.9D + 1.0W 60	0.00		0									
Bot Compression		21.90	1.2D + 1.0W	0.00		0									

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat




© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 19		TRAMO 7-A		Bot Elev (m): 30.38				Height (m): 1.200							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 3.5X3.5X0.	-17.04	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.49	12	2	0.00	44.99	64 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2X2X0.1875	-1.99	1.2D + 1.0W 90	2.355	50	50	50	118.9	2531.1	6.48	1	1	4.01	2.81	70 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 3.5X3.5X0.	14.00	0.9D + 1.0W 60	2,531	4,078	26.52	12	2	0.00	0.00			52	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00	0	0		
DIAG	SAE - 2X2X0.1875	1.95	1.2D + 1.0W 90	2,531	4,078	10.50	1	1	4.01	2.81	3.23	69	Bolt Bear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type					
Top Tension		12.35	0.9D + 1.0W 60	0.00			0	0							
Top Compression		15.30	1.2D + 1.0W	0.00			0								
Bot Tension		15.61	0.9D + 1.0W 60	0.00			0								
Bot Compression		19.00	1.2D + 1.0W	0.00			0								

Section: 20		TRAMO 7-B		Bot Elev (m): 31.58				Height (m): 1.200							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 3.5X3.5X0.	-13.56	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.49	0	0	0.00	0.00	51 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2X2X0.25	-1.81	1.2D + 1.0W 90	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	48 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 3.5X3.5X0.	10.79	0.9D + 1.0W 60	2,531	4,078	26.52	0	0	0.00	0.00			40	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00	0	0		
DIAG	SAE - 2X2X0.25	1.82	1.2D + 1.0W 90	2,531	4,078	13.80	1	1	4.01	3.75	4.30	48	Bolt Bear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type					
Top Tension		9.24	0.9D + 1.0W 60	0.00			0	0							
Top Compression		11.85	1.2D + 1.0W	0.00			0								
Bot Tension		12.35	0.9D + 1.0W 60	0.00			0								
Bot Compression		15.30	1.2D + 1.0W	0.00			0								

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

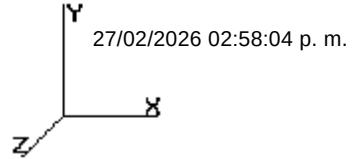


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 21		TRAMO 7-C		Bot Elev (m): 32.78				Height (m): 1.200								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 3.5X3.5X0.	-10.17	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.49	0	0	0.00	0.00	38	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-1.39	1.2D + 1.0W	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	37	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	8.01	1.2D + 1.0W 60	2,531	4,078	26.52	0	0		0.00	0.00			30	User Input	
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0		
DIAG	SAE - 2X2X0.25	1.38	1.2D + 1.0W 90	2,531	4,078	13.80	1	1		4.01	3.75		4.30	36	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		7.05	0.9D + 1.0W 60	0.00		0		0								
Top Compression		8.96	1.2D + 1.0W	0.00		0										
Bot Tension		9.24	0.9D + 1.0W 60	0.00		0										
Bot Compression		11.85	1.2D + 1.0W	0.00		0										

Section: 22		TRAMO 7-D		Bot Elev (m): 33.98				Height (m): 1.200								
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls	
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 3.5X3.5X0.	-7.77	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.49	0	0	0.00	0.00	29	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-1.25	1.2D + 1.0W 90	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	33	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm ²)	Fu (kg/ cm ²)	phi	Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls	
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	5.89	1.2D + 1.0W 60	2,531	4,078	26.52	0	0		0.00	0.00			22	User Input	
HORIZ		0.00		0	0	0.00	0	0		0.00	0.00		0.00	0		
DIAG	SAE - 2X2X0.25	1.26	1.2D + 1.0W 90	2,531	4,078	13.80	1	1		4.01	3.75		4.30	33	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		4.92	0.9D + 1.0W 60	0.00		0		0								
Top Compression		6.55	1.2D + 1.0W	0.00		0										
Bot Tension		7.05	0.9D + 1.0W 60	0.00		0										
Bot Compression		8.96	1.2D + 1.0W	0.00		0										

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat

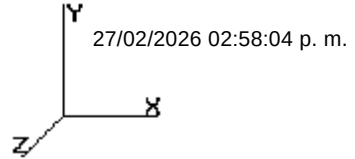


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 23		TRAMO 7-E		Bot Elev (m): 35.18				Height (m): 1.200									
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls		
Max Compression Member					X	Y	Z	KL/R									
LEG	60D - 60D 3.5X3.5X0.	-5.39	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.49	0	0	0.00	0.00	20 User Input		
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0		
DIAG	SAE - 2X2X0.25	-1.05	1.2D + 1.0W	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	27 Bolt Bear		
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls			
Max Tension Member																	
LEG	60D - 60D 3.5X3.5X0.	4.01	0.9D + 1.0W 60	2,531	4,078	26.52	0	0	0.00		0.00			15 User Input			
HORIZ		0.00		0	0	0.00	0	0	0.00		0.00		0.00	0			
DIAG	SAE - 2X2X0.25	1.04	1.2D + 1.0W 90	2,531	4,078	13.80	1	1	4.01		3.75		4.30	27 Bolt Bear			
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type							
Top Tension		3.20	0.9D + 1.0W 60	0.00		0		0									
Top Compression		4.50	1.2D + 1.0W	0.00		0											
Bot Tension		4.92	0.9D + 1.0W 60	0.00		0											
Bot Compression		6.55	1.2D + 1.0W	0.00		0											

Section: 24		TRAMO 8-A		Bot Elev (m): 36.38				Height (m): 1.200									
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls		
Max Compression Member					X	Y	Z	KL/R									
LEG	60D - 60D 3.5X3.5X0.	-3.63	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.15	12	2	0.00	44.99	13 User Input		
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0		
DIAG	SAE - 2X2X0.25	-0.92	1.2D + 1.0W 90	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	24 Bolt Bear		
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)		Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls			
Max Tension Member																	
LEG	60D - 60D 3.5X3.5X0.	2.49	0.9D + 1.0W 60	2,531	4,078	26.52	12	2	0.00		0.00			9 User Input			
HORIZ		0.00		0	0	0.00	0	0	0.00		0.00		0.00	0			
DIAG	SAE - 2X2X0.25	0.93	1.2D + 1.0W 90	2,531	4,078	13.80	1	1	4.01		3.75		4.30	24 Bolt Bear			
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type							
Top Tension		1.64	0.9D + 1.0W 60	0.00		0		0									
Top Compression		2.72	1.2D + 1.0W	0.00		0											
Bot Tension		3.20	0.9D + 1.0W 60	0.00		0											
Bot Compression		4.50	1.2D + 1.0W	0.00		0											

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

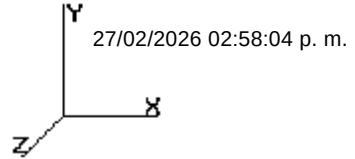


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 25		TRAMO 8-B		Bot Elev (m): 37.58				Height (m): 1.200								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 3.5X3.5X0.	-1.83	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.15	0	0	0.00	0.00	6	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-0.83	1.2D + 1.0W	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	22	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	0.89	0.9D + 1.0W 60	2,531	4,078	26.52	0	0	0.00	0.00				3	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0.00	0		
DIAG	SAE - 2X2X0.25	0.80	1.2D + 1.0W 90	2,531	4,078	13.80	1	1	4.01	3.75		4.30	4.30	21	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		0.28	0.9D + 1.0W 60	0.00		0		0								
Top Compression		1.17	1.2D + 1.0W	0.00		0										
Bot Tension		1.64	0.9D + 1.0W 60	0.00		0										
Bot Compression		2.72	1.2D + 1.0W	0.00		0										

Section: 26		TRAMO 8-C		Bot Elev (m): 38.78				Height (m): 1.200								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R								
LEG	60D - 60D 3.5X3.5X0.	-0.54	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.15	0	0	0.00	0.00	2	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-0.30	1.2D + 1.0W	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	8	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phi	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	0.09	1.2D + 1.0W	2,531	4,078	26.52	0	0	0.00	0.00				0	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0.00	0		
DIAG	SAE - 2X2X0.25	0.27	1.2D + 1.0W 60	2,531	4,078	13.80	1	1	4.01	3.75		4.30	4.30	7	Bolt Bear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type						
Top Tension		0.12	0.9D + 1.0W 60	0.00		0		0								
Top Compression		0.38	1.2D + 1.0W	0.00		0										
Bot Tension		0.28	0.9D + 1.0W 60	0.00		0										
Bot Compression		1.17	1.2D + 1.0W	0.00		0										

Site Number: 434153
Location: Limpio II
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : B
Topo : Method 2 Flat




© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 27		TRAMO 8-D		Bot Elev (m): 39.98				Height (m): 1.200									
		Force	Load Case	Len	Bracing %				F'y	phi			Shear	Bear	Use		
		(ton)		(m)	X	Y	Z	KL/R	(kg/ cm²)	Pn	Num	Num	phiRnv	phiRn	%	Controls	
Max Compression Member																	
LEG	60D - 60D 3.5X3.5X0.	-0.23	1.2D + 1.0W	1.20	100	100	100	0.0	0.0	26.15	0	0	0.00	0.00	0	User Input	
HORIZ	SAE - 2X2X0.25	-0.11	1.2D + 1.0W 60	2.026	100	100	100	206.7	2531.1	2.85	1	1	4.01	3.75	3	Member Z	
DIAG	SAE - 2X2X0.25	-0.14	1.2D + 1.0W 60	2.355	50	50	50	120.1	2531.1	8.38	1	1	4.01	3.75	3	Bolt Bear	
				Fy	Fu	phi	Pn	Num	Num	Shear							
Max Tension Member		Force	Load Case	(kg/ cm²)	(kg/ cm²)	(ton)		Bolts	Holes	Cap (ton)		Bear	Cap	Blk	Shear	Use	
		(ton)										(ton)	(ton)	phi	Pn(ton)	%	Controls
LEG	60D - 60D 3.5X3.5X0.	0.02	1.2D + 1.0W	2,531	4,078	26.52	0	0		0.00		0.00				0	User Input
HORIZ	SAE - 2X2X0.25	0.13	1.2D + 1.0W	2,531	4,078	13.80	1	1		4.01		3.75		4.30		3	Bolt Bear
DIAG	SAE - 2X2X0.25	0.15	1.2D + 1.0W	2,531	4,078	13.80	1	1		4.01		3.75		4.30		4	Bolt Bear
		Force		Capacity			Use %	Num	Bolts								
Max Splice Forces		(ton)	Load Case	(ton)													
Top Tension		0.00			0.00		0		0								
Top Compression		0.07	1.2D + 1.0W 60		0.00		0										
Bot Tension		0.12	0.9D + 1.0W 60		0.00		0										
Bot Compression		0.38	1.2D + 1.0W		0.00		0										

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat

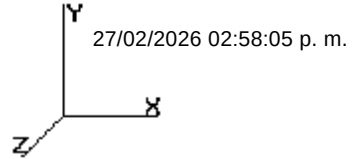

© 2026 by ATC IP LLC.All rights reserved.

Support Forces Summary


Load Case	Radius (m)	Elevation (m)	Azimuth (deg)	Node	FX (ton)	FY (ton)	FZ (ton)	(-) = Uplift (+) = Down
1.0D + 1.0W Service 90 deg	2.97	00.00	240	1b	-1.00	-8.50	-0.48	
	2.97	00.00	120	1a	-1.32	13.98	0.66	
	2.97	00.00	0	1	-0.18	2.74	-0.18	
1.0D + 1.0W Service 60 deg	2.97	00.00	240	1b	-1.09	-9.87	-0.63	
	2.97	00.00	120	1a	-0.86	9.05	0.32	
	2.97	00.00	0	1	-0.15	9.05	-0.90	
1.0D + 1.0W Service Normal	2.97	00.00	240	1b	-0.46	-4.29	-0.46	
	2.97	00.00	120	1a	0.46	-4.29	-0.46	
	2.97	00.00	0	1	0.00	16.81	-1.81	
0.9D + 1.0W 90 deg	2.97	00.00	240	1b	-6.62	-62.73	-3.24	
	2.97	00.00	120	1a	-6.85	67.67	3.36	
	2.97	00.00	0	1	-1.02	2.47	-0.13	
0.9D + 1.0W 60 deg	2.97	00.00	240	1b	-7.13	-70.72	-4.12	
	2.97	00.00	120	1a	-4.16	39.06	1.42	
	2.97	00.00	0	1	-0.85	39.07	-4.31	
0.9D + 1.0W Normal	2.97	00.00	240	1b	-3.49	-38.33	-3.14	
	2.97	00.00	120	1a	3.49	-38.33	-3.14	
	2.97	00.00	0	1	0.00	84.07	-9.56	
1.2D + 1.0W 90 deg	2.97	00.00	240	1b	-6.57	-61.98	-3.21	
	2.97	00.00	120	1a	-6.90	68.57	3.39	
	2.97	00.00	0	1	-1.02	3.29	-0.18	
1.2D + 1.0W 60 deg	2.97	00.00	240	1b	-7.08	-69.98	-4.09	
	2.97	00.00	120	1a	-4.21	39.92	1.45	
	2.97	00.00	0	1	-0.85	39.93	-4.37	
1.2D + 1.0W Normal	2.97	00.00	240	1b	-3.44	-37.55	-3.12	
	2.97	00.00	120	1a	3.44	-37.55	-3.12	
	2.97	00.00	0	1	0.00	84.98	-9.62	

Max Uplift:	70.72 (ton)	Moment:	363.63 (ton-m)	1.2D + 1.0W Normal
Max Down:	84.98 (ton)	Total Down:	9.88 (ton)	
Max Shear:	9.62 (ton)	Total Shear:	15.85 (ton)	

Maximum Reactions Summary

	Base	DL + WL	DL + WL + IL
Vertical	84.98	9.88	0.00
Horizontal	9.62	15.85	0.00
Moment (kip-ft)		363.63	0.00

Site Number: 434153
 Location: Limpio II
 Code: ANSI/TIA-222-H
 Risk Category: II
 Exposure : B
 Topo : Method 2 Flat



© 2026 by ATC IP LLC.All rights reserved.

Deflections and Rotations

Load Case	Elevation (m)	Deflection (cm)	Twist (°)	Sway (°)
232.24 km/hr Normal to Face with No Ice (Reduced)	26.26	45.9803	0.0371	0.8167
	32.78	73.1850	0.0416	1.0529
	35.18	84.5716	0.0390	1.0940
	38.78	102.1735	0.0364	1.1072
	41.18	113.9068	0.0359	1.1149
232.24 km/hr 60 deg with No Ice (Reduced DL)	26.26	41.5697	0.0375	0.7409
	32.78	66.2619	0.0439	0.9573
	35.18	76.6306	0.0420	0.9959
	38.78	92.6263	0.0410	1.0066
	41.18	103.3151	0.0412	1.0012
232.24 km/hr 60 deg with No Ice	26.26	41.6294	0.0377	0.7422
	32.78	66.3707	0.0441	0.9591
	35.18	76.7600	0.0422	0.9979
	38.78	92.7882	0.0411	1.0087
	41.18	103.4990	0.0413	1.0033
232.24 km/hr 90 deg with No Ice (Reduced DL)	26.26	42.6283	0.0255	0.7580
	32.78	67.9775	0.0296	0.9832
	35.18	78.5961	0.0276	1.0229
	38.78	94.9877	0.0256	1.0307
	41.18	105.9310	0.0252	1.0230
232.24 km/hr 90 deg with No Ice	26.26	42.6897	0.0255	0.7594
	32.78	68.0890	0.0296	0.9851
	35.18	78.7287	0.0276	1.0249
	38.78	95.1536	0.0256	1.0329
	41.18	106.1194	0.0252	1.0251
232.24 km/hr Normal To Face with No Ice	26.26	46.0514	0.0372	0.8182
	32.78	73.3049	0.0418	1.0551
	35.18	84.7142	0.0392	1.0963
	38.78	102.3518	0.0366	1.1095
	41.18	114.1091	0.0360	1.1171
Serviceability - 96.56 km/hr Wind 60 deg	26.26	7.1509	0.0060	0.1275
	32.78	11.4113	0.0066	0.1646
	35.18	13.1953	0.0060	0.1714
	38.78	15.9530	0.0054	0.1735
	41.18	17.7910	0.0052	0.1724
Serviceability - 96.56 km/hr Wind 90 deg	26.26	7.3502	0.0040	0.1307
	32.78	11.7103	0.0044	0.1694
	35.18	13.5377	0.0040	0.1762
	38.78	16.3648	0.0036	0.1777
	41.18	18.2471	0.0034	0.1762
Serviceability - 96.56 km/hr Wind Normal	26.26	7.9389	0.0058	0.1409
	32.78	12.6110	0.0063	0.1817
	35.18	14.5736	0.0057	0.1886
	38.78	17.6058	0.0051	0.1909
	41.18	19.6278	0.0049	0.1921
	41.18	0.0000	0.0000	0.0000