


Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

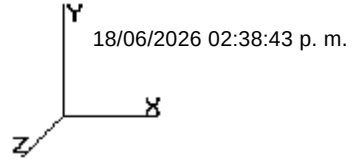

© 2026 by ATC IP LLC.All rights reserved.

Analysis Parameters

Location:	Oriental	Height (m):	50.05
Code:	ANSI/TIA-222-H	Base Elevation (m):	0.30
Shape:	Triangle	Bottom Face Width (m):	6.41
Tower Manufacturer:	*	Top Face Width (m):	2.00
Tower Type:	Self Support		
Kd:	0.85		
Ke	0.97		


Ice & Wind Parameters

Exposure Category:	B	Design Windspeed Without Ice:	0 km/hr
Risk Category:	II	Design Windspeed With Ice:	0 km/hr
Topo Factor Proc:	Method 2	Operational Windspeed:	184 km/hr
Feature:	Flat	Design Ice Thickness:	0.00 cm
Crest Height (H):	0 m		
Crest Length (L):	0 m		
Distance from Apex (x):	0 m		
Upwind / Downwind	Upwind		

Load Cases

1.0D + 1.0W Service Normal	Serviceability - 183.60 km/hr Wind Normal
1.0D + 1.0W Service 60 deg	Serviceability - 183.60 km/hr Wind 60 deg
1.0D + 1.0W Service 90 deg	Serviceability - 183.60 km/hr Wind 90 deg

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

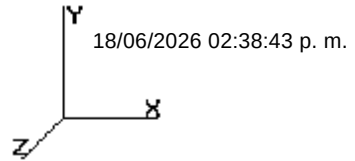

© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service Normal

Serviceability - 183.60 km/hr Wind Normal

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.92	94.33	3.14	0.00	0.00	0.13	2.86	1.00	1.0	0.00	0.00	3.14	1.77	0.00	1.26	0.00	0.72	0.21	0.93
2	7.00	94.33	4.90	0.00	0.00	0.13	2.84	1.00	1.0	0.00	0.00	4.90	2.64	0.00	1.68	0.00	1.12	0.31	1.43
3	13.25	105.63	4.06	0.00	0.00	0.12	2.87	1.00	1.0	0.00	0.00	4.06	3.01	0.00	1.54	0.00	1.04	0.42	1.46
4	19.45	117.64	3.67	0.00	0.00	0.13	2.85	1.00	1.0	0.00	0.00	3.67	2.76	0.00	1.18	0.00	1.05	0.41	1.46
5	24.90	126.12	2.89	0.00	0.00	0.15	2.77	1.00	1.0	0.00	0.00	2.89	1.97	0.00	1.13	0.00	0.86	0.30	1.16
6	29.60	132.44	2.55	0.00	0.00	0.15	2.77	1.00	1.0	0.00	0.00	2.55	2.00	0.00	0.82	0.00	0.79	0.32	1.12
7	34.30	138.08	2.46	0.00	0.00	0.17	2.71	1.00	1.0	0.00	0.00	2.46	2.00	0.00	0.75	0.00	0.78	0.33	1.11
8	39.00	143.20	2.13	0.00	0.00	0.17	2.69	1.00	1.0	0.00	0.00	2.13	1.71	0.00	0.66	0.00	0.70	0.30	0.99
9	42.75	146.97	1.39	0.00	0.00	0.22	2.52	1.00	1.0	0.00	0.00	1.39	0.77	0.00	0.40	0.00	0.44	0.13	0.57
10	44.74	148.88	0.44	0.00	0.00	0.18	2.67	1.00	1.0	0.00	0.00	0.44	0.32	0.00	0.13	0.00	0.15	0.06	0.20
11	45.92	149.99	0.53	0.00	0.00	0.21	2.55	1.00	1.0	0.00	0.00	0.53	0.32	0.00	0.15	0.00	0.17	0.06	0.23
12	47.10	151.07	0.44	0.00	0.00	0.18	2.67	1.00	1.0	0.00	0.00	0.44	0.32	0.00	0.13	0.00	0.15	0.06	0.21
13	48.28	152.14	0.53	0.00	0.00	0.21	2.55	1.00	1.0	0.00	0.00	0.53	0.32	0.00	0.15	0.00	0.17	0.06	0.23
14	49.46	153.18	0.52	0.00	0.00	0.21	2.56	1.00	1.0	0.00	0.00	0.52	0.30	0.00	0.15	0.00	0.17	0.05	0.23
																10.12	0.00		11.33

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

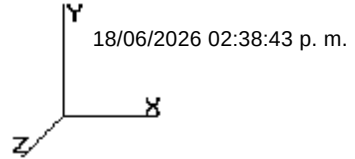

© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service 60 deg

Serviceability - 183.60 km/hr Wind 60 deg

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.92	94.33	3.14	0.00	0.00	0.13	2.86	0.80	1.0	0.00	0.00	2.51	1.77	0.00	1.26	0.00	0.58	0.22	0.79
2	7.00	94.33	4.90	0.00	0.00	0.13	2.84	0.80	1.0	0.00	0.00	3.92	2.64	0.00	1.68	0.00	0.89	0.31	1.20
3	13.25	105.63	4.06	0.00	0.00	0.12	2.87	0.80	1.0	0.00	0.00	3.25	3.01	0.00	1.54	0.00	0.84	0.42	1.25
4	19.45	117.64	3.67	0.00	0.00	0.13	2.85	0.80	1.0	0.00	0.00	2.93	2.76	0.00	1.18	0.00	0.84	0.41	1.25
5	24.90	126.12	2.89	0.00	0.00	0.15	2.77	0.80	1.0	0.00	0.00	2.31	1.97	0.00	1.13	0.00	0.69	0.30	0.99
6	29.60	132.44	2.55	0.00	0.00	0.15	2.77	0.80	1.0	0.00	0.00	2.04	2.00	0.00	0.82	0.00	0.64	0.32	0.96
7	34.30	138.08	2.46	0.00	0.00	0.17	2.71	0.80	1.0	0.00	0.00	1.97	2.00	0.00	0.75	0.00	0.62	0.33	0.96
8	39.00	143.20	2.13	0.00	0.00	0.17	2.69	0.80	1.0	0.00	0.00	1.70	1.71	0.00	0.66	0.00	0.56	0.30	0.85
9	42.75	146.97	1.39	0.00	0.00	0.22	2.52	0.80	1.0	0.00	0.00	1.11	0.77	0.00	0.40	0.00	0.35	0.13	0.48
10	44.74	148.88	0.44	0.00	0.00	0.18	2.67	0.80	1.0	0.00	0.00	0.35	0.32	0.00	0.13	0.00	0.12	0.06	0.17
11	45.92	149.99	0.53	0.00	0.00	0.21	2.55	0.80	1.0	0.00	0.00	0.42	0.32	0.00	0.15	0.00	0.14	0.06	0.19
12	47.10	151.07	0.44	0.00	0.00	0.18	2.67	0.80	1.0	0.00	0.00	0.35	0.32	0.00	0.13	0.00	0.12	0.06	0.18
13	48.28	152.14	0.53	0.00	0.00	0.21	2.55	0.80	1.0	0.00	0.00	0.42	0.32	0.00	0.15	0.00	0.14	0.06	0.19
14	49.46	153.18	0.52	0.00	0.00	0.21	2.56	0.80	1.0	0.00	0.00	0.42	0.30	0.00	0.15	0.00	0.14	0.05	0.19
																10.12	0.00		9.67

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

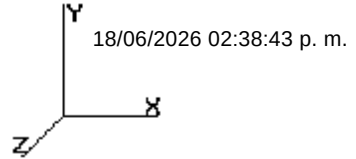

© 2026 by ATC IP LLC.All rights reserved.

Section Forces

LoadCase 1.0D + 1.0W Service 90 deg

Serviceability - 183.60 km/hr Wind 90 deg

Gust Response Factor :0.85


Dead Load Factor :1.00

Wind Load Factor :1.00

Wind Importance Factor 1.00

Sect Seq	Wind Height (m)	qz (kg/ m²)	Total Flat Area (m²)	Total Round Area (m²)	Ice Round Area (m²)	Sol Ratio	Cf	Df	Dr	Rr	Ice Thick (cm)	Eff Area (m²)	Linear Area (m²)	Ice Linear Area (m²)	Total Weight (ton)	Weight Ice (ton)	Struct Force (ton)	Linear Force (ton)	Total Force (ton)
1	1.92	94.33	3.14	0.00	0.00	0.13	2.86	0.85	1.0	0.00	0.00	2.67	1.77	0.00	1.26	0.00	0.61	0.22	0.83
2	7.00	94.33	4.90	0.00	0.00	0.13	2.84	0.85	1.0	0.00	0.00	4.16	2.64	0.00	1.68	0.00	0.95	0.31	1.26
3	13.25	105.63	4.06	0.00	0.00	0.12	2.87	0.85	1.0	0.00	0.00	3.45	3.01	0.00	1.54	0.00	0.89	0.42	1.31
4	19.45	117.64	3.67	0.00	0.00	0.13	2.85	0.85	1.0	0.00	0.00	3.12	2.76	0.00	1.18	0.00	0.89	0.41	1.30
5	24.90	126.12	2.89	0.00	0.00	0.15	2.77	0.85	1.0	0.00	0.00	2.46	1.97	0.00	1.13	0.00	0.73	0.30	1.03
6	29.60	132.44	2.55	0.00	0.00	0.15	2.77	0.85	1.0	0.00	0.00	2.17	2.00	0.00	0.82	0.00	0.68	0.32	1.00
7	34.30	138.08	2.46	0.00	0.00	0.17	2.71	0.85	1.0	0.00	0.00	2.09	2.00	0.00	0.75	0.00	0.66	0.33	1.00
8	39.00	143.20	2.13	0.00	0.00	0.17	2.69	0.85	1.0	0.00	0.00	1.81	1.71	0.00	0.66	0.00	0.59	0.30	0.89
9	42.75	146.97	1.39	0.00	0.00	0.22	2.52	0.85	1.0	0.00	0.00	1.18	0.77	0.00	0.40	0.00	0.37	0.13	0.51
10	44.74	148.88	0.44	0.00	0.00	0.18	2.67	0.85	1.0	0.00	0.00	0.37	0.32	0.00	0.13	0.00	0.13	0.06	0.18
11	45.92	149.99	0.53	0.00	0.00	0.21	2.55	0.85	1.0	0.00	0.00	0.45	0.32	0.00	0.15	0.00	0.15	0.06	0.20
12	47.10	151.07	0.44	0.00	0.00	0.18	2.67	0.85	1.0	0.00	0.00	0.37	0.32	0.00	0.13	0.00	0.13	0.06	0.18
13	48.28	152.14	0.53	0.00	0.00	0.21	2.55	0.85	1.0	0.00	0.00	0.45	0.32	0.00	0.15	0.00	0.15	0.06	0.20
14	49.46	153.18	0.52	0.00	0.00	0.21	2.56	0.85	1.0	0.00	0.00	0.44	0.30	0.00	0.15	0.00	0.15	0.05	0.20
																10.12	0.00		10.08

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

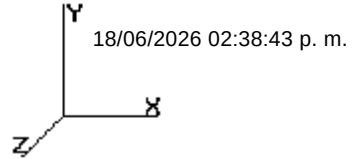

© 2026 by ATC IP LLC.All rights reserved.

Tower Loading

Discrete Appurtenance Properties 1.0D + 1.0W Service Normal


Serviceability - 183.60 km/hr Wind Normal

Attach Elev (m)	Description	Qty	No Ice		Ice		Len (m)	Width (cm)	Depth (cm)	Ka	Orient. Factor	Vert Ecc (m)	Qz (kg/m)	F _a WL (ton)	P _a DL (ton)
			Weight (ton)	CaAa (m ²)	Weight (ton)	CaAa (m ²)									
0.00	AQU4518R14v07	1	0.02	0.770	0.00	0.000	1.499	36.90	14.90	0.80	0.74	0.00	94.33	0.036	0.02
35.00	IP-20LH XPIC SD	2	0.01	0.070	0.00	0.000	0.230	21.80	12.50	1.00	1.00	0.00	138.87	0.017	0.01
35.00	SCX2-220xxx	1	0.01	0.450	0.00	0.000	0.671	67.05	26.41	1.00	1.00	0.00	138.87	0.053	0.01
35.00	OVP 10-910069-100	2	0.00	0.070	0.00	0.000	0.226	22.09	14.73	1.00	1.00	0.00	138.87	0.017	0.01
35.00	Side Arm	1	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	138.87	0.037	0.02
37.00	FXFC	1	0.03	0.390	0.00	0.000	0.561	49.27	13.20	0.80	0.64	0.00	0.00	0.000	0.00
37.00	MMM65A-3x2	3	0.02	0.980	0.00	0.000	1.389	50.29	11.68	0.80	0.65	0.00	0.00	0.000	0.00
37.00	FRIG 4x30 W	3	0.02	0.260	0.00	0.000	0.460	40.00	16.23	0.80	0.71	0.00	0.00	0.000	0.00
37.30	Breezemax 935030	1	0.00	0.030	0.00	0.000	0.155	12.70	0.000	1.00	1.00	0.00	141.40	0.004	0.00
38.00	AHFII AirScale RRH 4T	3	0.03	0.300	0.00	0.000	0.632	34.20	11.00	0.80	0.68	0.00	142.15	0.059	0.08
38.00	RV4-65B-R5	3	0.03	1.030	0.00	0.000	2.100	35.00	20.80	0.80	0.83	0.00	142.15	0.248	0.09
38.00	ARPB	1	0.02	0.250	0.00	0.000	0.118	44.10	40.20	0.80	0.96	0.00	142.15	0.023	0.02
38.00	Side Arm	3	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	142.15	0.114	0.07
41.00	RRU3262-2600Mhz	3	0.01	0.170	0.00	0.000	0.400	30.00	10.00	0.80	0.68	0.00	145.24	0.034	0.05
41.00	RRU3942	3	0.03	0.220	0.00	0.000	0.485	38.00	17.00	0.80	0.73	0.00	145.24	0.047	0.08
41.00	RRU 3936	3	0.01	0.140	0.00	0.000	0.400	30.00	12.00	0.80	0.71	0.00	145.24	0.029	0.05
41.00	AQU4518R25V06	3	0.04	1.530	0.00	0.000	2.550	42.92	19.55	0.80	0.77	0.00	145.24	0.349	0.11
41.00	Side Arm	3	0.02	0.470	0.00	0.000	0.000	0.000	0.000	1.00	0.67	0.00	145.24	0.117	0.07
44.00	ATR4518R6	3	0.03	0.949	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.359	0.08
44.00	Radio 4478 B71	1	0.03	0.179	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.023	0.03
44.00	Radio 4499	2	0.04	0.310	0.00	0.000	0.553	39.80	19.00	0.80	0.74	0.00	148.18	0.046	0.08
44.00	Radio 4415	4	0.02	0.201	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.101	0.09
44.00	2UNPX203.6R2 (81.6 I	1	0.04	1.378	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.174	0.04
44.00	T-Arm	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	148.18	0.236	0.35
44.00	RADIO2219 B3	2	0.02	0.224	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.056	0.03
44.00	RADIO2219 B3	2	0.02	0.224	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.18	0.056	0.03
44.50	COM-BD21ODN8	4	0.00	0.036	0.00	0.000	0.000	0.000	0.000	0.80	1.00	0.00	148.66	0.018	0.00
50.00	2UNPX203.6R2 (81.6 I	1	0.04	1.210	0.00	0.000	1.746	56.50	12.70	0.80	0.65	0.00	153.66	0.082	0.04
50.00	ATR4518R6	2	0.03	0.950	0.00	0.000	2.020	34.90	16.60	0.80	0.78	0.00	153.66	0.154	0.05
50.00	T-Arm	3	0.12	1.110	0.00	0.000	0.000	0.000	0.000	0.75	0.75	0.00	153.66	0.245	0.35
50.05	Lightning Rod	1	0.03	0.093	0.00	0.000	0.000	0.000	0.000	1.00	1.00	0.91	154.49	0.012	0.03
Totals		69	2.03		0.00		Number of Appurtenances :31							2.7464	1.8782

Linear Appurtenance Properties

Elev From (m)	Elev To (m)	Description	Qty	Width (cm)	Weight (kg/m)	Pct in Block	Spread On Faces	Bundling Arrangement	Cluster Dia (cm)	Out Of Zone	Spacing (cm)	Orientation Factor	Ka Override
0.00	50.00	Climbing Ladder,	1	4.76	10.2	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	50.00	Coax 19.3 cm	1	14.4	4.90	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	50.00	Wave Guide	1	7.62	8.93	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
36.65	44.15	Adicional T8	1	0.51	1.09	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	41.00	Coax 7.16 cm	1	4.01	2.00	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	40.00	Wave Guide	1	4.76	8.93	100	Lin App	Individual	0.00	N	1.00	1.00	1.00

Site Number: 435257
 Location: Oriental
 Code: ANSI/TIA-222-H
 Struct Class :
 Exposure : B
 Topo : 1

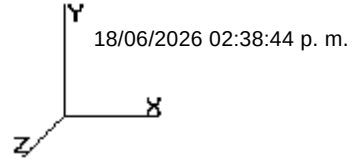


© 2026 by ATC IP LLC.All rights reserved.

Tower Loading

0.00	38.00	Coax 11.66 cm	1	6.34	2.90	100	Lin App	Individual	0.00	Y	1.00	1.00	1.00
31.95	36.65	Adicional T7	1	0.51	1.02	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
27.25	31.95	Adicional T6	1	0.51	1.10	100	None	Individual	0.00	N	1.00	1.00	1.00
16.35	22.55	Adicional T4	1	2.54	5.26	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
10.15	16.35	Adicional T3	1	6.60	19.1	100	Lin App	Individual	0.00	N	1.00	1.00	1.00
0.00	3.85	Adicional T1	1	4.06	12.7	100	None	Individual	0.00	N	1.00	1.00	1.00

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

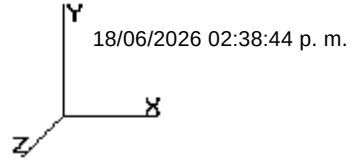


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 1		Tramo 1		Bot Elev (m): 0.00				Height (m): 3.850							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 8X8X0.5	-73.80	1.0D + 1.0W	3.86	50	50	50	0.0	0.0	152.40	20	3	0.00	342.23	48 User Input
HORIZ	SAE - 3X3X0.25	-2.23	1.0D + 1.0W	3.011	100	100	100	202.1	2396.3	4.58	2	1	12.52	9.76	48 Member Z
DIAG	SAE - 3X3X0.3125	-3.70	1.0D + 1.0W	5.010	50	50	50	169.2	2396.3	8.06	2	1	12.52	12.20	45 Member Z
		Force (ton)	Load Case	Fy (kg/cm²)	Fu (kg/cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 8X8X0.5	59.11	1.0D + 1.0W	3,600	5,201	183.24	20	3	0.00	0.00		32	User Input		
HORIZ	SAE - 3X3X0.25	2.24	1.0D + 1.0W	2,396	4,201	19.33	2	1	12.52	9.76	9.50	23	Blk Shear		
DIAG	SAE - 3X3X0.3125	3.52	1.0D + 1.0W	2,396	4,201	23.85	2	1	12.52	12.20	11.87	29	Blk Shear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type					
Top Tension		58.91	1.0D + 1.0W	0.00			0	0							
Top Compression		73.58	1.0D + 1.0W	0.00			0								
Bot Tension		63.78	1.0D + 1.0W	0.00			0								
Bot Compression		79.49	1.0D + 1.0W	0.00			0								

Section: 2		Tramo 2		Bot Elev (m): 3.85				Height (m): 6.300							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 8X8X0.5	-68.45	1.0D + 1.0W	6.31	25	25	25	0.0	0.0	156.30	20	3	0.00	342.23	43 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-3.51	1.0D + 1.0W	8.503	25	25	25	142.7	2396.3	9.18	2	1	12.52	9.76	38 Member Z
		Force (ton)	Load Case	Fy (kg/cm²)	Fu (kg/cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 8X8X0.5	54.89	1.0D + 1.0W	3,600	5,201	164.28	20	3	0.00	0.00		33	User Input		
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00	0			
DIAG	SAE - 3X3X0.25	3.28	1.0D + 1.0W	2,396	4,201	19.33	2	1	12.52	9.76	9.50	34	Blk Shear		
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type					
Top Tension		50.78	1.0D + 1.0W	0.00			0	0							
Top Compression		63.90	1.0D + 1.0W	0.00			0								
Bot Tension		58.91	1.0D + 1.0W	0.00			0								
Bot Compression		73.58	1.0D + 1.0W	0.00			0								

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

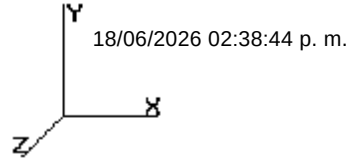


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 3		Tramo 3		Bot Elev (m): 10.15				Height (m): 6.200							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 6X6X0.5	-58.62	1.0D + 1.0W	6.21	25	25	25	0.0	0.0	151.93	20	3	0.00	291.90	38 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 3X3X0.25	-3.34	1.0D + 1.0W	8.020	25	25	25	134.6	2396.3	10.32	2	1	12.52	9.76	34 Bolt Bear
		Force (ton)	Load Case	Fy (kg/cm ²)	Fu (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phi Pn (ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 6X6X0.5	47.34	1.0D + 1.0W	3,600	5,201	148.89	20	3	0.00	0.00			31	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 3X3X0.25	3.24	1.0D + 1.0W	2,396	4,201	19.33	2	1	12.52	9.76	9.50		34	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		42.82	1.0D + 1.0W	0.00		0		0							
Top Compression		53.66	1.0D + 1.0W	0.00		0									
Bot Tension		50.78	1.0D + 1.0W	0.00		0									
Bot Compression		63.90	1.0D + 1.0W	0.00		0									

Section: 4		Tramo 4		Bot Elev (m): 16.35				Height (m): 6.200							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 6X6X0.375	-47.74	1.0D + 1.0W	6.21	25	25	25	0.0	0.0	84.40	20	3	0.00	218.93	56 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-3.43	1.0D + 1.0W	7.643	25	25	25	156.6	2396.3	6.30	2	1	12.52	9.76	54 Member Z
		Force (ton)	Load Case	Fy (kg/cm ²)	Fu (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phi Pn (ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 6X6X0.375	38.75	1.0D + 1.0W	3,600	5,201	97.77	20	3	0.00	0.00			39	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2.5X2.5X0.25	3.21	1.0D + 1.0W	2,396	4,201	15.53	2	1	12.52	9.76	8.86		36	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		34.41	1.0D + 1.0W	0.00		0		0							
Top Compression		43.04	1.0D + 1.0W	0.00		0									
Bot Tension		42.82	1.0D + 1.0W	0.00		0									
Bot Compression		53.66	1.0D + 1.0W	0.00		0									

Site Number: 435257
 Location: Oriental
 Code: ANSI/TIA-222-H
 Struct Class :
 Exposure : B
 Topo : 1

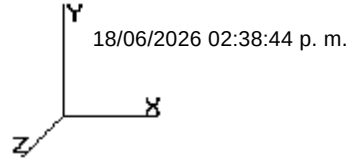


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 5		Tramo 5		Bot Elev (m): 22.55				Height (m): 4.700							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 6X6X0.375	-38.92	1.0D + 1.0W	4.71	25	25	25	0.0	0.0	86.47	20	3	0.00	181.18	45 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	DAE - 2.5X2.5X0.25	-2.69	1.0D + 1.0W	6.123	25	25	25	132.8	2396.3	17.53	2	1	18.04	11.79	22 Bolt Bear
		Force (ton)	Load Case	Fy (kg/cm ²)	Fu (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 6X6X0.375	31.51	1.0D + 1.0W	3,600	5,201	86.23	20	3	0.00	0.00			36	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	DAE - 2.5X2.5X0.25	2.66	1.0D + 1.0W	2,396	4,201	33.12	2	1	18.04	11.79	11.22		23	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		27.87	1.0D + 1.0W	0.00		0		0							
Top Compression		34.93	1.0D + 1.0W	0.00		0									
Bot Tension		34.41	1.0D + 1.0W	0.00		0									
Bot Compression		43.04	1.0D + 1.0W	0.00		0									

Section: 6		Tramo 6		Bot Elev (m): 27.25				Height (m): 4.700							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 5X5X0.375	-30.26	1.0D + 1.0W	4.71	25	25	25	0.0	0.0	81.20	16	3	0.00	144.94	37 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-2.75	1.0D + 1.0W	5.833	25	25	25	119.5	2396.3	10.58	1	1	9.02	5.90	46 Bolt Bear
		Force (ton)	Load Case	Fy (kg/cm ²)	Fu (kg/cm ²)	phi Pn (ton)	Num Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk Shear phiPn(ton)	Use %	Controls		
Max Tension Member															
LEG	60D - 60D 5X5X0.375	24.56	1.0D + 1.0W	3,600	5,201	74.86	16	3	0.00	0.00			32	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2.5X2.5X0.25	2.64	1.0D + 1.0W	2,396	4,201	15.05	1	1	9.02	5.90	5.61		46	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		20.97	1.0D + 1.0W	0.00		0		0							
Top Compression		26.45	1.0D + 1.0W	0.00		0									
Bot Tension		27.87	1.0D + 1.0W	0.00		0									
Bot Compression		34.93	1.0D + 1.0W	0.00		0									

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

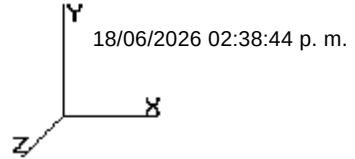


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 7		Tramo 7		Bot Elev (m): 31.95				Height (m): 4.700							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member															
LEG	60D - 60D 5X5X0.3125	-21.98	1.0D + 1.0W	4.71	25	25	25	0.0	0.0	59.47	16	3	0.00	120.79	36 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-2.76	1.0D + 1.0W	5.568	25	50	25	143.5	2396.3	7.50	1	1	9.02	5.90	46 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phit (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phitPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 5X5X0.3125	17.39	1.0D + 1.0W	3,600	5,201	62.91	16	3	0.00	0.00			27	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2.5X2.5X0.25	2.74	1.0D + 1.0W	2,396	4,201	15.05	1	1	9.02	5.90	5.61		48	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts							
Top Tension		13.36	1.0D + 1.0W	0.00		0		0							
Top Compression		17.59	1.0D + 1.0W	0.00		0									
Bot Tension		20.97	1.0D + 1.0W	0.00		0									
Bot Compression		26.45	1.0D + 1.0W	0.00		0									

Section: 8		Tramo 8		Bot Elev (m): 36.65				Height (m): 4.700							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member															
LEG	60D - 60D 4X4X0.3125	-12.56	1.0D + 1.0W	4.71	25	25	25	0.0	0.0	52.04	16	3	0.00	120.79	24 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-2.71	1.0D + 1.0W	5.332	25	50	25	137.4	2396.3	8.18	1	1	9.02	5.90	46 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phit (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phitPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 4X4X0.3125	9.62	1.0D + 1.0W	3,600	5,201	47.13	16	3	0.00	0.00			20	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2.5X2.5X0.25	2.47	1.0D + 1.0W	2,396	4,201	15.05	1	1	9.02	5.90	5.61		43	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts							
Top Tension		6.25	1.0D + 1.0W	0.00		0		0							
Top Compression		9.11	1.0D + 1.0W	0.00		0									
Bot Tension		13.36	1.0D + 1.0W	0.00		0									
Bot Compression		17.59	1.0D + 1.0W	0.00		0									

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

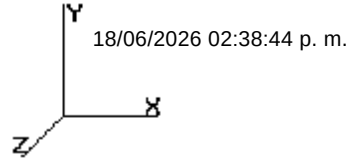


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 9		Tramo 9		Bot Elev (m): 41.35				Height (m): 2.800							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member															
LEG	60D - 60D 4X4X0.3125	-6.89	1.0D + 1.0W	2.80	25	25	25	0.0	0.0	49.40	12	2	0.00	90.60	13 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2.5X2.5X0.25	-1.39	1.0D + 1.0W	3.525	25	50	25	90.8	2396.3	13.88	1	1	9.02	5.90	23 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 4X4X0.3125	4.77	1.0D + 1.0W	3,600	5,201	48.65	12	2	0.00	0.00			9	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2.5X2.5X0.25	1.41	1.0D + 1.0W	2,396	4,201	15.05	1	1	9.02	5.90	5.61		25	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts							
Top Tension		2.82	1.0D + 1.0W	0.00		0		0							
Top Compression		4.69	1.0D + 1.0W	0.00		0									
Bot Tension		6.25	1.0D + 1.0W	0.00		0									
Bot Compression		9.11	1.0D + 1.0W	0.00		0									

Section: 10		Tramo 10		Bot Elev (m): 44.15				Height (m): 1.180							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member															
LEG	60D - 60D 3.5X3.5X0.	-3.57	1.0D + 1.0W	1.18	100	100	100	0.0	0.0	33.83	12	2	0.00	72.47	10 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2X2X0.25	-0.80	1.0D + 1.0W	2.322	50	50	50	118.5	2396.3	8.45	1	1	6.26	4.88	16 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 3.5X3.5X0.	2.59	1.0D + 1.0W	3,600	5,201	34.96	12	2	0.00	0.00			7	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00	0.00		0		
DIAG	SAE - 2X2X0.25	0.64	1.0D + 1.0W	2,396	4,201	11.70	1	1	6.26	4.88	4.33		14	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts							
Top Tension		2.24	1.0D + 1.0W	0.00		0		0							
Top Compression		3.26	1.0D + 1.0W	0.00		0									
Bot Tension		2.82	1.0D + 1.0W	0.00		0									
Bot Compression		4.69	1.0D + 1.0W	0.00		0									

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

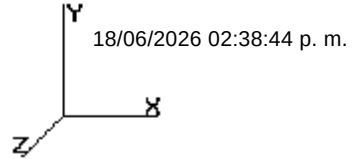


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 11		Tramo 10A		Bot Elev (m): 45.33				Height (m): 1.180								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member																
LEG	60D - 60D 3.5X3.5X0.	-2.92	1.0D + 1.0W	1.18	50	50	50	0.0	0.0	38.76	0	0	0.00	0.00	7	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-0.49	1.0D + 1.0W	2.322	50	50	50	118.5	2396.3	8.45	1	1	6.26	4.88	10	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	1.96	1.0D + 1.0W	3,600	5,201	36.37	0	0	0.00	0.00				5	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0.00	0		
DIAG	SAE - 2X2X0.25	0.61	1.0D + 1.0W	2,396	4,201	11.70	1	1	6.26	4.88		4.33	4.33	14	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type						
Top Tension		1.46	1.0D + 1.0W	0.00			0	0								
Top Compression		2.31	1.0D + 1.0W	0.00			0									
Bot Tension		2.24	1.0D + 1.0W	0.00			0									
Bot Compression		3.26	1.0D + 1.0W	0.00			0									

Section: 12		Tramo 10B		Bot Elev (m): 46.51				Height (m): 1.180								
		Force (ton)	Load Case	Len (m)	Bracing %				F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member																
LEG	60D - 60D 3.5X3.5X0.	-1.72	1.0D + 1.0W	1.18	100	100	100	0.0	0.0	33.83	0	0	0.00	0.00	5	User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0	
DIAG	SAE - 2X2X0.25	-0.53	1.0D + 1.0W	2.322	50	50	50	118.5	2396.3	8.45	1	1	6.26	4.88	10	Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls		
Max Tension Member																
LEG	60D - 60D 3.5X3.5X0.	1.06	1.0D + 1.0W	3,600	5,201	36.37	0	0	0.00	0.00				2	User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0.00	0		
DIAG	SAE - 2X2X0.25	0.44	1.0D + 1.0W	2,396	4,201	11.70	1	1	6.26	4.88		4.33	4.33	10	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)			Use %	Num Bolts		Bolt Type						
Top Tension		0.77	1.0D + 1.0W	0.00			0	0								
Top Compression		1.44	1.0D + 1.0W	0.00			0									
Bot Tension		1.46	1.0D + 1.0W	0.00			0									
Bot Compression		2.31	1.0D + 1.0W	0.00			0									

Site Number: 435257
Location: Oriental
Code: ANSI/TIA-222-H
Struct Class :
Exposure : B
Topo : 1

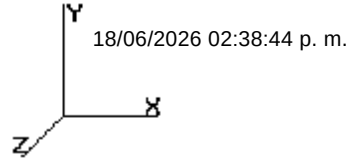


© 2026 by ATC IP LLC.All rights reserved.

Force/Stress Summary

Section: 13		Tramo 10C		Bot Elev (m): 47.69				Height (m): 1.180							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 3.5X3.5X0.	-1.15	1.0D + 1.0W	1.18	50	50	50	0.0	0.0	38.76	0	0	0.00	0.00	2 User Input
HORIZ		0.00		0.000	0	0	0	0.0	0.0	0.00	0	0	0.00	0.00	0
DIAG	SAE - 2X2X0.25	-0.32	1.0D + 1.0W	2.322	50	50	50	118.5	2396.3	8.45	1	1	6.26	4.88	6 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG	60D - 60D 3.5X3.5X0.	0.55	1.0D + 1.0W	3,600	5,201	36.37	0	0	0.00	0.00				1 User Input	
HORIZ		0.00		0	0	0.00	0	0	0.00	0.00		0.00	0	0	
DIAG	SAE - 2X2X0.25	0.39	1.0D + 1.0W	2,396	4,201	11.70	1	1	6.26	4.88		4.33	8	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		0.22	1.0D + 1.0W	0.00		0		0							
Top Compression		0.76	1.0D + 1.0W	0.00		0									
Bot Tension		0.77	1.0D + 1.0W	0.00		0									
Bot Compression		1.44	1.0D + 1.0W	0.00		0									

Section: 14		Tramo 10D		Bot Elev (m): 48.87				Height (m): 1.180							
		Force (ton)	Load Case	Len (m)	Bracing %			F'y (kg/ cm²)	phi Pn (ton)	Num Bolts	Num Holes	Shear phiRnv (ton)	Bear phiRn (ton)	Use %	Controls
Max Compression Member					X	Y	Z	KL/R							
LEG	60D - 60D 3.5X3.5X0.	-0.38	1.0D + 1.0W	1.18	50	50	50	0.0	0.0	33.83	0	0	0.00	0.00	1 User Input
HORIZ	SAE - 1.75X1.75X0.18	0.00	1.0D + 1.0W	2.000	100	100	100	232.6	2396.3	1.50	1	1	6.26	3.66	0 Member Z
DIAG	SAE - 2X2X0.25	-0.33	1.0D + 1.0W	2.322	50	50	50	118.5	2396.3	8.45	1	1	6.26	4.88	6 Bolt Bear
		Force (ton)	Load Case	Fy (kg/ cm²)	Fu (kg/ cm²)	phi (ton)	Pn Bolts	Num Holes	Shear Cap (ton)	Bear Cap (ton)	Blk phiPn(ton)	Shear Pn(ton)	Use %	Controls	
Max Tension Member															
LEG		0.00		0	0	0.00	0	0	0.00	0.00			0		
HORIZ	SAE - 1.75X1.75X0.18	0.04	1.0D + 1.0W	2,396	4,201	7.56	1	1	6.26	3.66		2.77	1	Blk Shear	
DIAG	SAE - 2X2X0.25	0.29	1.0D + 1.0W	2,396	4,201	11.70	1	1	6.26	4.88		4.33	6	Blk Shear	
Max Splice Forces		Force (ton)	Load Case	Capacity (ton)		Use %		Num Bolts		Bolt Type					
Top Tension		0.00		0.00		0		0							
Top Compression		0.20	1.0D + 1.0W	0.00		0									
Bot Tension		0.22	1.0D + 1.0W	0.00		0									
Bot Compression		0.76	1.0D + 1.0W	0.00		0									

Site Number: 435257
 Location: Oriental
 Code: ANSI/TIA-222-H
 Struct Class :
 Exposure : B
 Topo : 1

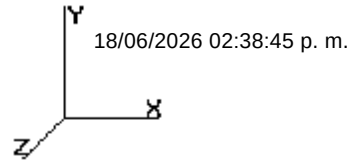

© 2026 by ATC IP LLC.All rights reserved.

Support Forces Summary


Load Case	Radius (m)	Elevation (m)	Azimuth (deg)	Node	FX (ton)	FY (ton)	FZ (ton)	(-) = Uplift (+) = Down
1.0D + 1.0W Service 90 deg	3.70	00.00	240	1b	-5.56	-56.08	-2.50	
	3.70	00.00	120	1a	-6.06	64.08	2.82	
	3.70	00.00	0	1	-1.21	4.00	-0.31	
1.0D + 1.0W Service 60 deg	3.70	00.00	240	1b	-5.90	-63.35	-3.41	
	3.70	00.00	120	1a	-3.84	37.68	1.07	
	3.70	00.00	0	1	-1.00	37.68	-3.86	
1.0D + 1.0W Service Normal	3.70	00.00	240	1b	-2.63	-33.65	-2.87	
	3.70	00.00	120	1a	2.63	-33.65	-2.87	
	3.70	00.00	0	1	0.00	79.29	-8.33	

Max Uplift:	63.35 (ton)	Moment:	417.77 (ton-m)	1.0D + 1.0W Service Normal
Max Down:	79.29 (ton)	Total Down:	12.00 (ton)	
Max Shear:	8.33 (ton)	Total Shear:	14.07 (ton)	

Maximum Reactions Summary

	Base	DL + WL	DL + WL + IL
Vertical	79.29	12.00	0.00
Horizontal	8.33	14.07	0.00
Moment (kip-ft)		417.77	0.00

Site Number: 435257
 Location: Oriental
 Code: ANSI/TIA-222-H
 Struct Class :
 Exposure : B
 Topo : 1

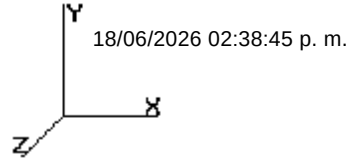

© 2026 by ATC IP LLC.All rights reserved.

Deflections and Rotations

Load Case	Elevation (m)	Deflection (cm)	Twist (°)	Sway (°)
Serviceability - 183.60 km/hr Wind 60 deg	36.65	38.5400	0.0474	0.5115
	41.35	49.7042	0.0626	0.5690
	44.15	56.7272	0.0696	0.5779
	50.05	72.0112	0.0618	0.5879
Serviceability - 183.60 km/hr Wind 90 deg	36.65	39.5239	0.0311	0.5305
	41.35	50.9545	0.0416	0.5906
	44.15	58.2329	0.0467	0.5923
	50.05	73.8453	0.0423	0.5985
Serviceability - 183.60 km/hr Wind Normal	36.65	42.6219	0.0504	0.5599
	41.35	54.9000	0.0658	0.6287
	44.15	62.5682	0.0725	0.6397
	50.05	79.3144	0.0657	0.6542
	50.05	0.0000	0.0000	0.0000