

Assignment 1

BEM Wind Turbine

Carlos Espinós Garcia
Niklas Perujo
Bernat Serra Zueras

Rotor and Wake Aerodynamics



Contents

1	Introduction	1
1.1	Assignment BEM BERNAT	1
1.2	Single polar innacuracies	1
2	Blade Element Momentum theory	3
2.1	Main assumptions of the BEM theory NIKLAS	3
2.2	Code flow chart CARLOS	3
3	Results	5
3.1	BEM aligned rotor	5
3.1.1	Main outputs	5
3.2	BEM yawed rotor NIKLAS	9
3.2.1	Main outputs NIKLAS	9
3.2.2	Influence of numerical discretization	10
3.3	Influence of the tip correction CARLOS	11
3.4	Evaluation of stagnation enthalpy CARLOS	12
3.5	System of circulation and vorticity CARLOS	12
3.6	Operational point NIKLAS	16
4	Optional	17
4.1	Explanation of the design approach used for maximizing the C_p or efficiency	17
4.2	Plots with explanation of the new designs.	17
5	Conclusions NIKLAS	19
	Bibliography	21

Introduction

1.1. Assignment BEM BERNAT

This group assignment is based on the study of a Wind Turbine rotor's performance. The methodology implemented is the Blade Element Moment theory. The BEM theory is a powerful procedure to be used to compute the main flow characteristics in a quick and cheap process if compared to other alternatives such as CFD. This is one of the main reasons why the BEM is a widely used tool to estimate the rotor performance in the Wind Energy business.

This is an introductory study and therefore has some simplifications in the model.

1.2. Single polar inaccuracies

This study would have some inaccuracies as it is planned if it is compared to a modern commercial wind turbine. One of the most relevant inaccuracies is the fact that the aerodynamics coefficients in all the radial sections of the blade have been extracted from the same polar curve.

Firstly, using single polar means assuming that all the radial positions are operating at the same Reynolds number. This is most probably false. Because from the Reynolds definition:

$$Re = \frac{\rho \cdot W \cdot c}{\mu_{visc}} \quad (1.1)$$

It has to be considered that as a first approximation that the relative velocity perceived by the airfoil at each section is depending on the radius. The relative velocity can be estimated like:

$$W = \sqrt{(U_{\infty} \cdot (1 - a))^2 + (\Omega \cdot r(1 + a'))^2} \quad (1.2)$$

While the chord distribution is ruled by the equation:

$$c = 3 \cdot (1 - \mu) + 1 \quad (1.3)$$

Then the Reynolds can be expressed as:

$$Re \quad Re(\mu) = \frac{\sqrt{(U_{\infty} \cdot (1 - a))^2 + (\lambda \cdot U_{\infty} \cdot \mu \cdot (1 + a'))^2} \cdot c(\mu)}{\nu} [-] \quad (1.4)$$

Then, as an example it is extracted the maximum and minimum Reynolds values from a BEM calculation at TSR = 8 with the converged inductions for the velocity. These sections would have a chord

$$\text{Blade root chord} \quad c(0.208) = 3 \cdot (1 - 0.208) + 1 = 3.376 \text{ m} \quad (1.5)$$

$$\text{Blade tip chord} \quad c(0.672) = 3 \cdot (1 - 0.672) + 1 = 1.984 \text{ m} \quad (1.6)$$

While the Reynolds would be.

$$\text{Blade root Re } Re(0.208) = \frac{\sqrt{(10 * (1 - a))^2 + (8 \cdot 10 \cdot 0.208 \cdot (1 + a'))^2} \cdot c(0.208)}{v} = 4.47 \cdot 10^6 \quad (1.7)$$

$$\text{Blade maximum Re } Re(0.672) = \frac{\sqrt{(10 * (1 - a))^2 + (8 \cdot 10 \cdot 0.672 \cdot (1 + a'))^2} \cdot c(0.672)}{v} = 7.63 \cdot 10^6 \quad (1.8)$$

Usually the increase in relative velocity along the blade is higher than the decrease in chord. Hence, the Reynolds number will be larger close to the tip, which usually means improving the aerodynamic coefficients performance.

Secondly, there are several models proposed as the one written by Snel et al. making reference to correction model of the polar data caused by the 3D effects. In particular, the one proposed by Snel states that it appears a delay in the stall of the sections closer to the root where the relative velocity is smaller. The Snel correction is modeled like eq (1 3.190) in the Wind Energy Handbook.

$$C_{L_{3D}} = C_{L_{2D}} + 3 \cdot \left(\frac{c}{r}\right)^2 \cdot \Delta C_L \quad (1.9)$$

This was initially pointed out by Himmelskamp, who observed in propellers *"lift coefficients being attained at the inboard section of a rotating blade which are significantly in excess of the maximum value possible in two-dimensional static tests."* These effects could have been taken into account in this study by using different airfoil polars depending on the blade section. Alternatively, it is also possible to include the 3D correction equations to the BEM code when extracting the aerodynamics coefficient from the polar files.

And lastly, it is not an strict inaccuracy, but nowadays wind trubine designs tend to optimize the structural and aerodynamics performance of a rotor. And to achieve that goal it is common to use different airfoils along the blade, which would yield different polar curves, as opposed to this study. Therefore it would be closer to the optimal to use slender airfoils near the tip to maximixe the aerodynamic performance and thicker airfoils closer to the root in order to increase their stiffness and load-carrying capacity.

2

Blade Element Momentum theory

2.1. Main assumptions of the BEM theory **NIKLAS**

Perujo

2.2. Code flow chart **CARLOS**

CS7. Carlos Simao 7, ô magnifico

3

Results

In this section are presented the main outcomes obtained when simulating the wind turbine model described previously. First are presented the results estimated for a wind turbine rotor that is aligned with the incoming flow. Next are presented the same results but for a rotor that it is not laterally aligned with the incoming flow, named as yawed rotor. After that its is described the effect of some extra features included in the BEM analysis such as the influence of the tip correction and numerical discretization, the evaluation of stagnation enthalpy or the evaluation of the system's circulation and vorticity.

Describe the initial conditions, table, cool

3.1. BEM aligned rotor

In this section it is considered that the rotor is fully aligned with the incoming flow as it would be in an ideal case. The discretization used to compute the main results includes 50 divisions in the radial position. The discretization is uniformly spaced using the same increment between adjacent sections.

3.1.1. Main outputs

The main outputs described in this sections would help the user identify the behaviour of the key variables that affect the rotor performance. Under this conditions the variables will only see its values affected by the radial position and not by their azimuthal position. The results are easily represented using only one value (the weighted average) per span section in a 2D plot that represents the variable versus the span section.

Angle of attack and inflow angle **BERNAT**

In Fig. 3.1 are displayed the inflow angle and angle of attack of each tip speed ratio study case.

The results are coherent with the tip speed ratio definition. In the study the freeflow incoming velocity is fixed at 10 m/s, so for the different TSR values the parameter changing is the rotor rotational speed Ω . At higher Ω values the rotational speed component is bigger and thus the inflow angle will decrease as shown in the plots. The angle of attack distribution also matches. Per definition, the geometrical twist of the blade could be obtained from these plots as the difference between the inflow angle and the angle of attack, which is a function of the μ parameter.

It must be highlighted that for the TSR=6 the inboard part of the blade is under stall conditions, hence will be a poor power generation section. This can be concluded because the stall AoA is included in the plot. In this study the stall AoA has a constant value along the entire span because the blade is built entirely with the same airfoil model. In commercial WTGs the blades use different airfoils depending on the radial section. If this WT model had to be design to operate most of the time under these conditions the optimal aerodynamic performance would probably be given at a TSR between 6 and 8. Because as it can be seen from Fig XXX, the maximum CL/CD ratio is obtained at AoA ranged between 7.5 and 9.25 degrees.

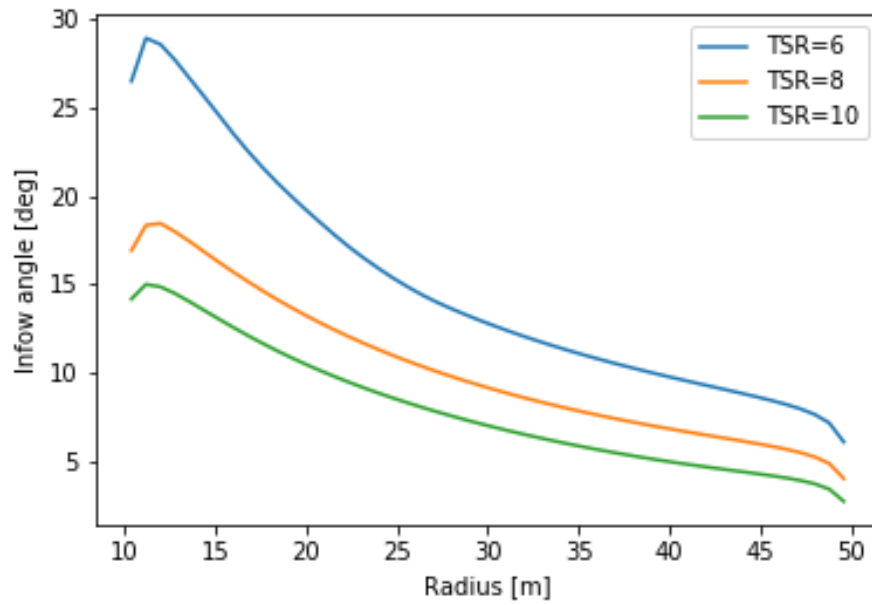


Figure 3.1: Inflow angle vs. Radius distribution at different TSR values

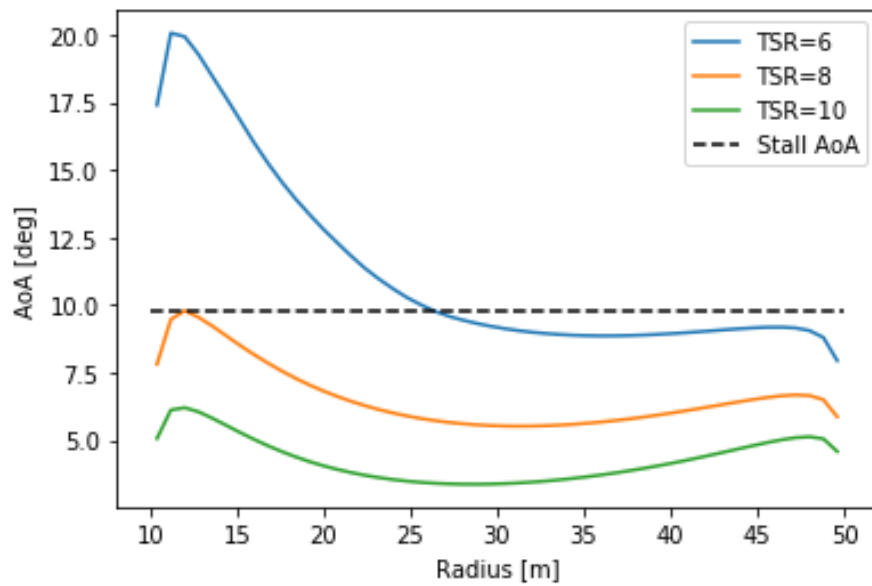


Figure 3.2: Angle of attack vs. Radius distribution at different TSR values

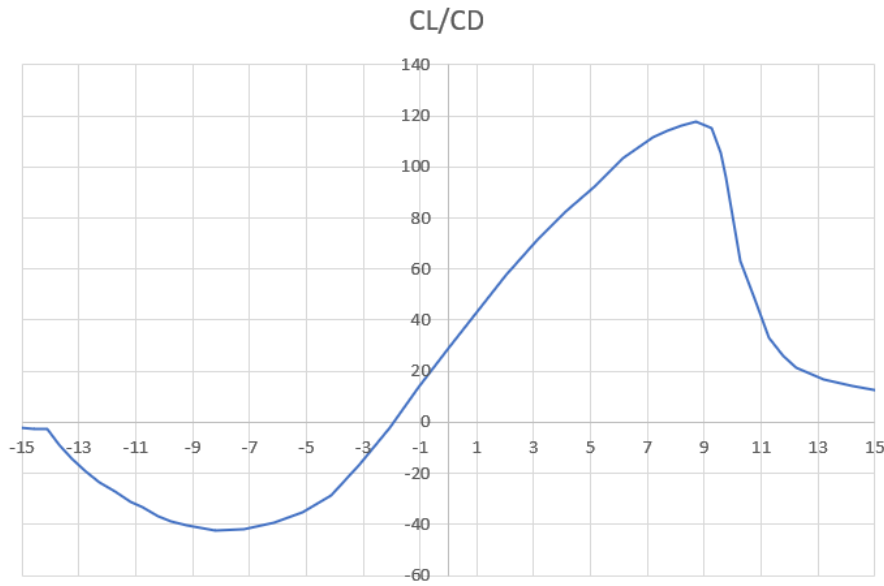


Figure 3.3: CL/CD ratio vs. Radius

Axial and azimuthal inductions **BERNAT**

In Fig. 3.1 are displayed the distribution of axial and tangential inductions of TSR case study.

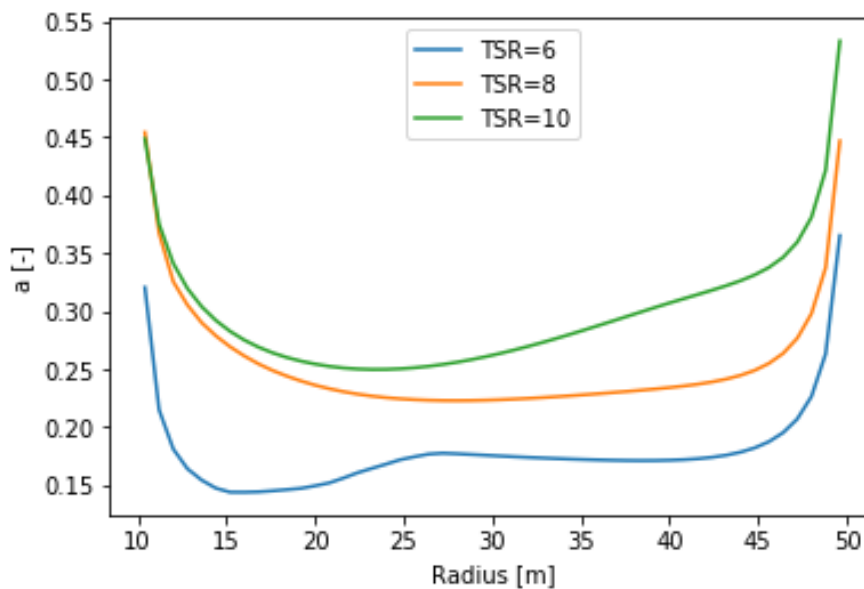


Figure 3.4: Axial induction factor vs. Radius distribution at different TSR values

Thrust and azimuthal loading **BERNAT**

In Fig. 3.6 are displayed the distribution of axial and tangential loads acting on the rotor for each TSR case study.

As it is mentioned in the previous subsection, in the TSR=6 operation regime the inboard part of the blade (approximately until 25m) loses its capacity to extract energy from the wind to generate thrust and torque. Under these conditions the inboard sections are experiencing inflow and AOA angles too high and the cross-sections airfoils are operating outside their optimal regime. This effect could have been partly mitigated if the polars of those inner sections would have been corrected by the 3D effects

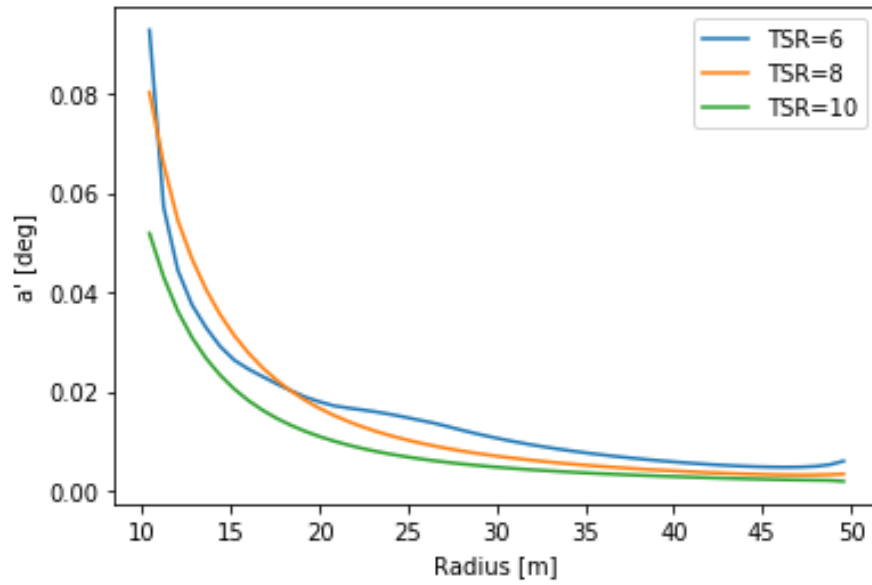


Figure 3.5: Tangential induction factor vs. Radius distribution at different TSR values

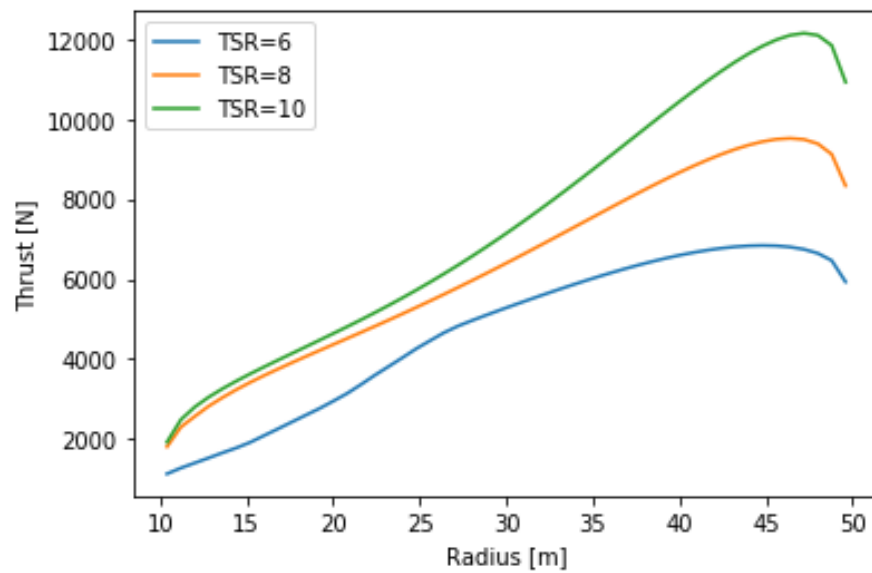


Figure 3.6: Thrust vs. Radius distribution at different TSR values

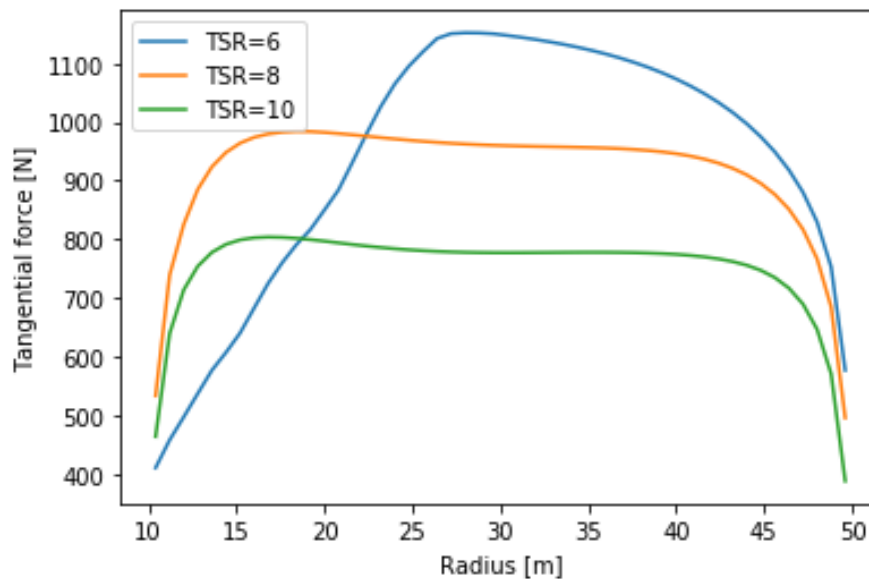


Figure 3.7: Tangential force vs. Radius distribution at different TSR values

such as the Snel correction proposed in the introduction.

The most intensively-loaded sections are the ones closer to the tip. This was expected by looking at the AoA radial distribution. Those sections operate at the upper range of the CL linear region, close to stall, where the CL/CD ratio is better. But the AoA is not the only parameter affecting the performance, if it was like that the curves at higher TSR would generate larger loads. It has to be taken into account that in the way the TSR modifications in this assignment consider the incoming flow velocity U_∞ and Blade Radius R constant, meaning that the only parameter changing its value is the rotor speed Ω . Thus, what is being done when increasing the TSR is increasing the absolute value of the relative velocity seen by the sections, which would end up increasing severely the loads as it affects the term that is at a power of 2.

Total thrust and torque BERNAT

Table ?? provides the values obtained for the total Thrust and Torque generated by the WTG at the different TSR. The total thrust force has been computed as the sum of the axial forces f_x generated by each annulus section. The total torque has been computed as the sum of the products of the tangential force f_y and the radial position r of each annular section. In the previous sections the loads have been provided without taking into account the density, thus with units $\frac{N}{kg/m^3}$. However, in Table XXX the total forces have been estimated for a standard density $\rho = 1.225 kg/m^3$ to give a better overview of the rotor performance.

	TSR = 6	TSR = 8	TSR = 10
Thrust [kN]	235.443	316.605	369.669
Torque [kN·m]	1464.494	1361.402	1116.159

3.2. BEM yawed rotor NIKLAS

3.2.1. Main outputs NIKLAS

Angle of attack and inflow angle NIKLAS

Axial and azimuthal inductions NIKLAS

Thrust and azimuthal loading NIKLAS

Total thrust and torque [NIKLAS](#)

3.2.2. Influence of numerical discretization

This subsection provides information about the influence that the numerical discretization has in the final results. The rotor conditions taken to carry out this analysis are at fixed at $\text{TSR} = 8$ and $U_\infty = 10$ m/s. For the yawed cases the misalignment angle is set to 15 degrees.

The first analysis is focused on the effect of the different spacing methods to apply in the radial divisions. The most straight-forward is to use an uniformly spaced distribution that has a constant radius increment in adjacent sections. The proposed alternative in this study is to use a cosine-spaced radial distribution. This method is widely used for executing panel methods on 2D airfoils because an airfoil usually has more curvature on the LE. Hence, for more a more accurate calculation in this region it is necessary to have finer divisions. Figure XXX provides an example of how the distrubution of μ nodes will be for a 15-nodes configuration using the two methods mentioned. The values in the y-axis are irrelevant, are just separated enough to provide a good overview of the x-axis discretization.

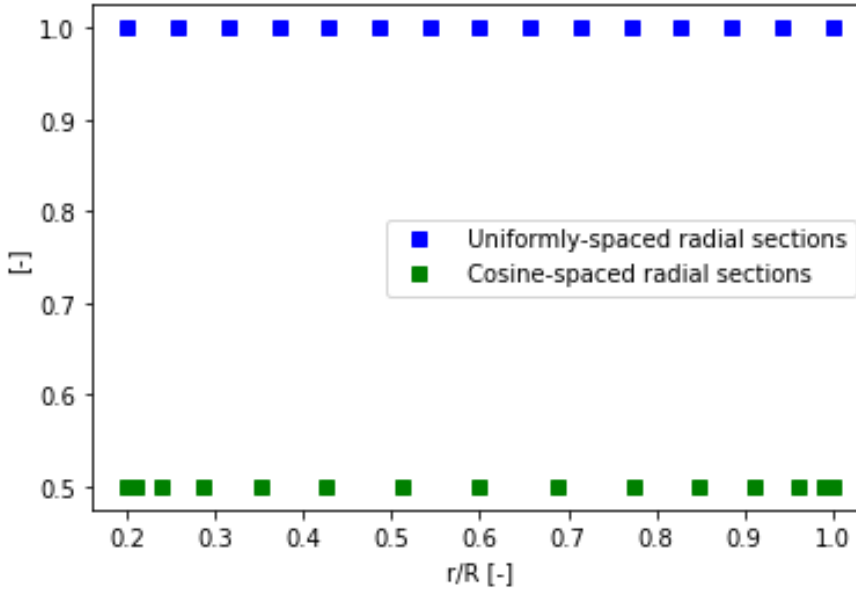


Figure 3.8: Distribution of 15 μ nodes with different division strategies

Taking into account Figure XXX it can be seen that the cosine spaced distribution provides smaller divisions at the edges of the range. For the WT model this would mean that the more refined regions in the study are in the root and tip of the rotor. Both regions have the feature to be the ones where the Prandtl tip correction factor has more effect and where it is also varying more with respect to the span. This is the main reason why it has been decided to use this kind of discretization here. The results for both methodologies are plotted in Figure 3.9. From this data it is obvious to conclude that the cosine spaced discretization is more efficient and converges faster. However it has to be mentioned that when forcing strict convergence tolerances the code has some trouble converging for more than 61 cosine-spaced divisions. This is probably due to the very tinny sections at the root and tip. Nevertheless, in the plot the value of Thrust for more than 61 divisions has been kept constant as it can be argued that the 60th value was the exact value, as it keeps the asymptotic trend showed by the uniformly spaced cases. So to reach the converged value with the uniform distribution it will be necessary to use around 100 sections, while for the cosine it is enough with 50, only the half of it. Thus, using the cosine sapce could save up to 50% of the computational effort.

Then a similar study has been carried out for the yawed case at 15 degrees and with 50 radial divisions for each method. Figure 3.10 displays the results obtained when using different numbers of azimuthal sections. Again, this study has been executed for the two radially spaced methods. In this case it can be seen that both methods do not converge in the same total Thrust value. This can be explained by looking again at Fig. 3.9. From this plot it can be extracted that at 50 radial sections, both methodologies had not yet reached the same value. This is the difference seen in Fig. 3.10. It

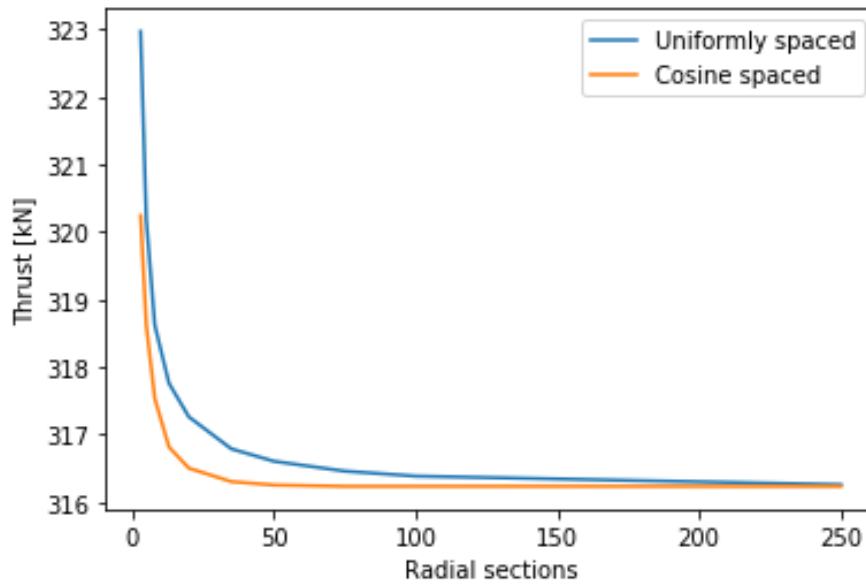


Figure 3.9: Total Thrust convergence vs. number of radial sections

is also worth to highlight that number of azimuthal sections convergence seems to be decoupled of the radial discretization methodology. Both techniques show variable behaviour until around 12 sections, where they reach a stable value. So computing the BEM in arcs of 30° seems to yield reliable results with this configuration.

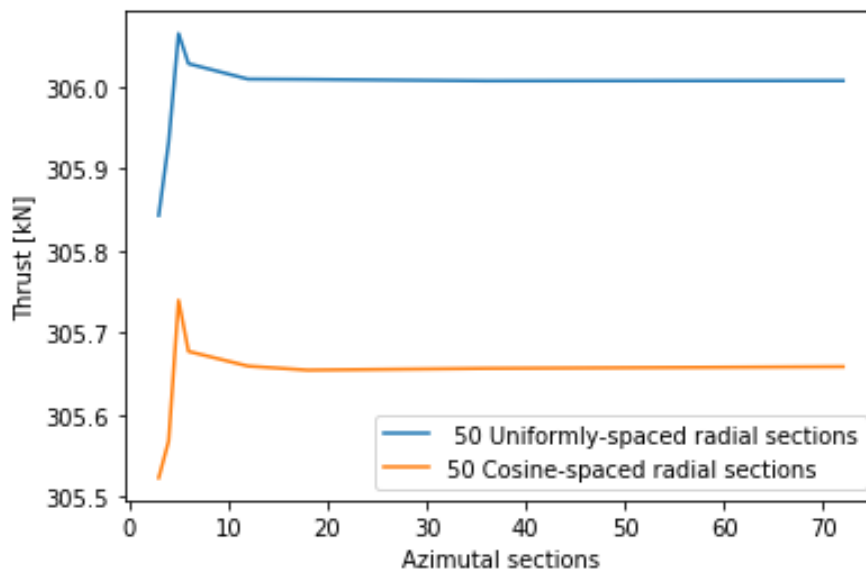


Figure 3.10: Total Thrust convergence vs. number of azimuthal sections

3.3. Influence of the tip correction CARLOS

The results shown in this section were obtained for the rotor described in the assignment instructions, operating with a tip speed ratio $\lambda = 8$ and no yaw. It can be seen that the tip correction reduces the power and thrust, resulting in a worse performance. Indeed, the rotor without the tip correction has a higher C_P/C_T ratio.

Near the blade tip, the flow angle ϕ is reduced due to the tip vortex (Figure 3.11), because it induces

a larger axial velocity (Figure 3.13). Having a lower flow angle ϕ results in a reduced power extraction, which is proportional to $c_l \sin \phi - c_d \cos \phi$ (Figure 3.14) [1]. However, reducing the flow angle ϕ contributes to an increase of the thrust, since it is proportional to $c_l \cos \phi + c_d \sin \phi$.

Note that c_l also decreases due to the reduction of ϕ , because it implies a decrease of the angle of attack α (Figure 3.12). Moreover, the relative velocity, which also affects the loads, will also be larger for the case without tip correction.

The tip correction tries to account for this effect. The expression Prandtl derived for that factor is shown in equation 3.1. Its value over the blade is plotted in Figure 3.15. It relates the induction factor near the blade a_b with the azimuth average a : $a_b = a/f$ [1].

$$f(\mu) = \frac{2}{\pi} \arccos \left[\exp \left(-\frac{B}{2} \left(\frac{1-\mu}{\mu} \right) \sqrt{1 + \frac{\lambda^2 \mu^2}{(1-a)^2}} \right) \right] \quad (3.1)$$

- Power coefficient C_p
 - Tip correction: 0.4528
 - No tip correction: 0.4757
 - Increase: 5.05 %
- Thrust coefficient C_T
 - Tip correction: 0.6581
 - No tip correction: 0.6691
 - Increase: 1.67 %
- Power to thrust ratio C_p/C_T
 - Tip correction: 0.6880
 - No tip correction: 0.7109
 - Increase: 3.32 %

3.4. Evaluation of stagnation enthalpy **CARLOS**

If heat exchange, viscous forces and compressibility effects are neglected, the flow temperature does not change. Therefore, it can be assumed that the air's internal energy is always constant. Then, the changes in stagnation enthalpy and stagnation pressure are equivalent. The mechanical energy equation (3.2) describes how the stagnation pressure p_t changes. Note that it has been obtained as the scalar product of the momentum equation and the velocity vector.

$$\vec{v} \cdot \vec{\nabla} p_t = \vec{v} \cdot \vec{\nabla} \vec{\tau} + \vec{v} \cdot \vec{b} \quad (3.2)$$

If viscous forces are not considered, $\tau = 0$, the stagnation pressure can only due to the body forces b work. The only domain region where these forces are not null, and therefore, exert some work is the rotor plane. This means that the stagnation pressure only changes across the rotor plane. See equations (3.3) and (3.4) for the stagnation pressure expressions up and down-stream of the rotor plane respectively. They are plotted in Figure 3.16.

$$p_{tu} = p_a + \frac{1}{2} \rho u_\infty^2 \quad (3.3)$$

$$p_{td} = p_a + \frac{1}{2} \rho u_\infty^2 (1 - 2a)^2 \quad (3.4)$$

3.5. System of circulation and vorticity **CARLOS**

Plot a representation of the system of circulation. Discuss the generation and release of vorticity in relation to the loading and circulation over the blade.

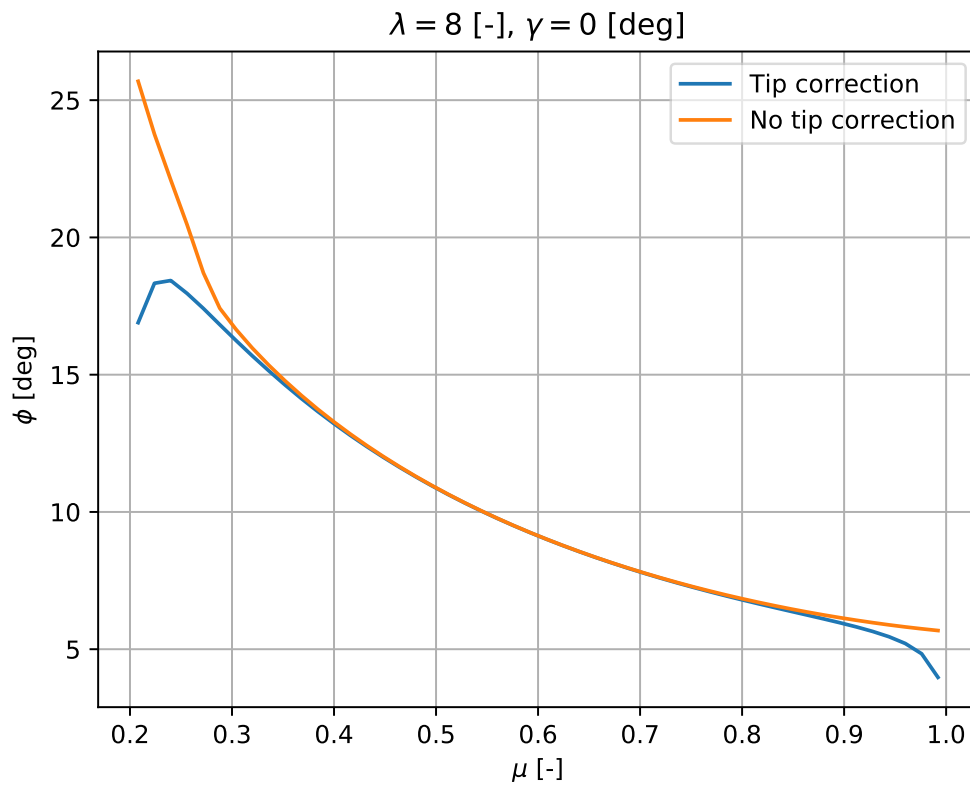


Figure 3.11: Flow angle distribution with and without tip correction.

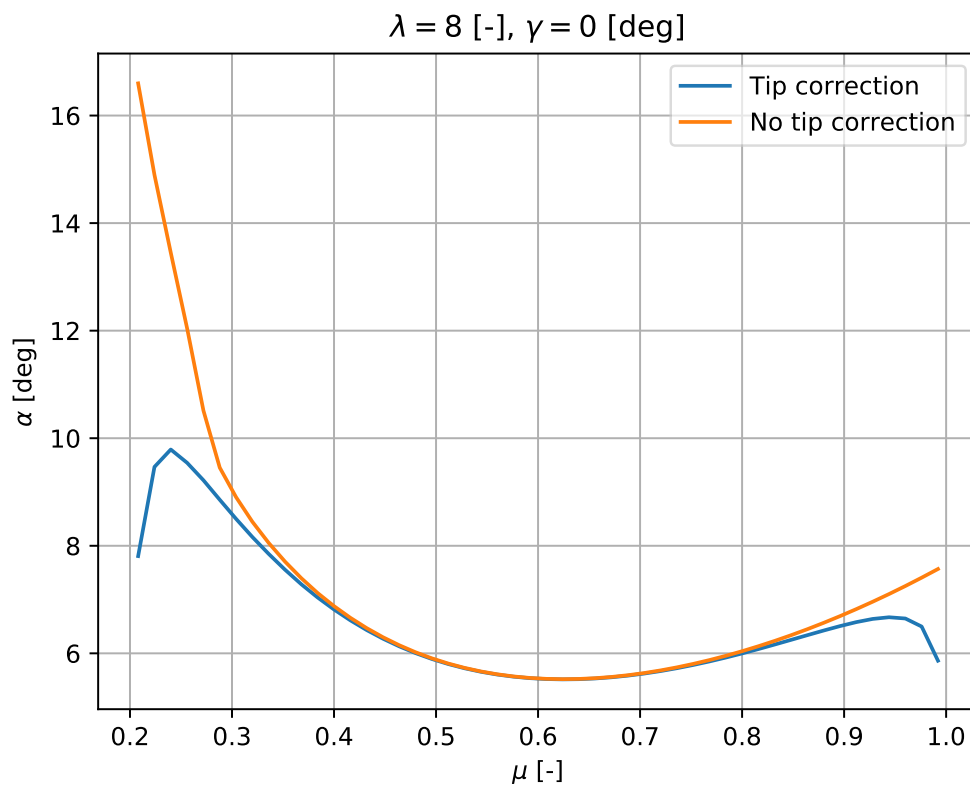


Figure 3.12: Angle of attack distribution with and without tip correction.

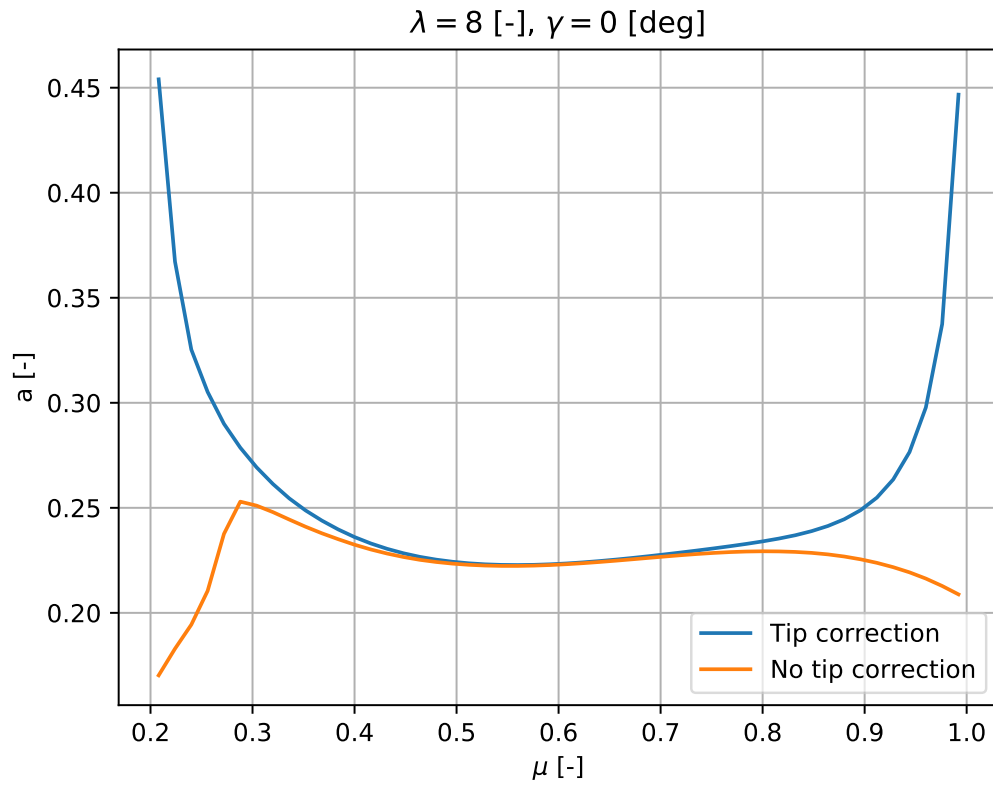


Figure 3.13: Axial induction distribution with and without tip correction.

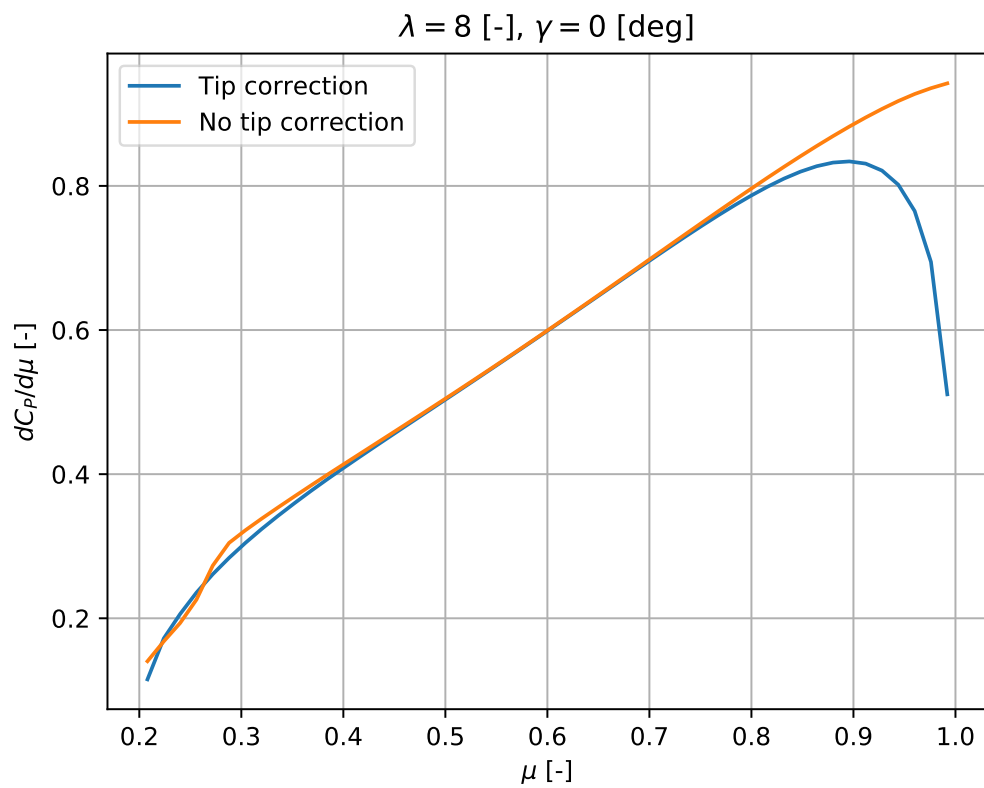


Figure 3.14: Power coefficient distribution with and without tip correction.

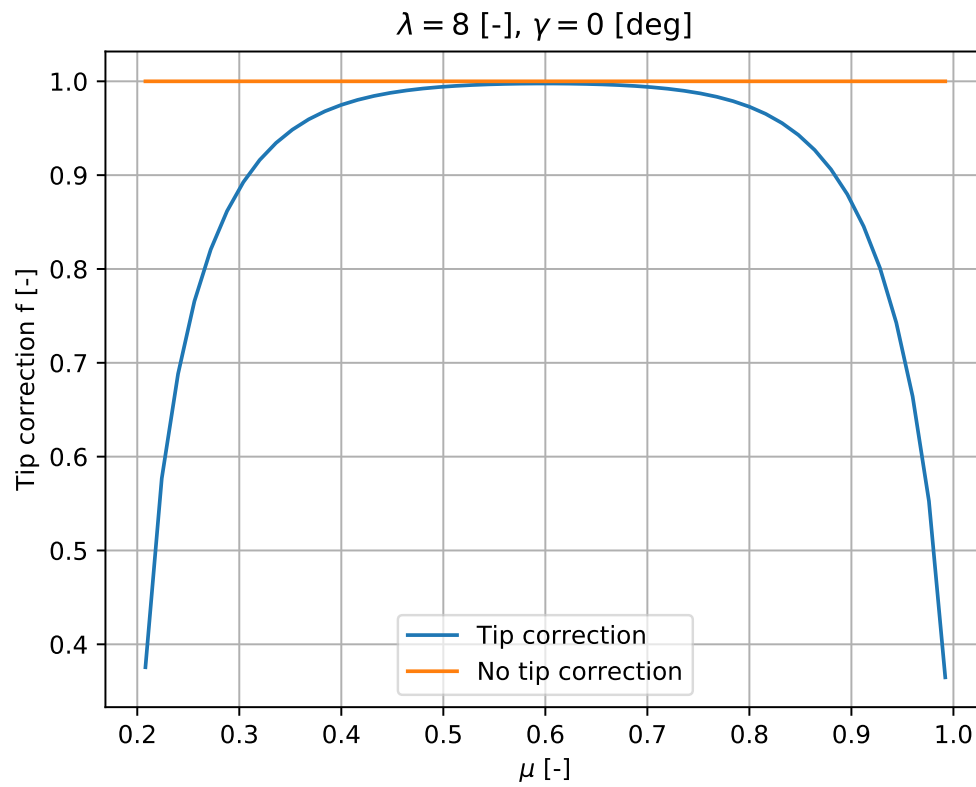


Figure 3.15: Prandtl's tip loss factor distribution with and without tip correction.


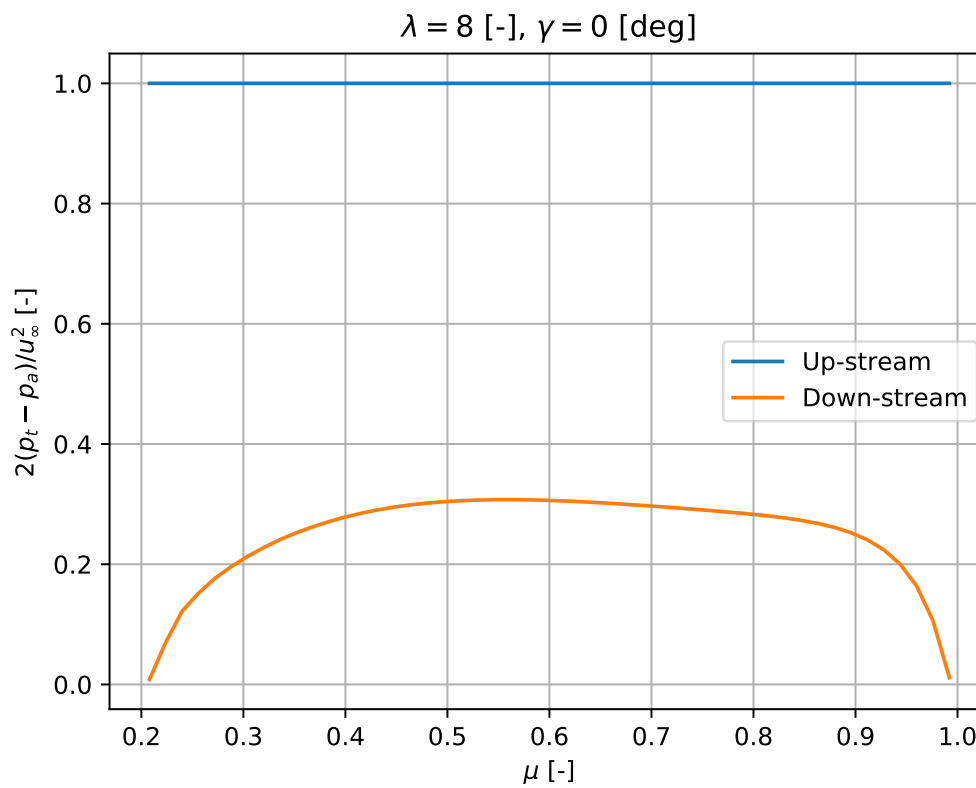


Figure 3.16: Stagnation enthalpy distribution.

3.6. Operational point **NIKLAS**



Optional

**4.1. Explanation of the design approach used for maximizing the
Cp or efficiency**

Blabla

4.2. Plots with explanation of the new designs

Rick Sanchez

5

Conclusions NIKLAS

SHORT discussion/conclusion, including the similarities and differences between the two rotor configurations (yaw vs. aligned rotor), flow field and operation

Bibliography

- [1] Burton, T. and Jenkins, J. and Sharpe, D. and Bossanyi, E. *Aerodynamics of Horizontal Axis Wind Turbines*, chapter 3, pages 39–136. John Wiley & Sons, Ltd, 2011. ISBN 9781119992714. doi: <https://doi.org/10.1002/9781119992714.ch3>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/9781119992714.ch3>.