


(PRODUCE THE SERIAL NUMBER)	TEST ITEMS: 1、OPEN/SHORT:100% TEST 2、INSULATION RESISTANCE:DC-200V/IR-20M OHMS MIN 3、CONTACT RESISTANCE: 1 OHMS MAX	版本(REVISION)			
		序號(NO)	描述(SPECIFICATION)	審核(CHECKED BY)	日期(DATE)
		A	Initial release	Zou.Jie	2024/10/13

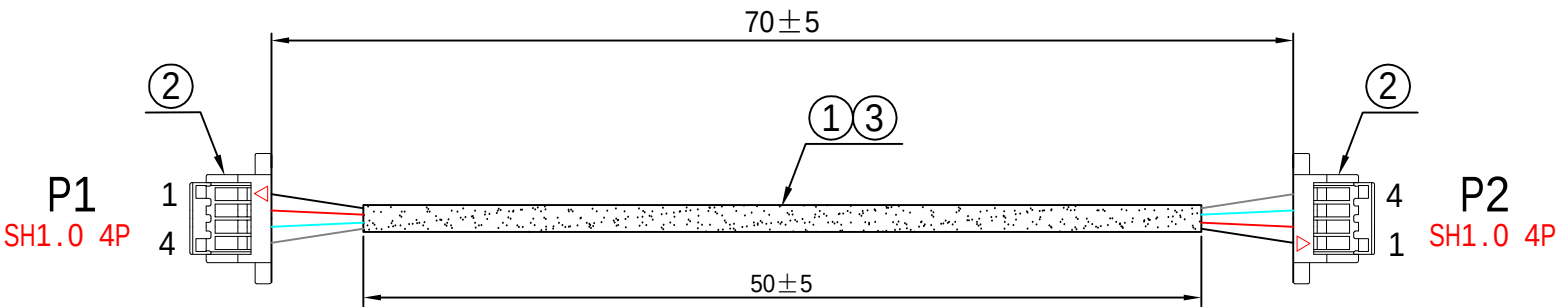


PIN-OUT

P1	1	2	3	4
P2	1	2	3	4
COLOR	black	red	blue	white
WIRE	UL1571 30AWG			

3	SHR TUBE:ID1.5*50mm SHRINK RATIO>50% BLACK 300V 125C--NO SHRINK	1 PCS
2	CONN:PITCH:1.0 SH1.0 4P WL P/N:1010H-4P HSG AND TER WL P/N:1010-T-T-S OR EQU	2 SET
1	WIRE:UL1571 30AWG OD:0.6mm COLOR SEE PIN-OUT	4 PCS
编号(NO.)	规格描述(SPECIFICATION)	数量(Q"TY)

注意：圖面非比例顯示，所有尺寸以毫米為單位。
(NOTE: DRAWING NOT TO SCALE HIDDEN LINES NOT SHOWN. ALL DIMENSION IN MM).



Sino-Media (H.K) Co.,Limited				
客戶(CUSTOMER):		MNT		
機型號(MODEL NO):		WIRE HARNESS SH1.0 4P-4P L=70mm		
工程图号(DRAWN P/N): FJ-MNT-24092506		版本(REV): A 頁碼(SHEET):1 OF 1		
核准(APPROVED BY)	審核(CHECKED BY)	繪圖(DRAWN BY)	日期(DATE)	品号(CUSTOMER P/N)
	Jack.hu	Zou.Jie	2024/10/13	FJ-MNT-24092506