


(PRODUCE THE SERIAL NUMBER)	TEST ITEMS: 1、OPEN/SHORT:100% TEST 2、INSULATION RESISTANCE:DC-200V/IR-20M OHMS MIN 3、CONTACT RESISTANCE: 1 OHMS MAX	版本(REVISION)			
		序號(NO)	描述(SPECIFICATION)	審核(CHECKED BY)	日期(DATE)
		A	Initial release	Zou.Jie	2024/10/13

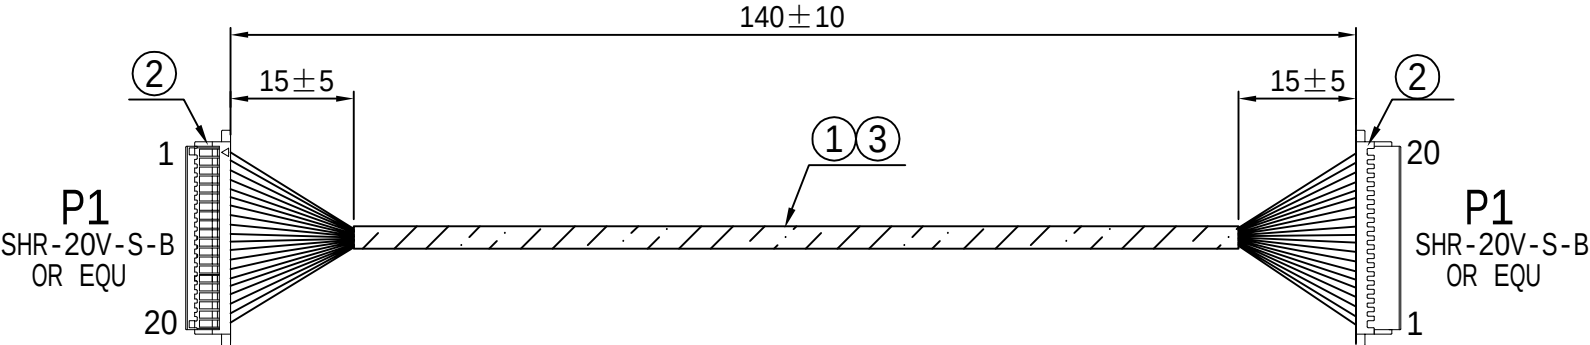

PIN-OUT

P1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COLOR	black	red	orange	yellow	green	black	red	orange	yellow	green	black	red	orange	yellow	green	black	red	orange	yellow	green
WIRE	UL1571 30AWG OD:0.6mm																			

3	TAPE:ACETATE TAPE T=0.12 W=12mm BLACK	N/A
2	CONN:HSG SH1.0 20P Single Row WL P/N:1010H-20P AND TER WL P/N:1010-T-T-S OR EQU	2 SET
1	WIRE:UL1571 30AWG OD:0.6mm COLOR SEE PIN-OUT	20 PCS
编号(NO.)	规格描述(SPECIFICATION)	数量(Q"TY)
注意：圖面非比例顯示，所有尺寸以毫米為單位。 (NOTE: DRAWING NOT TO SCALE HIDDEN LINES NOT SHOWN. ALL DIMENSION IN MM).		

Sino-Media (H.K) Co.,Limited				
客戶(CUSTOMER):		MNT		
機型號(MODEL NO):		WIRE HARNESS SH1.0 20P-20P L=140mm		
工程图号(DRAWN P/N): FJ-MNT-24092509		版本(REV): A 頁碼(SHEET):1 OF 1		
核准(APPROVED BY)	審核(CHECKED BY)	繪圖(DRAWN BY)	日期(DATE)	品号(CUSTOMER P/N)
	Jack.hu	Zou.Jie	2024/10/13	FJ-MNT-24092509