


S21 difference: measured minus calibrated NIST (295 K)

Below 0 = more loss than NIST. Part of the offset is the RFC connector section NIST's curve excludes.

— SN77 minus NIST

— SN78 minus NIST

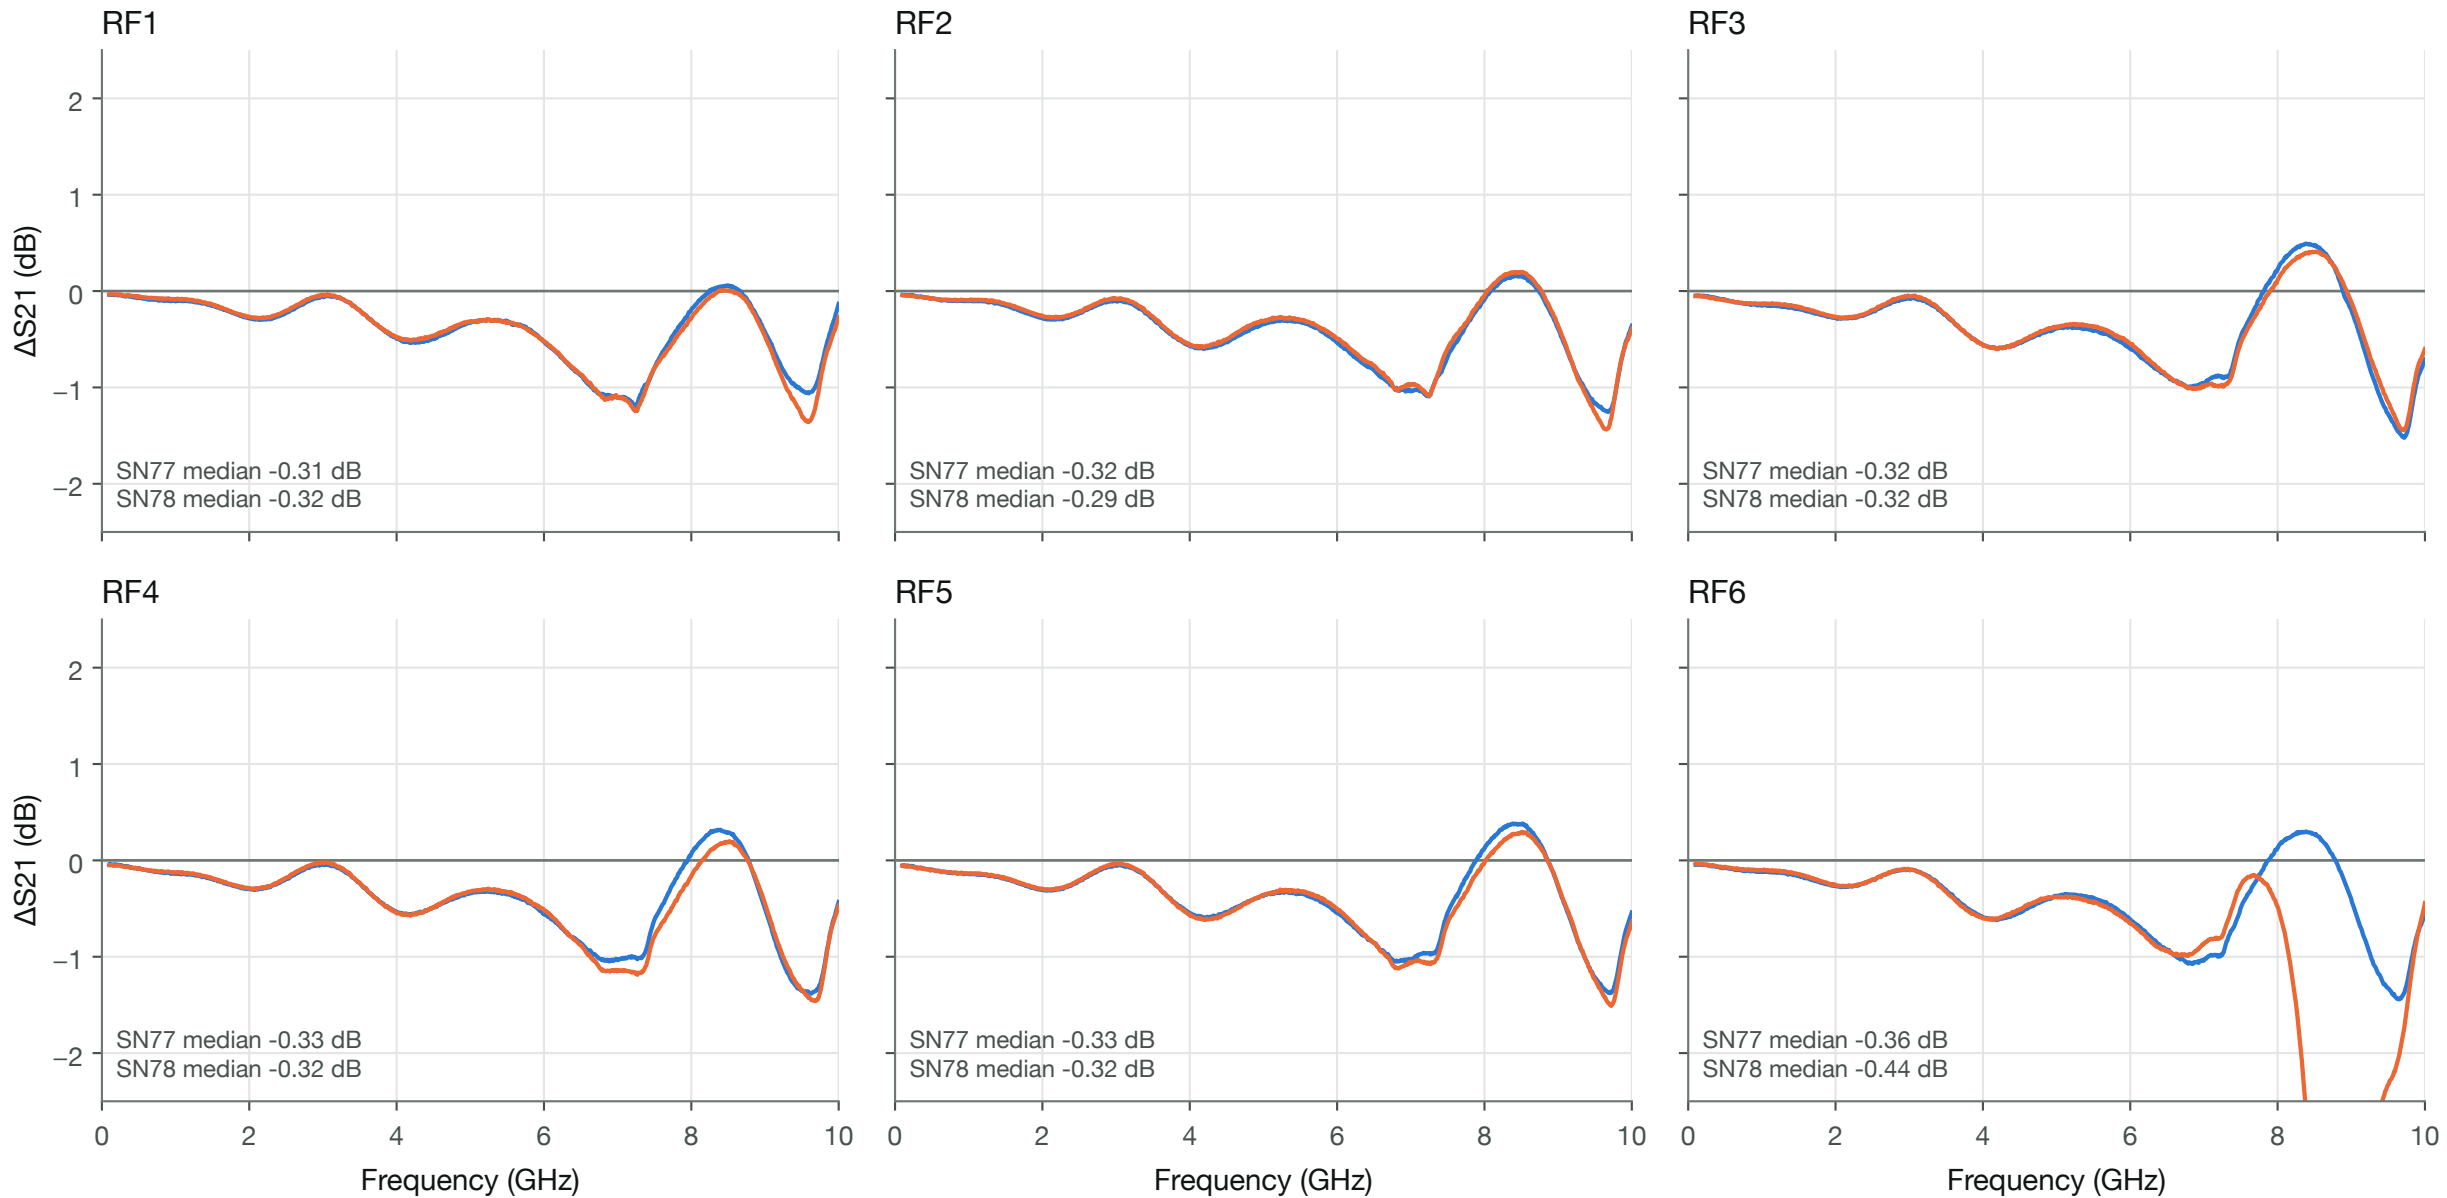

Measured: MM4250 SN77/SN78, 295 K, 11 Sep 2026, VNA-calibrated at switch connectors (RFC to RF port). NIST: SN0031 throw path from tier-2 cal, 295 K (internal junction to RF port; excludes RFC section).