


Internal-standard definitions at the RF-port SMA plane: our SOLT-derived vs NIST's 295 K ideals

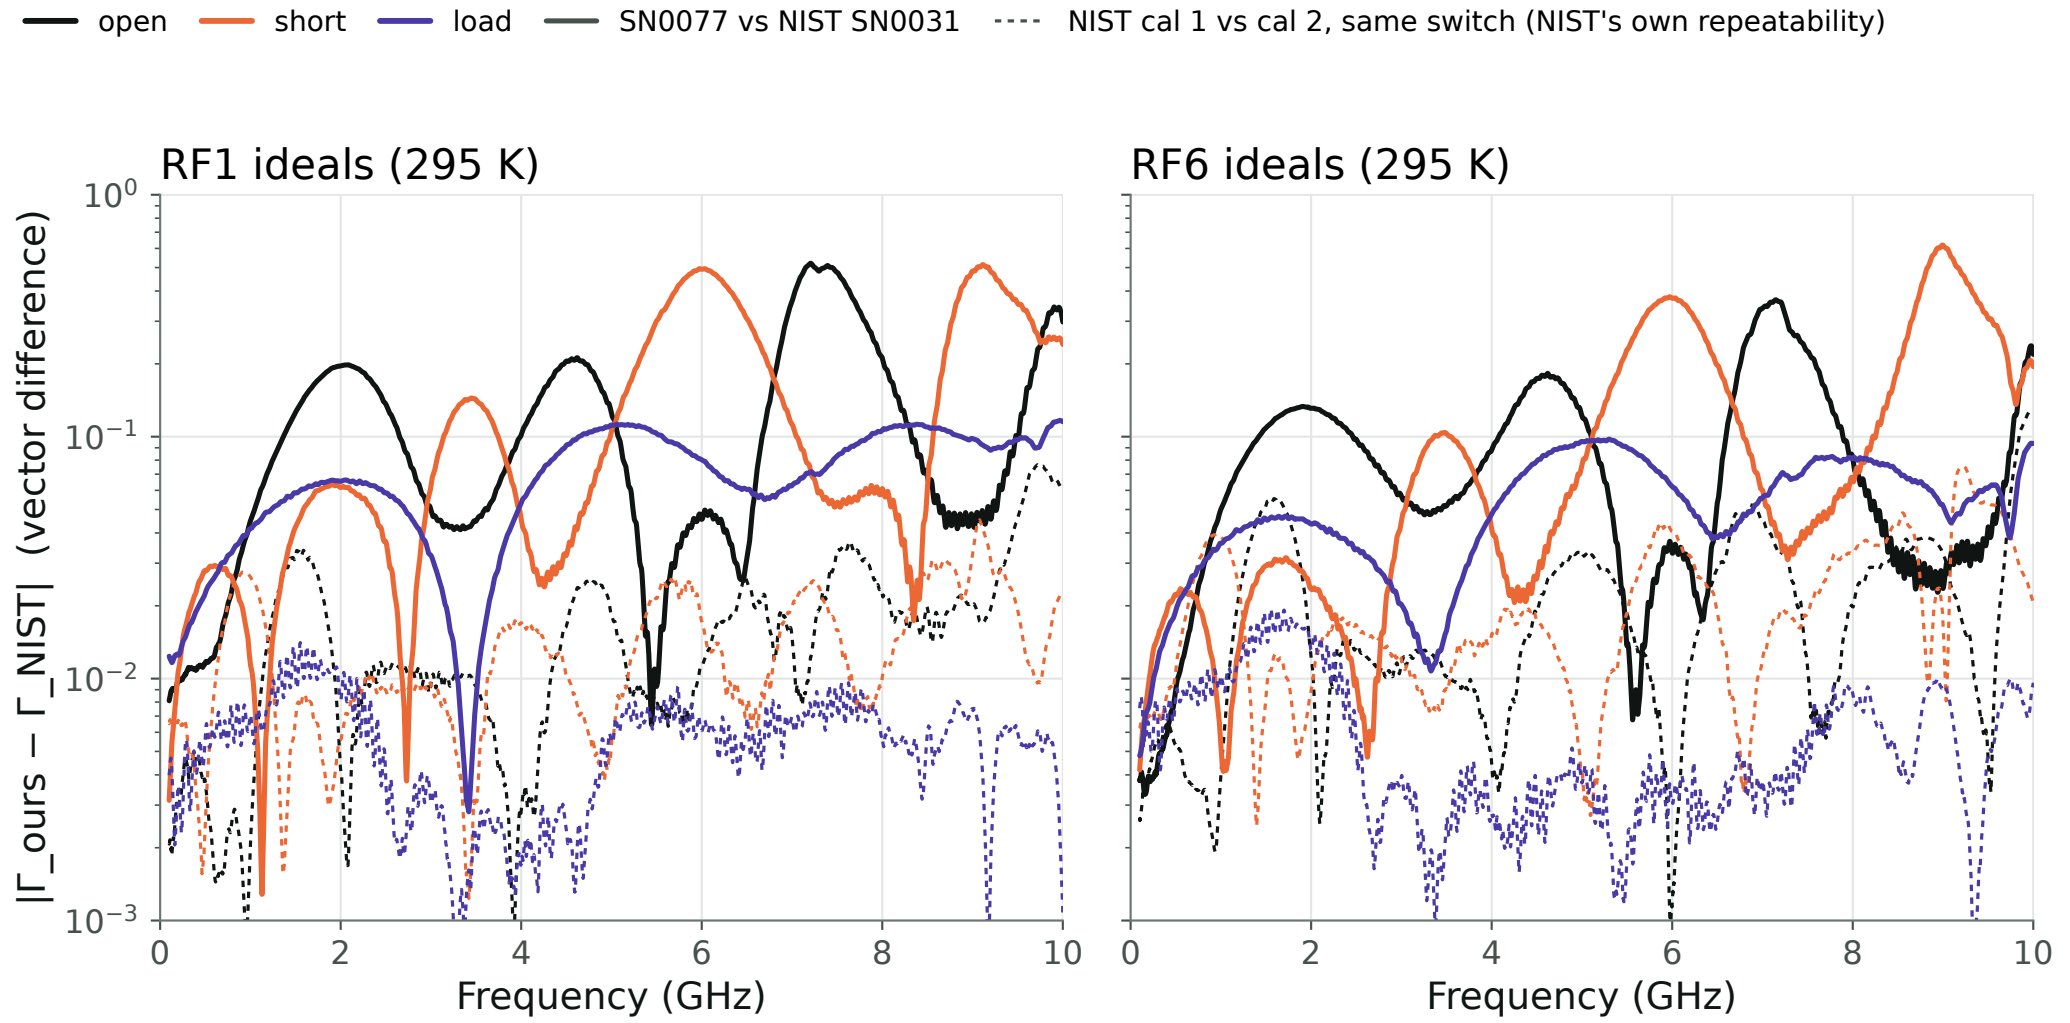

Ours: calibrated standard at RFC with the calibrated RFC→RFn path de-embedded · 50 MHz running mean · 0.01  $\approx$  -40 dB error vector