Resonator S11, complex plane: VNA calibration vs. switch, e-cal (NIST definitions)

NIST 295 K definitions (SN0031), plane at RF1 connector. 535-562 MHz shown.
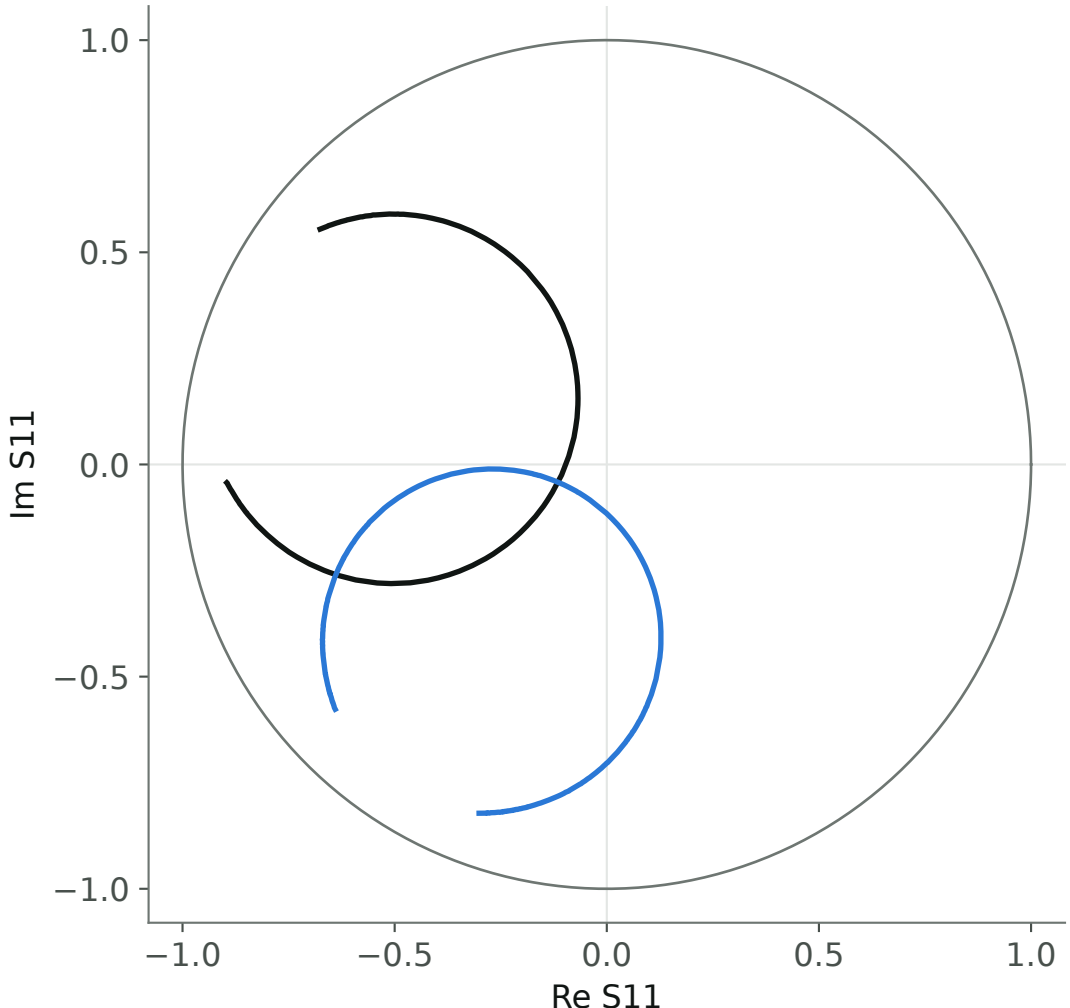
	f_0 (MHz)	Q_i	Q_e	β
—— Resonator alone, VNA cal	548.90	72.6 ± 0.3	87.1 ± 0.1	0.83
—— Via switch, e-cal (NIST)	549.00	73.0 ± 1.5	88.1 ± 0.6	0.83