Resonator S11 phase: VNA calibration vs. switch, e-cal (perfect standards)

Perfect standards, plane inside the switch.
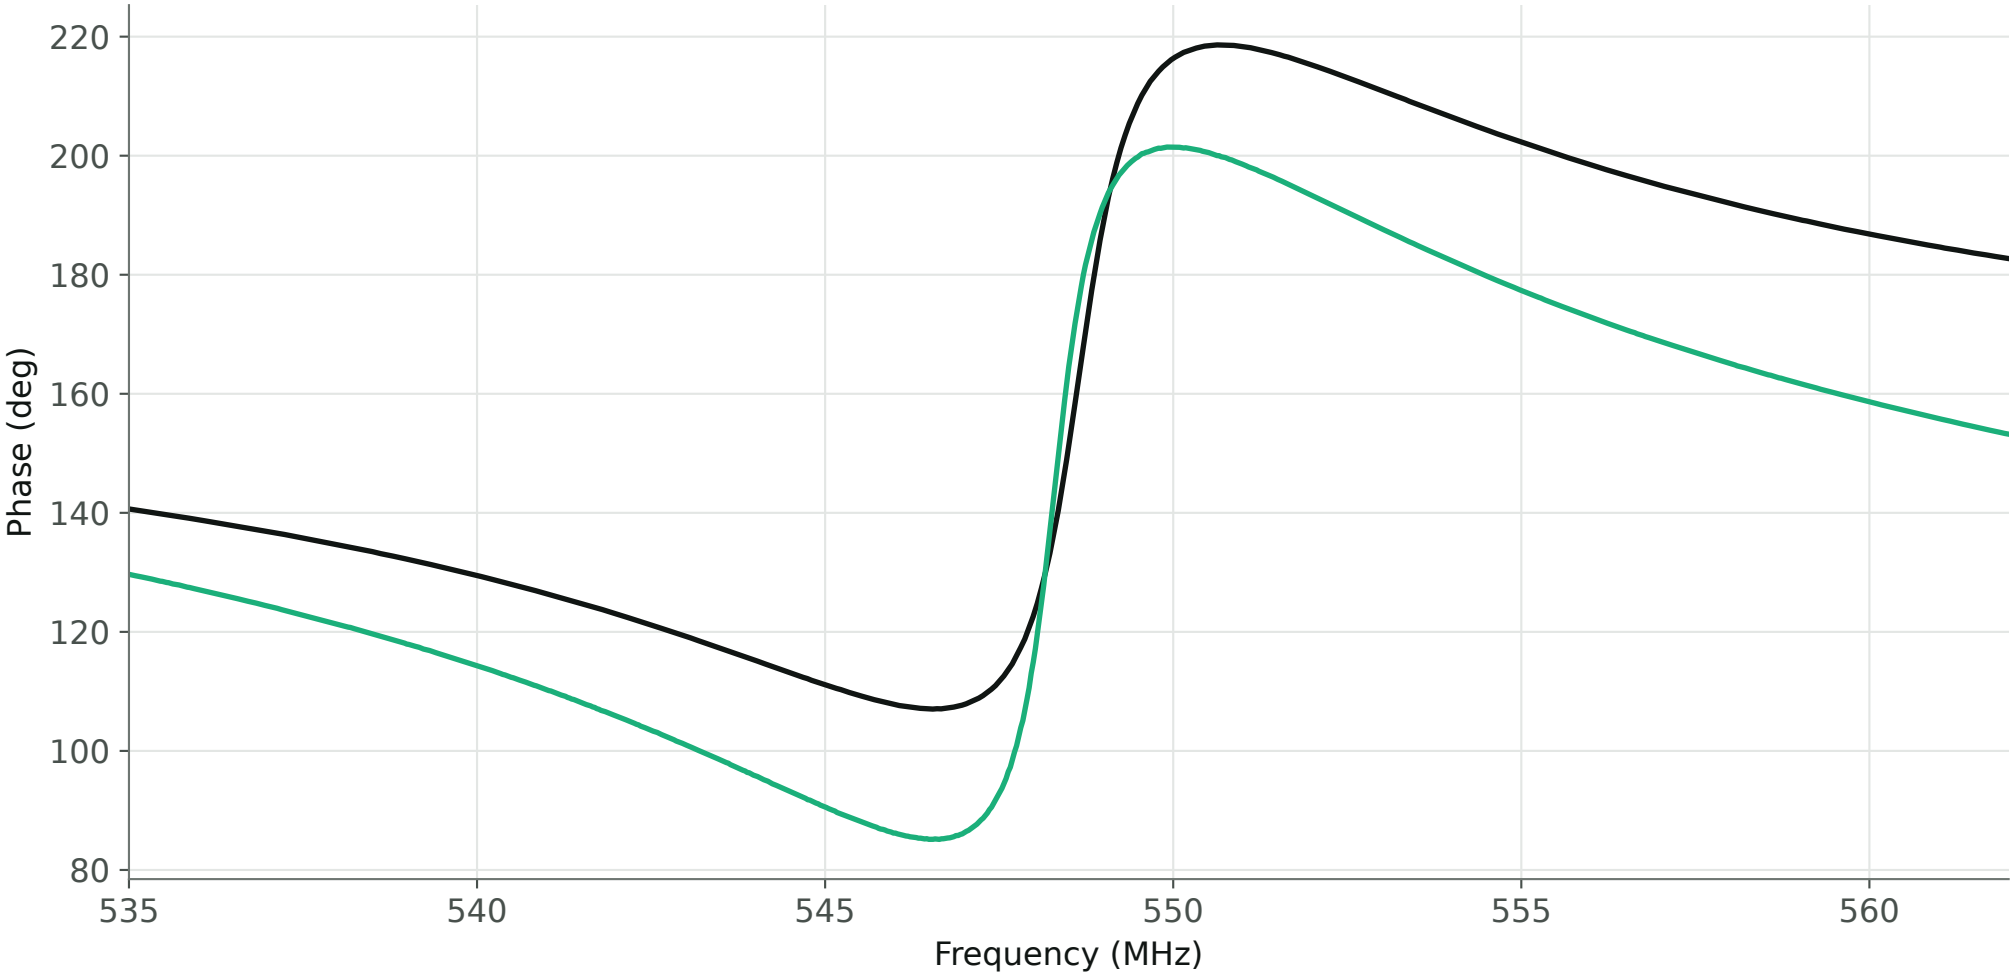
	f_0 (MHz)	Q_i	Q_e	β
—— Resonator alone, VNA cal	548.90	72.6 ± 0.3	87.1 ± 0.1	0.83
—— Via switch, e-cal (perfect)	548.47	75.1 ± 2.1	86.8 ± 1.2	0.87