


Internal-standard definitions at the RF-port SMA plane: our SOLT-derived vs NIST's 295 K ideals

— open    — short    — load    — SN0077 vs NIST SN0031    ---- NIST cal 1 vs cal 2, same switch (NIST's own repeatability)

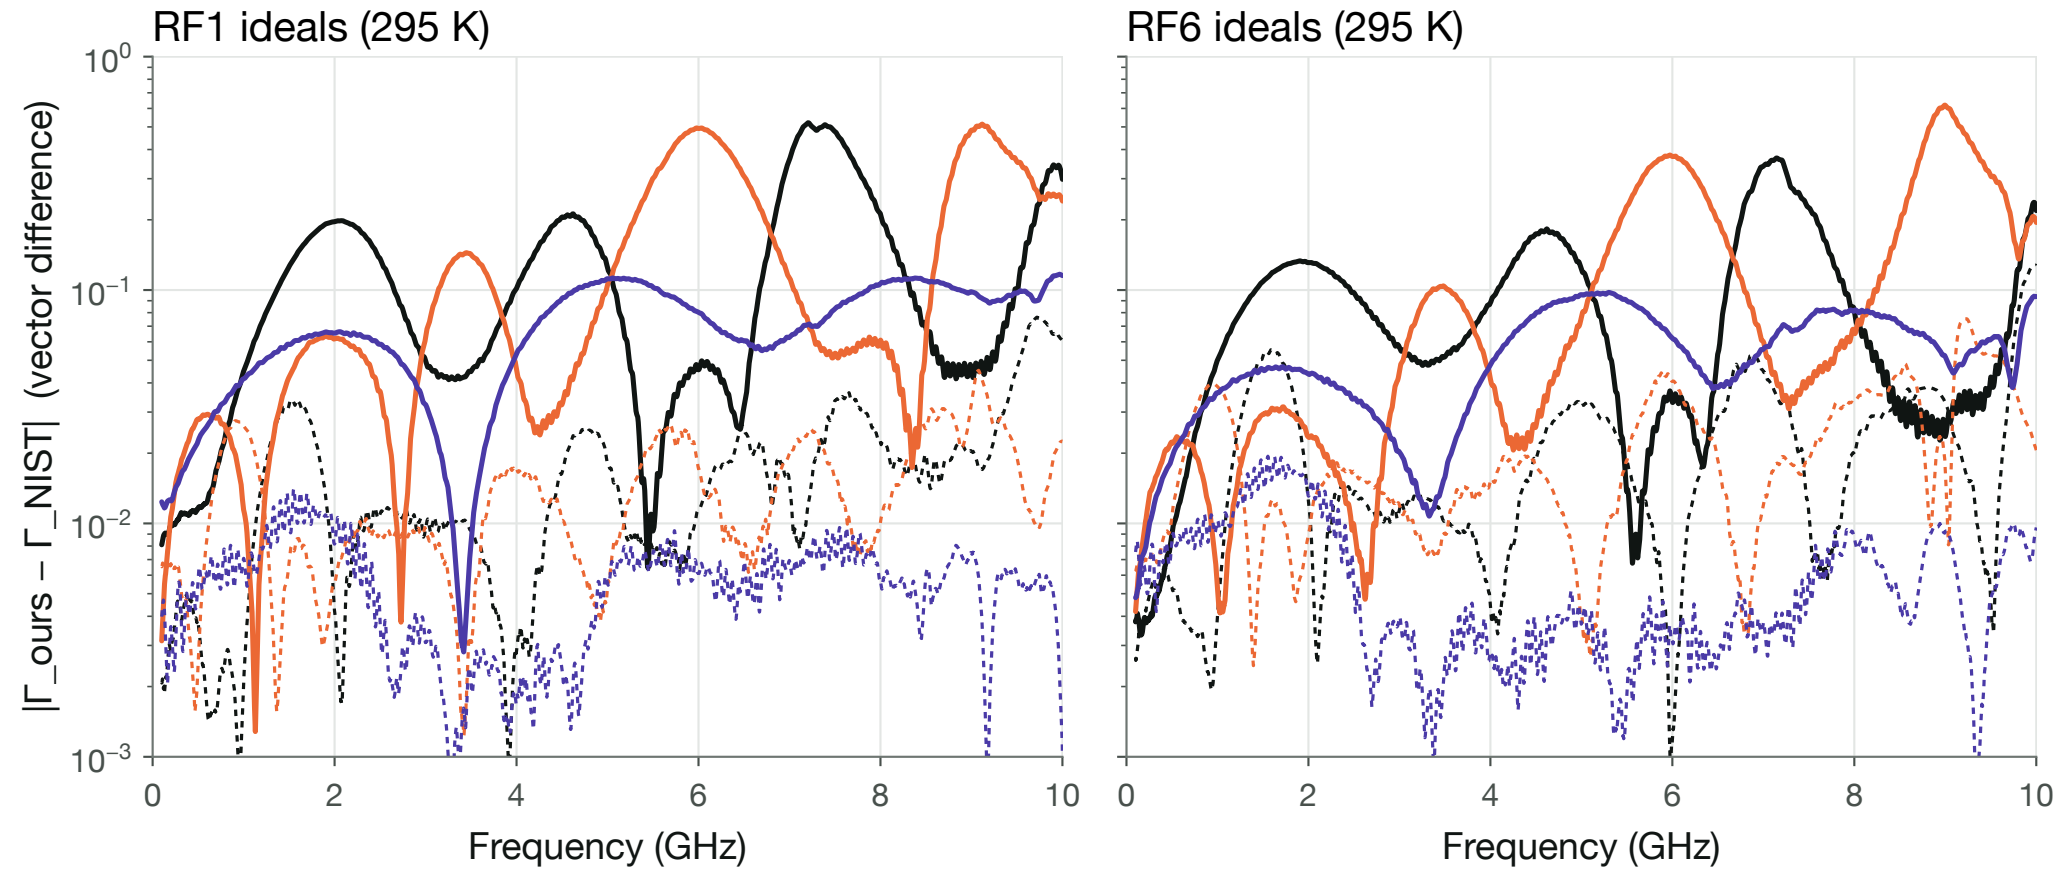

Ours: calibrated standard at RFC with the calibrated RFC → RFn path de-embedded · 50 MHz running mean · 0.01 ≈ -40 dB error vector