


S11: measured switches vs calibrated NIST reference (295 K)

— SN77 (measured) — SN78 (measured) - - - NIST SN0031 (calibrated)

NIST curve is SN0031's throw path only; measured curves also include the RFC connector section

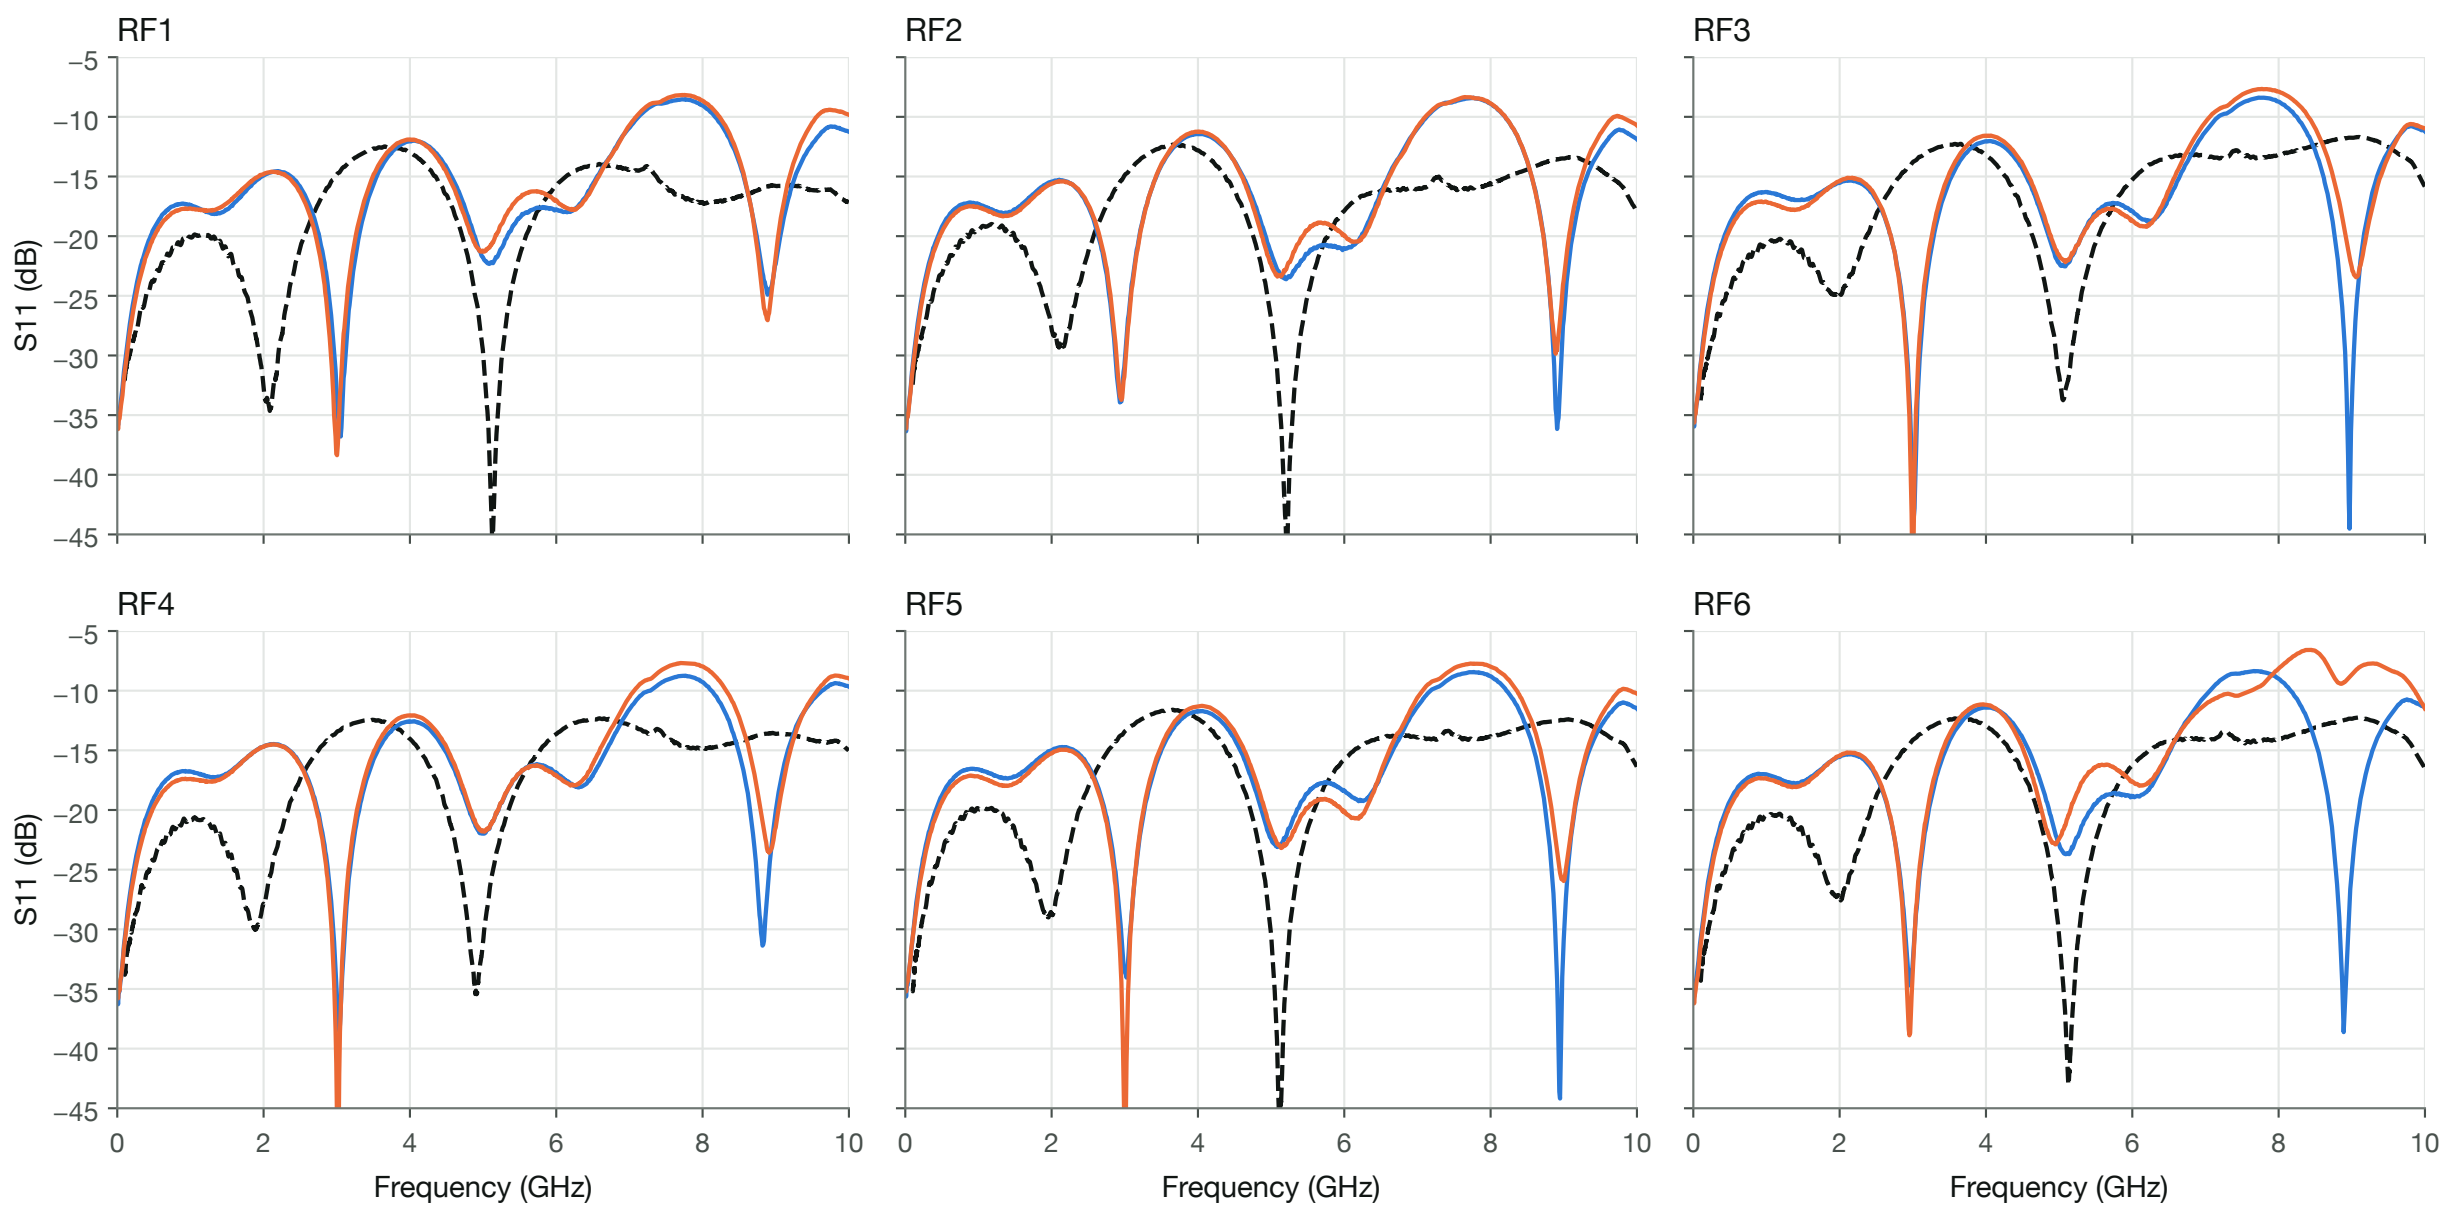

Measured: MM4250 SN77/SN78, 295 K, 11 Sep 2026, VNA-calibrated at switch connectors (RFC to RF port). NIST: SN0031 throw path from tier-2 cal, 295 K (internal junction to RF port; excludes RFC section).