



(a) face-to-face flow

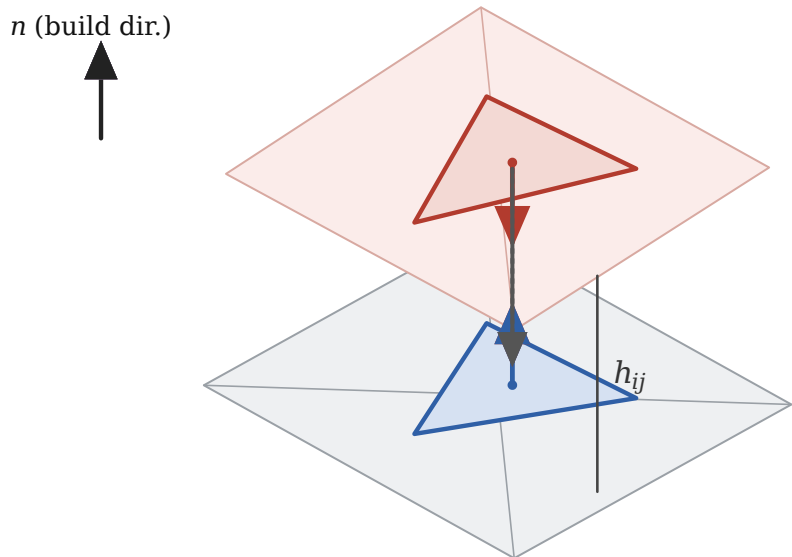

overhang face i (normal $\mathbf{m}_i$, $O_i = -\mathbf{m}_i \cdot \mathbf{n} > 0$)
receiver face j ($\mathbf{m}_j \cdot \mathbf{n} \in (\eta, 1)$), tensor term $\mathbf{m}_i \mathbf{m}_j^T$

(b) build-plate (virtual ground node)

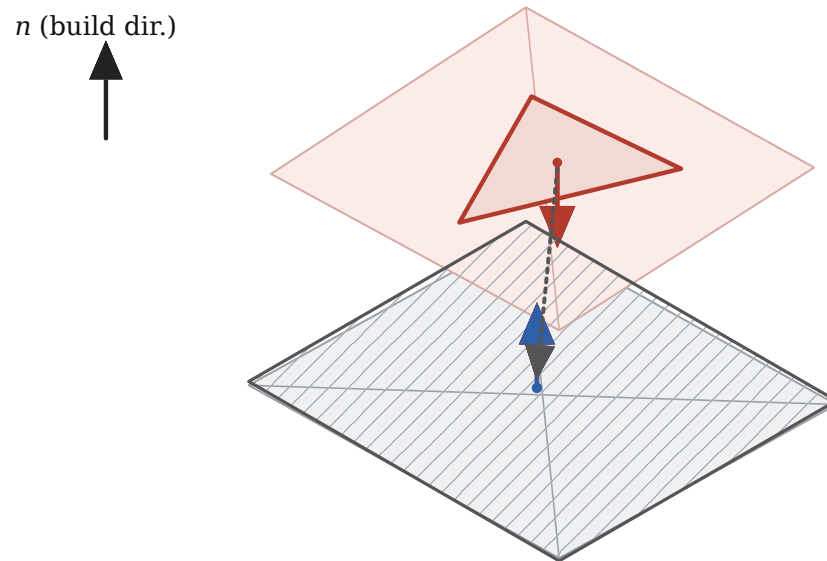

build plate = limiting receiver, normal = $\mathbf{n}$ ($\mathbf{m} \cdot \mathbf{n} = 1$)
no face below $\rightarrow$ tensor term $\mathbf{m}_i \mathbf{n}^T$ (build-plate cost B)

Every overhang flows to a receiver — another mesh face (a) or the build plate (b); both are terms of one augmented flow tensor $\tilde{F}(\mathbf{n})$.