Creintors Environmental Solutions Pvt. Ltd.

Crienviro®

Engineering Eco-Sustainability

Scan QR Code for Video



Water Treatment Solutions

Our Projects 50+

www.crienviro.com

Crienviro®
Engineering Eco-Sustainability



WATER SUPPLY SCHEME

AT ALADAHALLI VILLAGE

Capacity
18419 LPH (0.37 MLD)

Place
Aladahalli, Taluk : Tiptur, Dist : Tumkur

OUR SOLUTIONS



WATER TREATMENT PLANT

AT BHENDWAD VILLAGE

Capacity
2.0 MLD

Place
Bhendwad, Taluk: Raibag, Dist : Belgaum

Crienviro®
Engineering Eco-Sustainability

WATER TREATMENT PLANT LAMELLA

AT BETTAHALLI VILLAGE

Capacity
85330 LPH (1.7 MLD)

Place
Bettahalli, Dist : Mysore



OUR SOLUTIONS

WATER TREATMENT PLANT LAMELLA

AT BRAHMASANDRA VILLAGE

Capacity
61500 LPH (1.23 MLD)

Place
Brahmasandra,
Dist : Tumkur



Crienviro®
Engineering Eco-Sustainability



WATER SUPPLY SCHEME
AT DASUR

Capacity
67650 LPH (1.35 MLD)

Place
Dasur, Taluk: Indi,
Dist : Bijapur

OUR SOLUTIONS



WATER SUPPLY SCHEME
AT DHABBEGHATTA VILLAGE

Capacity
55000 LPH (1.10 MLD)

Place
Dhabbeghatta,
Dist : Tumkur

WATER SUPPLY SCHEME

AT DHARANHATTI VILLAGE

- **Capacity**
  45000 LPH (0.9 MLD)
- **Place**
  Dharanhatti,
  Dist : Belgaum



WATER SUPPLY SCHEME

AT HANDIGANUR VILLAGE

- **Capacity**
  116000 LPH (2.32MLD)
- **Place**
  Handiganur,
  Dist : Belgaum



Crienviro®
Engineering Eco-Sustainability



WATER SUPPLY SCHEME

AT AGADI VILLAGE

Capacity
135000 LPH (2.7MLD)

Place
Agadi, Dist : Haveri

OUR SOLUTIONS



WATER SUPPLY SCHEME

AT MUNDAGANUR VILLAGE

Capacity
2.5 MLD

Place
Mundaganur, Taluk : Bilgi, Dist : Bagalkot

Crienviro®
Engineering Eco-Sustainability

REVERSE OSMOSIS PLANT (RO)

- Reverse Osmosis, the natural tendency of water with dissolved salts to flow through a membrane from lower to higher salt concentration.
- RO removes many dissolved substances efficiently & produce good quality water.



OUR SOLUTIONS

EFFLUENT TREATMENT PLANT

FOR CAR SHOWROOM BELLAD AT BELGAUM

Capacity
3 KLD

Place
Hindalga, Belgaum



Crienviro®
Engineering Eco-Sustainability



SEWAGE TREATMENT PLANT

FOR HOSPITAL

- **Capacity**
  35 KLD
- **Place**
  CHIKKODI, BELGAUM

OUR SOLUTIONS



WATER TREATMENT PLANT

- **Capacity**
  300000 LPH (6 MLD)
- **Place**
  Yallama, Taluk : Saundatti, Dist : Belgaum

ALUM DOSING SYSTEM


- Chemical Dosing System for dosing the coagulants/flocculants like Lime, Ferrous Sulphate, Polymer, PAC & Alum to remove suspended solids & other particulates from water.
- Compact system, mounted on skid & provide steady set dosing rates for varying conditions.
- Accurate dosing rate to meet the dosing PPM in the flow.
- It consist of dosing pump with corrosion resistance material of construction, mixing tank in FRP/HDPE/SS.



OUR PRODUCTS

DISINFECTION SYSTEMS
ELECTROCHLORINATOR

- Electrochlorinator produces sodium hypochlorite by running an electric current through salt water.
- Generated sodium hypochlorite solution is used to disinfect water
- Dosing of sodium hypochlorite in water by dosing pump in right quantity.
- High efficiency, simple structure with excellence performance.

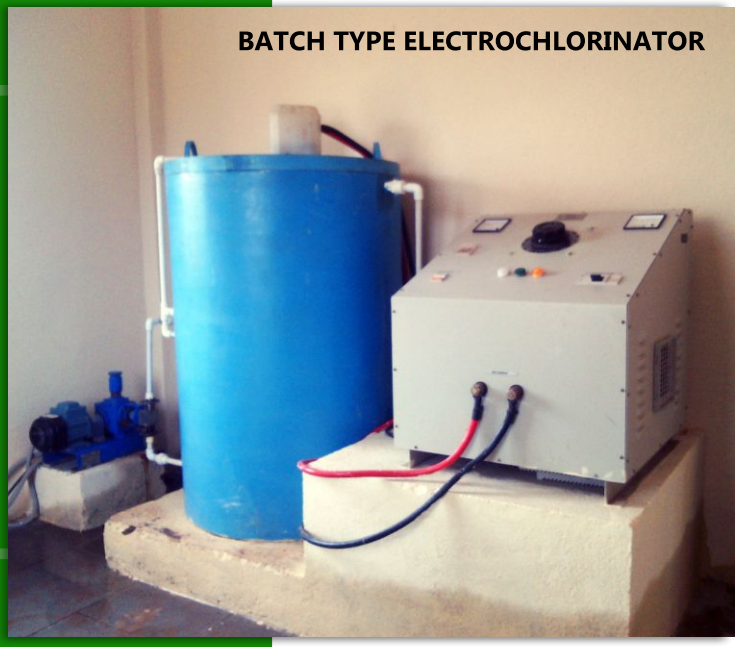

Crienviro®
Engineering Eco-Sustainability



SEMI- CONTINUOUS ELECTROCHLORINATOR

Place
Dasur village
Taluk : Indi, Dist : Bijapur

OUR PRODUCTS



CONTINUOUS TYPE ELECTROCHLORINATOR

Place
Bhendwad,
Raibag,Belgaum

GAS CHLORINATOR

Gravity Feed Gas Chlorinator

- For higher range of MLD's where Electrochlorinator & other disinfection systems have high initial costs, Gas chlorinators are used.
- System is cabinet mounted vacuum operated, solution feed type.
- Present in different variant such as floor mounting, wall mounting & cylinder mounting.
- High efficiency & compact structure.
- Instant use for disinfection of water.

Place : Bhendwad, Taluk : Raibag, Dist : Belgaum



MULTI GRADE PRESSURE FILTER

Anthracite Multi grade Pressure Sand Filter

- System mainly consist of vessel, supports & piping's will be of mild steel.
- Coated with external Anti-corrosive epoxy paint & internal Anti-corrosive food grade epoxy paint / Food grade FRP Coating.
- Pressure sand filter removes the suspended solids, turbidity & visible impurities etc from water.
- Pressure filters are available with Manual operation & automatic back wash operation.
- Easy to operate

Place : Girihal village, Taluk : Bailhongal, Dist : Belgaum



Place : Brahmasandra, Dist : Tumkur



Crienviro®
Engineering Eco-Sustainability

CIRCULAR
Dissolved air
Flotation (DAF)





RECTANGULAR
Dissolved air
Flotation (DAF)


DISSOLVED AIR FLOTATION (DAF)

- DAF clarifies raw water by removal of oil, grease, algae, suspended solids and dissolved solids.
- Removal is achieved by micro air bubbles released from the pressured dissolved air water mixture in the flotation tank.
- The bubbles adhere to the suspended particles forming a floc & then floating to the surface of water in the form of froth which is removed by a skimming device.



LAMELLA CLARIFIER

- Lamella Clarifier provides large effective settling for a small foot prints to separate particulates /Suspended solids from liquid/water.
- As the water flows upwards, the solid settles on the inclined parallel plates and slides into the sludge hopper at the bottom.
- Sludge is discharged periodically from bottom hopper.
- Lamella Clarifier is constructed with Mild Steel, Coated with external Anti-corrosive epoxy paint & internal Anti-corrosive food grade epoxy paint / Food grade FRP Coating.

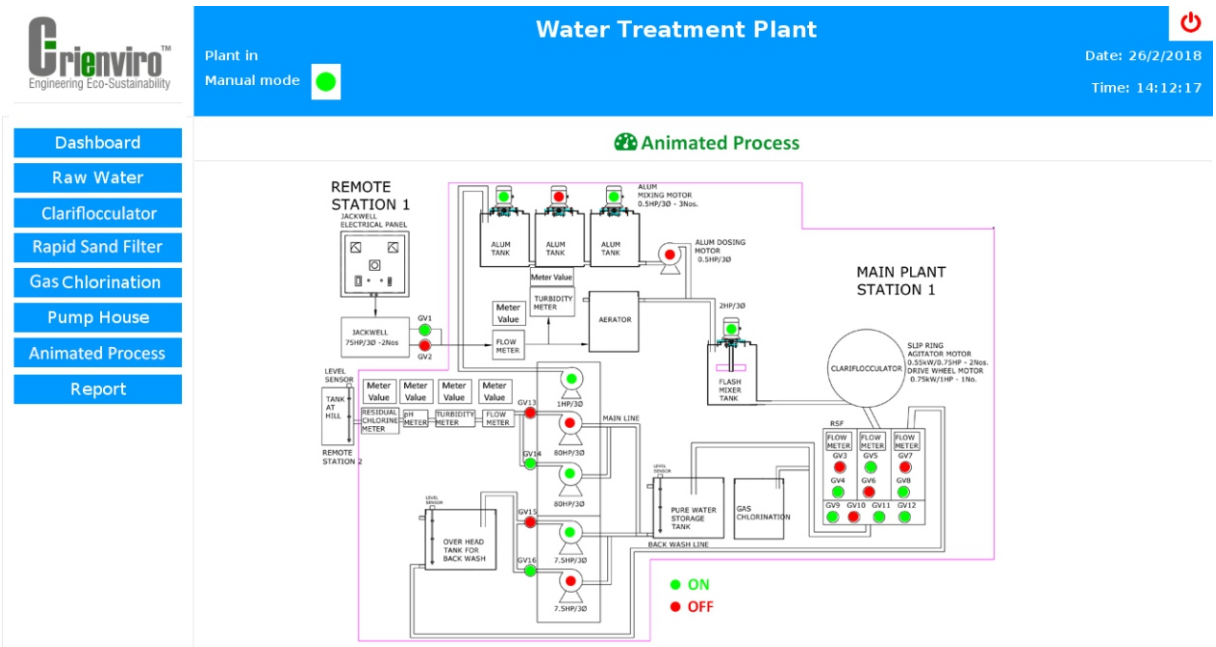


AUTOMATIC PLANT OPERATION & ONLINE PLANT MONITORING SYSTEM (SCADA SYSTEM)

- System involves Supervisory Control And Data Acquisition (SCADA), GSM based communication & controls with state of art reporting system with data collection storage & authorized retrieval system.
- Automated mobile & computer email alerts
- Increased productivity, high long term stability & reliability.
- Improved consistent product quality.
- Availability of accurate data/information,enabling timely decision making and better process control.
- PLC based automation of Plants And Products

WATER QUALITY MONITORING SYSTEM

To monitor the process flow and water quality Creintors provides SCADA System by integrating with Sensors of pH, Turbidity, Electrical Conductivity, Chloride, ORP, Residual Chlorine

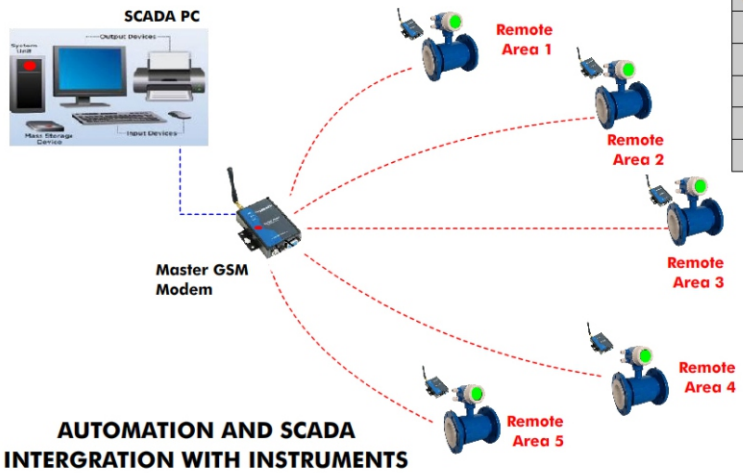

Sr No	Flow Mtr Sr No	Date	Flow Totaliser	Village (Remote Area)
01	1805380	2019-06-13	9800.00LTR	REMOTE AREA 1
02	1805386	2019-06-13	389900.00LTR	REMOTE AREA 2
03	1805380	2019-06-14	14400.00LTR	REMOTE AREA 3
04	1805386	2019-06-14	23400.00LTR	REMOTE AREA 4
05	1805388	2019-06-14	31200.00LTR	REMOTE AREA 5

Crienviro®
Engineering Eco-Sustainability

FLOW METERS

- Flow meters measures and indicate the flow through pipe lines
- Helps for uniform water distribution, Outlet water management
- Hourly/Daily/Weekly/Monthly base water flow report through SCADA

CAPACITY OF CHLORINATOR

$$\text{Capacity in gm/hr} = \frac{\text{Plant Flowrate in LPH x Chlorine dose (1 to 2 mg/l)}}{1000}$$

Example :

Capacity of Chlorinator for the water treatment plant of capacity 25000LPH $= \frac{25000 \times 2}{1000} = 50$ gm/hr

WATER TREATMENT PLANT CAPACITY

$$\text{Plant Flow rate } m^3/hr = \frac{\text{Population x Water demand per capita in Liter}}{\text{Plant operation Hours x 1000}}$$

$$\text{Plant Capacity in MLD} = \frac{\text{Plant flowrate in LPH x Plant operation Hours}}{1000000}$$

Example :

Population (2021) = Population Rural 2021 + Population Urban 2021
= 3975499 + 1447662
= 5423161


(Data from projected population of Karnataka 2012 - 2021 Issued by Directorate of Economics and Statistics Bangalore 2013)

Rate of water supply = 68.75 LPCD

- Plant flowrate = $\frac{5423161 \times 68.75}{20 \times 1000}$ = 18642 m^3/hr

- Plant Capacity = $\frac{18642 \times 1000 \times 20}{1000000}$ = 372 MLD

PROCESS LAYOUT OF LAMELLA CLARIFIER SYSTEM

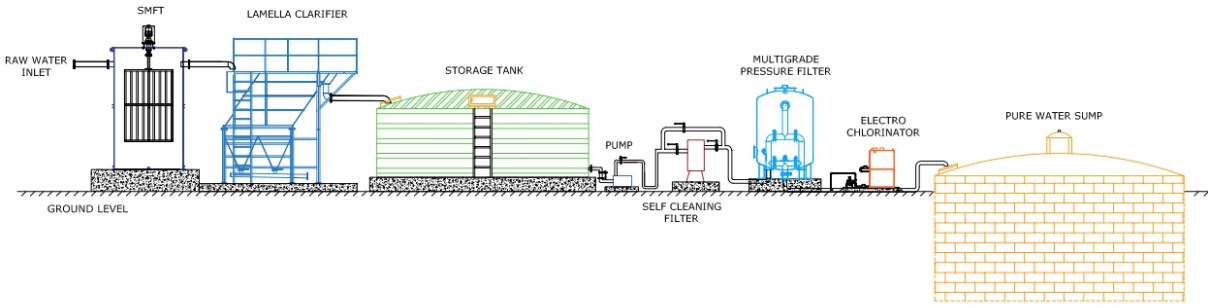

Our Clients

Scan QR Code for Website

Crienviro®
Engineering Eco-Sustainability

CREINTORS ENVIRONMENTAL SOLUTIONS PVT. LTD.

Plot No-1, Survey No. 22/3, Waghawade Road, Waghawade, Belgaum 590018 Karnataka, India.

Toll Free: 1800 123 112 111 | E-mail: sales@crienviro.com | **Website: www.crienviro.com**

Sanket Yadav: +91 96069 40285 | Vishal Rajhuns: +91 77950 00807